

LAWRENCE

e

6a
La

series "500"

A.I.A. File No. 27A

Interior

SLIDING DOOR HARDWARE

PACKAGED SETS

OPEN STOCK

LAWRENCE BROTHERS, INC. • Sterling • Illinois

**series "500"
sliding door hardware**






Typical of the quality builders' hardware that Lawrence has manufactured since 1876, is the series "500" interior sliding door hardware. Whether your requirement is hardware for wardrobe, closet, communicating, or other type sliding doors, in residential or commercial construction, series "500" fills the need.

Hardware is available to accommodate open or closed pocket, single or bi-parting, and bypassing 2, 3, or 4 door installations, using doors $\frac{3}{4}$ " to $1\frac{3}{4}$ " in thickness. Four aluminum tracks plus a heavy duty steel track, ten types of hangers, and a complete line of accessory items, provide a complete selection to meet every condition.

For closed pocket installations, single or bi-parting, Lawrence pocket frame sets end all door sticking, warping and jamming. These sets with their steel header assembly, and steel split-jamb units, provide the greater strength essential in this type of installation. Wall materials are applied directly to the steel members, which are equipped with kiln-dried wood nailing strips. All parts are factory pre-assembled for maximum convenience and rapid installation.

Detailed instruction sheets, for each type of installation, are regularly packed with all hardware, and are available separately on request.

Specify Lawrence series "500" sliding door hardware for simplicity of installation, ease of operation, and customer satisfaction.

POCKET**SINGLE DOOR****POCKET****BI-PARTING DOORS****BY-PASSING****BY-PASSING****BY-PASSING**

USE AND APPLICATION

tracks

Single — Used primarily in pocket door installations. Bi-parting doors operate on single track. Use for by-passing doors when spacing is desired other than can be obtained with standard double tracks.

Double — Used for by-passing doors. In three or four-door installations the center door(s) operate on one tread and the end doors on the other.

hangers

Top Mounting — Ordinarily used on communicating type single or bi-parting pocket applications. Top mounted hangers can be used on any door thickness from $\frac{3}{4}$ " to $1\frac{3}{4}$ ". May be used on by-passing installations, with provision for the increased headroom, if doors are hollow-core flush panel, solid core, or panel type. Vertical and horizontal adjustments are provided to offset for carpeting, misalignments, etc.

Side Mounting — Ordinarily used on by-passing wardrobe type installations. Designed for specific thickness of doors. Side mounting hangers are available for pocket type installations using plywood or novoply. Vertical adjustment provided to plumb doors with jambs.

structural convenience

By-passing door sets require no special framing or millwork. No floor tracks necessary. Only $1\frac{1}{8}$ " headroom.

fast installation

Series "500" hardware is designed for ease of installation. Complete simple instructions are included with all hardware.

packaged sets

Packaged sets are offered that contain every item of hardware necessary for a complete installation. The key to ordering sets is given on Page 6.

open stock

Individual parts are also available, as well as a line of heavy and special duty hardware.

demonstration models

Attractive demonstration models for counter display are available, to show the outstanding quality of this hardware to your customers.

PRODUCT INDEX

	Page
Features	4, 5
PACKAGED SETS	
Key to Catalog Numbers	6
Length of Track Required	6
DOOR THICKNESS	
FOR POCKET DOORS	
DeLuxe Sets — for standard duty:	
Hardware with Frame	$1\frac{3}{8}$ " — $1\frac{3}{4}$ "
Extension Hardware	7
Junction Hardware	7
Hardware Only	$1\frac{3}{8}$ " — $1\frac{3}{4}$ "
FOR BY-PASSING DOORS	
DeLuxe Sets — for standard duty:	
$\frac{3}{4}$ "	9
$1\frac{3}{8}$ "	10
$1\frac{3}{4}$ "	11
Economy Sets — for standard duty:	
$\frac{3}{4}$ "	12
$1\frac{3}{8}$ "	13
Parts Only	15-19
OPEN STOCK	
Selection Guide	
POCKET and BY-PASSING DOOR HARDWARE	
Standard Duty	$\frac{3}{4}$ " — $1\frac{3}{4}$ "
Heavy Duty	1 " — $1\frac{3}{4}$ "
Special Duty	14
Facia Plate (accessory)	15
Guides, Door	18
Guide Strip	18
Hangers	16
Latch	17
Models, Demonstration	19-20
Pulls, Door	17
Stops, Door	19
Track	15

NUMERICAL INDEX

Catalog No.	Page No.	Catalog No.	Page No.	Catalog No.	Page No.
402-A	17	508	15	540-D	10
403-A	17	PF510EH	7	540-E	11
404-A	17	PF510JH	7	548-A	9
405-A	17	PF510M	19	548-D	10
406-A	17	PF512-0	7	548-E	11
407-A	17	PF512-4	7	550	16
408-A	17	PF512-6	7	551	16
408-AM	19	PF512-10	7	552	16
420-AM	19	512	8	554	16
424-A	12	512 $\frac{1}{2}$	8	555	16
424-D	13	513	8	556	16
425-A	12	520DM	19	557	16
425-D	13	524-A	9	557 $\frac{1}{2}$	16
426-A	12	524-D	10	560	18
426-D	13	524-E	11	561	18
436-A	12	525-A	9	562	18
436-D	13	525-D	10	563	18
438-A	12	525-E	11	564	18
438-D	13	526-A	9	565	19
440-A	12	526-D	10	566	19
440-D	13	526-E	11	567	19
448-A	12	528-A	9	568	19
448-D	13	536-A	9	570	15
448-D	16	536-D	10	590	15
455	18	536-E	11	596	16
461	18	538-A	9	597	16
462	15	538-D	10	598	19
500	15	538-E	11		
505	15	540-A	9		
506	15				

DeLuxe HARDWARE

1 — Aluminum Track — Anodized, satin finish for permanent beauty. Exposed face serves as finish trim or may be painted. Non-derail design. Adequate spacing between doors provided by tread spacing, eliminates rubbing if doors warp.

2 — Hangers — Mount on doors before hanging. Serrated plate provides fine adjustment to plumb door with jamb. Evener bar distributes door weight equally on each wheel.


3 — Nylon Rollers — Self-lubricating. Can't stick or wear out. Quiet, smooth-running action. Heavy screw-machined axle provides maximum load capacity.

4 — Guide Strips and Door Guides — Guide strips are aluminum for permanence. Attach to back of door at bottom edge. Not visible from room side. Full guiding action without groove in bottom of door. No interference with traffic.

5 — Multi-Purpose Door Stops — Heavy, zinc plated steel, with attractive white rubber bumpers. Used as double-ended stops, limit travel of inside by-passing door to keep flush pulls accessible, as well as acting as a jamb stop and silencer for outside door. Creased in center for break-off when used as two single stops.

Screws — All series "500" items are packed with Phillips head sheet metal screws. The deep, full-length threads provide maximum holding power in wood. There are no sharp corners on the Phillips head to catch clothing, and the self-centering recess avoids damage from driver slippage. A No. 2 size driver will handle all sizes of screws that are used.

Latch — An attractive, functional sliding door latch is available as an accessory item for pocket doors. Latch may also be used on 2-door by-passing installations using doors $1\frac{3}{8}$ " to $1\frac{3}{4}$ " thick. The retracting bolt leaves the opening clear on both door and jamb sides.

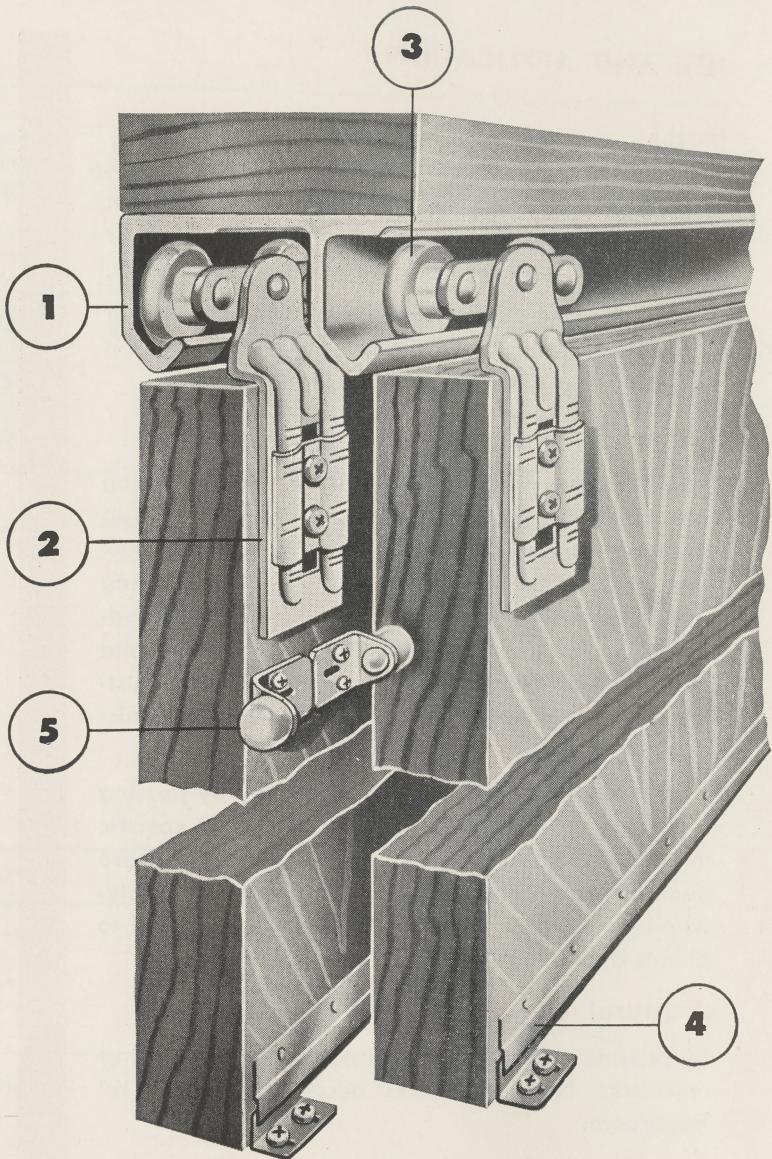**Economy** HARDWARE


These sets use the same quality hardware as in our Deluxe sets, with economies effected by the elimination of extras.







The same extruded aluminum track sections with non-derail design are used, with the surface clean and bright.

All hangers are single wheel with weight limit 60 pounds.

Tough, smooth nylon door guides are easily installed and adjusted.

Detailed listing of parts that are included in Economy sets is shown on pages 12 and 13.

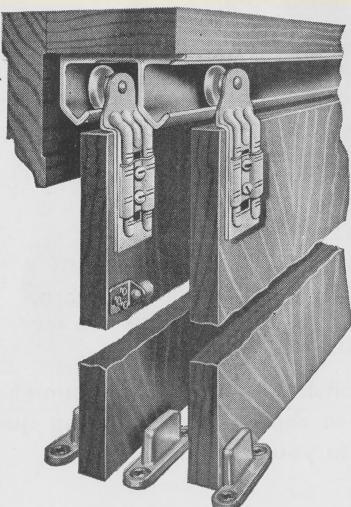

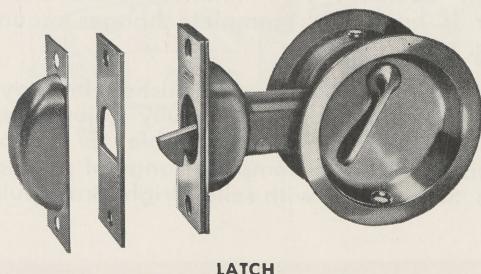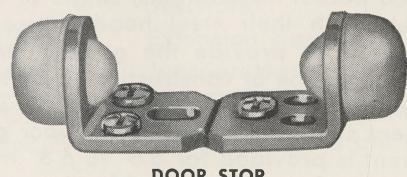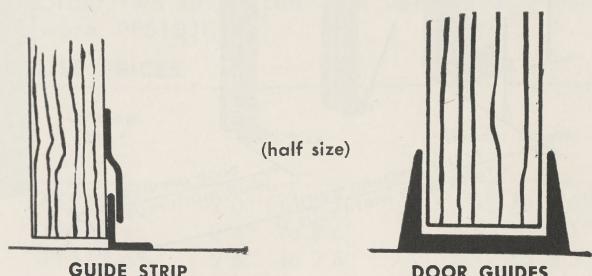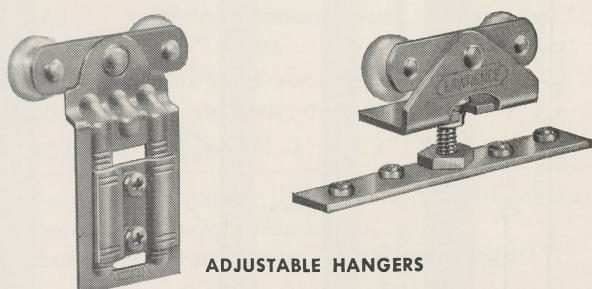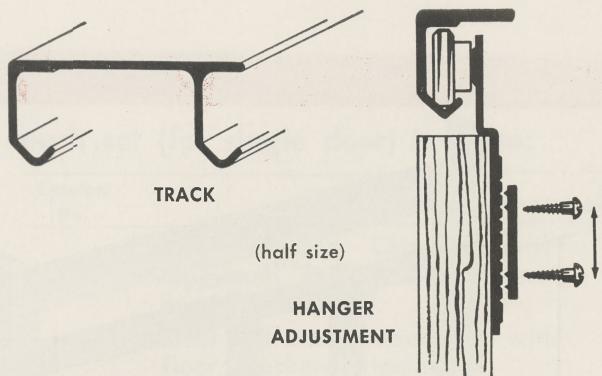


EASY TO INSTALL


See Instructions With Each Set

Lawrence series "500" Sliding Door Hardware sets are simple to install. A complete set of instructions is included with each packaged set.

Track comes pre-cut to proper length for correct opening. Screw track to header through holes provided. **1**




Attach hangers to the back side of door, using metal template furnished for hole location. Screw guide strip to back of door at bottom edge. **2**




Perfected Lawrence design makes it possible to hang door after above hardware has been mounted. Simply tilt door in position shown and lift onto track. Allow to swing into natural, vertical position. Non-derail feature of track prevents rollers from leaving the groove. **3**



Slip door guide into guide strip on door bottom and fasten guide to floor, using slotted openings in guide for final adjustment. **4**



Plumb door with jamb, using the simplified, serrated, adjustment plate on required hanger, to complete the installation. **5**



series "500"
PACKAGED SETS

KEY TO CATALOG NUMBERS FOR SETS

Lawrence series "500" sets are individually packaged to contain complete hardware needed for single pocket doors and two, three or four by-passing doors. Sets are designated this way:

door hardware sets

1st Digit	2nd Digit	3rd Digit	4th Digit
SERIES	NUMBER OF DOORS	WIDTH OF OPENING	DOOR THICKNESS CODE
5	2	4	A- $\frac{3}{4}$ " D- $1\frac{3}{8}$ " E- $1\frac{3}{4}$ "

EXAMPLES:

524A means series "500" hardware for two-door application in a four foot opening with doors $\frac{3}{4}$ " thick.

524D is similar except that doors would be $1\frac{3}{8}$ " thick.

POCKET FRAME SETS

Add the prefix PF. The last two digits designate the minimum door width within each set range in feet and inches. (e.g. PF512-4 indicates set for 2'4" to 2'6" doors).

HEADROOM REQUIREMENTS

Minimum $1\frac{1}{8}$ " headroom is required on by-passing doors — $1\frac{1}{8}$ " minimum on pocket doors.

REQUIRED TRACK LENGTHS


Door openings should be constructed to permit 1" overlap on by-passing installation for each pair of doors.

Door Width	Single Pocket Door	Bi-Parting Pocket Door†	By-Passing		
			2 Doors	3 Doors	4 Doors
2'0"	47"**	47"	47"**	70"	94"**
2'2"	51"	51"	51"	76"	102"
2'4"	55"	55"	55"	82"	110"
2'6"	59"**	59"	59"**	88"	118"**
2'8"	63"	63"	63"	94"**	
2'10"	67"	67"	67"	100"	
3'0"	71"**	71"	71"**	106"	

† Two pieces of track required.

** Standard length indicated; cut other lengths shown from next larger size.

DeLuxe POCKET FRAME SETS

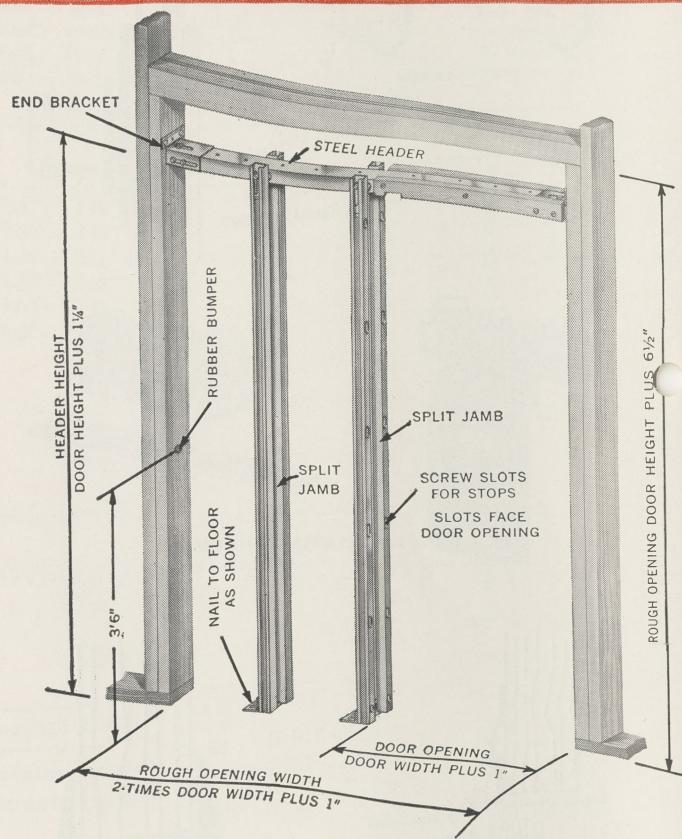

For closed pocket installations, single or bi-parting, these sets with their steel header assembly and steel split-jambs provide the greater strength essential in this type of construction. Sets install in a standard 2" x 4" stud wall. Split-jamb units have adjustment slots to plumb uneven floor conditions. Adjustment is provided for 6'6" to 6'8" high doors. Extension hardware is available to accommodate doors 6'10" to 7'0" high. Sets take all wall and trim conditions. Header and split-jamb have kiln-dried wood nailing strips for application of any wall covering, either dry or wet construction. Nylon door guide is straddle type; eliminates grooving. All parts are factory assembled, ready to set in rough opening, for minimum installation time. Door is hung with complete hanger mounted on door.

All steel and wood parts finished in gray paint. Extruded aluminum track. Fully adjustable, nylon wheel hangers. Sets adjustable for 2" of door width; 4 sets cover complete range of popular door sizes. Sets packed with solid, Bright Brass pulls only.

..... for 1 3/8" doors weighing up to 80 lbs. — 6'6" to 6'8" high†

each set (for single door) includes:

Catalog No.	Item	Quantity
	Steel Header Channel with aluminum track installed, end brackets attached.	1
	Steel Split-Jamb Assemblies with floor brackets attached.	2
556	2-Wheel Hangers	2
563	Nylon Bottom Door Guide, for 1 3/8" doors	1
566	Rubber Door Bumper	1
405-A	Flush Pulls, 2 1/2" O.D.	2
407-A	Edge Pull, 2 1/2" x 1"	1

Packed complete in one box with all necessary screws, bolts, and installation sheet.

Extra — Demonstration Model, see page 19.

for bi-parting doors:



Order two single sets plus one set of Junction Hardware, PF510JH.

LIST PRICES

Catalog No.*	Door Size	Header Length	List Price			Ship. Wt. Per Set lbs. — oz.
			Less Than Quantity Sets	Price List Ea.	Quantity Sets	
PF512-0	2'0" to 2'2"	4'1" to 4'5"	1	\$	6	\$
PF512-4	2'4" to 2'6"	4'9" to 5'1"	1		6	43 — 14
PF512-6	2'6" to 2'8"	5'1" to 5'5"	1		6	44 — 11
PF512-10	2'10" to 3'0"	5'9" to 6'1"	1		6	45 — 8
						46 — 5
Description			Per Carton			
PF510EH	Extension Hardware		1	\$	12	\$
PF510JH	Junction Hardware		1		12	39 — 9
						8 — 7

* Catalog numbers indicate minimum door size within each set range. (e.g., PF512-4 indicates set for 2'4" to 2'6" doors). Sets are shipped with headers adjusted for widest door.

application of door trim to split jambs (quarter size)

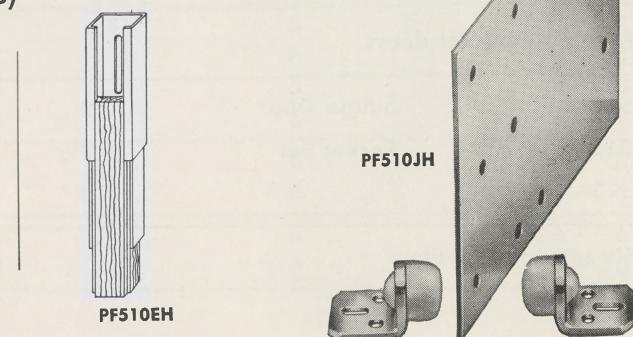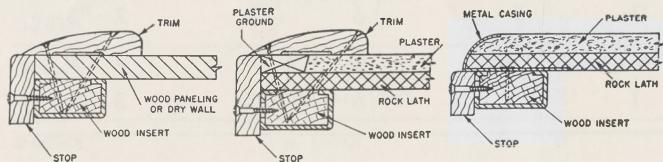

DeLuxe Sets for 1 $\frac{3}{8}$ " thick POCKET DOORS**features**


Minimum 1 $\frac{5}{8}$ " headroom. Extruded aluminum track. Non-derail 2-wheel hangers, fully adjustable, self-lubricating nylon rollers. Nylon bottom door guide. Door is hung with complete hanger mounted on door. Sets packed with solid Bright Brass pulls only.

application

Open or closed pocket, single or bi-parting, communicating doors. Also single door closets. Standard duty, for 1 $\frac{3}{8}$ " doors up to 80 lbs. See header section detail under No. 556 hanger page 16.

each set includes

Catalog No.	Item	Pocket Door Set	
		Single	Bi-Parting
Quantity			
506	Single Track	1	
556	2-Wheel Hanger	2	For Bi-Parting application use 2 single sets and order center stop No. 567 shown on page 19.
405-A	Flush Pull 2 $\frac{1}{2}$ " O.D.	2	
407-A	Edge Pull 2 $\frac{1}{2}$ " x 1"	1	
563	Door Guide	1	
566	Rubber Bumper	1	
Screws — All necessary screws included			




No. 506




No. 556




No. 405-A



No. 407-A



No. 563



No. 566

Extra Accessory — Latch, See page 17.

LIST PRICES

Catalog No.	Description	Width Opening	List Prices				Ship. Wt. Per Set lbs. — oz.
			Standard Sets	Cartons List Each	Sets†	Quantity List Each	
For single pocket doors							
512	Single Door	2'	1	\$	6	\$	2 — 8
512 $\frac{1}{2}$	Pocket Set	2 $\frac{1}{2}$ '	1		6		3 — 0
513		3'	1		6		3 — 7

† Six sets to a bundle.

DeLuxe sets for $\frac{3}{4}$ " thick BY-PASSING DOORS (Code "A")6a
La

features

Minimum $1\frac{1}{8}$ " headroom. Aluminum track, anodized satin finish to serve as finish trim. Non-derail design. Hangers have positive fine adjustment. Self-lubricating nylon rollers. Aluminum guide strips. Sets packed with solid, Bright Brass pulls only.

application

By-passing doors on storage closets and wardrobes. Standard duty, for $\frac{3}{4}$ " doors up to 60 lbs. Set 528A for 4' doors up to 80 lbs., packed with 2-wheel hangers, No. 551. See header section detail under No. 550 hanger, page 16.

each set includes

Catalog No.	Item	By-Passing Sets		
		2 Door	3 Door	4 Door
Quantity				
500	Double Track	1	1	1
550	1 Wheel Hanger	4	6	8
or	2 Wheel Hanger			
551	(with Set No. 528A)	4	—	—
405-A	Flush Pull $2\frac{1}{2}$ " O.D.	2	3	4
560	Guide Strip	2	3	4
561	Door Guide	2	3	4
565	Door Stop	1	—	2
567	Center Door Stop	—	—	1
568	Intermediate Door Stop	—	1	—
Screws—All necessary screws included.				

Extra Accessories — Facia Plate, see page 15.



LIST PRICES

Catalog No.	Description	Width of Opening	List Prices				Ship. Wt. Per Set lbs. — oz.
			Standard Cartons		Quantity Price		
			Sets	List Each	Sets†	List Each	
524-A		4'	1	\$	6	\$	3 — 4
525-A	2 Door	5'	1		6		3 — 10
526-A	By-Passing Set	6'	1		6		4 — 8
528-A		8'	1		6		5 — 7
536-A	3 Door	6'	1		6		4 — 13
538-A	By-Passing Set	8'	1		6		6 — 6
548-A	4 Door	8'	1		6		6 — 6
540-A	By-Passing Set	10'	1		6		7 — 13

† Six sets in a bundle.

DeLuxe sets for 1 3/8" thick BY-PASSING DOORS (Code "D")

features

Minimum 1 1/8" headroom. Aluminum track, anodized satin finish to serve as finish trim. Non-derail design. Hangers have positive fine adjustment. Self-lubricating nylon rollers. Aluminum guide strips. Sets packed with solid, Bright Brass pulls only.

each set includes

Catalog No.	Item	By-Passing Sets		
		2 Door	3 Door	4 Door
Quantity				
505	Double Track	1	1	1
555	2 Wheel Hanger	4	6	8
405-A	Flush Pull 2 1/2" O.D.	2	3	4
560	Guide Strip	2	3	4
561	Door Guide	2	3	4
565	Door Stop	1	—	2
567	Center Door Stop	—	—	1
568	Intermediate Door Stop	—	1	—

Screws—All necessary screws included.

Extra Accessories — Facia Plate, see page 15.
Demonstration Model, see page 19.

application

By-passing doors on storage closets and wardrobes. Standard duty for 1 3/8" doors up to 80 lbs. See header section detail under No. 555 hanger, page 16.



LIST PRICES

Catalog No.	Description	Width Opening	LIST PRICES				Ship. Wt. Per Set lbs. — oz.
			Standard Cartons		Quantity Price	List Each	
		Sets	List Each	Sets†	List Each		
524-D	2 Door	4'	1	\$	6	\$	3 — 7
525-D	By-Passing Set	5'	1		6		4 — 1
526-D		6'	1		6		4 — 11
536-D	3 Door	6'	1		6		5
538-D	By-Passing Set	8'	1		6		6 — 3
548-D	4 Door	8'	1		6		7 — 4
540-D	By-Passing Set	10'	1		6		8

† Six sets in a bundle.

DeLuxe sets for 1 3/4" thick BY-PASSING DOORS (Code "E")

features

Minimum 1 1/8" headroom. Aluminum track, anodized satin finish to serve as finish trim. Non-derail design. Hangers have positive fine adjustment. Self-lubricating nylon rollers. Aluminum guide strips. Sets packed with solid, Bright Brass pulls only.

each set includes


Catalog No.	Item	By-Passing Sets		
		2 Door	3 Door	4 Door
Quantity				
508	Double Track	1	1	1
555	2 Wheel Hanger	4	6	8
405-A	Flush Pull 2 1/2" O.D.	2	3	4
560	Guide Strip	2	3	4
561	Door Guide	2	3	4
565	Door Stop	1	—	2
567	Center Door Stop	—	—	1
568	Intermediate Door Stop	—	1	—

Screws—All necessary screws included.

Extra Accessories — Facia Plate, see page 15

application

By-passing doors on storage closets and wardrobes. Standard duty for 1 3/4" doors up to 80 lbs. See header section detail under No. 555 hanger, page 16.

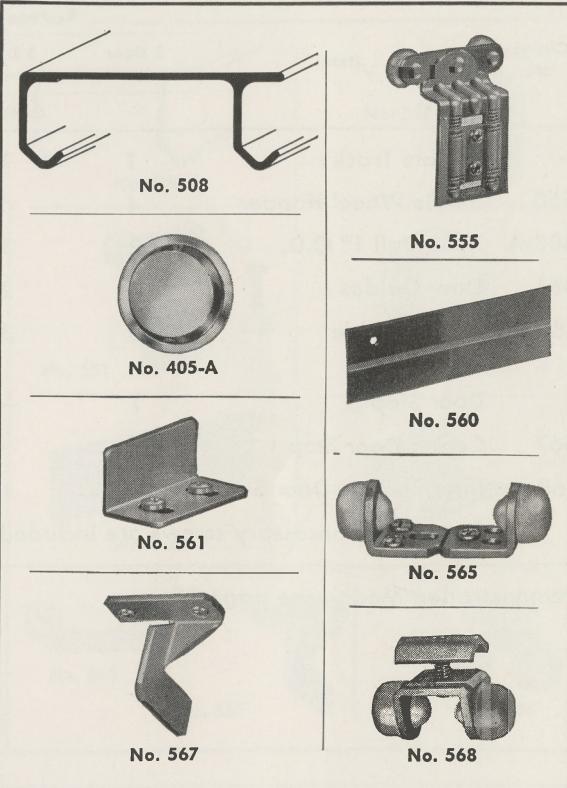

LIST PRICES

Catalog No.	Description	Width Opening	List Prices				Ship. Wt. Per Set lbs. — oz.
			Standard Cartons		Quantity Price	List Each	
Sets	List Each	Sets†	List Each				
524-E	2 Door	4'	1	\$	6	\$	3 — 10
525-E	By-Passing Set	5'	1		6		3 — 17
526-E		6'	1		6		4 — 16
536-E	3 Door	6'	1		6		5 — 5
538-E	By-Passing Set	8'	1		6		6 — 15
548-E	4 Door	8'	1		6		6 — 15
540-E	By-Passing Set	10'	1		6		8 — 8

† Six sets in a bundle.

Economy sets for $\frac{3}{4}$ " thick BY-PASSING DOORS (Code "A")**features**

Minimum $1\frac{1}{8}$ " headroom. Aluminum track, clean and bright. Non-derail design. Hangers have positive fine adjustment. Self-lubricating nylon rollers. Tough, smooth nylon door guides. Sets packed with solid, Bright Brass pulls only.


each set includes

Catalog No.	Item	By-Passing Sets		
		2 Door	3 Door	4 Door
Quantity				
—	Double Track	1	1	1
550	Single Wheel Hanger	4	6	8
403-A	Flush Pull 1" O.D.	2	3	4
461	Door Guides	—	2	—
462	Center Guide Side Guides	3	3	6
	Door Stop	1	—	2
567	Center Door Stop	—	—	1
568	Intermediate Door Stop	—	1	—
Screws—All necessary screws are included				

Demonstration Model, see page 19.

application

By-passing doors on storage closets and wardrobes. Standard duty, for $\frac{3}{4}$ " doors up to 60 lbs. See header section detail, under No. 455 hanger, page 16.




Track



No. 550




No. 403-A



No. 462




No. 567



No. 461



Door Stop



No. 568

LIST PRICES

Catalog No.	Description	Width Opening	LIST PRICES				Ship. Wt. Per Set lbs. — oz.
			Standard Sets	Cartons List Each	Quantity Sets†	Price List Each	
424-A	2 Door	4'	1	\$	6	\$	2 — 10
425-A	2 Door	5'	1		6		3 — 2
426-A	By-Passing Set	6'	1		6		3 — 9
436-A	3 Door	6'	1		6		3 — 14
438-A	By-Passing Set	8'	1		6		4 — 13
448-A	4 Door	8'	1		6		5 — 7
440-A	By-Passing Set	10'	1		6		6 — 3

† Six sets to a bundle.

Economy sets for 1 3/8" thick BY-PASSING DOORS (Code "D")**features**


Minimum 1 1/8" headroom. Aluminum track, clean and bright. Non-derail design. Hangers have positive fine adjustment. Self-lubricating nylon rollers. Tough, smooth nylon door guides. Sets packed with solid, Bright Brass pulls only.

each set includes

Catalog No.	Item	By-Passing Sets		
		2 Door	3 Door	4 Door
Quantity				
—	Double Track	1	1	1
455	Single Wheel Hanger	4	6	8
403-A	Flush Pull 1" O.D.	2	3	4
461	Door Guides	—	2	—
462	Center Guide Side Guides	3	3	6
	Door Stop	1	—	2
567	Center Door Stop	—	—	1
568	Intermediate Door Stop	—	1	—
Screws—All necessary screws are included				

application

By-passing doors on storage closets and wardrobes. Standard duty, for 1 3/8" doors up to 60 lbs. See header section detail under No. 455 hanger, page 16.

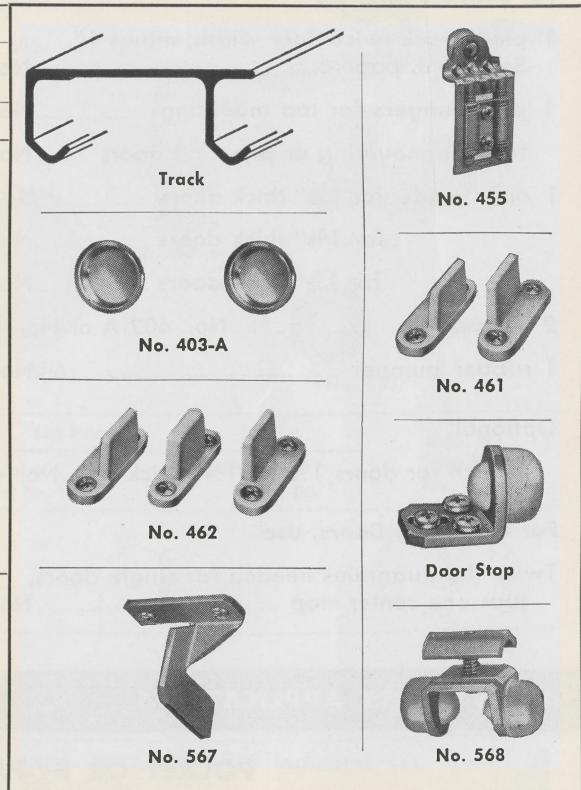**LIST PRICES**

Catalog No.	Description	Width Opening	LIST PRICES				Ship. Wt. Per Set lbs. —oz.
			Standard Sets	Cartons List Each	Quantity Sets†	List Each	
424-D	2 Door	4'	1	\$	6	\$	3
425-D	2 Door	5'	1		6		3 — 8
426-D	By-Passing Set	6'	1		6		4
436-D	3 Door	6'	1		6		4 — 6
438-D	By-Passing Set	8'	1		6		5 — 6
448-D	4 Door	8'	1		6		6
440-D	By-Passing Set	10'	1		6		6 — 9

† Six sets to a bundle.

selection guide

series "500" OPEN STOCK

POCKET DOORS

STANDARD DUTY APPLICATIONS

For pocket doors weighing 80 lbs. or less, and with 1 $\frac{1}{8}$ " minimum headroom, select as indicated below:

For Single Doors, use

1 piece track twice door width, minus 1".
See table, page 6 _____ No. 506

1 pair hangers for top mounting _____ No. 556
for side mounting or plywood doors _____ No. 557

1 only guide for 1 $\frac{1}{8}$ " thick doors _____ No. 562
for 1 $\frac{3}{8}$ " thick doors _____ No. 563
for 1 $\frac{3}{4}$ " thick doors _____ No. 564

2 flush pulls _____ No. 402-A or No. 405-A

1 rubber bumper _____ No. 566

Optional

1 latch for doors 1 $\frac{3}{8}$ " to 1 $\frac{3}{4}$ " thick _____ No. 408-A

For Bi-Parting Doors, use

Twice the quantities needed for single doors,
plus one center stop _____ No. 567

BY-PASSING DOORS

For 2, 3, or 4 by-passing doors weighing 80 lbs. or less, and with 1 $\frac{1}{8}$ " minimum headroom, select as indicated below:

1 PIECE TRACK, WIDTH OF OPENING*, ANY NUMBER OF DOORS.

For Door Thickness of	3/4"	1"	1 1/8"	1 3/8"	1 3/4"
Use Track No.	500	500	505	505	508

1 PAIR HANGERS FOR EACH DOOR.

For Door Thickness of	3/4"	1"	1 1/8"	1 3/8"	1 3/4"
60lb. doors Use No.	550	552		455	
80lb. doors Use No.	551		554	555	555

1 aluminum guide strip, No. 560 for each door or 1 set of 3 nylon guides, No. 462, for each 2 doors and/or 1 set of 2 nylon guides, No. 461, for a third door.

1 flush pull for each door.

Choose No. 402-A, 403-A, 404-A or 405-A.

1 door stop, No. 565, for each 2 doors, and, if desired, add 2 additional No. 565 stops for jamb silencers for any number of doors. In addition, 3 door installations require 1 No. 568 universal stop, and 4 door installations 1 No. 567 center stop.

Optional — 1 piece facia plate, No. 570, width of opening.

* Consideration must be given to overlap of doors in determining track length. See Table, page 6. Door openings should be constructed to permit 1" overlap for each pair of doors.

HEAVY DUTY APPLICATIONS

POCKET OR BY-PASSING DOORS

For doors exceeding 80 and up to 150 lbs., select as indicated below:

1 piece Track No. 590, twice door width for single doors.

2 pieces Track No. 590, width of opening, for by-passing doors. See Table Page 6.

1 pair hangers for each top mounting 1 to 1 $\frac{3}{4}$ " thick door _____ No. 596

1 pair hangers for each side mounting 3/4" or more thick door _____ No. 597

For guide strip (or guides), flush pulls, stops, and silencers, see Standard Duty requirements.

Headroom — 3 $\frac{3}{8}$ " headroom is required for heavy duty series hardware.

SPECIAL DUTY APPLICATIONS

For special pocket door applications using doors less than 1 $\frac{1}{8}$ " thickness, nylon door guide set No. 461 may be used.


Lawrence sliding door hardware may be used in other combinations to suit special conditions. Where assistance is needed, contact nearest representative.

track — facia plate

6a
La

Catalog No.	Description	Length† in inches	LIST PRICES				Ship. Wt. Per Carton lbs. — oz.
			Standard Cartons‡ No. Pieces	Cartons‡ List Each	Quantity Price No. Pieces	Quantity Price List Each	
TRACK, (screws packed with hangers)							
500	Double Track, Aluminum Anodized satin finish. Tread centers 1-7/32". Use for doors 3/4" and 1".	47 59 71 94 118	12 12 12 12 12	\$ 72 72 72 72	\$ 72 72 72 72	20 — 2 25 — 4 30 — 6 40 — 4 50 — 8	
505	Double Track, Aluminum Anodized satin finish. Tread centers 1-25/32". Use for doors 1 1/8" and 1 3/8".	47 59 71 94 118	12 12 12 12 12	72 72 72 72 72	23 28 — 14 34 — 12 46 57 — 12		
506	Single Track, Aluminum Anodized satin finish. Use for any door thickness.	47 59 71 94 118	12 12 12 12 12	72 72 72 72 72	10 — 13 13 — 9 16 — 5 21 — 10 27 — 2		
508	Double Track, Aluminum Anodized satin finish. Tread centers 2-3/32". Use for doors 1 3/4".	47 59 71 94 118	12 12 12 12 12	72 72 72 72 72	25 — 5 31 — 12 38 — 2 50 — 10 63 — 8		
590	Single Heavy Duty Track, Steel, with gray painted finish. Use for any door thickness.	47 59 71 94 118	6 6 6 6 6	36 36 36 36 36	21 26 — 12 30 — 8 42 52 — 12		
FACIA PLATE							
570	Optional accessory for by-passing doors. Used as finish trim to conceal track. Pressed steel with gray prime coat. Installs under track screws. Slots provide adjustment.	47 59 71 94 118	12 12 12 12 12	72 72 72 72 72	22 — 7 28 — 6 34 — 4 44 55 — 4		

† For length of track required, see page 6. ‡ Six cartons in a bundle.

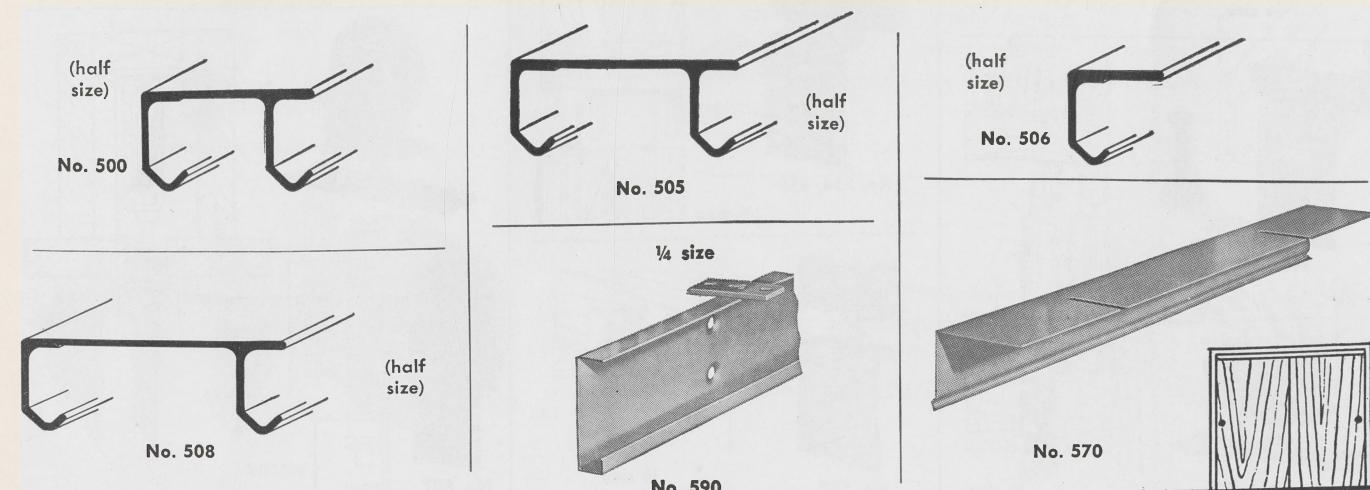

hangers

Catalog No.	Includes Door Guide No.	Use with Track No.	For Door Thickness	Max. Wt. lbs. Doors	Number Wheels	Total Vertical Adjustment	Min. imum Head-room	LIST PRICES				Ship. Wt. Per Carton 12 Pairs lbs. — oz.
								Standard Cartons**		Quantity Price		
								Pairs	List Pair	Pairs	List Pair	
SIDE MOUNTED HANGERS												
455	561	500	1 3/8"	60	1†	5/16"	1 1/8"	12	\$	72	\$	5 — 2
550	561	500	3/4"	60	1†	5/16"	1 1/8"	12		72		4 — 1
551	561 with m.s. & tee nuts	500	3/4"	80	2†	5/16"	1 1/8"	12		72		5 — 7
552*	561	500	1"	60	1†	5/16"	1 1/8"	12		72		4 — 8
554*	561	505	1 1/8"	80	2†	5/16"	1 1/8"	12		72		5
555	561	505	1 3/8"	80	2†	5/16"	1 1/8"	12		72		6
557	563 with 1 No. 566 bumper	506	3/4" to 1 3/4"	80	2†	1"	1 1/8"	12		36		11 — 1
557 1/2 (557)	apron only to convert No. 556 hanger)							12				5 — 12
597	563 with 1 No. 566 bumper	590	3/4" or more	150	1‡	1"	3 3/8"	12		72		18
TOP MOUNTED HANGERS												
556	563 with 1 No. 566 bumper	506	3/4" to 1 3/4"	80	2†	1"	1 1/8"	12		72		9 — 12
596	563 with 1 No. 566 bumper	590	1" to 1 3/4"	150	1‡	1"	3 3/8"	12		36		17 — 15

Machine screws — 3/4" x No. 8 pan head m.s. and tee nuts — available separately. List price per 100 — \$

* Specify F for front door, R for rear door.








† 3/4" diameter nylon wheel.

** One pair in a box.

‡ 2 1/8" diameter rubber covered steel wheels.

DESCRIPTION

All steel, electro-zinc plated. Heavy turned axles. In addition to vertical adjustment, hangers Nos. 556, 557, 596 and 597 have horizontal adjustment to center door. Screws for both hangers and track included.

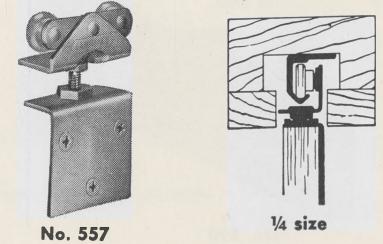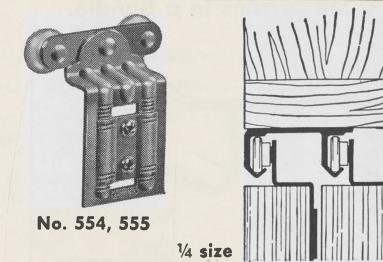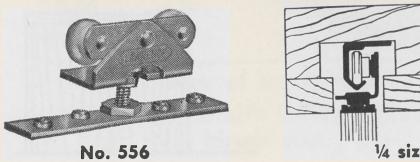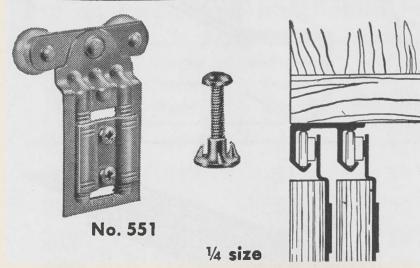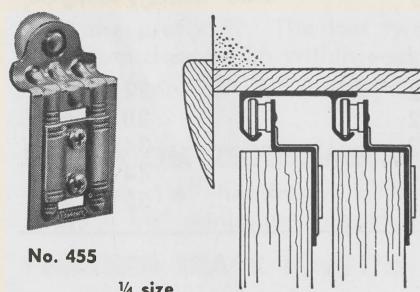

door pulls • latch

Catalog No.	Description	Finish*	List Prices			Ship. Wt. Per Carton lbs. — oz.
			Less than Standard Cartons		Standard Cartons†	
			List Dz.	No. Dz.	List Dz.	
FLUSH PULLS • solid brass						
402-A	3 finger, elongated, 3 5/16" x 1 3/8" x 3/8" d. with screws	BB, DBz Chr, DChr	\$	24	\$	23 — 2
403-A	Round, 1" o.d. x 3/8" d. Press fits 3/4" hole. Use singly or 3 in a row.	BB, DBz Chr, DChr		24		1 — 12
404-A	Round, 2" o.d. x 3/8" d. Press fits 1 1/4" holes. 2 brass escutcheons pins furnished	BB, DBz, DAL Chr, DChr		24		10 — 1
405-A	Round, 2 1/2" o.d. x 3/8" d. Fits 2" hole, with screws.	BB, DBz, DAL Chr, DChr		24		14 — 2
EDGE PULLS • die cast or solid brass						
406-A	Zinc alloy. 4 3/16" x 3/4"	BB, DBz, Chr, DChr		10		19 — 12
407-A	Solid Brass. 2 1/2" x 1" x 5/8" d.	BB, DBz Chr, DChr		10		8 — 8
SLIDING DOOR LATCH • with screws						
408-A	Fits 2" x 7/8" bore x 2 3/8" back set. For 1 1/8" to 1 3/4" doors. With screws.	BB, DBz Chr, DChr Split †	\$ ea.	24 ea.	\$ ea.	10

Demonstration Model — See page 19.


Split finishes — When desired, specify the finish for lever side first; e.g., 408-A-Chr x BB indicates Bright Chromium on lever side and Bright Brass on emergency release side. (Face plate will be finished same as lever side).

Lever For Both Sides will be furnished for connecting rooms, single or bi-parting doors; specify 408-ALBS (lever both sides).

Lever Inside, Blank Outside, also available for patio and exterior doors; specify 408-ABO (blank outside).

* Pulls and latches furnished in Bright Brass, Dull Bronze, Bright Chromium and Dull Chromium. No. 404-A and 405-A also available in aluminum, Anodized satin finish, "DAL".

† All pulls packed one dozen in a box except 403-A — 3 dozen. Latch 408-A, one each in a box.

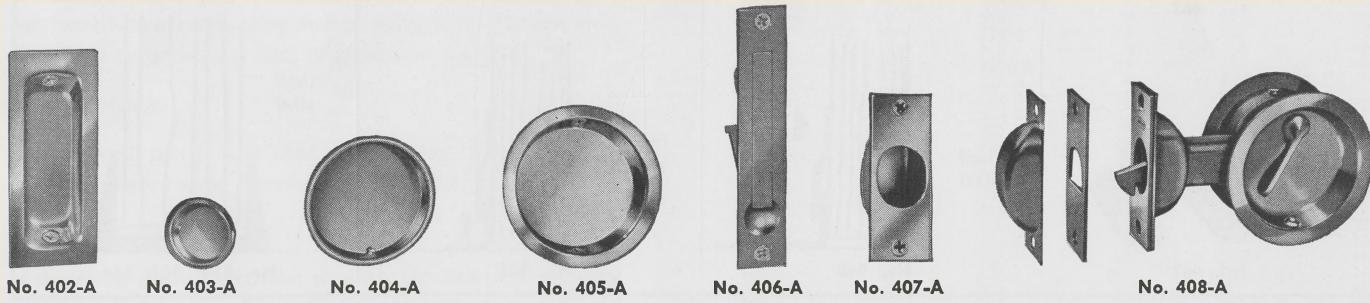


guide strip • door guide

Catalog No.	Description	Design-nated Length†	List Prices			Ship. Wt. Per Carton lbs. — oz.
			Less Than Quantity Price	Quantity Price	List	
GUIDE STRIP* aluminum • with screws						
560		24"	\$	72 pcs.	\$	2
		30"		72 pcs.		2 — 8
		32"		72 pcs.		2 — 11
	†Actual length $\frac{1}{4}$ " shorter than design-nated shown	36"		72 pcs.		3
		48"		72 pcs.		4
BY-PASSING DOOR GUIDES** • with screws						
461	Nylon guide set for single door (2 side guides).		dz.	10 dz.	dz.	3
462	Nylon guide set for by-passing doors. (2 side guides, 1 center spacer).		dz.	10 dz.	dz.	3
561	Use with No. 560 guide strip or door bottom may be grooved. Steel, zinc plated, $1\frac{1}{2}$ " long, adjustable mounting holes. Regularly packed with open stock by-passing door hangers.		dz.	10 dz.	dz.	6 — 3
POCKET DOOR GUIDES** nylon • with screws						
562	For $1\frac{1}{8}$ " doors.		dz.	10 dz.	dz.	3 — 8
563	For $1\frac{3}{8}$ " doors (regularly packed with open stock pocket door hangers).		dz.	10 dz.	dz.	3 — 10
564	For $1\frac{3}{4}$ " doors.		dz.	10 dz.	dz.	3 — 13

* Packed 12 pieces in a carton; six cartons in a bundle.

** Packed one dozen in a box; 10 dozen in a carton.

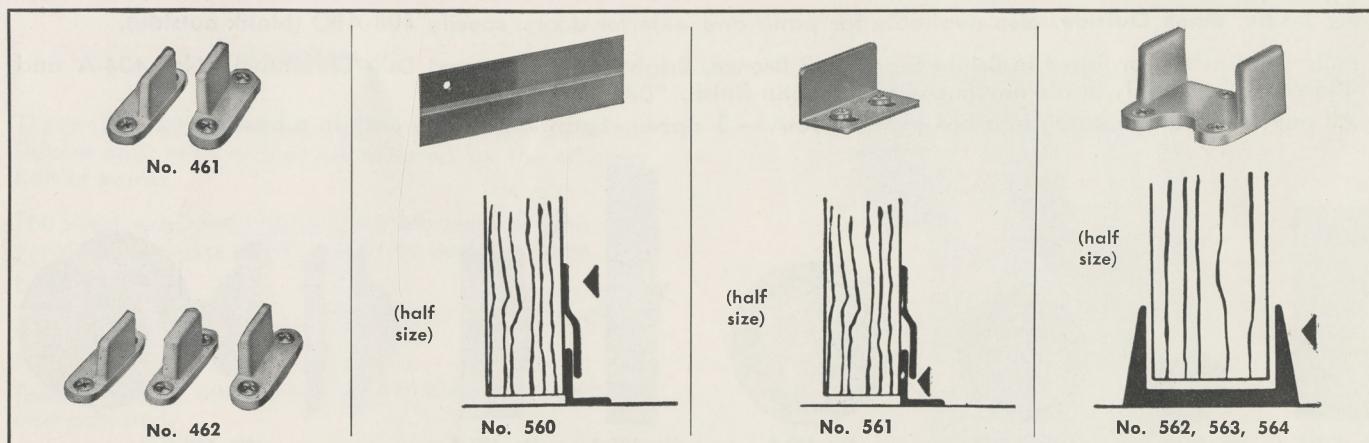


door stops • demonstration models

Catalog No.	Description	List Prices			Ship. Wt. Per Carton lbs — oz.
		Less Than Quantity List	No.	Quantity Price List	
Door Stops* heavy steel zinc plated • with screws					
565	With white rubber bumpers. Limits travel of inside by-passing door to keep flush pulls accessible, also acts as jamb silencer. Will break in center for use as 2 separate stops.	\$	dz.	10 dz.	\$ dz. 10
566	Rubber bumper. Used as silencer on pocket doors.		dz.	24 dz.	dz. 6
567	Center stop for 4-by-passing doors, or bi-parting pocket doors. Includes one No. 565 stop.		dz.	10 dz.	dz. 25
568	With white rubber bumpers. Clamps on track to limit door travel in 3 or 4 door installations.		dz.	10 dz.	dz. 8 — 4
598	Center stop for heavy duty bi-parting pocket doors. Used with No. 590 track. Includes one No. 565 stop.		dz.	10 dz.	dz. 32 — 12

Demonstration Models**

408AM	Latch, 13½" w. x 6½" h.	\$	ea.	-----	-----	3
420AM	¾" by-passing door, 17½" x 11½" h.		ea.	-----	-----	8
520DM	1¾" by-passing door 17½" x 11½" h.		ea.	-----	-----	8
PF510M	Pocket Frame Door, 22" w. x 18½" h.		ea.	-----	-----	17 — 15

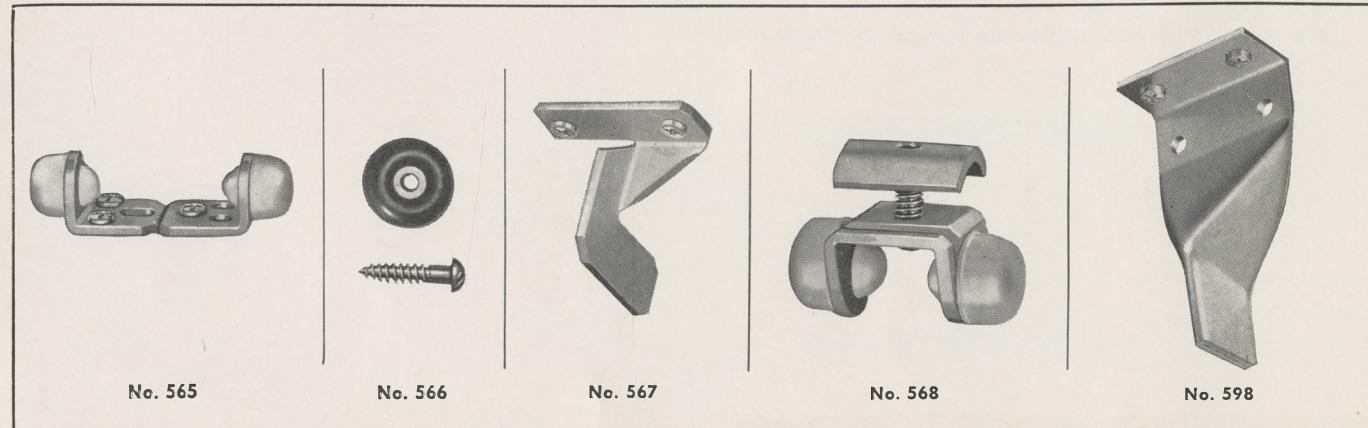

* Packed one dozen in a box; 10 dozen in a carton (except No. 566, three dozen in a box, 24 dozen in a carton.)


** Illustrated on page 20. One Model 408AM, 420AM, or 520DM free with \$50.00 net order.
One Model PF510M free with order for 12 pocket frame sets.

LAWRENCE


series "500"

SLIDING DOOR HARDWARE


DEMONSTRATION MODELS

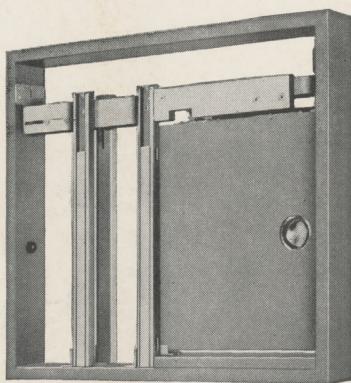


PF510M



408AM



520DM



420AM

See page 19 for description and prices of above models.

LAWRENCE BROTHERS, INC.

Quality Builders' Hardware since 1876.

STERLING, ILLINOIS

Printed in U.S.A.