

DO NOT SCALE

FOR OPENINGS TO 110° - 12°
FOR OPENINGS 111° TO 135° - 9"

1 3/4"

OF HINGE

HINGE EDGE OF DOOR

A- TO 110°
B- 111° TO 135°


C

G (REF)

DRILL 13/64 HOLE & TAP FOR
1/4 - 20 MACHINE SCREWS OR USE
NO. 14 WOOD SCREWS (4 HOLES)

DRILL 13/64 HOLE & TAP FOR
1/4 - 20 MACHINE SCREWS OR USE
NO. 14 WOOD SCREWS (2 HOLES)

H (REF)

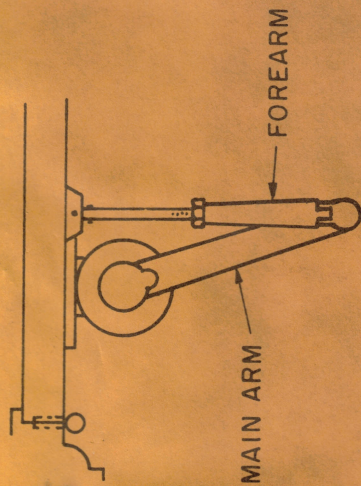

POSITION OF ARMS

RIGHT HAND DOOR SHOWN

DOOR CLOSER - 90 SERIES									
CLOSER LIST NO.	OPEN. 110°	111°-135°	A	B	C	D	E	+1/4 -0 F	G H
92	8 3/8	5 3/8	3 3/16	1 1/8	25/32	1 1/8	25/32	4 3/16	3 1/4
93	8 5/16	5 5/16	3 3/8	1 1/4	13/16	1 1/4	13/16	4 9/16	3 1/2
94	8 1/16	5 1/16	3 7/8	1 7/16	29/32	1 7/16	29/32	5 1/16	3 7/8
95	7 7/8	4 7/8	4 1/4	1 5/8	1 1/32	1 5/8	1 1/32	5 1/16	4 1/4

MOUNTING DIMENSIONS FOR WOOD & METAL DOOR
SERIES:— 90 DOOR CLOSERS - MODEL 66
APPLICATION:— STANDARD



YALE LOCK AND HARDWARE DIVISION
RYE, NEW YORK 10580

TEMPLATE DRAWING

No. 80-7390-0003-10 Date (8-1-66)