

PRESS SWING CHECK VALVES

- Lead Free Compliant
- One-Piece Body Design
- EPDM O-Ring Seal
- Heavy Pattern Cast Brass



Press Swing Check Valve

- One-piece body design
- EPDM o-ring seal
- Heavy pattern cast brass construction
- Lead free brass material
- Metal to metal disc seal
- 200 WOG
- Max Temp: 248°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
400R012-NL	1/2"	Press Swing Check Valve	10	160
400R034-NL	3/4"	Press Swing Check Valve	10	120
400R001-NL	1"	Press Swing Check Valve	5	60
400R114-NL	1-1/4"	Press Swing Check Valve	5	40
400R112-NL	1-1/2"	Press Swing Check Valve	5	30
400R002-NL	2"	Press Swing Check Valve	2	24

Press Ball Valve With Drain
Full Port Lead Free

- Lead free DZR brass material
- Full port forged brass body
- 250 WOG
- Max Temp: 203°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
310D012-NL	1/2"	Press Ball Valve	5	50
310D034-NL	3/4"	Press Ball Valve	5	40
310D001-NL	1"	Press Ball Valve	4	20

Press x MIP Ball Valve
Full Port Lead Free

- Lead free DZR brass material
- Full port forged brass body
- 250 WOG / 150 WSP
- Max Temp: 203°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
320M012-NL	1/2"	Press Ball Valve	5	50
320M034-NL	3/4"	Press Ball Valve	5	40
320M001-NL	1"	Press Ball Valve	4	20
320M114-NL	1-1/4"	Press Ball Valve	5	20
320M112-NL	1-1/2"	Press Ball Valve	4	16
320M002-NL	2"	Press Ball Valve	2	8

Press Ball Valve
Full Port Lead Free

- Lead free DZR brass material
- UPC NSF1-8
- Double O-Ring
- Blow Out Proof Stem
- 250 WOG
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
310R012-NL	1/2"	Full Port Press Ball Valve	5	50
310R034-NL	3/4"	Full Port Press Ball Valve	5	40
310R001-NL	1"	Full Port Press Ball Valve	4	20
310R114-NL	1-1/4"	Full Port Press Ball Valve	5	20
310R112-NL	1-1/2"	Full Port Press Ball Valve	4	16
310R002-NL	2"	Full Port Press Ball Valve	2	8
310R212-NL	2-1/2"	Full Port Press Ball Valve	1	6
310R003-NL	3"	Full Port Press Ball Valve	1	4
310R004-NL	4"	Full Port Press Ball Valve	1	2

Press x FIP Ball Valve
Full Port Lead Free

- Lead free DZR brass material
- Full port forged brass body
- 250 WOG
- Max Temp: 203°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
320T012-NL	1/2"	Press Ball Valve	5	50
320T034-NL	3/4"	Press Ball Valve	5	40
320T001-NL	1"	Press Ball Valve	4	20
320T114-NL	1-1/4"	Press Ball Valve	5	20
320T112-NL	1-1/2"	Press Ball Valve	4	16
320T002-NL	2"	Press Ball Valve	2	8

NOW AVAILABLE PRESS COPPER FITTINGS

ONE PIECE GAS VALVE

One piece brass body for leak resistance and long valve life.



One Piece Gas Ball Valve

- One-piece brass body
- Female NPT x Female NPT
- PTFE ball seats
- Blow out proof brass stem
- Pressure Rating: 175 GAS
- Max Temp: -4° F to 149° F

- Thread conforms to ANSI B1.20.1
- Approvals: ANSI Z21.15/CSA 9.1 for 1/2 psig, ASME B16.44/CR91-002 for 5 psig, ASME B16.33/CGA3.16 for 125 psig

RAVEN
SAFETY PRODUCTS

PART #	SIZE	DESCRIPTION	INNER	MASTER
OP4512	1/2"	FIP Gas Ball Valve	10	120
OP4534	3/4"	FIP Gas Ball Valve	10	120
OP4501	1"	FIP Gas Ball Valve	10	50



Gas Ball Valve Yellow Handle

- Forged brass body
- UL approved 125 psig, ANSI Z21.15
- CSA approved 1/2 psig / 5 psig /125 psig
- 600 WOG / 175 GAS
- Max Temp: 149°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
4512Y	1/2"	FIP Gas Ball Valve	10	120
4534Y	3/4"	FIP Gas Ball Valve	10	120

Gas Ball Valve With Screw Driver Slot

- Forged brass body
- UL approved 1/2"- 3/4" 125 psig
- CSA approved 1/2 psig / 5 psig /125 psig
- 600 WOG / 175 GAS,
- Max Temp: 149°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
S4512	1/2"	FIP Gas Ball Valve	10	50
S4534	3/4"	FIP Gas Ball Valve	10	120
S4501	1"	FIP Gas Ball Valve	10	120

Premium Approved Lock Handle Ball Valve Full Port Lead Free

- Lead free DZR brass material
- Threaded & sweat ends available
- CSA, UL, FM, UPC approved
- 600 WOG / 150 WSP
- Max Temp: 300°F



# SWT	# IPS	SIZE	INNER	MASTER
-	L-610T014-NL	1/4"	12	144
-	L-610T038-NL	3/8"	12	144
L-610C012-NL	L-610T012-NL	1/2"	10	100
L-610C034-NL	L-610T034-NL	3/4"	10	100
L-610C001-NL	L-610T001-NL	1"	5	50
L-610C114-NL	L-610T114-NL	1-1/4"	5	25
L-610C112-NL	L-610T112-NL	1-1/2"	5	25
L-610C002-NL	L-610T002-NL	2"	2	12
L-610C212-NL	L-610T212-NL	2-1/2"	2	8
L-610C003-NL	L-610T003-NL	3"	2	6
L-610C004-NL	L-610T004-NL	4"	2	4

Hose Ball Valve With Cap Full Port Lead Free

- Lead free DZR brass material
- Threaded & sweat ends available
- CSA/IAPMO, NSF/ANSI 372, IGC 157
- blow out proof stem
- Cap and chain included
- 600 WOG / 150 WSP
- Max Temp: 300°F



# SWT	# IPS	SIZE	INNER	MASTER
CHBV-012-NL	THBV-012-NL	1/2" x Hose	10	100
CHBV-034-NL	THBV-034-NL	3/4" x Hose	10	100

LARGE PEX BALL VALVES

1 1/4"

1 1/2"

2"

THINK
BIGASTM
F1807
CRIMP PEXPex Ball Valve
Large Diameter

- Lead free DZR brass material
- Full port forged brass body
- Blow out proof brass stem
- 600 WOG
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
600P114-NL	1-1/4"	PEX x PEX	5	25
600P112-NL	1-1/2"	PEX x PEX	5	25
600P002-NL	2"	PEX x PEX	2	12

Pex Ball Valve
PEX x SWT

- Lead free DZR brass material
- T-Handle
- 600 WOG / 150 WSP
- Max Temp: 300°F



PSBV-012-NL	1/2" x 1/2"	PEX x SWT	2	12
PSBV-034-NL	3/4" x 3/4"	PEX x SWT	5	25

Pex Ball Valve
PEX x SWT

- Lead free DZR brass material
- Lever Handle
- 600 WOG / 150 WSP
- Max Temp: 300°F



PSBL-012-NL	1/2" x 1/2"	PEX x SWT	5	25
PSBL-034-NL	3/4" x 3/4"	PEX x SWT	5	25
PSBL-001-NL	1" x 1"	PEX x SWT	2	12

Inline Check Valve
Spring Loaded

- Lead free brass body
- Sweat / Threaded
- 200 CWP
- Max Temp: 180°F



# SWT	# IPS	SIZE	INNER	MASTER
150C012-NL	150T012-NL	1/2"	10	100
150C034-NL	150T034-NL	3/4"	10	80
150C114-NL	150T114-NL	1-1/4"	6	60
150C112-NL	150T112-NL	1-1/2"	4	40
150C100-NL	150T100-NL	1"	5	30
150C200-NL	150T200-NL	2"	5	20

207 Series Gate Valve
Heavy Duty Industrial Grade

- Brass body
- Full Port
- 200 WOG
- Max Temp: 200°F



207T112-NL	1-1/2"	IPS Gate Valve	5	30
207T002-NL	2"	IPS Gate Valve	2	20
207T012	1/2"	IPS Gate Valve	10	100
207T034	3/4"	IPS Gate Valve	10	80
207T001	1"	IPS Gate Valve	5	50
207T114	1-1/4"	IPS Gate Valve	5	40
207T112	1-1/2"	IPS Gate Valve	5	30
207T002	2"	IPS Gate Valve	2	20
207T212	2-1/2"	IPS Gate Valve	1	8
207T003	3"	IPS Gate Valve	1	6
207T004	4"	IPS Gate Valve	1	4

LARGE SIZE PEX

FITTINGS

THINK
BIG

Brass PEX Elbow

PEX x PEX

- Lead Free



PART #	SIZE	INNER	MASTER
PXLN0114-NL	1-1/4"	10	100
PXLN0112-NL	1-1/2"	10	50
PXLN0200-NL	2"	5	20

Brass PEX Tee

PEX x PEX x PEX

- Lead Free



PXTE0114-NL	1-1/4"	100	300
PXTE0112-NL	1-1/2"	50	500
PXTE0200-NL	2"	50	300
PXRT1412-NL	1-1/4" x 1" x 1/2"	10	60
PXRT1413-NL	1-1/4" x 1" x 3/4"	10	80
PXRT1414-NL	1-1/4" x 1" x 1"	10	60
PXRT1401-NL	1-1/4" x 1-1/4" x 1/2"	10	80
PXRT1402-NL	1-1/4" x 1-1/4" x 3/4"	10	80
PXRT1403-NL	1-1/4" x 1-1/4" x 1"	10	70
PXRT1502-NL	1-1/2" x 1-1/2" x 3/4"	10	50
PXRT1503-NL	1-1/2" x 1-1/2" x 1"	10	40
PXRT1521-NL	1-1/2" x 1-1/4" x 1"	10	50
PXRT1504-NL	1-1/2" x 1-1/2" x 1-1/4"	10	30
PXRT2001-NL	2" x 2" x 1/2"	5	25
PXRT2002-NL	2" x 2" x 3/4"	5	25
PXRT2003-NL	2" x 2" x 1"	5	20
PXRT2004-NL	2" x 2" x 1-1/2"	5	20

Brass PEX Plug

PEX

- Lead Free



EPPL0114-NL	1-1/4"	10	100
EPPL0112-NL	1-1/2"	10	80
EPPL0200-NL	2"	10	60

Brass PEX Coupling

PEX x PEX

- Lead Free



PART #	SIZE	INNER	MASTER
EPCP0114-NL	1-1/4"	10	100
EPCP0112-NL	1-1/2"	10	60
EPCP0200-NL	2"	5	40
EPRC1134-NL	1-1/4" x 3/4"	10	100
EPRC1101-NL	1-1/4" x 1"	10	100
EPRC1534-NL	1-1/2" x 3/4"	10	80
EPRC1501-NL	1-1/2" x 1"	10	80
EPRC1511-NL	1-1/2" x 1-1/4"	10	80
EPRC2015-NL	2" x 1-1/2"	5	40

Brass PEX Adapter

PEX x IPS

- Lead Free



EPMA0114-NL	1-1/4" x 1-1/4"	10	60
EPMA0112-NL	1-1/2" x 1-1/2"	10	40
EPMA0200-NL	2" x 2"	5	20

Brass PEX Adapter

PEX x SWT

- Lead Free



PSFA1101-NL	1-1/4" x 1"	10	80
PSFA0114-NL	1-1/4" x 1-1/4"	10	100
PSFA0112-NL	1-1/2" x 1-1/2"	10	60
PSFA0200-NL	2" x 2"	5	25

PEX Crimp Ring

Copper



EPCR0114-NL	1-1/4"	50	200
EPCR0112-NL	1-1/2"	50	100
EPCR0200-NL	2"	25	100

COPPER PEX Sweat x PEX Fittings

Features

- Copper PEX
- ASTM F1807



Copper Adapter

Sweat x PEX



PART #	SIZE	INNER	MASTER
PSMA1212-NL	1/2" Male Sweat x 1/2" PEX	50	500
PSMA3434-NL	3/4" Male Sweat x 3/4" PEX	50	250
PSMA1010-NL	1" Male Sweat x 1" PEX	25	250
PSFA1212-NL	1/2" Female Sweat x 1/2" PEX	50	500
PSFA3434-NL	3/4" Female Sweat x 3/4" PEX	50	250
PSFA1010-NL	1" Female Sweat x 1" PEX	50	250

Copper Elbow

Sweat x PEX



PART #	SIZE	INNER	MASTER
PXSL1212-NL	1/2" Female Sweat x 1/2" PEX	50	500
PXSL3434-NL	3/4" Female Sweat x 3/4" PEX	50	250
PXSL1010-NL	1" Female Sweat x 1" PEX	50	250
PXSL1234-NL	1/2" Female Sweat x 3/4" PEX	50	250
PXSL1238-NL	1/2" Female Sweat x 3/8" PEX	50	500
PXSL1258-NL	1/2" Female Sweat x 5/8" PEX	50	500
PXSL3412-NL	3/4" Female Sweat x 1/2" PEX	50	250



Copper Crimp Ring

PEX

- Buy America Compliant Made in Canada

PART #	SIZE	INNER	MASTER
C-EPCR0038	3/8"	100	2000
C-EPCR0012	1/2"	100	2000
C-EPCR0058	5/8"	100	1200
C-EPCR0034	3/4"	100	1200
C-EPCR0100	1"	100	500

Brass PEX Elbow

PEX x Female FIP

- Lead Free

PART #	SIZE	INNER	MASTER
PXFL1212-NL	1/2" Female IP x 1/2" PEX	25	100
PXFL3434-NL	3/4" Female IP x 3/4" PEX	25	100



Water Heater Pans


Available in Aluminum & Black Plastic

- PVC Drain fitting included for 1" and 1-1/2"
- Protects your property from water damage

ALUMINUM #	PLASTIC #	SIZE	QTY
AWHP20	-	20"	10
AWHP22	PWHP22	22"	10
AWHP24	PWHP24	24"	10
AWHP26	PWHP26	26"	10
AWHP28	PWHP28	28"	10
AWHP30	-	30"	10

PVC MALE ADAPTER - W/ WASHER & LOCK NUT

PART #	SIZE	QTY
AWLN01WH	1"	100

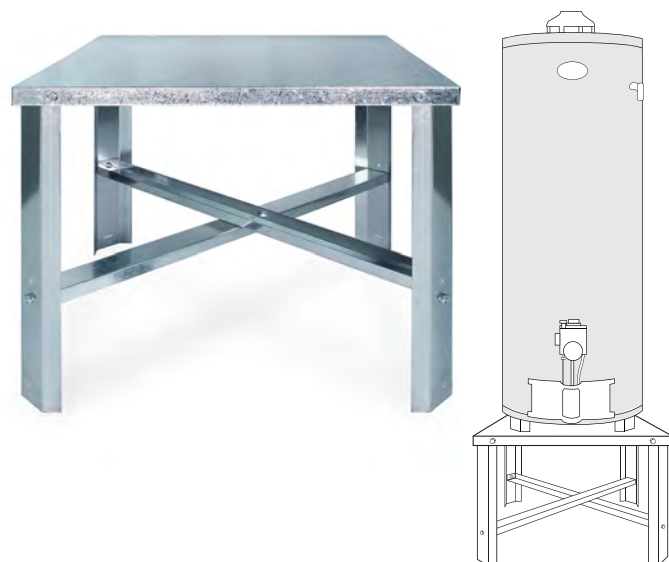

Steel Water Heater Stand


- 18 Gauge galvanized steel construction
- 650lb Load rating & up to 52 gallons
- Seismic clips included for secure mounting

PART #	SIZE	QTY
GWHS21	21" x 21" x 18"	5
GWHS24	24" x 24" x 18"	5


Steel Water Heater Straps

- Adjustable - Fits up to 80 gallon tanks
- Protect your home & family against water, fire & explosions
- Easy to install / Corrosion resistant
- Wrap around mount

PART #	SIZE	QTY
GWHSE55	UP TO 55 GALLONS WITH CLIP	8
GWHSE80	UP TO 80 GALLONS WITH CLIP	8

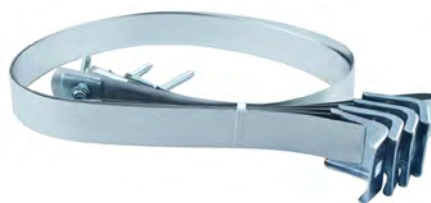

PROTECTS DURING
 **EARTHQUAKES**
 **HURRICANES**
 **TORNADOS**

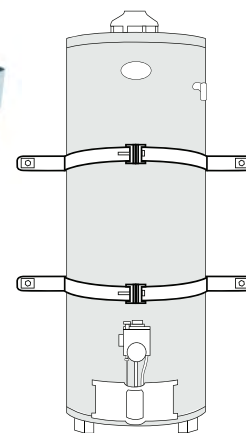

Ball Drip Valve

NPT Thread x NPT Thread

- Lead free brass
- Two piece
- Solid brass ball
- NPT threads
- For horizontal use only



PART#	SIZE	INNER	MASTER
681T012-NL	1/2"	10	100
681T034-NL	3/4"	10	100



Trap Primer

Pressure Drop Activated

- Lead free brass
- Built in vacuum breaker ports
- Threaded inlet and outlet connection



PART #	SIZE	INNER	MASTER
681T012-NL	1/2"	10	100
681T034-NL	3/4"	10	100



PRESSURE BALANCE Shower Cartridge

Features

- Anti-scald capability
- Pressure balance design
- Air tested to avoid leaking
- Gerber replacement
- Works for hot and cold
- All plastic construction
- Stops leaks



PART #	DESCRIPTION	INNER	MASTER
PBGS	Rep Shower Cartridge	1	10



5 Gallon Bucket

- All purpose plastic pail
- Features durable plastic construction
- Tapered for easy stacking

RAVEN
INDUSTRIAL PRODUCTS

PART #	DESCRIPTION	INNER	MASTER
5GB	5 Gallon Bucket	1	1
5GL	5 Gallon Lid	1	1
5GBLKT	White Bucket / Blue Lid	1	1

Universal Thermocouples

- For gas furnaces and 30 millivolt systems
- Positive positioning for quick insertion
- Includes adapter fittings
- Heavy-duty, long-lasting element

PART #	DESCRIPTION	INNER	MASTER
TCP18	18"	1 Carded/25	100
TCP24	24"	1 Carded/25	100
TCP30	30"	1 Carded/25	100
TCP36	36"	1 Carded/25	100
TCP48	48"	1 Carded/25	100





CLOSET BOLTS

- 4 Washers
- 2 Nuts & 2 Bolts

EZ-Snap Brass Closet Bolts

RAVEN
SPECIALTY PRODUCTS

- Quick snap off design
no hack saw needed
- Solid brass bolts, nuts, and washers
- With plastic grip tight washers



JBEZ-14214	2-1/4" x 2-1/4"	100	200
JBEZ-516214	2-5/16" x 2-1/4"	100	200
JBEZ-516312	2-5/16" x 3-1/2"	100	200

Brass Plated Closet Bolts

RAVEN
SPECIALTY PRODUCTS

- Nickel plated nuts and washers
- Brass plated closet bolts
- With plastic grip tight washers



JBCB-14214	2-1/4" x 2-1/4"	100	200
JBCB-14312	2-1/4" x 3-1/2"	100	200
JBCB-516214	2-5/16" x 2-1/4"	100	200
JBCB-516312	2-5/16" x 3-1/2"	100	200

Solid Brass Closet Bolts

RAVEN
SPECIALTY PRODUCTS

- Solid brass bolts
- Nickel plated brass nuts, SS washers
- With plastic grip tight washers



S-JBCB-14214	2-1/4" x 2-1/4"	100	200
S-JBCB-14312	2-1/4" x 3-1/4"	100	200
S-JBCB-516214	2-5/16" x 2-1/4"	100	200
S-JBCB-516312	2-5/16" x 3-1/4"	100	200

Specialty Cast Iron Closet Flange Extra Heavy / Specialty

RAVEN
SPECIALTY PRODUCTS



CFCX4212	4" x 2-1/2"	1	12
CFCX0404	4" x 4"	1	12
CFCX0406	4" x 6"	1	8
CFC50402	4" x 2" Shallow Offset	1	12
CFCNH0403	4" x 3" No Hub	1	12
CFCCR0403	4" x 3" Caulk Reducing	1	12
CFCD0404	4" x 4" Deep Offset	1	12

Closet Flange Cast Iron



CI41-320	3" x 2"	12	12
CI41-420	4" x 2"	12	12
CI41-430	4" x 3"	8	8
CI41-440	4" x 4"	8	8
CI43-441	4" x 4" Offset	8	8

Boiler Plug

- Boiler tube plug
- Cast iron body
- Square head for wrench



BP200	2"	8	16
BP212	2-1/2"	24	48
BP300	3"	5	10

Lead Plug

- Lead "Fit All" plug
- Cast iron body
- Square head for wrench



LP200	2"	24	48
LP212	2-1/2"	24	48
LP300	3"	12	24
LP312	3-1/2"	12	24
LP400	4"	6	12
LP412	4-1/2"	6	12
LP500	5"	1	8
LP512	5-1/2"	1	8
LP600	6"	1	8

High Quality PTFE Sealing Tape

- A new, thicker, professional-grade density
- Protects against rust and corrosion
- Creates a permanent, watertight seal
- Easy to apply



RAVEN
SPECIALTY PRODUCTS



Point of sale display box

Designed for threads made from galvanized steel, iron, brass, copper, aluminum, stainless steel, polyethylene, polypropylene, PVC, CPVC, ABS, fiberglass and more.

Will not harden or crack on the joints

Raven PTFE polytetrafluoropolyethylene thread sealing tape is a thicker, denser, general-purpose thread seal tape. Fewer wraps are necessary to affect a leak-proof seal and it applies easily. No waste, and no re-taping make sealing joints an easy task. Raven thread sealing tape is manufactured from PTFE resin, a polymer consisting of recurring tetrafluoroethylene monomers (CF₂-CF₂)_n formula.



White PTFE Sealing Tape

Composition: 99.6% PTFE < 0.4%
Pigment Color: White
Thickness: 0.0035" +/- 10%
Tensile Strength: 15N / mm²
Density: 0.8g/cm³



Gray PTFE Sealing Tape

Composition: 99.6% PTFE < 0.4%
Pigment Color: Gray
Thickness: 0.0035" +/- 10%
Tensile Strength: 15N / mm²
Density: 0.8g/cm³

PART #	SIZE	INNER	MASTER	LIST PRICE
TTC12520	1/2" x 520	25	250	\$1.67
TTC34520	3/4" x 520	25	250	\$2.22
TTC1296	1/2" x 1296	25	250	\$3.33

PART #	SIZE	INNER	MASTER	LIST PRICE
TTC12520G	1/2" x 520	45	250	\$1.67
TTC34520G	3/4" x 520	45	250	\$2.22
* TTC1296G	1/2" x 1296	63	252	\$3.33
* TTC3496G	3/4" x 1296	45	180	\$4.44

* Sold in Display Case

Brass Elbow

F1960 PEX x F1960 PEX

- Lead Free



PART #	SIZE	INNER	OUTER
WPLN0038-NL	3/8"	50	400
WPLN0012-NL	1/2"	50	200
WPLN0058-NL	5/8"	50	200
WPLN0034-NL	3/4"	50	150
WPLN0100-NL	1"	50	80
WPRL3412-NL	3/4" x 1/2"	50	200

Brass Elbow

F1960 PEX x Female Sweat

- Lead Free



PWSL1212-NL	1/2" x 1/2" Female SWT	25	250
PWSL1234-NL	1/2" x 3/4" Female SWT	25	100
PWSL3458-NL	3/4" x 5/8" Female SWT	50	150
PWSL3412-NL	3/4" x 1/2" Female SWT	25	150
PWSL3434-NL	3/4" x 3/4" Female SWT	25	100

Brass Elbow

F1960 PEX x Male Sweat

- Lead Free



WPMSL1212-NL	1/2" x 1/2" Male SWT	25	200
WPMSL1234-NL	1/2" x 3/4" Male SWT	25	200
WPMSL5834-NL	5/8" x 3/4" Male SWT	25	100
WPMSL3434-NL	3/4" x 3/4" Male SWT	25	150

Brass Elbow

F1960 PEX x MIP

- Lead Free



WPML1212-NL	1/2" x 1/2" MIP	25	200
WPML1234-NL	1/2" x 3/4" MIP	25	100
WPML5834-NL	5/8" x 3/4" MIP	25	100
WPML3434-NL	3/4" x 3/4" MIP	25	100
WPML3410-NL	3/4" x 1" MIP	25	100

Brass Swivel Elbow

F1960 PEX x FIP

- Lead Free



PART #	SIZE	INNER	OUTER
WPFSL1212-NL	1/2" x 1/2" FIP	25	200
WPFSL3434-NL	3/4" x 3/4" FIP	25	100

Brass Drop Ear Elbow

F1960 PEX x FIP

- Lead Free



WPDL0012-NL	1/2" x 1/2" FIP	25	150
WPDL0034-NL	3/4" x 3/4" FIP	25	100

Brass Tee

F1960 PEX

- Lead Free



WPTE0038-NL	3/8"	100	300
WPTE0012-NL	1/2"	50	200
WPTE0034-NL	3/4"	25	100
WPTE0100-NL	1"	10	50

Brass Reducing Tee

F1960 PEX

- Lead Free



WPRT1213-NL	1/2" x 1/2" x 3/4"	25	100
WPRT3411-NL	3/4" x 1/2" x 1/2"	25	100
WPRT3413-NL	3/4" x 1/2" x 3/4"	25	100
WPRT3431-NL	3/4" x 3/4" x 1/2"	25	100
WPRT3410-NL	3/4" x 3/4" x 1"	10	150
WPRT1013-NL	1" x 1/2" x 3/4"	10	50
WPRT1121-NL	1" x 1/2" x 1"	10	50
WPRT1031-NL	1" x 3/4" x 1/2"	10	50
WPRT1033-NL	1" x 3/4" x 3/4"	10	50
WPRT1341-NL	1" x 3/4" x 1"	10	50
WPRT1112-NL	1" x 1" x 1/2"	10	50
WPRT1134-NL	1" x 1" x 3/4"	10	50

Brass Coupling

F1960 PEX x F1960 PEX

- Lead Free



PART #	SIZE	INNER	MASTER
WPCP0038-NL	3/8"	50	700
WPCP0012-NL	1/2"	50	400
WPCP0058-NL	5/8"	50	250
WPCP0034-NL	3/4"	50	250
WPCP0100-NL	1"	25	100
WPRC1238-NL	1/2" x 3/8"	50	500
WPRC3412-NL	3/4" x 1/2"	50	200
WPRC1034-NL	1" x 3/4"	25	150

Brass Adapter

F1960 PEX x Female Sweat

- Lead Free



WPSFA1212-NL	1/2" x 1/2" Female SWT	50	500
WPSFA1258-NL	5/8" x 1/2" Female SWT	50	400
WPSFA1234-NL	1/2" x 3/4" Female SWT	50	250
WPSFA3412-NL	3/4" x 1/2" Female SWT	50	250
WPSFA3434-NL	3/4" x 3/4" Female SWT	50	250
WPSFA1034-NL	1" x 3/4" Female SWT	50	150
WPSFA1010-NL	1" x 1" Female SWT	25	100

Brass Adapter

F1960 PEX x Male Sweat

- Lead Free



WPSMA1238-NL	3/8" x 1/2" Male SWT	50	700
WPSMA1212-NL	1/2" x 1/2" Male SWT	50	500
WPSMA1234-NL	1/2" x 3/4" Male SWT	25	250
WPSMA3412-NL	3/4" x 1/2" Male SWT	25	250
WPSMA3434-NL	3/4" x 3/4" Male SWT	25	250
WPSMA1034-NL	1" x 3/4" Male SWT	50	150
WPSMA1010-NL	1" x 1" Male SWT	25	150

Brass Red. Coupling

F1960 PEX x F1960 PEX

- Lead Free



PART #	SIZE	INNER	MASTER
WPRC1238-NL	1/2" x 3/8"	50	500
WPRC3412-NL	3/4" x 1/2"	50	200
WPRC1034-NL	1" x 3/4"	25	150

Brass Adapter

F1960 PEX x FIP

- Lead Free



WPFA1212-NL	1/2" x 1/2" FIP	50	250
WPFA1234-NL	1/2" x 3/4" FIP	25	150
WPFA3412-NL	3/4" x 1/2" FIP	25	150
WPFA3434-NL	3/4" x 3/4" FIP	15	150
WPFA3410-NL	3/4" x 1" FIP	50	100
WPFA1010-NL	1" x 1" FIP	50	100

Brass Adapter

F1960 PEX x MIP

- Lead Free



WPMA0012-NL	1/2" x 1/2" MIP	50	250
WPMA1234-NL	1/2" x 3/4" MIP	50	150
WPMA5812-NL	5/8" x 1/2" MIP	50	200
WPMA3412-NL	3/4" x 1/2" MIP	50	200
WPMA3434-NL	3/4" x 3/4" MIP	50	200
WPMA3410-NL	3/4" x 1" MIP	25	100

Brass Plug

F1960 PEX

- Lead Free



WPPL0038-NL	3/8"	100	1,000
WPPL0012-NL	1/2"	50	600
WPPL0034-NL	3/4"	50	300
WPPL0100-NL	1"	50	150

Poly-Alloy Elbow

F1960 PEX Elbow

- Lead Free



PART #	SIZE	INNER	MASTER
B-FPLN0012	1/2"	25	250
B-FPLN0034	3/4"	10	120
B-FPLN0100	1"	10	100
B-FPRL3412	3/4" x 1/2"	10	120

Poly-Alloy Adapter

F1960 PEX x MIP

- Lead Free



B-FPMA0012	1/2" x 1/2" MIP	25	300
------------	-----------------	----	-----

Poly-Alloy Coupling

F1960 PEX

- Lead Free



B-FPPCP0012	1/2"	25	500
B-FPPCP0034	3/4"	25	200
B-FPPCP0100	1"	10	100
B-FPRC1034	1" x 3/4"	25	150
B-FPRC1234	1/2" x 3/4"	25	250
B-FPRC1238	1/2" x 3/8"	50	1,000

Poly-Alloy Plug

F1960 PEX

- Lead Free



PART #	SIZE	INNER	MASTER
B-FPPL0012	1/2"	50	800
B-FPPL0034	3/4"	25	400
B-FPPL0100	1"	25	250

Poly-Alloy Tee

F1960 PEX

- Lead Free



B-FPTE0012	1/2"	25	200
B-FPTE0034	3/4"	10	100
B-FPTE0100	1"	10	60

Poly-Alloy Red. Tee

F1960 PEX

- Lead Free



B-FPTE1213	1/2" x 1/2" x 3/4"	25	200
B-FPTE3411	3/4" x 1/2" x 1/2"	10	120
B-FPTE3413	3/4" x 1/2" x 3/4"	10	100
B-FPTE3431	3/4" x 3/4" x 1/2"	10	100
B-FPTE1341	1" x 3/4" x 3/4"	10	80
B-FPTE1033	1" x 1" x 1/2"	10	80
B-FPTE1112	1" x 3/4" x 1"	10	80
B-FPTE3410	1" x 1" x 3/4"	10	80

Brass Drop Ear Tee

F1960 PEX x F1960 PEX x FIP

- Lead Free



RAVEN
PEX F1960 PEX

WIDT0012-NL	1/2" x 1/2" x 1/2" FIP	15	150
WIDT0034-NL	3/4" x 3/4" x 3/4" FIP	10	100

Monoflow Tee

F1960 PEX

- Lead Free



RAVEN
PEX F1960 PEX

MFW3412	3/4" x 3/4" x 1/2"	10	40
---------	--------------------	----	----

ASTM F1960 Expansion PEX Sleeve With Stop Edge



- For use installing PEX-a tubing with ASTM F1960 Expansion PEX fittings
- Includes a stop edge to further simplify the use of Expansion PEX fittings

PART #	DESCRIPTION	INNER	MASTER
FPXSL038	3/8"	40	4,000
FPXSL012	1/2"	20	2,000
FPXSL058	5/8"	50	2,500
FPXSL034	3/4"	40	2,000
FPXSL100	1"	26	1,300
FPXSL114	1-1/4"	10	200
FPXSL112	1-1/2"	10	200
FPXSL200	2"	15	375

Chrome Plated 1/4 Turn Stops F1960 PEX Oval Handle

- NSF & UPC Approved
- Oval Handle
- Lead Free



PART #	DESCRIPTION	INNER	MASTER
F-82512PR-NL	1/2" F1960 x 3/8" Comp Straight	10	100
F-81512PR-NL	1/2" F1960 x 3/8" Comp Angle	10	100

Chrome Plated 1/4 Turn Stops F1960 PEX Lever Handle

- NSF & UPC Approved
- Lever Handle
- Lead Free



PART #	DESCRIPTION	INNER	MASTER
27-WA1214-NL	1/2" F1960 x 1/4" Comp Angle	10	100
27-WA12-NL	1/2" F1960 x 3/8" Comp Angle	10	100
27-WS12-NL	1/2" F1960 x 3/8" Comp Straight	10	100

CP Frost Free Sillcock 3/4" Hose x 1/2" F1960 PEX

- Lead Free Compliant



SIZE	STANDARD	ANTI SIPHON	INNER	MASTER
4"	6204F-NL	-	2	40
6"	6206F-NL	62061F-NL	2	40
8"	6208F-NL	62081F-NL	2	40
10"	6210F-NL	62101F-NL	2	40
12"	6212F-NL	62121F-NL	2	40
14"	6214F-NL	-	2	40

CP F1960 PEX Sillcock Oversized Flange

- Lead Free Compliant
- 1/4 Turn Lever



RAVEN
MANUFACTURING

PART #	DESCRIPTION	INNER	MASTER
1165WIR-NL	1/2"	10	50

F1960 PEX Stub Outs

- Accepts sweat, push, and compression Valves
- Enables easy adapting with F1960 PEX system
- Lead Free Compliant



PART #	DESCRIPTION	INNER	MASTER
FSO-12S8	1/2" x 8" Straight Stub Out	1	50
FSO-34S8	3/4" x 8" Straight Stub Out	1	30
FSO-12L8	1/2" x 3-1/2" x 8" Stub Out Elbow	1	50
FSO-34L8	3/4" x 4" x 8" Stub Out Elbow	1	30
FSO-12F8	1/2" x 3-1/2" x 8" Stub Out Elbow - Flange	1	25
FSO-34F8	3/4" x 4" x 8" Stub Out Elbow - Flange	1	20

PEX Ball Valves**F1960 PEX**

- Lead Free Forged Brass
- Full Port
- 400 PSI (CWP)
- UPC Approved
- Blow-Out Proof Stems
- ASTM F1960



PART #	SIZE	INNER	MASTER
600F012-NL	1/2" F1960 PEX	10	100
600F034-NL	3/4" F1960 PEX	10	100
600F001-NL	1" F1960 PEX	5	50
600F114-NL	1-1/4" F1960 PEX	5	25
600F112-NL	1-1/2" F1960 PEX	5	25
600F002-NL	2" F1960 PEX	2	12

Adapter Ball Valves**F1960 PEX x SWT**

- Lead Free Forged Brass
- Full Port
- 400 PSI (CWP)
- UPC Approved
- Blow-Out Proof Stems
- ASTM F1960



FSBL-012-NL	1/2" F1960 PEX x SWT	10	100
FSBL-034-NL	3/4" F1960 PEX x SWT	10	100
FSBL-001-NL	1" F1960 PEX x SWT	5	50

Adapter Ball Valves**F1960 PEX x FIP**

- Lead Free Forged Brass
- Full Port
- 400 PSI (CWP)
- UPC Approved
- Blow-Out Proof Stems
- ASTM F1960



FFBL-012-NL	1/2" F1960 PEX x FIP	10	100
FFBL-034-NL	3/4" F1960 PEX x FIP	10	100
FFBL-001-NL	1" F1960 PEX x FIP	5	50

Drop Ear Ball Valves**F1960 PEX x F1960 PEX**

- Lead Free Forged Brass
- Full Port
- 400 PSI (CWP)
- UPC Approved
- Blow-Out Proof Stems
- ASTM F1960



806W012-NL	1/2" F1960 PEX	20	100
806W034-NL	3/4" F1960 PEX	10	50

PEX Ball Valves**F1960 PEX With Drain**

- Lead Free Forged Brass
- Full Port
- 400 PSI (CWP)
- UPC Approved
- Blow-Out Proof Stems
- ASTM F1960



PART #	SIZE	INNER	MASTER
405F012-NL	1/2" F1960 PEX	10	100
405F034-NL	3/4" F1960 PEX	10	100
405F001-NL	1" F1960 PEX	5	50

Adapter Ball Valves**F1960 PEX x MIP**

- Lead Free Forged Brass
- Full Port
- 400 PSI (CWP)
- UPC Approved
- Blow-Out Proof Stems
- ASTM F1960



FMBL-012-NL	1/2" F1960 PEX x MIP	10	100
FMBL-034-NL	3/4" F1960 PEX x MIP	10	100
FMBL-001-NL	1" F1960 PEX x MIP	5	50

Drop Ear Ice Maker**F1960 PEX x F1960 PEX x COMP**

- Lead Free Forged Brass
- Full Port
- 400 PSI (CWP)
- UPC Approved
- Blow-Out Proof Stems
- ASTM F1960



WIMV12-NL	1/2" x 1/2" x 1/4" COMP	1	60
-----------	-------------------------	---	----

Drop Ear Ball Valves**F1960 PEX With Drain**

- Lead Free Forged Brass
- Full Port
- 400 PSI (CWP)
- UPC Approved
- Blow-Out Proof Stems
- ASTM F1960



807W012-NL	1/2" F1960 PEX	20	100
807W034-NL	3/4" F1960 PEX	10	50