


Model UB Full port union. The union has an EPDM O-ring seal and tailpiece available in MNPT, FNPT and SWT end connections.

SPECIFICATIONS

Pressure Ratings: 600 PSI (4140 kPa)
 Temperature Ratings: 250 °F (120 °C)
 Body Material: Forged Brass
 End Connections: Brass - Fixed End: SWT, FNPT
 Union End: SWT, FNPT, & MNPT
 Seals: EPDM
 Available Options: Hose end drain valve.

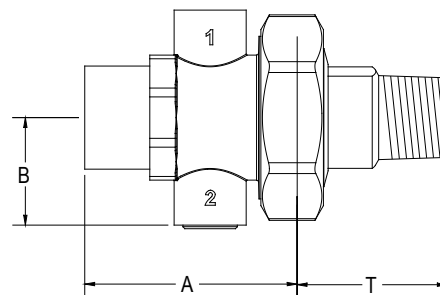

NOMINAL DIMENSIONS & WEIGHTS

Size		A			B	*T MPT	Wgt	
in	mm		FNPT	SWT			lbs	kg
3/8"	10	in	N/A	1.88	0.87	N/A	0.76	0.35
		mm	N/A	47.68				
1/2"	15	in	1.99	1.88	0.87	1.50	0.86	0.39
		mm	50.47	47.68	22.10	38.10		
3/4"R	20	in	2.04	2.12	0.87	1.55	0.79	0.36
		mm	51.82	53.90	22.10	39.37		
3/4"	20	in	2.04	2.12	1.11	1.56	1.06	0.48
		mm	51.82	53.90	28.19	39.70		
1"	25	in	2.15	2.28	1.11	1.75	1.16	0.53
		mm	54.56	57.85	28.19	44.72		
1-1/4"	32	in	2.39	2.56	1.49	1.80	2.20	1.00
		mm	60.63	65.05	36.98	45.72		
1-1/2"	40	in	2.39	2.69	1.49	1.80	2.42	1.10
		mm	60.63	68.35	36.98	45.72		
2"	50	in	2.49	3.03	1.80	1.98	3.42	1.55
		mm	63.30	76.96	44.75	50.17		

* Please reference the tailpiece data sheet (Form #M-TP) for other sizes and connections.
Dimensions not for construction purposes unless certified by factory.

Optional features and accessories available for this Macon product are an extra charge, and not included in the standard model price.

Tunstall Corporation
 118 Exchange Street
 Chicopee, MA 01013