



Data sheet | Item number: 2001-1208

2-conductor shield terminal block; 1.5 mm²; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 1,50 mm²; white

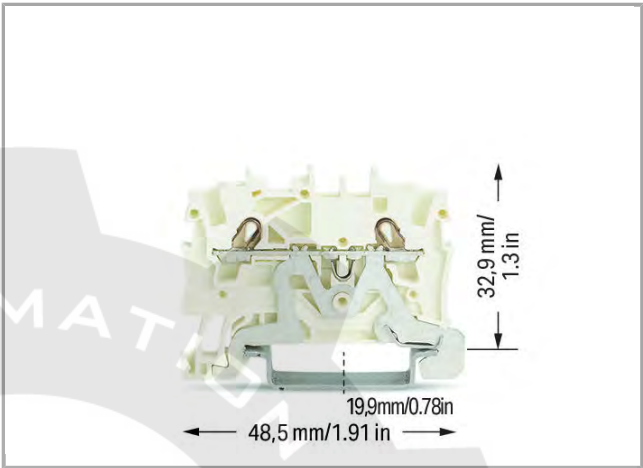


2001-1208

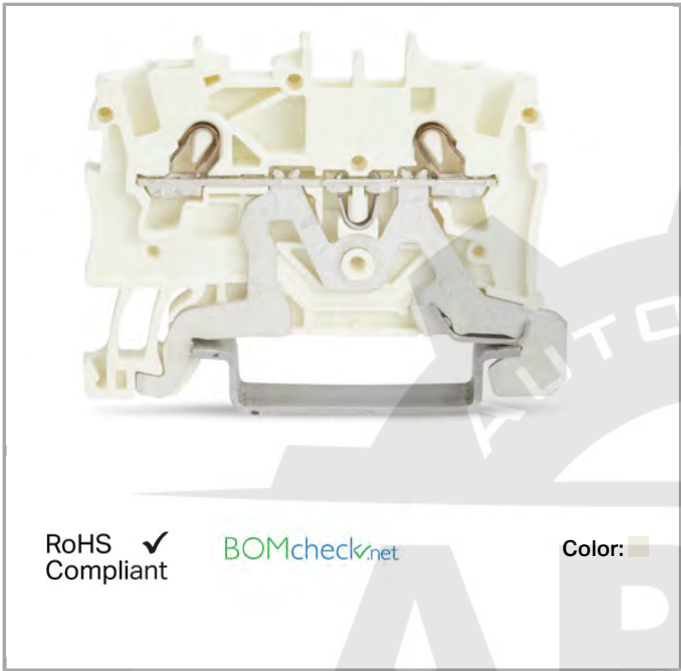

RoHS Compliant

[BOMcheck.net](#)

Color:

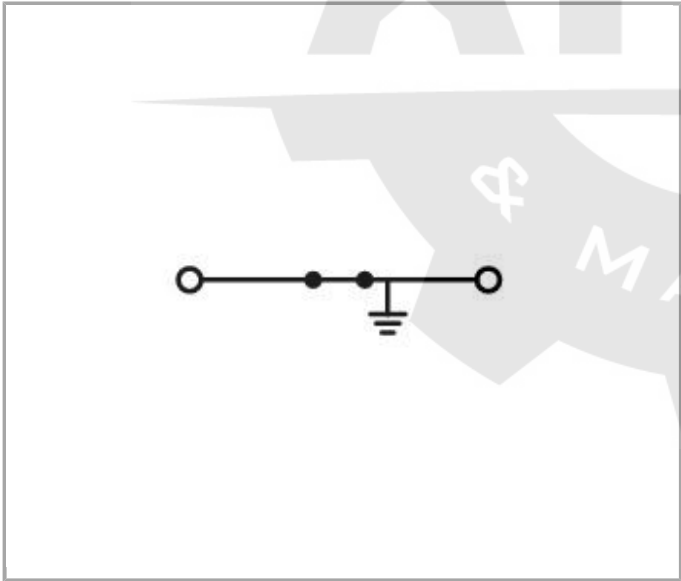

Data

Connection data

Connection technology	Push-in CAGE CLAMP®
Actuation type	Push-in Open Tool Slot



Connectable conductor materials	Copper
Nominal cross section	1.5 mm ²
Solid conductor	0.25 2.5 mm ² / 22 14 AWG
Solid conductor, push-in termination	0.75 2.5 mm ² / 18 14 AWG
Fine-stranded conductor	0.25 2.5 mm ² / 22 14 AWG
Strip length	9 11 mm / 0.35 0.43 inch
Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.
Total number of connection points	2
Number of levels	1
Type of wiring	Front-entry wiring
Number of jumper slots	2

Geometrical Data

Width	4.2 mm / 0.165 inch
Height from upper-edge of DIN-35 rail	32.9 mm / 1.295 inch
Depth	50.8 mm / 2 inch

Mechanical data

Design	horizontal
Type of mounting	DIN-35 rail
Marking level	Center/side marking

Material Data

Color	white
Insulating material	Polyamide 66 (PA 66)
Weight	6.517 g

Commercial data

Country of origin	DE
GTIN	4055143448208
Customs Tariff No.	85369010000

Approvals / Certificates

Radio-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947	2160584.07



CCA
DEKRA Certification B.V.

EN 60947

NTR NL-
7084



CSA
DEKRA Certification B.V.

C22.2 No. 158

1645434

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947	2160584.07
	CCA DEKRA Certification B.V.	EN 60947	NTR NL- 7084
	CSA DEKRA Certification B.V.	C22.2 No. 158	1645434
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001V2
	LR Lloyds Register	EN 60947	91/20112 (E9)

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	ABS American Bureau of Shipping	EN 60947	14- HG1293677- PDA
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001V2
	LR Lloyds Register	EN 60947	91/20112 (E9)

Other Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH	UL 1059	E45172

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH	UL 1059	20190731- E45172

Compatible products



End plate

	Item no.: 2002-1291 End and intermediate plate; 0.8 mm thick; gray	2002-1291
	Item no.: 2002-1292 End and intermediate plate; 0.8 mm thick; orange	2002-1292
	Item no.: 2002-1293 Separator plate; 2 mm thick; oversized; gray	2002-1293
	Item no.: 2002-1294 Separator plate; 2 mm thick; oversized; orange	2002-1294

Marking accessories

	Item no.: 2009-110 Marking strips; on reel; not stretchable; plain; snap-on type; white	2009-110
	Item no.: 2009-114 WMB-Inline; for Smart Printer; on reel; stretchable 4 - 4.2 mm; plain; snap-on type; white	2009-114
	Item no.: 2009-114/000-002 WMB-Inline; for Smart Printer; on reel; stretchable 4 - 4.2 mm; plain; snap-on type; yellow	2009-114 /000-002

	Item no.: 2009-114/000-005 WMB-Inline; for Smart Printer; on reel; stretchable 4 - 4.2 mm; plain; snap-on type; red	/000-005	2009-114
	Item no.: 2009-114/000-006 WMB-Inline; for Smart Printer; on reel; stretchable 4 - 4.2 mm; plain; snap-on type; blue	/000-006	2009-114
	Item no.: 2009-114/000-007 WMB-Inline; for Smart Printer; on reel; stretchable 4 - 4.2 mm; plain; snap-on type; gray	/000-007	2009-114
	Item no.: 2009-114/000-012 WMB-Inline; for Smart Printer; on reel; stretchable 4 - 4.2 mm; plain; snap-on type; orange	/000-012	2009-114
	Item no.: 2009-114/000-023 WMB-Inline; for Smart Printer; on reel; stretchable 4 - 4.2 mm; plain; snap-on type; green	/000-023	2009-114
	Item no.: 2009-114/000-024 WMB-Inline; for Smart Printer; on reel; stretchable 4 - 4.2 mm; plain; snap-on type; violet	/000-024	2009-114
	Item no.: 793-4501 WMB marking card; as card; stretchable 4 - 4.2 mm; plain; snap-on type; white		793-4501
	Item no.: 793-4501/000-002 WMB marking card; as card; stretchable 4 - 4.2 mm; plain; snap-on type; yellow	/000-002	793-4501
	Item no.: 793-4501/000-005 WMB marking card; as card; stretchable 4 - 4.2 mm; plain; snap-on type; red	/000-005	793-4501
	Item no.: 793-4501/000-006 WMB marking card; as card; stretchable 4 - 4.2 mm; plain; snap-on type; blue	/000-006	793-4501
	Item no.: 793-4501/000-007 WMB marking card; as card; stretchable 4 - 4.2 mm; plain; snap-on type; gray	/000-007	793-4501
	Item no.: 793-4501/000-012 WMB marking card; as card; stretchable 4 - 4.2 mm; plain; snap-on type; orange	/000-012	793-4501
	Item no.: 793-4501/000-017 WMB marking card; as card; stretchable 4 - 4.2 mm; plain; snap-on type; light green	/000-017	793-4501
	Item no.: 793-4501/000-023 WMB marking card; as card; stretchable 4 - 4.2 mm; plain; snap-on type; green	/000-023	793-4501
	Item no.: 793-4501/000-024 WMB marking card; as card; stretchable 4 - 4.2 mm; plain; snap-on type; violet	/000-024	793-4501

	Item no.: 793-501 WMB marking card; as card; not stretchable; plain; snap-on type; white	793-501
	Item no.: 793-501/000-002 WMB marking card; as card; not stretchable; plain; snap-on type; white	793-501 /000-002
	Item no.: 793-501/000-005 WMB marking card; as card; not stretchable; plain; snap-on type; white	793-501 /000-005
	Item no.: 793-501/000-006 WMB marking card; as card; not stretchable; plain; snap-on type; white	793-501 /000-006
	Item no.: 793-501/000-007 WMB marking card; as card; not stretchable; plain; snap-on type; white	793-501 /000-007
	Item no.: 793-501/000-012 WMB marking card; as card; not stretchable; plain; snap-on type; white	793-501 /000-012
	Item no.: 793-501/000-017 WMB marking card; as card; not stretchable; plain; snap-on type; white	793-501 /000-017
	Item no.: 793-501/000-023 WMB marking card; as card; not stretchable; plain; snap-on type; white	793-501 /000-023
	Item no.: 793-501/000-024 WMB marking card; as card; not stretchable; plain; snap-on type; white	793-501 /000-024
Carrier rail		
	Item no.: 210-112 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm	210-112
	Item no.: 210-113 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715	210-113
	Item no.: 210-114 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715	210-114
	Item no.: 210-115 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm	210-115
	Item no.: 210-118 Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715	210-118
	Item no.: 210-196 Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored	210-196
	Item no.: 210-197 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715	210-197

**Item no.: 210-198**

210-198

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

Insulation stop**Item no.: 2001-171**

2001-171

Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip; light gray

Protective Warning Marker**Item no.: 2001-115**

2001-115

Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks; yellow

ferrule**Item no.: 216-241**

216-241

Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white

**Item no.: 216-242**

216-242

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

**Item no.: 216-243**

216-243

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

**Item no.: 216-244**

216-244

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

tools**Item no.: 210-647**

210-647

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

**Item no.: 210-648**

210-648

Operating tool with partially insulated shaft; Blade (2.5 x 0.4) mm; short; angled

**Item no.: 210-719**

210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Jumper**Item no.: 2001-402**

2001-402

Push-in type jumper bar; insulated; 2-way; Nominal current 18 A; light gray

**Item no.: 2001-403**

2001-403

Push-in type jumper bar; insulated; 3-way; Nominal current 18 A; light gray

**Item no.: 2001-404**

2001-404

Push-in type jumper bar; insulated; 4-way; Nominal current 18 A; light gray

**Item no.: 2001-405**

2001-405

Push-in type jumper bar; insulated; 5-way; Nominal current 18 A; light gray

**Item no.: 2001-405/011-000**

2001-405

Star point jumper; insulated; 3-way (1-3-5); IN = IN terminal block; light gray

/011-000

**Item no.: 2001-406**

2001-406

Push-in type jumper bar; insulated; 6-way; Nominal current 18 A; light gray

**Item no.: 2001-406/020-000**

Delta jumper; insulated; 1-2 3-4 5-6; IN = IN terminal block; light gray

2001-406

/020-000

**Item no.: 2001-407**

Push-in type jumper bar; insulated; 7-way; Nominal current 18 A; light gray

2001-407

**Item no.: 2001-408**

Push-in type jumper bar; insulated; 8-way; Nominal current 18 A; light gray

2001-408

**Item no.: 2001-409**

Push-in type jumper bar; insulated; 9-way; Nominal current 18 A; light gray

2001-409

**Item no.: 2001-410**

Push-in type jumper bar; insulated; 10-way; Nominal current 18 A; light gray

2001-410

**Item no.: 2001-433**

Push-in type jumper bar; insulated; from 1 to 3; Nominal current 18 A; light gray

2001-433

**Item no.: 2001-434**

Push-in type jumper bar; insulated; from 1 to 4; Nominal current 18 A; light gray

2001-434

**Item no.: 2001-435**

Push-in type jumper bar; insulated; from 1 to 5; Nominal current 18 A; light gray

2001-435

**Item no.: 2001-436**

Push-in type jumper bar; insulated; from 1 to 6; Nominal current 18 A; light gray

2001-436

**Item no.: 2001-437**

Push-in type jumper bar; insulated; from 1 to 7; Nominal current 18 A; light gray

2001-437

**Item no.: 2001-438**

Push-in type jumper bar; insulated; from 1 to 8; Nominal current 18 A; light gray

2001-438

**Item no.: 2001-439**

Push-in type jumper bar; insulated; from 1 to 9; Nominal current 18 A; light gray

2001-439

**Item no.: 2001-440**

Push-in type jumper bar; insulated; from 1 to 10; Nominal current 18 A; light gray

2001-440

**Item no.: 2009-412**Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 1.5 mm²; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks; black

2009-412

**Item no.: 2009-414**Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 1.5 mm²; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks; black

2009-414

**Item no.: 2009-416**Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 1.5 mm²; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks; black

2009-416

**Item no.: 210-103**

Wire commoning chain; insulated; 50 connections; black

210-103

**Item no.: 210-123**

Wire commoning chain; insulated; 50 connections

210-123

check

Item no.: 2001-511Modular TOPJOB®S connector; modular; for jumper contact slot; 1-pole; 1,50 mm²; gray

2001-511

**Item no.: 2001-549**

Spacer module; modular; e.g., for bridging commoned terminal blocks; gray

2001-549

**Item no.: 2001-552**Modular TOPJOB®S connector; modular; for jumper contact slot; 2-pole; 1,50 mm²; gray

2001-552

**Item no.: 2001-553**Modular TOPJOB®S connector; modular; for jumper contact slot; 3-pole; 1,50 mm²; gray

2001-553

**Item no.: 2001-554**Modular TOPJOB®S connector; modular; for jumper contact slot; 4-pole; 1,50 mm²; gray

2001-554

**Item no.: 2001-555**Modular TOPJOB®S connector; modular; for jumper contact slot; 5-pole; 1,50 mm²; gray

2001-555

**Item no.: 2001-556**Modular TOPJOB®S connector; modular; for jumper contact slot; 6-pole; 1,50 mm²; gray

2001-556

**Item no.: 2001-557**Modular TOPJOB®S connector; modular; for jumper contact slot; 7-pole; 1,50 mm²; gray

2001-557

**Item no.: 2001-558**Modular TOPJOB®S connector; modular; for jumper contact slot; 8-pole; 1,50 mm²; gray

2001-558

**Item no.: 2001-559**Modular TOPJOB®S connector; modular; for jumper contact slot; 9-pole; 1,50 mm²; gray

2001-559

**Item no.: 2001-560**Modular TOPJOB®S connector; modular; for jumper contact slot; 10-pole; 1,50 mm²; gray

2001-560

**Item no.: 2009-174**

Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray

2009-174

**Item no.: 2009-182**Testing tap; for max. 2.5 mm²; tool-free connection for individual test wires 0.08 - 2.5 mm; gray

2009-182

Downloads**Documentation****Bid Text**

2001-1208

docx
14.8 kB

Download

Additional Information

Technical explanations

Apr 3, 2019

pdf
2.1 MB

Download



Subject to changes.
