
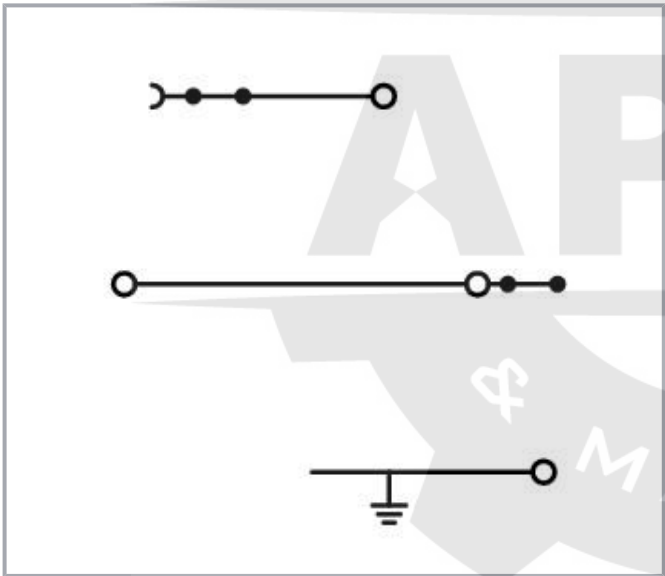
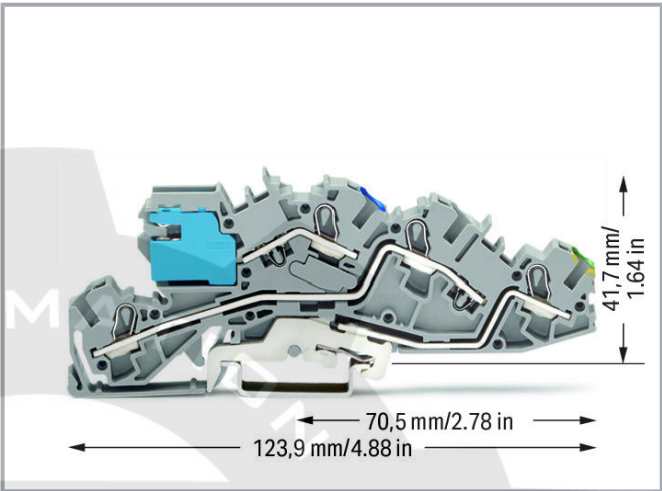


**Data sheet | Item number: 2005-7641**

Multilevel installation terminal block; with operating slots; 4 mm²; with N-disconnect slide link; NT/L/PE; Push-in CAGE CLAMP®; 4,00 mm²; gray

[www.wago.com/2005-7641](http://www.wago.com/2005-7641)

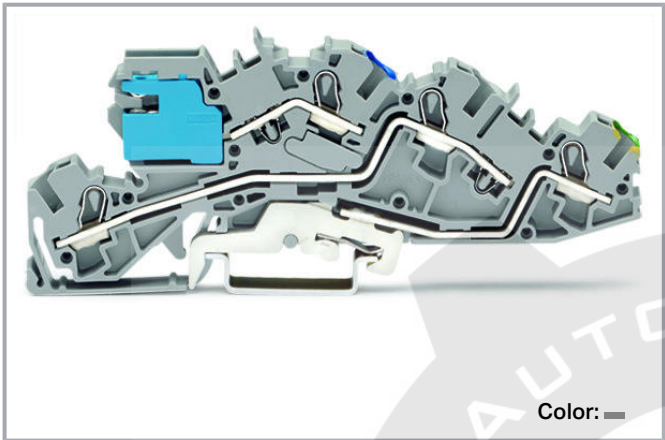

**Data**  
**Electrical data**

**IEC Approvals**

|                         |                    |
|-------------------------|--------------------|
| Ratings (note)          | Potential – ground |
| Rated voltage (III / 3) | 250 V              |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|                               |                                                                   |
|-------------------------------|-------------------------------------------------------------------|
| Rated surge voltage (III/3)   | 4 kV                                                              |
| Rated current                 | 32 A                                                              |
| Ratings (note) 2              | Potential – potential                                             |
| Rated voltage (III/3) 2       | 400 V                                                             |
| Rated surge voltage (III/3) 2 | 6 kV                                                              |
| Rated current 2               | 36 A                                                              |
| Legend (ratings)              | (III / 3) $\hat{=}$ Overvoltage category III / Pollution degree 3 |

## Connection data

|                                                            |                                                                                                                                   |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Connection technology                                      | Push-in CAGE CLAMP®                                                                                                               |
| Actuation type                                             | Push-in<br>Open Tool Slot                                                                                                         |
| Connectable conductor materials                            | Copper                                                                                                                            |
| Nominal cross-section                                      | 4 mm²                                                                                                                             |
| Solid conductor                                            | 0.5 ... 6 mm² / 20 ... 10 AWG                                                                                                     |
| Solid conductor; push-in termination                       | 1.5 ... 6 mm² / 14 ... 10 AWG                                                                                                     |
| Fine-stranded conductor                                    | 0.5 ... 6 mm² / 20 ... 10 AWG                                                                                                     |
| Fine-stranded conductor; with insulated ferrule            | 0.5 ... 4 mm² / 20 ... 12 AWG                                                                                                     |
| Fine-stranded conductor; with ferrule; push-in termination | 1.5 ... 4 mm² / 18 ... 12 AWG                                                                                                     |
| Note (conductor cross-section)                             | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |
| Strip length                                               | 11 ... 13 mm / 0.43 ... 0.51 inch                                                                                                 |
| Total number of connection points                          | 4                                                                                                                                 |
| Total number of potentials                                 | 3                                                                                                                                 |
| Number of levels                                           | 3                                                                                                                                 |
| Wiring direction                                           | Front-entry wiring                                                                                                                |

## Physical data

|                                   |                      |
|-----------------------------------|----------------------|
| Width                             | 6.2 mm / 0.244 inch  |
| Height                            | 124 mm / 4.882 inch  |
| Depth from upper edge of DIN-rail | 41.7 mm / 1.642 inch |

## Mechanical data

|                   |                     |
|-------------------|---------------------|
| Potential marking | NT/L/PE             |
| Design            | angled              |
| Mounting type     | DIN-35 rail         |
| Marking level     | Center/side marking |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

## Material data

|                             |                  |
|-----------------------------|------------------|
| Color                       | gray             |
| Insulation material         | Polyamide (PA66) |
| Flammability class per UL94 | V0               |
| Fire load                   | 0.349 MJ         |
| Weight                      | 31.7 g           |

## Commercial data

|                       |               |
|-----------------------|---------------|
| Product Group         | 22 (TOPJOB S) |
| Packaging type        | BOX           |
| Country of origin     | CN            |
| GTIN                  | 4055143042239 |
| Customs tariff number | 8536904000    |

## Required accessories

### End plates

|                                                                                 |                                                                       |                                                                    |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------|
|  | Item no.: 2005-7692<br>End and intermediate plate; 1 mm thick; orange | <a href="http://www.wago.com/2005-7692">www.wago.com/2005-7692</a> |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------|

## Optional accessories

### Mounting

|                                                                                   |                                                                                                                                     |                                                                  |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
|  | Item no.: 2009-304<br>TOPJOB®S busbar carrier; rail mount; 1.5 mm wide; blue                                                        | <a href="http://www.wago.com/2009-304">www.wago.com/2009-304</a> |
|  | Item no.: 2009-305<br>TOPJOB®S busbar carrier; with end stop function and detachable separator plate; rail mount; 7.5 mm wide; blue | <a href="http://www.wago.com/2009-305">www.wago.com/2009-305</a> |

### General accessories

|                                                                                   |                                                                                                                   |                                                                    |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
|  | Item no.: 2005-7300<br>Lock-out; prevents reclosing of slide link; Snap-in type; for 2002 and 2005 Series; orange | <a href="http://www.wago.com/2005-7300">www.wago.com/2005-7300</a> |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|

### N-busbar

|                                                                                   |                                                                        |                                                                |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------|----------------------------------------------------------------|
|  | Item no.: 210-133<br>Busbar; tin-plated; 1000 mm long; Cu 10 mm x 3 mm | <a href="http://www.wago.com/210-133">www.wago.com/210-133</a> |
|  | Item no.: 777-303<br>N-busbar cover; 1000 mm long; transparent         | <a href="http://www.wago.com/777-303">www.wago.com/777-303</a> |

### Ferrules

|  |                                                                                                                          |                                                                |
|--|--------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | Item no.: 216-262<br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight | <a href="http://www.wago.com/216-262">www.wago.com/216-262</a> |
|--|--------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|

Subject to changes. Please also observe the further product documentation!



crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item no.: 216-263**

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; [www.wago.com/216-263](http://www.wago.com/216-263)  
acc. to DIN 46228, Part 4/09.90; red



**Item no.: 216-264**

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black [www.wago.com/216-264](http://www.wago.com/216-264)



**Item no.: 216-266**

Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue [www.wago.com/216-266](http://www.wago.com/216-266)



**Item no.: 216-267**

Ferrule; Sleeve for 4 mm<sup>2</sup> / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray [www.wago.com/216-267](http://www.wago.com/216-267)

### Testing accessories



**Item no.: 2009-174**

TOPJOB®S test plug adapter; for test plug 4 mm Ø; for testing TOPJOB®S terminal blocks; gray [www.wago.com/2009-174](http://www.wago.com/2009-174)



**Item no.: 2009-182**

TOPJOB®S testing tap; tool-free; 12 AWG max; for testing TOPJOB®S terminal blocks; gray [www.wago.com/2009-182](http://www.wago.com/2009-182)



**Item no.: 210-136**

Test plug; 2 mm Ø; with 500 mm cable [www.wago.com/210-136](http://www.wago.com/210-136)

### Insulations stops



**Item no.: 2004-171**

Insulation stop; 0.25 - 0.5 mm<sup>2</sup>; 5 pieces/strip; light gray [www.wago.com/2004-171](http://www.wago.com/2004-171)



**Item no.: 2004-172**

Insulation stop; 0.75 - 1 mm<sup>2</sup>; 5 pieces/strip; dark gray [www.wago.com/2004-172](http://www.wago.com/2004-172)

### Jumpers



**Item no.: 2004-402**

Jumper; 2-way; insulated; light gray [www.wago.com/2004-402](http://www.wago.com/2004-402)



**Item no.: 2004-403**

Jumper; 3-way; insulated; light gray [www.wago.com/2004-403](http://www.wago.com/2004-403)



**Item no.: 2004-404**

Jumper; 4-way; insulated; light gray [www.wago.com/2004-404](http://www.wago.com/2004-404)



**Item no.: 2004-405**

Jumper; 5-way; insulated; light gray [www.wago.com/2004-405](http://www.wago.com/2004-405)



**Item no.: 2004-405/011-000**

Star point jumper; 3-way; insulated; light gray [www.wago.com/2004-405/011-000](http://www.wago.com/2004-405/011-000)



**Item no.: 2004-406**

Jumper; 6-way; insulated; light gray [www.wago.com/2004-406](http://www.wago.com/2004-406)

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

|                                                                                    |                                                                                                                                                      |                                                                                  |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|     | <b>Item no.: 2004-406/020-000</b><br>Delta jumper; insulated; light gray                                                                             | <a href="http://www.wago.com/2004-406/020-000">www.wago.com/2004-406/020-000</a> |
|    | <b>Item no.: 2004-407</b><br>Jumper; 7-way; insulated; light gray                                                                                    | <a href="http://www.wago.com/2004-407">www.wago.com/2004-407</a>                 |
|    | <b>Item no.: 2004-408</b><br>Jumper; 8-way; insulated; light gray                                                                                    | <a href="http://www.wago.com/2004-408">www.wago.com/2004-408</a>                 |
|    | <b>Item no.: 2004-409</b><br>Jumper; 9-way; insulated; light gray                                                                                    | <a href="http://www.wago.com/2004-409">www.wago.com/2004-409</a>                 |
|    | <b>Item no.: 2004-410</b><br>Jumper; 10-way; insulated; light gray                                                                                   | <a href="http://www.wago.com/2004-410">www.wago.com/2004-410</a>                 |
|    | <b>Item no.: 2004-433</b><br>Jumper; from 1 to 3; insulated; light gray                                                                              | <a href="http://www.wago.com/2004-433">www.wago.com/2004-433</a>                 |
|    | <b>Item no.: 2004-434</b><br>Jumper; from 1 to 4; insulated; light gray                                                                              | <a href="http://www.wago.com/2004-434">www.wago.com/2004-434</a>                 |
|    | <b>Item no.: 2004-435</b><br>Jumper; from 1 to 5; insulated; light gray                                                                              | <a href="http://www.wago.com/2004-435">www.wago.com/2004-435</a>                 |
|    | <b>Item no.: 2004-436</b><br>Jumper; from 1 to 6; insulated; light gray                                                                              | <a href="http://www.wago.com/2004-436">www.wago.com/2004-436</a>                 |
|   | <b>Item no.: 2004-437</b><br>Jumper; from 1 to 7; insulated; light gray                                                                              | <a href="http://www.wago.com/2004-437">www.wago.com/2004-437</a>                 |
|  | <b>Item no.: 2004-438</b><br>Jumper; from 1 to 8; insulated; light gray                                                                              | <a href="http://www.wago.com/2004-438">www.wago.com/2004-438</a>                 |
|  | <b>Item no.: 2004-439</b><br>Jumper; from 1 to 9; insulated; light gray                                                                              | <a href="http://www.wago.com/2004-439">www.wago.com/2004-439</a>                 |
|  | <b>Item no.: 2004-440</b><br>Jumper; from 1 to 10; insulated; light gray                                                                             | <a href="http://www.wago.com/2004-440">www.wago.com/2004-440</a>                 |
|   | <b>Item no.: 210-103</b><br>Wire commoning chain; insulated; black                                                                                   | <a href="http://www.wago.com/210-103">www.wago.com/210-103</a>                   |
|   | <b>Item no.: 210-123</b><br>Wire commoning chain; insulated; blue                                                                                    | <a href="http://www.wago.com/210-123">www.wago.com/210-123</a>                   |
| <b>Carrier rail</b>                                                                |                                                                                                                                                      |                                                                                  |
|   | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a>                   |
|   | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                  | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a>                   |
|                                                                                    | <b>Item no.: 210-114</b>                                                                                                                             |                                                                                  |

Subject to changes. Please also observe the further product documentation!

|                                                                                   |                                                                                                                          |                                                                                  |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored                   | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a>                   |
| <b>Item no.: 210-115</b>                                                          |                                                                                                                          |                                                                                  |
|    | Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a>                   |
| <b>Item no.: 210-118</b>                                                          |                                                                                                                          |                                                                                  |
|    | Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                 | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a>                   |
| <b>Item no.: 210-196</b>                                                          |                                                                                                                          |                                                                                  |
|    | Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored               | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a>                   |
| <b>Item no.: 210-197</b>                                                          |                                                                                                                          |                                                                                  |
|    | Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored                     | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a>                   |
| <b>Item no.: 210-198</b>                                                          |                                                                                                                          |                                                                                  |
|    | Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored                | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a>                   |
| <b>Clamps</b>                                                                     |                                                                                                                          |                                                                                  |
|    | <b>Item no.: 209-105</b><br>Connector; silver-colored                                                                    | <a href="http://www.wago.com/209-105">www.wago.com/209-105</a>                   |
| <b>Item no.: 210-281</b>                                                          |                                                                                                                          |                                                                                  |
|    | Connector; blue                                                                                                          | <a href="http://www.wago.com/210-281">www.wago.com/210-281</a>                   |
| <b>Marking accessories</b>                                                        |                                                                                                                          |                                                                                  |
| <b>Item no.: 2009-110</b>                                                         |                                                                                                                          |                                                                                  |
|   | Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white                                  | <a href="http://www.wago.com/2009-110">www.wago.com/2009-110</a>                 |
| <b>Item no.: 2009-115</b>                                                         |                                                                                                                          |                                                                                  |
|  | WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white                   | <a href="http://www.wago.com/2009-115">www.wago.com/2009-115</a>                 |
| <b>Item no.: 2009-115/000-002</b>                                                 |                                                                                                                          |                                                                                  |
|  | WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow                  | <a href="http://www.wago.com/2009-115/000-002">www.wago.com/2009-115/000-002</a> |
| <b>Item no.: 2009-115/000-005</b>                                                 |                                                                                                                          |                                                                                  |
|  | WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red                     | <a href="http://www.wago.com/2009-115/000-005">www.wago.com/2009-115/000-005</a> |
| <b>Item no.: 2009-115/000-006</b>                                                 |                                                                                                                          |                                                                                  |
|  | WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue                    | <a href="http://www.wago.com/2009-115/000-006">www.wago.com/2009-115/000-006</a> |
| <b>Item no.: 2009-115/000-007</b>                                                 |                                                                                                                          |                                                                                  |
|  | WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray                    | <a href="http://www.wago.com/2009-115/000-007">www.wago.com/2009-115/000-007</a> |
| <b>Item no.: 2009-115/000-012</b>                                                 |                                                                                                                          |                                                                                  |
|  | WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange                  | <a href="http://www.wago.com/2009-115/000-012">www.wago.com/2009-115/000-012</a> |
| <b>Item no.: 2009-115/000-017</b>                                                 |                                                                                                                          |                                                                                  |

Subject to changes. Please also observe the further product documentation!



|                                                                                    |                                                                                                                                                   |                                                                                  |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|                                                                                    | WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green                                      | <a href="http://www.wago.com/2009-115/000-017">www.wago.com/2009-115/000-017</a> |
|                                                                                    | <b>Item no.: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green       | <a href="http://www.wago.com/2009-115/000-023">www.wago.com/2009-115/000-023</a> |
|                                                                                    | <b>Item no.: 2009-115/000-024</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet      | <a href="http://www.wago.com/2009-115/000-024">www.wago.com/2009-115/000-024</a> |
|                                                                                    | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white          | <a href="http://www.wago.com/2009-145">www.wago.com/2009-145</a>                 |
|                                                                                    | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | <a href="http://www.wago.com/2009-145/000-002">www.wago.com/2009-145/000-002</a> |
|                                                                                    | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red    | <a href="http://www.wago.com/2009-145/000-005">www.wago.com/2009-145/000-005</a> |
|                                                                                    | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | <a href="http://www.wago.com/2009-145/000-006">www.wago.com/2009-145/000-006</a> |
|                                                                                    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | <a href="http://www.wago.com/2009-145/000-007">www.wago.com/2009-145/000-007</a> |
|                                                                                    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange | <a href="http://www.wago.com/2009-145/000-012">www.wago.com/2009-145/000-012</a> |
|                                                                                    | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green  | <a href="http://www.wago.com/2009-145/000-023">www.wago.com/2009-145/000-023</a> |
|                                                                                    | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet | <a href="http://www.wago.com/2009-145/000-024">www.wago.com/2009-145/000-024</a> |
|  | <b>Item no.: 2009-191</b><br>Group marker carrier                                                                                                 | <a href="http://www.wago.com/2009-191">www.wago.com/2009-191</a>                 |
|  | <b>Item no.: 2009-192</b><br>Group marker carrier                                                                                                 | <a href="http://www.wago.com/2009-192">www.wago.com/2009-192</a>                 |
|  | <b>Item no.: 2009-193</b><br>Group marker carrier                                                                                                 | <a href="http://www.wago.com/2009-193">www.wago.com/2009-193</a>                 |

Subject to changes. Please also observe the further product documentation!



**Item no.: 2009-198**  
Adaptor; gray

[www.wago.com/2009-198](http://www.wago.com/2009-198)



**Item no.: 248-501**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)



**Item no.: 248-501/000-002**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/248-501/000-002](http://www.wago.com/248-501/000-002)



**Item no.: 248-501/000-005**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)



**Item no.: 248-501/000-006**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/248-501/000-006](http://www.wago.com/248-501/000-006)



**Item no.: 248-501/000-007**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/248-501/000-007](http://www.wago.com/248-501/000-007)



**Item no.: 248-501/000-012**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/248-501/000-012](http://www.wago.com/248-501/000-012)



**Item no.: 248-501/000-017**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)



**Item no.: 248-501/000-023**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)



**Item no.: 248-501/000-024**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)



**Item no.: 793-501**  
WMB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/793-501](http://www.wago.com/793-501)



**Item no.: 793-501/000-002**  
WMB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/793-501/000-002](http://www.wago.com/793-501/000-002)



**Item no.: 793-501/000-005**  
WMB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/793-501/000-005](http://www.wago.com/793-501/000-005)



**Item no.: 793-501/000-006**  
WMB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/793-501/000-006](http://www.wago.com/793-501/000-006)

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|                                                                                   |                                                                                                                                                           |                                                                                  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | <b>Item no.: 793-501/000-007</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; gray                                                 | <a href="http://www.wago.com/793-501/000-007">www.wago.com/793-501/000-007</a>   |
|    | <b>Item no.: 793-501/000-012</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; orange                                               | <a href="http://www.wago.com/793-501/000-012">www.wago.com/793-501/000-012</a>   |
|    | <b>Item no.: 793-501/000-017</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; light green                                          | <a href="http://www.wago.com/793-501/000-017">www.wago.com/793-501/000-017</a>   |
|    | <b>Item no.: 793-501/000-023</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; green                                                | <a href="http://www.wago.com/793-501/000-023">www.wago.com/793-501/000-023</a>   |
|    | <b>Item no.: 793-501/000-024</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; violet                                               | <a href="http://www.wago.com/793-501/000-024">www.wago.com/793-501/000-024</a>   |
|    | <b>Item no.: 793-5501</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white          | <a href="http://www.wago.com/793-5501">www.wago.com/793-5501</a>                 |
|    | <b>Item no.: 793-5501/000-002</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | <a href="http://www.wago.com/793-5501/000-002">www.wago.com/793-5501/000-002</a> |
|  | <b>Item no.: 793-5501/000-005</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red    | <a href="http://www.wago.com/793-5501/000-005">www.wago.com/793-5501/000-005</a> |
|  | <b>Item no.: 793-5501/000-006</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | <a href="http://www.wago.com/793-5501/000-006">www.wago.com/793-5501/000-006</a> |
|  | <b>Item no.: 793-5501/000-007</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | <a href="http://www.wago.com/793-5501/000-007">www.wago.com/793-5501/000-007</a> |
|  | <b>Item no.: 793-5501/000-012</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange | <a href="http://www.wago.com/793-5501/000-012">www.wago.com/793-5501/000-012</a> |
|  | <b>Item no.: 793-5501/000-014</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown  | <a href="http://www.wago.com/793-5501/000-014">www.wago.com/793-5501/000-014</a> |
|  | <b>Item no.: 793-5501/000-017</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green  | <a href="http://www.wago.com/793-5501/000-017">www.wago.com/793-5501/000-017</a> |
|  | <b>Item no.: 793-5501/000-023</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type         | <a href="http://www.wago.com/793-5501/000-023">www.wago.com/793-5501/000-023</a> |

Subject to changes. Please also observe the further product documentation!



type; light green

**Item no.: 793-5501/000-024**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/793-5501/000-024](http://www.wago.com/793-5501/000-024)**Tools****Item no.: 2009-309**

Operating tool; Blades: 3.5 x 0.5 mm and 2.5 x 0.4 mm; for TOPJOB®S installation terminal blocks

[www.wago.com/2009-309](http://www.wago.com/2009-309)**Item no.: 2009-310**

Operating tool; Blades: 3.5 x 0.5 mm and 5.5 x 0.8 mm; for TOPJOB®S installation terminal blocks; green

[www.wago.com/2009-310](http://www.wago.com/2009-310)**Item no.: 210-658**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured

[www.wago.com/210-658](http://www.wago.com/210-658)**Item no.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

[www.wago.com/210-720](http://www.wago.com/210-720)**Downloads****Documentation****Bid Text**

|                           |              |                 |          |
|---------------------------|--------------|-----------------|----------|
| 2005-7641<br>docx - Datei | Aug 7, 2018  | docx<br>15.1 kB | Download |
| 2005-7641<br>X81 - Datei  | Feb 19, 2019 | xml<br>4.1 kB   | Download |

**Additional Information**

|                        |             |               |          |
|------------------------|-------------|---------------|----------|
| Technical explanations | Apr 3, 2019 | pdf<br>2.2 MB | Download |
|------------------------|-------------|---------------|----------|

**CAD files****CAE data**

|                             |     |          |
|-----------------------------|-----|----------|
| WSCAD Universe 2005-7641    | URL | Download |
| EPLAN Data Portal 2005-7641 | URL | Download |

**Environmental Product Compliance****Compliance Search**

Environmental Product Compliance 2005-7641

Subject to changes. Please also observe the further product documentation!


WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.


Multilevel installation terminal block; with operating slots; 4 mm<sup>2</sup>; with N-disconnect slide link; NT/L/PE; Push-in CAGE CLAMP®; 4,00 mm<sup>2</sup>; gray

## Installation Notes

### Conductor termination

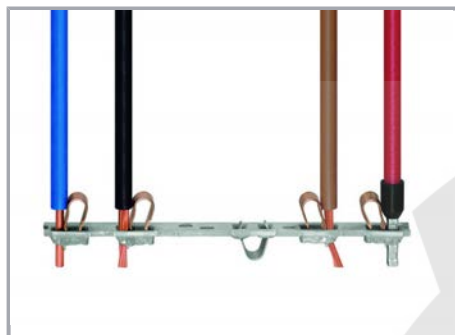

All conductor types at a glance

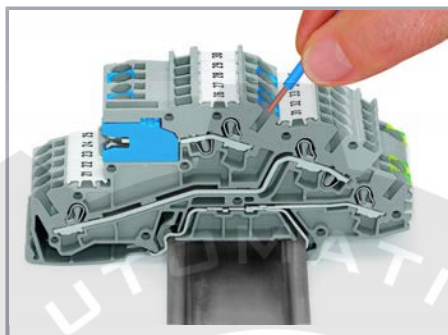

Inserting a conductor via push-in termination.




Inserting a conductor via operating tool.


Solid conductors with cross-sections from either one size above, or up to two sizes below, the rated cross-section can be simply pushed in – no tools needed.

Connecting fine-stranded conductors without ferrules, or small cross-sectional conductors that cannot be pushed in, is performed similarly to the original CAGE CLAMP® – just use an operating tool.


### Commoning

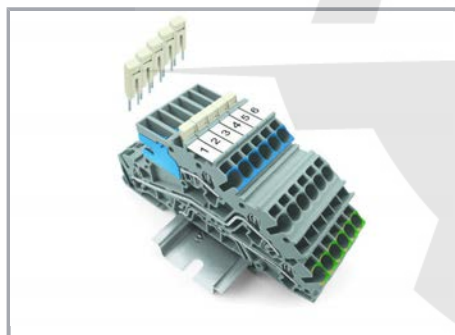

Adjacent Jumpers for Continuous Commoning (2002-400)

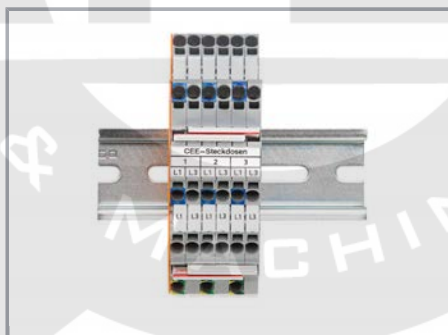


Commoning two potentials in one single jumper slot via extremely slim staggered jumpers.

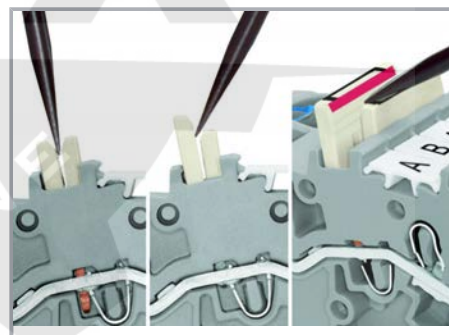


Removing a staggered jumper:

Insert the operating tool between the staggered jumpers, then lift up the jumper.


Subject to changes. Please also observe the further product documentation!

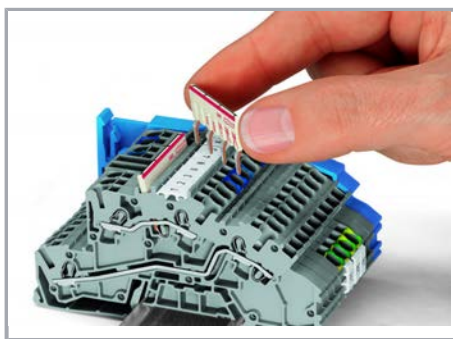


Insert the staggered jumper and push down until it hits the backstop.

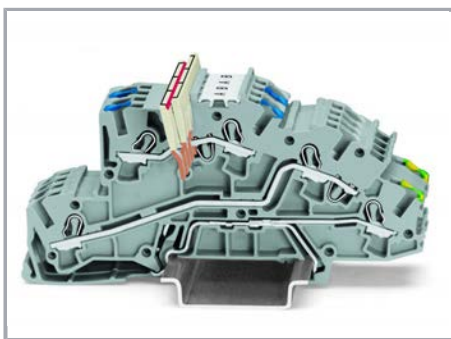

Insert the staggered jumper and push down until it hits the backstop.

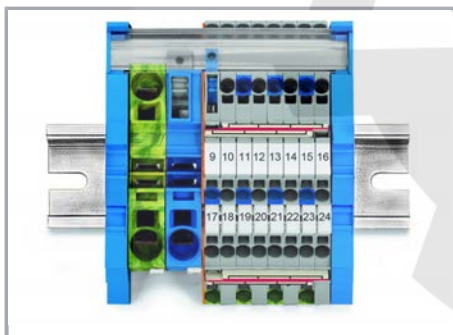


Mounting busbars on busbar carriers: Insert busbar ends onto large busbar carriers (2009-305) or onto supply terminal blocks with an integrated busbar carrier.

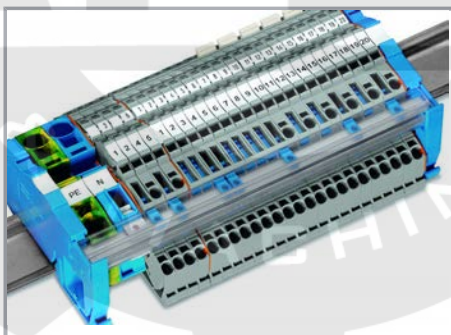


The busbar transparent cover (Item No. 777-303) protects the busbar against accidental contact and makes it easy to see which terminal blocks are connected to the busbar.

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

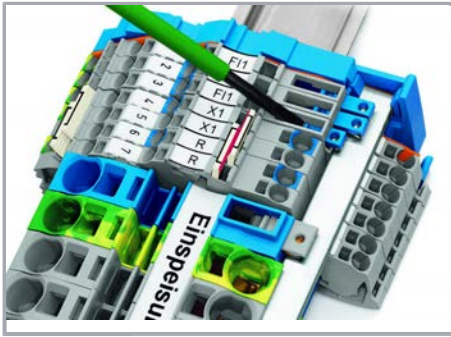

Tool-operated N-disconnect slide link

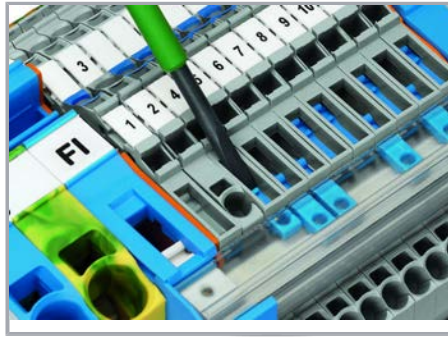

Tool-operated N-disconnect slide link

## Product family

### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.