

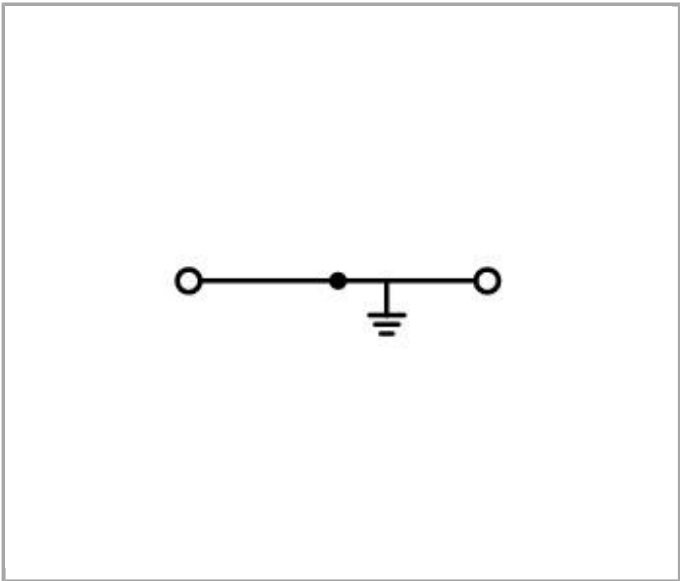


Data sheet | Item number: 880-907

2-conductor ground terminal block; 4 mm²; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®; 4,00 mm2; green-yellow

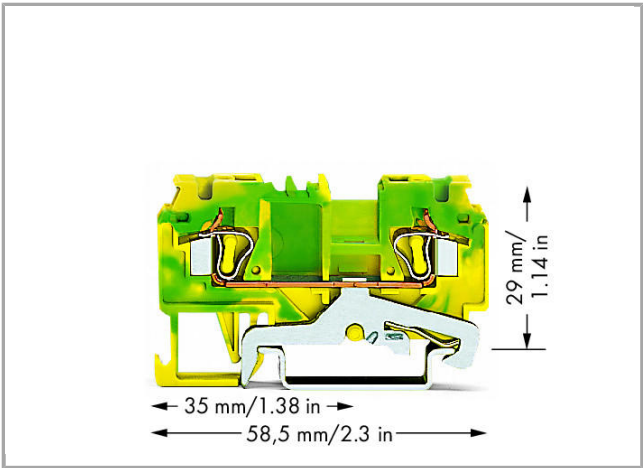

880-907

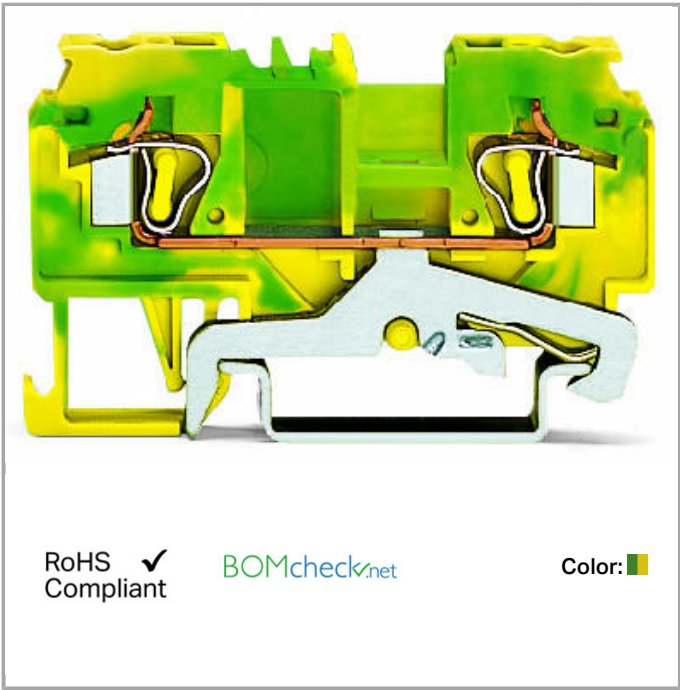

Data

Connection data

|                                 |                |
|---------------------------------|----------------|
| Connection technology           | CAGE CLAMP®    |
| Actuation type                  | Operating tool |
| Connectable conductor materials | Copper         |

|                                   |                                    |
|-----------------------------------|------------------------------------|
| Solid conductor                   | 0.08 4 mm <sup>2</sup> / 28 12 AWG |
| Fine-stranded conductor           | 0.08 4 mm <sup>2</sup> / 28 12 AWG |
| Strip length                      | 8 9 mm / 0.31 0.35 inch            |
| Total number of connection points | 2                                  |
| Total number of potentials        | 1                                  |
| Number of levels                  | 1                                  |
| Type of wiring                    | Front-entry wiring                 |

## Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 5 mm / 0.197 inch    |
| Height from upper-edge of DIN-35 rail | 29 mm / 1.142 inch   |
| Depth                                 | 58.5 mm / 2.303 inch |

## Mechanical data

|                  |                     |
|------------------|---------------------|
| Design           | horizontal          |
| Type of mounting | DIN-35 rail         |
| Marking level    | Center/side marking |

## Material Data

|                     |                      |
|---------------------|----------------------|
| Color               | green-yellow         |
| Insulating material | Polyamide 66 (PA 66) |
| Fire load           | 0.103 MJ             |
| Weight              | 10.061 g             |

## Commercial data

|                    |               |
|--------------------|---------------|
| Country of origin  | DE            |
| GTIN               | 4045454121167 |
| Customs Tariff No. | 85369010000   |

## Approvals / Certificates

### Radio-Approvals

| Logo                                                                               | Approval                        | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | 2174152.01       |
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | NTR-NL<br>7339   |

#### Country specific Approvals

| Logo                                                                              | Approval                                  | Additional Approval Text | Certificate name |
|-----------------------------------------------------------------------------------|-------------------------------------------|--------------------------|------------------|
|   | <b>ABS</b><br>American Bureau of Shipping | EN 60947                 | 14-HG1293677-PDA |
|   | <b>CCA</b><br>DEKRA Certification B.V.    | EN 60947                 | 2174152.01       |
|   | <b>CCA</b><br>DEKRA Certification B.V.    | EN 60947                 | NTR-NL 7339      |
|  | <b>LR</b><br>Lloyds Register              | EN 60947                 | 91/20112 (E9)    |

#### Ship Approvals

| Logo                                                                                | Approval                                                | Additional Approval Text | Certificate name |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------|------------------|
|   | <b>ABS</b><br>American Bureau of Shipping               | EN 60947                 | 14-HG1293677-PDA |
|   | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE00001V2       |
|  | <b>LR</b><br>Lloyds Register                            | EN 60947                 | 91/20112 (E9)    |

#### Other Approvals

| Logo                                                                               | Approval                                    | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|---------------------------------------------|--------------------------|------------------|
|  | <b>UL</b><br>Underwriters Laboratories Inc. | UL 1059                  | 20170731-E45172  |

#### UL-Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|------|----------|--------------------------|------------------|
|------|----------|--------------------------|------------------|



UL  
Underwriters Laboratories Inc.

UL 1059

20170731-  
E45172

## Compatible products

## Marking accessories

|                                                                                    |                                                                                                                                       |                      |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|    | <b>Item no.: 2009-115</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; white               | 2009-115             |
|    | <b>Item no.: 2009-115/000-002</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; yellow      | 2009-115<br>/000-002 |
|  | <b>Item no.: 2009-115/000-006</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; blue        | 2009-115<br>/000-006 |
|  | <b>Item no.: 2009-115/000-007</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; gray        | 2009-115<br>/000-007 |
|  | <b>Item no.: 2009-115/000-012</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; orange      | 2009-115<br>/000-012 |
|  | <b>Item no.: 2009-115/000-017</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; light green | 2009-115<br>/000-017 |
|  | <b>Item no.: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; green       | 2009-115<br>/000-023 |
|  | <b>Item no.: 2009-115/000-024</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; violet      | 2009-115<br>/000-024 |
|  | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; white          | 2009-145             |
|  | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | 2009-145<br>/000-002 |

|                                                                                    |                                                                                                                                       |          |          |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------|----------|
|    | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; red    | /000-005 | 2009-145 |
|    | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | /000-006 | 2009-145 |
|    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | /000-007 | 2009-145 |
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; orange | /000-012 | 2009-145 |
|    | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; green  | /000-023 | 2009-145 |
|    | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; violet | /000-024 | 2009-145 |
|    | <b>Item no.: 248-501</b><br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card          |          | 248-501  |
|  | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow                      | /000-002 | 248-501  |
|  | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-005 | 248-501  |
|  | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-006 | 248-501  |
|  | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-007 | 248-501  |
|  | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-012 | 248-501  |
|  | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-017 | 248-501  |
|  | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-023 | 248-501  |
|  | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-024 | 248-501  |

**Item no.: 793-501**

WMB marking card; as card; not stretchable; plain; snap-on type; white

793-501

**Item no.: 793-501/000-002**

WMB marking card; as card; not stretchable; plain; snap-on type; white

/000-002

793-501

**Item no.: 793-501/000-005**

WMB marking card; as card; not stretchable; plain; snap-on type; white

/000-005

793-501

**Item no.: 793-501/000-006**

WMB marking card; as card; not stretchable; plain; snap-on type; white

/000-006

793-501

**Item no.: 793-501/000-007**

WMB marking card; as card; not stretchable; plain; snap-on type; white

/000-007

793-501

**Item no.: 793-501/000-012**

WMB marking card; as card; not stretchable; plain; snap-on type; white

/000-012

793-501

**Item no.: 793-501/000-017**

WMB marking card; as card; not stretchable; plain; snap-on type; white

/000-017

793-501

**Item no.: 793-501/000-023**

WMB marking card; as card; not stretchable; plain; snap-on type; white

/000-023

793-501

**Item no.: 793-501/000-024**

WMB marking card; as card; not stretchable; plain; snap-on type; white

/000-024

793-501

**Item no.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

793-5501

**Item no.: 793-5501/000-002**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

/000-002

793-5501

**Item no.: 793-5501/000-005**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; red

/000-005

793-5501

**Item no.: 793-5501/000-006**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; blue

/000-006

793-5501

**Item no.: 793-5501/000-007**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; gray

/000-007

793-5501

**Item no.: 793-5501/000-012**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; orange

/000-012

793-5501

**Item no.: 793-5501/000-017**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; light green

/000-017

793-5501

**Item no.: 793-5501/000-023**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; green

/000-023

793-5501

**Item no.: 793-5501/000-024**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; violet


/000-024

793-5501

**Jumper****Item no.: 210-103**

Wire commoning chain; insulated; 50 connections; black

210-103

**Item no.: 210-123**

Wire commoning chain; insulated; 50 connections

210-123

**Item no.: 249-123**Push-in type wire jumper; insulated; wire length 180 mm; Conductor cross section 0.75 mm<sup>2</sup>

249-123

**Item no.: 249-125**Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 0.75 mm<sup>2</sup>

249-125

**Item no.: 249-126**Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 0.75 mm<sup>2</sup>

249-126

**Item no.: 249-127**Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 0.75 mm<sup>2</sup>

249-127

**Item no.: 280-402**

Adjacent jumper; insulated; IN = IN terminal block; gray

280-402

**Item no.: 280-409**

Alternate jumper; insulated; IN = IN terminal block; gray

280-409

**Item no.: 280-422**

Adjacent jumper; insulated; IN = IN terminal block; yellow-green

280-422

**Item no.: 280-482**

Comb-style jumper bar; insulated; 2-way; IN = IN terminal block; gray

280-482

**Item no.: 280-483**

Comb-style jumper bar; insulated; 3-way; IN = IN terminal block; gray

280-483

**Item no.: 280-484**

Comb-style jumper bar; insulated; 4-way; IN = IN terminal block; gray

280-484

**Item no.: 280-485**

Comb-style jumper bar; insulated; 5-way; IN = IN terminal block; gray

280-485

**Item no.: 280-490**

Comb-style jumper bar; insulated; 10-way; IN = IN terminal block; gray

280-490

**Item no.: 280-492**

Alternate comb-style jumper bar; insulated; 2-way; IN = IN terminal block; gray

280-492

**Item no.: 709-110**

Wire commoning chain; insulated; 4 connections; 3 x 110 mm; black

709-110

|                                                                                    |                                                                                                                                        |         |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 709-111</b><br>Wire commoning chain; insulated; 3 connections; 2 x 120 mm; black                                          | 709-111 |
|    | <b>Item no.: 709-112</b><br>Wire commoning chain; insulated; 3 connections; 2 x 170 mm; black                                          | 709-112 |
|    | <b>Item no.: 780-452</b><br>Staggered jumper; insulated; from 1 to 2; Spacing: 5 mm; suitable for 2-conductor female plugs; gray       | 780-452 |
|    | <b>Item no.: 780-453</b><br>Staggered jumper; insulated; from 1 to 3; Spacing: 5 mm; suitable for 2-conductor female plugs; gray       | 780-453 |
|    | <b>Item no.: 780-454</b><br>Staggered jumper; insulated; from 1 to 4; Spacing: 5 mm; suitable for 2-conductor female plugs; gray       | 780-454 |
|    | <b>Item no.: 780-455</b><br>Staggered jumper; insulated; from 1 to 5; Spacing: 5 mm; suitable for 2-conductor female plugs; gray       | 780-455 |
|    | <b>Item no.: 780-456</b><br>Staggered jumper; insulated; from 1 to 6; Spacing: 5 mm; suitable for 2-conductor female plugs; gray       | 780-456 |
|    | <b>Item no.: 780-457</b><br>Staggered jumper; insulated; from 1 to 7; Spacing: 5 mm; suitable for 2-conductor female plugs; gray       | 780-457 |
|   | <b>Item no.: 780-458</b><br>Staggered jumper; insulated; from 1 to 8; Spacing: 5 mm; suitable for 2-conductor female plugs; gray       | 780-458 |
| <b>Protective Warning Marker</b>                                                   |                                                                                                                                        |         |
|  | <b>Item no.: 280-415</b><br>Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks; yellow                  | 280-415 |
| <b>Carrier rail</b>                                                                |                                                                                                                                        |         |
|  | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm   | 210-112 |
|  | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715                    | 210-113 |
|  | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                     | 210-114 |
|  | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm   | 210-115 |
|  | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                   | 210-118 |
|  | <b>Item no.: 210-162</b><br>Steel carrier rail; 35 x 7.5 mm; slotted; 1 mm thick                                                       | 210-162 |
|  | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored | 210-196 |
|  | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                       | 210-197 |
|                                                                                    | <b>Item no.: 210-198</b>                                                                                                               |         |



|                                                                                    |                                                                                                                                                                         |         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslopped; according to EN 60715; copper-colored                                                               | 210-198 |
|    | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slopped; galvanized; according to EN 60715                                           | 210-504 |
|    | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslopped; galvanized; according to EN 60715                                         | 210-505 |
|    | <b>Item no.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslopped; galvanized; similar to EN 60715                                          | 210-506 |
|    | <b>Item no.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slopped; galvanized; similar to EN 60715                                            | 210-508 |
| <b>General accessories</b>                                                         |                                                                                                                                                                         |         |
|    | <b>Item no.: 249-105</b><br>Group marker carrier                                                                                                                        | 249-105 |
|     | <b>Item no.: 280-404</b><br>Test plug adapter; 5 mm wide; for test plug 210-137 (2.3 mm Ø); suitable for 1.5 mm² - 4 mm² tbs; gray                                      | 280-404 |
|    | <b>Item no.: 280-418</b><br>Test plug module; modular; suitable for all WAGO 280 and 780 Series rail-mounted terminal blocks with jumper slots in the current bar; gray | 280-418 |
|   | <b>Item no.: 280-419</b><br>Spacer module; modular; bridging commoned terminal blocks; gray                                                                             | 280-419 |
|  | <b>Item no.: 281-407</b><br>Test plug; 6 mm wide; Nominal current 24 A; for 0.08 mm² - 2.5 mm²; 2,50 mm²; gray                                                          | 281-407 |
| <b>Insulation stop</b>                                                             |                                                                                                                                                                         |         |
|  | <b>Item no.: 280-470</b><br>Insulation stop; 0.08 - 0.2 mm² "s" (0.14 mm² "f-st"); 5 pieces/strip; white                                                                | 280-470 |
|  | <b>Item no.: 280-471</b><br>Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip; light gray                                                                                 | 280-471 |
|  | <b>Item no.: 280-472</b><br>Insulation stop; 0.75 - 1 mm²; 5 pieces/strip                                                                                               | 280-472 |
| <b>ferrule</b>                                                                     |                                                                                                                                                                         |         |
|  | <b>Item no.: 216-106</b><br>Ferrule; Sleeve for 2.5 mm² / AWG 14; uninsulated; electro-tin plated                                                                       | 216-106 |
|  | <b>Item no.: 216-107</b><br>Ferrule; Sleeve for 4 mm² / AWG 12; uninsulated; electro-tin plated                                                                         | 216-107 |
|  | <b>Item no.: 216-108</b><br>Ferrule; Sleeve for 6 mm² / AWG 10; uninsulated; electro-tin plated                                                                         | 216-108 |
|  | <b>Item no.: 216-109</b><br>Ferrule; Sleeve for 10 mm² / AWG 8; uninsulated; electro-tin plated                                                                         | 216-109 |
|  | <b>Item no.: 216-110</b><br>Ferrule; Sleeve for 16 mm² / AWG 6; uninsulated; electro-tin plated                                                                         | 216-110 |
|                                                                                    | <b>Item no.: 216-121</b>                                                                                                                                                |         |

|                                                                                    |                                                                                                                                                                               |         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated                                                                                                         | 216-121 |
|    | <b>Item no.: 216-122</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated                                                                            | 216-122 |
|    | <b>Item no.: 216-123</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated                                                                               | 216-123 |
|    | <b>Item no.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated                                                                             | 216-124 |
|    | <b>Item no.: 216-131</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated                                                                            | 216-131 |
|    | <b>Item no.: 216-132</b><br>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated                                                                            | 216-132 |
|    | <b>Item no.: 216-141</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92     | 216-141 |
|    | <b>Item no.: 216-142</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92    | 216-142 |
|    | <b>Item no.: 216-143</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92       | 216-143 |
|   | <b>Item no.: 216-144</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92     | 216-144 |
|  | <b>Item no.: 216-151</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated                                                                            | 216-151 |
|  | <b>Item no.: 216-152</b><br>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated                                                                            | 216-152 |
|  | <b>Item no.: 216-207</b><br>Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; gray                                                                           | 216-207 |
|  | <b>Item no.: 216-208</b><br>Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow | 216-208 |
|  | <b>Item no.: 216-209</b><br>Ferrule; Sleeve for 10 mm² / AWG 8; insulated; electro-tin plated; red                                                                            | 216-209 |
|  | <b>Item no.: 216-210</b><br>Ferrule; Sleeve for 16 mm² / AWG 6; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue   | 216-210 |
|  | <b>Item no.: 216-221</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white                                                                        | 216-221 |
|  | <b>Item no.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray                                                                        | 216-222 |
|  | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red                                                                            | 216-223 |

|                                                                                    |                                                                                                                                                                                            |         |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; black                                                                         | 216-224 |
|    | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | 216-241 |
|    | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | 216-242 |
|    | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | 216-243 |
|    | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | 216-244 |
|    | <b>Item no.: 216-246</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | 216-246 |
|    | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | 216-262 |
|   | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | 216-263 |
|  | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | 216-264 |
|  | <b>Item no.: 216-266</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | 216-266 |
|  | <b>Item no.: 216-267</b><br>Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray    | 216-267 |
|  | <b>Item no.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | 216-284 |
|  | <b>Item no.: 216-286</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | 216-286 |
|  | <b>Item no.: 216-287</b><br>Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray    | 216-287 |
|  | <b>Item no.: 216-288</b><br>Ferrule; Sleeve for 6 mm <sup>2</sup> / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow  | 216-288 |
|  | <b>Item no.: 216-289</b><br>Ferrule; Sleeve for 10 mm <sup>2</sup> / AWG 8; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | 216-289 |
|                                                                                    | <b>Item no.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow                                                                       | 216-321 |
|                                                                                    | <b>Item no.: 216-322</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated; green                                                                        | 216-322 |



#### assembling

|                                                                                  |                                                                                                      |         |
|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------|
|  | <b>Item no.: 209-106</b><br>Mounting carrier; for isolated mounting on DIN 35 rails; gray            | 209-106 |
|  | <b>Item no.: 709-153</b><br>Cover; Type 1; suitable for cover carrier, type 1; 1 m long; transparent | 709-153 |

#### check

|                                                                                  |                                                                                                                            |         |
|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|---------|
|  | <b>Item no.: 209-170</b><br>Test plug adapter; 8.3 mm wide; for 4 mm Ø test plugs; suitable for 1.5 mm² - 10 mm² tbs; gray | 209-170 |
|  | <b>Item no.: 210-136</b><br>Test plug; 2 mm Ø; with 500 mm cable; red                                                      | 210-136 |
|  | <b>Item no.: 210-137</b><br>Test plug; 2.3 mm Ø; with 500 mm cable; yellow                                                 | 210-137 |
|  | <b>Item no.: 249-106</b><br>B-type test plug module; modular; 1,50 mm²; gray                                               | 249-106 |
|  | <b>Item no.: 249-107</b><br>B-type spacer module; modular; e.g., for bridging commoned terminal blocks; gray               | 249-107 |

#### End plate

|                                                                                    |                                                                              |         |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------|---------|
|  | <b>Item no.: 880-325</b><br>End and intermediate plate; 2.5 mm thick; gray   | 880-325 |
|  | <b>Item no.: 880-326</b><br>Separator plate; 2 mm thick; oversized; gray     | 880-326 |
|  | <b>Item no.: 880-328</b><br>End and intermediate plate; 2.5 mm thick; orange | 880-328 |
|  | <b>Item no.: 880-329</b><br>Separator plate; 2 mm thick; oversized; orange   | 880-329 |

#### Downloads

##### Documentation

##### Additional Information

|                        |             |               |          |
|------------------------|-------------|---------------|----------|
| Technical explanations | Apr 3, 2019 | pdf<br>2.1 MB | Download |
|------------------------|-------------|---------------|----------|

#### CAD/CAE - Smart Data

##### CAD data

|                     |     |          |
|---------------------|-----|----------|
| 3D Download 880-907 | URL | Download |
|---------------------|-----|----------|

##### EPLAN

EPLAN Data Portal



[Download](#)

---

WSCAD

WSCAD Universe

[Download](#)

---

Subject to changes.

---