

STANDARD SPOT CYLINDER HEAD

VTSH92RBL

By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:

DATE:




DESCRIPTION

Standard series spot cylinder head with three different beam angles, achieved through refractive or hybrid optical units. The junction arm is integrated into the spotlight's body, ensuring the barrel stays aligned with the track and preventing any imbalance in suspended track versions. The junction also allows for 360° rotation, providing maximum flexibility. Additionally, the fixture includes an external dimming interface compatible with Triac, 0/1-10V, and Dali systems for versatile lighting control.


PHOTOMETRICS

10°




h(m)	E(lx)	Φ(m)
1	9750	Φ0.20
2	2437	Φ0.40
3	1083	Φ0.60
4	609	Φ0.80
5	390	Φ1.00

30°




h(m)	E(lx)	Φ(m)
1	2204	Φ0.39
2	551	Φ0.79
3	244	Φ1.19
4	137	Φ1.59
5	88	Φ1.99

20°



h(m)	E(lx)	Φ(m)
1	6022	Φ0.25
2	1505	Φ0.50
3	669	Φ0.75
4	376	Φ1.00
5	240	Φ1.25

DIMENSIONS

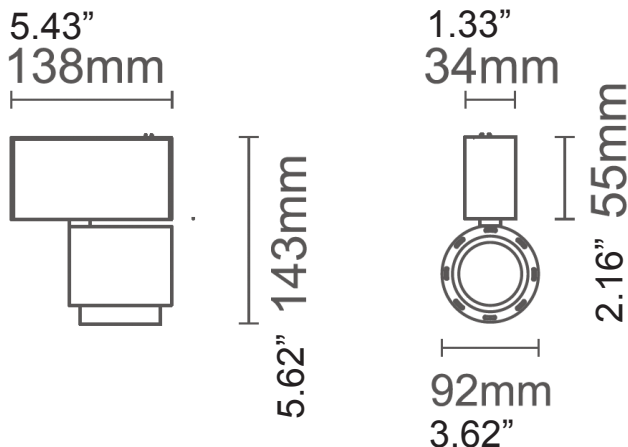

SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTSH92RBL	92mm x 92mm x 82mm (3.62" x 3.62" x 3.23")	15W	2700K/3000K/4000K	485Lm	>90	10/20/30D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.
3323 NE 163rd St. PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

