




2 YEAR WARRANTY

Upright Single-Door Pastry Freezer

700L Capacity | Adjustable 600x400 Tray Supports

SPECS	MODEL	CPCC070DB
	TYPE	Upright 1 Door Pastry Freezer
	TEMPERATURE (°C)	(-22/-18)
	GROSS VOLUME	639 Litres
	NET CHILLING VOLUME	341 Litres
	NET / GROSS WEIGHT	121 / 135kg
	MAX TRAY CAPACITY	30 x (600x400) Trays at 41.4mm Pitch
	EXTERNAL DIMENSIONS (MM)	720x815x2080-2130 H
PACKAGE DIMENSIONS (MM)	760x860x2240mm H	
POWER	COOLING OUTPUT (W)	568 Watts
	POWER CONSUMPTION (W)	530 Watts
	VOLTAGE	230 Volts
	AMPERAGE	3.1 Amps
	POWER CABLE	2 Meter Length
COOLING	COMPRESSOR TYPE	Ventilated Monoblock
	CONDENSATE EVAPORATION	Condensate water evaporation by means of anti-corrosion coil in low carbon AISI 316.
	REFRIGERANT GAS	R290
	REFRIGERANT CHARGE (kg)	0.090 kg
	DEFROST TYPE	Electric
	HUMIDITY (%) CONTROL	N/A
ENERGY	ENERGY CLASS	D
	CLIMATE CLASS	5 (+40°C / 40% R.H.)
	ANNUAL ENERGY CONSUMPTION (AEC)	2896 Kwh/annum
	GLOBAL WARMING POTENTIAL (GWP)	3
CONSTRUCTION	INTERNAL MATERIAL	AISI 304 Stainless Steel
	EXTERNAL MATERIAL	AISI 304 Stainless Steel (back, top and bottom in galvanized sheet metal)
	INTERNAL CORNERS	Rounded corners inside for easy and optimal cleaning
	INSULATION THICKNESS (MM)	60mm
	INSULATION MATERIAL	HFO Polyurethane (No CFC, no HCFC)
	DOOR SEAL	Easily removed, triple chamber magnetic seal
	DOOR HINGE	Standard Left, Reversible
	GUIDES	AISI 304 "L" Stainless Steel Guides
	CONTROLLER	Capacitive touch screen
	ALARM	Visual And Audible
NOISE (DB)	<70	
INCLUSIONS		5 x "L" Guide Pairs (600 x 400)
		LED Internal Lighting
		Air distribution duct
		Lock with key
	PRICE	\$5,500.00

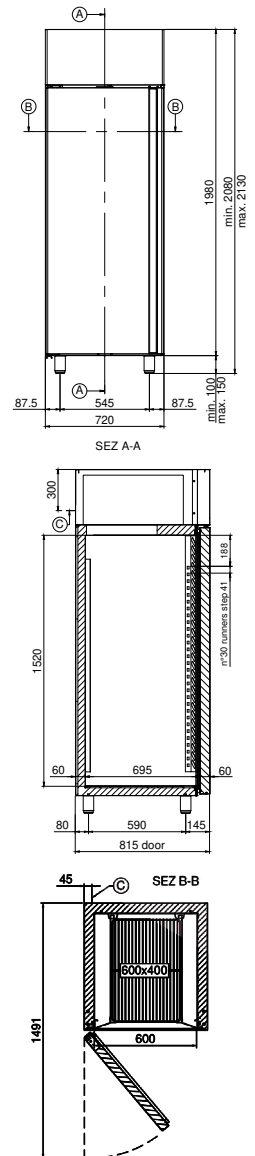


AISI 304 STAINLESS STEEL ADJUSTABLE AND REMOVABLE GUIDES AND RACKS

Accessories

	MODEL	DESCRIPTION	PRICE
	AM14802	Stainless steel Grid 600x400	\$ 140.00
	AM14811	Polyethylene Grid 600x400	\$110.00
	AKITRU04	4-wheel kit - H 110 mm Ø 80 mm (2 with brake, 2 without brake)	\$120.00
	AKITGPA70	Pair of L-profile tray holders	\$60.00

Air Distribution

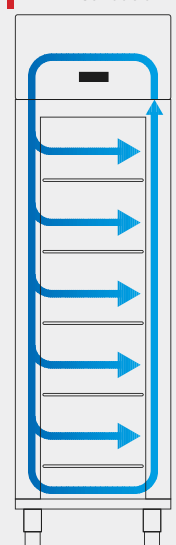

Features



CLIMATE 5



MONOBLOCK



FORCED INTERN



**AISI 316 SPOOL
FOR EVAPORATION**



HOT GAS AUTOMAT



COOLING



AlSi 304



REVERSIBLE



ISI 304 ADJUSTABLE



INSULATI



LED BAR



**LOCK
WITH KEY**



LED LIGHT

TOUCH
SCREEN

**INTERNAL
AIR CONVEYOR**



L-SHAP GUIDE