INDUSTRY KITCHENS
www.industrykitchens.com.au 1800 611 058

BLUE SEAL EVOLUTION SERIES®

GRIDDLE TOASTER **600mm**

G55T

- Griddle plate with toaster under
- 16mm griddle plate
- Individually controlled dual burners
- Large capacity grease collection drawer
- Rear rollers
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular



G55T

Overall Construction

- 16mm machined surface mild steel griddle plate
- 2.5mm stainless steel integral splashguard
- 2.5mm stainless steel grease channel at front of plate
- Stainless steel grease collection drawer below mid shelf
- Dual burners with individual pilot and flame failure
- Stainless steel radiant reflectors on burners for efficient toasting
- Welded 1.5mm 304 stainless steel bull nose
- Splashback and hob sides 1.2mm 304 stainless steel
- Vitreous enamelled control panel
- Toasting compartment 1.2mm high temperature aluminised steel
- Base shelf and mid shelf finished in 0.9mm 304 stainless steel
- Vitreous enamelled steel spill tray
- Chrome wire toasting rack with integral crumb tray
- Chrome wire rack supports
- 63mm dia. heavy-duty 1.2mm 304 stainless steel adjustable legs at front and two rollers at rear

Controls

- Large easy use control knobs - heat resistant reinforced
- Easy view control settings on knobs
- Dual controls with variable high to low burner setting
- Flame failure pilot burners
- Piezo ignition to pilot burners

Cleaning and Servicing

- Removable grill rack system, rack supports, and crumb tray
- Removable grease drawer
- Easy clean stainless steel exterior
- Access to all parts from front of unit

INDUSTRY KITCHENS
www.industrykitchens.com.au 1800 611 058

BLUE SEAL EVOLUTION SERIES®

GRIDDLE TOASTER **600mm**

G55T

Specifications

Burners
2 x 22MJ tubular burners with grill radiants

Gas power
44MJ/hr, 12.2kW

Plate
16mm thick mild steel
Cooking surface 590mm x 520mm, 3068cm2

Toaster Dimensions
Rack size 430mm x 470mm
Rack positions 4

Gas connection
R 1/2 (BSP) male
Optional underside connection, please specify when ordering
All units supplied with Natural and LP gas regulator


Dimensions
Width 600mm
Depth 812mm
Height 915mm
Incl. splashback 1085mm

Nett weight
115kg

Packing data
0.70m3, 165kg
Width 645mm
Depth 870mm
Height 1255mm

Gas types
Available in Natural gas and LP gas, please specify when ordering
Units supplied complete with gas type conversion kits
Other gas types on request

Options
Adjustable feet at rear
Joining caps
Castors

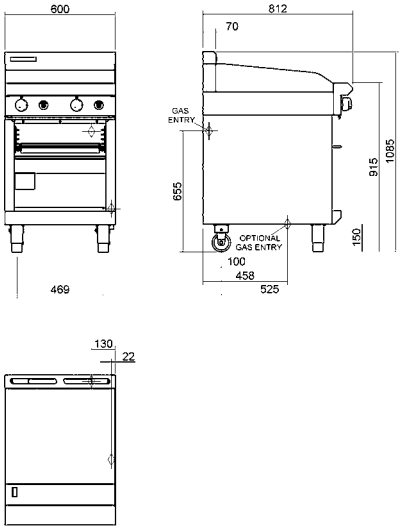

MOFFAT

moffat.com.au
moffat.co.nz

Australia
moffat.com.au

Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New South Wales
Telephone +612-8833 4111
nswsales@moffat.com.au

South Australia
Telephone +613-9518 3888
vsales@moffat.com.au

Queensland
Telephone +617-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone +618-9413 2400
wasales@moffat.com.au

New Zealand
moffat.co.nz

Moffat Limited

Rolleston
45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
Telephone +64 9-574 3150
sales@moffat.co.nz

24:7 Service Support

ISO9001 Quality Management Standard

Cert. No. 6869

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.BSE.01.19/1620