

WD-90DUO EFFICIENT COMBINATION DISHWASHER

STANDARD FEATURES:

- Automatic hood lift
- 0.74kW wash pump
- 9kW booster heater
- 90 litres wash tank volume
- Eye level control
- User friendly panel with 9 programs
- High capacity – 6 x 1/1 pans per cycle on a rotating rack
- Fast spin drying action – fixed wash arms
- Flexibility – can be used with or without granules
- 670mm high clearance
- Low water consumption – 5 litres per cycle
- Steam is directed on opening upwards behind the machine
- Includes 3 dishwashing baskets & 1 round post washing cassette

Upgrades and options are available, please contact Moffat for more details

TECHNICAL INFORMATION:

Dimensions

Width: 850mm
Depth: 998mm
Height: 1719mm

Water

Hot water temperature: 50-70°C
Hot water connection: R 3/4"
Hot water pressure: 100-600kPa
Cold water temperature: 5-12°C
Cold water connection: R 3/4"
Cold water pressure: 300kPa

Flow: 30 litres per minute
Water quality (Hardness): 2-7odH


Waste

Connection: 50mm dia direct

Electrical

3P+N+E 400-415V 50/60Hz
11.7kW 20A

Refer operator manual for complete installation instructions

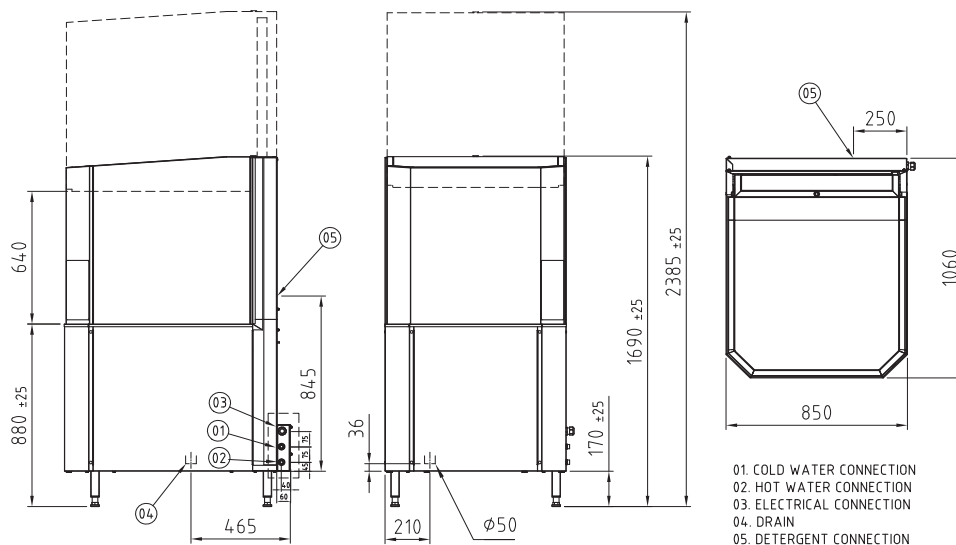

Australia

moffat.com.au

Moffat Pty Limited
740 Springvale Road
Mulgrave
Victoria 3170
Australia
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New Zealand

moffat.co.nz

Moffat Limited
45 Illinois Drive
Izone Business Hub
Rolleston 7675
New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.