

The Extra Heavy Duty Master Series' modular approach combines the convenience of custom kitchen design with proven, premium quality components to deliver world class functionality.

Featuring stainless steel construction front and sides, large front 'plate rail' 191mm deep and 2.5mm thick.

2 piece burners are easy to remove and clean with protected individual pilot lights and flame failure as standard. Large 683mm deep work surface fits two 300mm pots easily and grate design allows pots to slide across the surface easily. Premium 25mm thick griddle with powerful cast iron 'H' burners controlled by Hi-Lo valve for even heat distribution.

Large easy-to-use control knobs sit atop the fully porcelain interior standard oven that accepts full sized sheet pans in both directions with 4-position rack guides. A 42.2MJ 'H' oven burner with flame failure and a strong adjustable

STANDARD FEATURES

- 152mm chrome steel adjustable legs
- Stainless steel drip tray under open burners
- Piezo Spark ignition for oven
- Modular 11/4" front manifold
- Removable front-mounted s/steel grease receptacle
- Removable ring grates over burners
- 250mm stainless steel backguard
- Electric Spark ignition on all pilots

OPTIONAL FEATURES

- Stainless steel oven interior, side(s) or main back
- Fully grooved griddle (or grooved sections)
- Additional oven rack
- Gas regulator 3/4" or 11/4'
- Rear gas connection, 3/4", 1", or 11/4"
- 4 swivel casters with front brakes
- End caps and cover (NC, Specify)
- Dais base (not for use with "RC" oven) Convection oven base, add C to model, eg MST42RC
- Stainless steel common front rail up to 1728mm wide
- (2 or more units in a battery)
- Gas flex hose & quick disconnect (3/4", 1" or 11/4" x 5') w/restraining device

DIMENSIONS

External Dimension: 864W x 962D x 1174H mm

Working height: 924mm

Oven Interior: 667W x 737D x 343H mm

Combustible wall clearance: Side: 356mm, Rear: 152mm

TECHNICAL DATA

Gas Type: Natural or LP

Total Output:	Natural 147.65MJ	LP 142.35MJ
Burner Ratings:	Natural	LP
Open Burner	36.9MJ	36.9MJ
Griddle Burner	31.65MJ	31.65MJ
Oven Burner	42.2MJ	36.9MJ

Gas Connection: 11/4"

Shipping weight: MST42RE 202kg, MST42SE 157kg

AGA approval number


SC380


SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


MST42RE & MST42SE

864mm WIDE MASTER SERIES 2 BURNER COMBINATION RANGE & 2 BURNER COMBINATION WITH STORAGE BASE





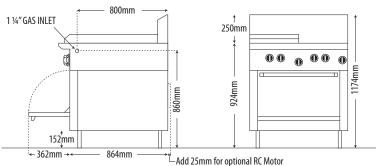

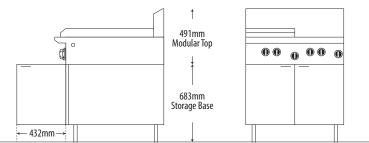





National Head Office 156 Swann Drive

Derrimut VIC 3030 +61 3 8369 4600 Tel: Fax: +61 3 8369 4699 Melbourne

96-100 Tope Street South Melbourne VIC 3205 +61 3 8369 4600 Tel: +61 3 8699 1299

Sydney

20/4 Avenue of the Americas Newington, NSW 2127 +61 2 9748 3000

Tel: Fax: +61 2 9648 4762 Brisbane

1/62 Borthwick Avenue Murarrie QLD 4172 +61 7 3399 3122 Tel: Fax: +61 7 3399 5311

Perth

Unit 16, 7 Abrams Street Balcatta, WA 6021 Tel: +61 8 6217 0700 Fax: +61 8 6217 0799