

TERMS & CONDITIONS

MINIMUM ORDER

\$5,000.00

PAYMENT TERMS

Net 30 days from date of invoice.

F.O.B. POINT

Thomas & Betts Corporation

LIMITED WARRANTY

Seller's liability under this warranty is limited to the repair or replacement of any unit which proves, in the reasonable opinion of Thomas & Betts, to be defective in material or workmanship under normal use and service, provided the unit is returned, transportation charges prepaid, to the Thomas & Betts Corporation shipping point within 90 days from date of shipment. Seller will in no case be responsible for special, incidental or consequential damages of any type or kind including, but not by way of limitation, cost of removal of units or reinstallation and loss of revenue. Thomas & Betts Corporation makes no warranty of merchantability or suitability for a particular purpose. This warranty is in lieu of all other warranties expressed or implied. Product mis-installation, abuse or mis-use will void this limited warranty.

RETURN OF GOODS

Merchandise returns must have a written advance return authorization number from Thomas & Betts. Return merchandise will be subject to a restocking charge plus transportation cost.

PRICES & TERMS SUBJECT TO CHANGE WITHOUT NOTICE

Thomas & Betts has made every effort to verify the accuracy of all information contained in this catalog prior to publication. However, due to the extent of the technical data contained herein, we cannot and do not guarantee the complete absence of errors and omissions, hence, no responsibility for same can be, nor is, assumed. Further, Thomas & Betts reserves the right to change specifications, without prior notice, on any parts illustrated in this catalog.

Table of Contents

DROP CONNECTORS & ACCESSORIESPage 3-40

Snap-N-Seal®	5
Connectors	6-15
Accessories & Security Shields	16
Multi-Fit™ Connectors	17-20
Hex Crimp	21-23
Miscellaneous	24-40
Female Splice Connectors "F" Series	24
"F" Series Hardware	25
Adaptors "F" Series	26-30
Terminators & Security Shields "F" Series	31-32
Ground Blocks "F" Series	33-34
Attenuator Pads "F" Series	35
EDC (IEC) Series Connectors	36
Self Terminating Connectors	37
Adaptors & Crimp On Connectors "N" Series	38-39
Easy Access Wall Plate	40

TRUNK & DISTRIBUTION CONNECTORS.....Page 41-62

LRC 2-Piece "K" Series	44-49
Pin Connectors	44
Splices	45
Pin Type Extension Connectors	46
Hardline to "F" Female Bulkhead Adaptors	47
Hardline to "F" Male Adaptors	48
Cable Terminators	49
LRC 3-Piece "G" Series	50
LRC 3-Piece "W" Series	51-58
Pin Connectors	51
Splices	52
Pin Type Extension Connectors	53
Hardline to "F" Female Bulkhead Adaptors	54
Hardline to "F" Male Adaptors	55
Cable Terminators	56
20 Ohm Power Connector & Splice	57-58
Miscellaneous	59-61
SNS320QR Connector	59
Feed Thru Entry Connectors	60
Fiber Entry Connectors	61

TRUNK & DISTRIBUTION ADAPTORS.....Page 63-81

Entry to Entry Adaptors	65
Entry Adaptors	66
Right Angle Adaptors	67-68
180° Adaptors	69-70

continued on next page

Table of Contents *(continued)*

Splice Block71

Extensions72

Terminators73-74

Female to Female75-76

Male to Female - Rotational77

Universal F Male to Hardline78

Plugs & Adaptors79

By-Pass Port Adaptor.....80

Flexible Cable Adaptors81

TOOLSPage 82-87

Drop Connector Installation Tools.....84-85

Crimp Tools - Ratchet & Non-Ratchet86

Locking Terminator & Security Shield Tools87-88

INDEXES.....Page 89

By Thomas & Betts Catalog Number113

By Cable Type and Size91

DROP

CONNECTORS



Table of Contents

Drop Connectors & Accessories.....	Pages 3-40
Snap-N-Seal®	5
Connectors.....	6-15
Accessories & Security Shields	16
Multi-Fit™.....	17
Connectors.....	17-20
Hex Crimp.....	21
Hex Crimp	21-23
Miscellaneous	24-40
Female Splice Connectors “F” Series	24
“F” Series Hardware	25
Adaptors “F” Series.....	26-30
Terminators & Security Shields “F” Series	31-32
Ground Blocks “F” Series	33-34
Attenuator Pads “F” Series	35
EDC (IEC) Series Connectors	36
Self Terminating Connectors	37
Adaptors & Crimp On Connectors “N” Series	38-39
Easy Access Wall Plate	40



THE LRC® SNAP-N-SEAL® STORY



A NEW STANDARD FOR CABLE TV

In 1988, a new standard was set for cable TV, with the introduction of the LRC® Snap-N-Seal® "F" Connector. Snap-N-Seal® connectors made it possible for cable operators to build the most reliable and dependable system possible. Today, Snap-N-Seal® connectors remain the connection of choice for advanced, multi-service cable systems.

THE COMPLETE TAP TO TV SOLUTION

Thomas & Betts' Snap-N-Seal® system doesn't stop at the connector. Snap-N-Seal® technology is available in - cable to F female connectors, ground blocks, splices, delta splices, and 'indoor' connectors. The Snap-N-Seal® system provides a complete Tap to TV solution for today's cable systems.

SIMPLE INSTALLATION FOR HIGH QUALITY, RELIABLE SYSTEMS

The Snap-N-Seal® system is designed to help eliminate problems where they most commonly occur. By installing Snap-N-Seal® technology in every drop, cable operators can focus on building the most reliable, high quality systems for their subscribers.

FACTS

- Craft-friendly, not craft-sensitive
- The "SNAP" says you're done, no visual inspection needed
- Moisture prevention, not just protection
- True compression, no deformed metal



- Simple, consistent cable preparation and installation
- Compatible with standard security shields
- Over thirteen years of field proven performance

ADVANTAGES

- Quad-sealed system prevents moisture from migrating into the connection
- Connectors manufactured from high quality 360 brass, cadmium plated with iridescent chromate coating for maximum corrosion resistance
- Design incorporates UV resistant plastic and O-rings providing a reliable, environmentally sealed product
- One-step 1/4" - 1/4" cable preparation is standard
- Average compression requires approximately 15-17 lbs compared to 40-50 lbs for some connectors, reducing installer fatigue
- Multiple tool options make installation fast, easy and reliable
- Product number is permanently stamped on connectors for easy identification

PERFORMANCE

- 360° radial compression provides superior RFI integrity
- Optimum RF shielding performance, -95dB effective shielding (typical on a 60% braid cable)
- Superb Return Loss performance of -30 dB up to 1GHz
- Connector to cable retention exceeds SCTE standard 40 lbs. minimum

Thomas & Betts

Snap-N-Seal® One Piece Drop Connectors



PROPERTIES

PHYSICAL

NUT, POST AND COLLAR: BRASS CDA360
NUT AND COLLAR FINISH: CADMIUM PLATED WITH
IRIDESCENT CHROMATE COATING
POST FINISH: TIN PLATED
O-RING: ETHYLENE PROPYLENE

ELECTRICAL

RETURN LOSS: ≥ -30 dB UP TO 1 GHz TYPICAL
INSERTION LOSS: ≤ -0.18 dB UP TO 1 GHz TYPICAL
RFI SHIELDING: -95 dB TYPICAL (60% BONDED FOIL
CABLE)

MECHANICAL

CABLE RETENTION: 40 LBS. MIN. COMPLIES TO SCTE
IPS-SP-404

ENVIRONMENTAL

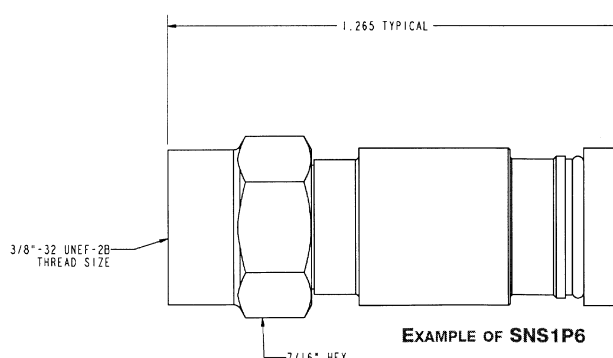
TEMPERATURE RATING: -40° F (-40°C) TO 140° F
(60°C)

Thomas & Betts introduces Snap-N-Seal® One Piece Drop Connectors, the newest addition to the Snap-N-Seal® system. With its user-friendly, pre-positioned and detachably coupled plastic sleeve, the Snap-N-Seal® One Piece Connector incorporates time-proven advantages for a reliable connection.

Snap-N-Seal® One Piece Drop Connectors use the same proven 360° compression design and installation tools as other LRC® Snap-N-Seal® products.

DESIGN ADVANTAGES

- To reduce assembly time and simplify installation, the plastic sleeve is pre-positioned and detachably coupled to the connector body.
- The plastic sleeve's separability from the connector body further simplifies difficult installations.
- True 360° compression onto cable ensures superior RF shielding performance, -95 dB effective shielding (typical on 60% bonded foil cable).
- Permanently stamped part numbers and color-coded sleeves for easy identification before and after installation.
- Installation requires one-step 1/4" - 1/4" cable preparation and standard compression tools used for all 59 & 6 series of Snap-N-Seal® product families.
- Quad sealed system prevents moisture migration.
- Incorporates an iridescent chromate finish plus UV resistant plastic and O-rings to provide a reliable, environmentally sealed product.
- Superb return loss performance of -30 dB to 1GHz.
- Cable retention exceeds 40 lb. minimum as specified by the SCTE.



Ordering Information

CATALOG NUMBER	POST I.D.	SLEEVE I.D.	SLEEVE COLOR	TOOL†	INNER PACK	OUTER PACK
SNS1P59	.154	.253	Orange	1+2	50	1000
SNS1P59QS	.154	.275	Green	1+2	50	1000
SNS1P59HEC	.154	.290	White	1+2	50	1000
SNS1P6	.191	.290	Blue	1+2	50	1000
SNS1P6QS	.191	.315	Violet	1+2	50	1000

†TOOL: 1 = CST596 OR CST596711 2 = SNSUTL

Snap-N-Seal® “F” Series Male Environmentally Sealed Connectors for Series 59 & 6 Cables



LRC Snap-N-Seal® connectors are environmentally sealed to protect drops from harsh environments. Through a unique 360° compression process, Snap-N-Seal® connectors also offers the signal leakage protection required for today's systems.

DESIGN ADVANTAGES

- Quad-sealed system prevents moisture from migrating into the connection.
- Connectors manufactured from high quality 360 brass, cadmium plated with iridescent chromate coating for maximum corrosion resistance.
- Design incorporates UV resistant plastic and O-rings providing a reliable, environmentally sealed product.
- 1/4"-1/4" cable preparation is standard.
- Multiple tool options make installation fast, easy and reliable.
- Product number is permanently stamped on connectors for easy identification.

PROPERTIES

PHYSICAL

NUT, POST AND COLLAR: BRASS CDA360
 NUT AND COLLAR FINISH: CADMIUM PLATED WITH IRIDESCENT CHROMATE COATING
 POST FINISH: TIN PLATED
 O-RING: ETHYLENE PROPYLENE

ELECTRICAL

RETURN LOSS: ≥ -30 dB UP TO 1 GHz TYPICAL
 INSERTION LOSS: ≤ -0.18 dB UP TO 1 GHz TYPICAL
 RFI SHIELDING: -95 dB TYPICAL (60% BONDED FOIL CABLE)

MECHANICAL

CABLE RETENTION: 40 LBS. MIN. COMPLIES TO SCTE IPS-SP-404

ENVIRONMENTAL

TEMPERATURE RATING: -40° F (-40°C) TO 140° F (60°C)



FIG. A




FIG. B




FIG. C

Ordering Information

CATALOG NUMBER	FIG.	POST I.D.	SLEEVE I.D.	SLEEVE COLOR	TOOL†	DIM A	INNER PACK	OUTER PACK
SNS59	C	.154	.253	Orange	1 or 2+3	-	50	1000
SNS59NS	B+C	.154	.253	Orange	1 or 2+3	-	50	1000
SNS59TP275	A+C	.154	.253	Orange	1 or 2+3	.275	50	500
SNS59TP450	A+C	.154	.253	Orange	1 or 2+3	.450	50	500
SNS59QS	C	.154	.275	Green	1 or 2+3	-	50	1000
SNS59QSNS	B+C	.154	.275	Green	1 or 2+3	-	50	1000
SNS59QSTP275	A+C	.154	.275	Green	1 or 2+3	.275	50	1000
SNS59QSTP450	A+C	.154	.275	Green	1 or 2+3	.450	50	500
SNS59HEC	C	.154	.290	White	1 or 2+3	-	50	1000
SNS6	C	.191	.290	Blue	1 or 2+3	-	50	1000
SNS6NS	B+C	.191	.290	Blue	1 or 2+3	-	50	1000
SNS6TP275	A+C	.191	.290	Blue	1 or 2+3	.275	50	500
SNS6TP450	A+C	.191	.290	Blue	1 or 2+3	.450	50	500
SNS6QS	C	.191	.315	Violet	1 or 2+3	-	50	1000
SNS6QSNS	B+C	.191	.315	Violet	1 or 2+3	-	50	1000
SNS6QSTP275	A+C	.191	.315	Violet	1 or 2+3	.275	50	1000
SNS6QSTP450	A+C	.191	.315	Violet	1 or 2+3	.450	50	500
SNS6PLA	C	.191	.253	Orange	1 or 2+3	-	50	1000

†Tool: 1 = IT1000, 2 = CST596 or CST596711, 3 = SNSUTL

Snap-N-Seal® “F” Series Male Environmentally Sealed Connectors for Series 7 & 11 Cables



LRC Snap-N-Seal® connectors are environmentally sealed to protect drops from harsh environments. Through a unique 360° compression process, Snap-N-Seal® connectors also offer the sustainable signal leakage protection required for today's systems.

DESIGN ADVANTAGES

- Quad-sealed system prevents moisture from migrating into the connection.
- Connectors manufactured from high quality 360 brass, cadmium plated with iridescent chromate coating for maximum corrosion resistance.
- Design incorporates UV resistant plastic and O-rings providing a reliable, environmentally sealed product.
- 1/4"-1/4" cable preparation is standard.
- Product number is permanently stamped on connectors for easy identification.

PROPERTIES

PHYSICAL

NUT, POST AND COLLAR: BRASS CDA360

NUT AND COLLAR FINISH: CADMIUM PLATED WITH
IRIDESCENT CHROMATE COATING

POST FINISH: TIN PLATED

O-RING: ETHYLENE PROPYLENE

ELECTRICAL

RETURN LOSS: ≥ -30 dB UP TO 1 GHz TYPICAL

INSERTION LOSS: ≤ -0.18 dB UP TO 1 GHz TYPICAL

RFI SHIELDING: -95 dB TYPICAL (60% BONDED FOIL
CABLE)

MECHANICAL

CABLE RETENTION: 40 LBS. MIN. COMPLIES TO SCTE
IPS-SP-404

ENVIRONMENTAL

TEMPERATURE RATING: -40° F (-40°C) TO 140° F
(60°C)



FIG. A




FIG. B




FIG. C

Ordering Information

CATALOG NUMBER	FIG.	POST I.D.	SLEEVE I.D.	SLEEVE COLOR	TOOL†	DIM A	INNER PACK	OUTER PACK
SNS7B	C	.238	.340	Black	1+2	-	36	288
SNS7BNS	B+C	.238	.340	Black	1+2	-	36	288
SNS7BTP275	A+C	.238	.340	Black	1+2	.275	36	288
SNS7BTP450	A+C	.238	.340	Black	1+2	.450	36	288
SNS7BQ	C	.238	.355	Black	1+2	-	36	288
SNS7BQNS	B+C	.238	.355	Black	1+2	-	36	288
SNS7BQTP275	A+C	.238	.355	Black	1+2	.275	36	288
SNS7BQTP450	A+C	.238	.355	Black	1+2	.450	36	288
SNS11AS	C	.295	.415	Black	1+2	-	36	432
SNS11ASNS	B+C	.295	.415	Black	1+2	-	36	432
SNS11ASTP275	A+C	.295	.415	Black	1+2	.275	36	432
SNS11ASTP450	A+C	.295	.415	Black	1+2	.450	36	432

† Tool: 1 = CST596711, 2 = L3011B

Snap-N-Seal® “F” Series Male Indoor Connectors



PROPERTIES

PHYSICAL

NUT, POST AND COLLAR: BRASS CDA360
 NUT AND COLLAR FINISH: CADMIUM PLATED WITH CLEAR CHROMATE COATING
 POST FINISH: TIN PLATED
 O-RING: ETHYLENE PROPYLENE

ELECTRICAL

RETURN LOSS: -30 dB UP TO 1 GHz TYPICAL
 INSERTION LOSS: -0.18 dB UP TO 1 GHz TYPICAL
 RFI SHIELDING: -95 dB TYPICAL (60% BONDED FOIL CABLE)

MECHANICAL

CABLE RETENTION: 40 LBS. MIN. COMPLIES TO SCTE IPS-SP-404
 CABLE INSERTION FORCE: < 20 LBS.

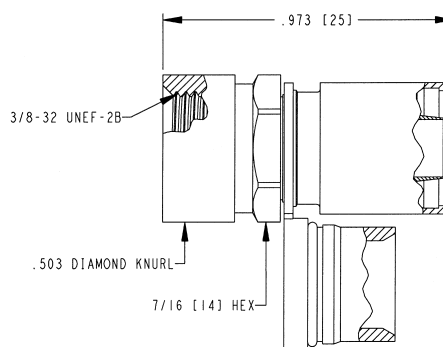
ENVIRONMENTAL

TEMPERATURE RATING: -40° F (-40°C) TO 140° F (60°C)

Adapted from our environmentally sealed, indoor/outdoor LRC® Snap-N-Seal® line, the Indoor F Series Snap-N-Seal® offers the same high shielding effectiveness, low insertion loss and excellent Return Loss specifications, but with a knurled nut to make indoor installation easy for installers and subscribers. Connectors that are not environmentally sealed should not be used outdoors.

DESIGN ADVANTAGES

- Large 1/2" diameter knurled “subscriber friendly” nut provides additional leverage over standard 7/16" hex nut, ensuring RF tight connections to TVs, VCRs and Set-Top Converters.
- Installer can use a standard 7/16" hex for wrench tight installations.
- Installation requires one-step 1/4"-1/4" cable preparation and the standard compression tools used for all Snap-N-Seal® products, which saves time and reduces the chances for errors.
- True 360° compression onto cable ensures optimum RF shielding performance, -95 dB effective shielding (typical on a 60% braid cable), without performance degradation experienced by all crimp style products over time.
- Superb return loss performance of -30 dB up to 1GHz.
- Cable retention exceeds 40 lb. minimum as specified by the SCTE.
- A clear chromate finish, permanently stamped part numbers and color-coded sleeves make the connector easy to identify before and after installation.
- The Indoor Snap-N-Seal® system includes jumper cable assemblies, which are the best choice for digital boxes and cable modems.



Ordering Information

CATALOG NUMBER	POST I.D.	SLEEVE I.D.	TOOL†	SLEEVE COLOR	INNER PACK	OUTER PACK
SNS59ID	.154	.253	1+2	Orange	50	1000
SNS59QSID	.154	.275	1+2	Green	50	1000
SNS59HECID	.154	.290	1+2	White	50	1000
SNS6ID	.191	.290	1+2	Blue	50	1000
SNS6QSID	.191	.315	1+2	Violet	50	1000

†TOOL: 1 = CST596 OR CST596711,
 2 = SNSUTL

Snap-N-Seal® Male Connector - RCA Type



PROPERTIES

PHYSICAL PROPERTIES

BODY COMPONENTS: BRASS
 BODY FINISH: DECORATIVE GOLD
 TERMINAL/CONTACT: BRASS CDA 360/BERILLIUM
 COPPER #25
 INSULATORS: TPX

ELECTRICAL PROPERTIES

RETURN LOSS: -30 dB UP TO 20 MHz TYPICAL
 INSERTION LOSS: -.27 dB UP TO 20 MHz TYPICAL
 RFI SHIELDING: 100 dB UP TO 20 MHz TYPICAL

MECHANICAL PROPERTIES

CABLE RETENTION : 40 LBS MIN. COMPLIES TO SCTE
 IPS-SP-404
 CABLE INSERTION FORCE: <20 LBS

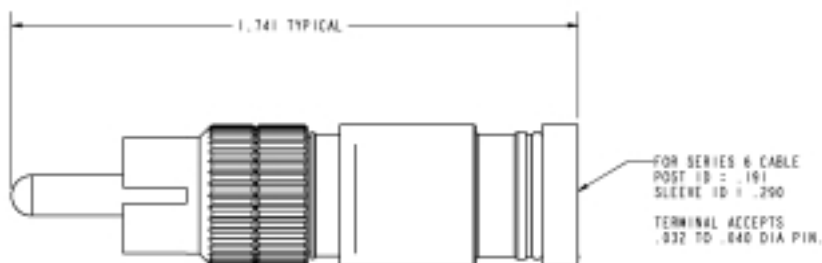
ENVIRONMENTAL PROPERTIES

TEMPERATURE RATING: -40°F (-40°C) TO
 140°F (60°C)

Extending the use of our LRC® Snap-N-Seal® technology, Thomas & Betts introduces the Snap-N-Seal® RCA connector. Designed to interface with all standard RCA female jacks and utilizing standard or tri-shield drop cable, this product gives the installer maximum flexibility for creating and placing audio cables in home entertainment systems.

DESIGN ADVANTAGES

- Features Snap-N-Seal® technology for simple and reliable installations.
- Designed to interface with RCA female (JACK) per IEC Specification 60603-14.
- Gold plated connector body and precision integral contact provides maximum conductivity and reliability.
- Uses the same installation tools as other Snap-N-Seal® 59 & 6 Series product families.
- Installation requires one-step 1/4"-1/4" cable preparation and standard compression tools used for all 59 and 6 series of Snap-N-Seal® product family.
- Color coded sleeves based on industry standards for RCA connector applications.



Ordering Information

CATALOG NUMBER	SLEEVE COLOR CODE	TOOL†	INNER PACK	OUTER PACK
SNS1P6RMBL	Blue	1+2	36	432
SNS1P6RMY	Yellow	1+2	36	432
SNS1P6RMW	White	1+2	36	432
SNS1P6RMR	Red	1+2	36	432
SNS1P6RMG	Green	1+2	36	432
SNS1P6RMBK	Black	1+2	36	432

†TOOL: 1 = CST596 OR CST596711 OR 2 = SNSUTL

Snap-N-Seal®
Precision BNC Plug
Connectors


PROPERTIES

PHYSICAL

BODY COMPONENTS: BRASS CDA 360

BODY FINISH: NICKEL

TERMINAL CONTACT: BERYLLIUM COPPER WITH SILVER PLATE

INSULATORS: TPX

O-RINGS: ETHYLENE PROPYLENE

ELECTRICAL

RETURN LOSS: -30dB UP TO 1 GHz TYPICAL

INSERTION LOSS: -0.2dB UP TO 1 GHz TYPICAL

RFI SHIELDING: -65dB TYPICAL

MECHANICAL

CABLE RETENTION: 40 LBS MIN. COMPLIES TO SCTE IPS-SP-404

CABLE INSERTION FORCE: < 20 LBS

ENVIRONMENTAL

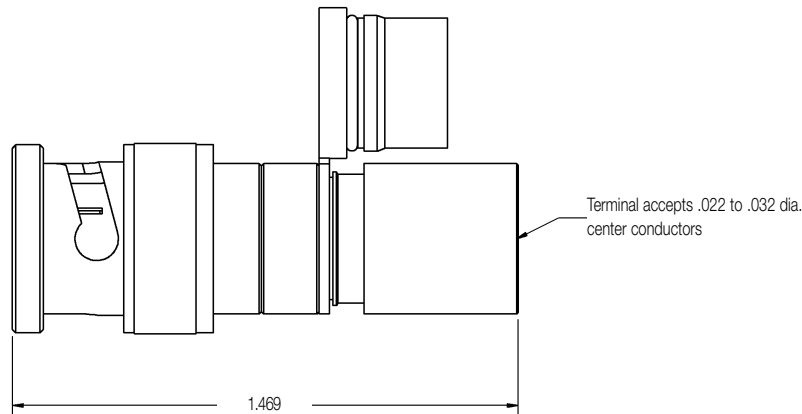
TEMPERATURE RATING: -40°F (-40°C) TO 140°F (60°C)

Introducing two new super premium Snap-N-Seal® precision BNC plug connectors from Thomas & Betts. The SNS59HECBNC is designed for applications using CommScope® series F59HEC-2 Headend Cable, S59HEC Headend Cable, or Times Fiber Communications, Inc. series 02240V or 02241V Headend Cables.

The SNS59HECBNCB is designed for applications using Belden® series 1505A Serial Digital Video Cable, or 9167 Broadband Headend Cable or Belden 9275 or 8241 cables.

DESIGN ADVANTAGES

- High performance, 75 ohm Snap-N-Seal® BNC Male connectors feature precision coaxial contacts for demanding bandwidth applications.
- True 360 degree compression onto cable ensures optimum RF shielding performance, -65dB effective shielding.
- BNC Male Plug interface is designed to nominal Mil Spec C-39012 with 75 ohm characteristic impedance.
- Integral silver-plated contact and Snap-N-Seal® design ensures ease of installation and reliable, high frequency return loss performance of -30dB to 1 GHz.
- Installation requires one-step 1/4" - 1/4" cable preparation and standard compression tools (CST596, CST596711 and SNSUTL) used for all 59 & 6 series Snap-N-Seal® product families, saving installation time.



Ordering Information

CATALOG NUMBER	POST I.D.	SLEEVE I.D.	SLEEVE COLOR	TOOL†	INNER PACK	OUTER PACK
SNS59HECBNC	.154	.290	White	1+2	40	480
SNS59HECBNCB	.154	.253	Orange	1+2	40	480

†TOOL: 1 = CST596 OR CST596711; 2 = SNSUTL

Snap-N-Seal® Environmentally Sealed Precision-Splice Connectors



PROPERTIES

PHYSICAL

BODY, POST AND COLLAR: BRASS CDA360
BODY AND COLLAR FINISH: CADMIUM PLATED WITH
IRIDESCENT CHROMATE COATING
POST FINISH: TIN PLATED
O-RING: ETHYLENE PROPYLENE

ELECTRICAL

RETURN LOSS: -30 dB UP TO 1 GHz TYPICAL
INSERTION LOSS: -0.27 dB UP TO 1 GHz TYPICAL
RFI SHIELDING: -95 dB TYPICAL (60% BONDED FOIL
CABLE)

MECHANICAL

CABLE RETENTION: 40 LBS. MIN. COMPLIES TO SCTE
IPS-SP-404
CABLE INSERTION FORCE: <20 LBS.

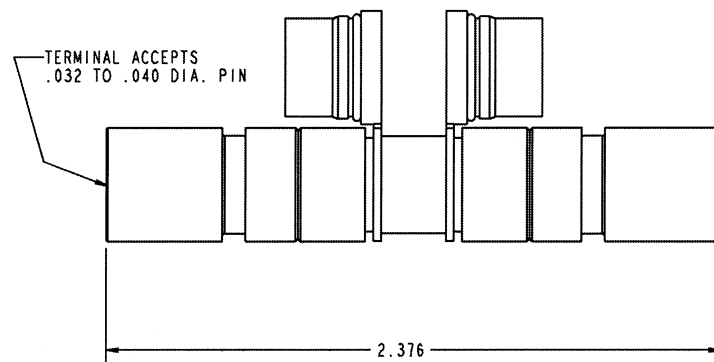
ENVIRONMENTAL

TEMPERATURE RATING: -40° F (-40°C) TO 140° F
(60°C)

Snap-N-Seal® Precision Splice Connectors use the same proven 360° compression design, installation tools and procedures as other Snap-N-Seal® products. With its precision integral center contact, the Snap-N-Seal® Precision Splice Connector ensures reliable, high frequency return loss performance for midspan and direct burial drop splices.

DESIGN ADVANTAGES

- Precision coaxial contact provides superior signal performance.
- Standard one-step 1/4" - 1/4" cable preparation.
- True 360° compression for superior RF Shielding performance.
- Superb return loss performance of -30 dB up to 1GHz.
- Cable retention exceeds 40 lb. minimum as specified by the SCTE.
- Permanently stamped part numbers and color coded O-rings for easy identification.
- Moisture prevention, not just protection.

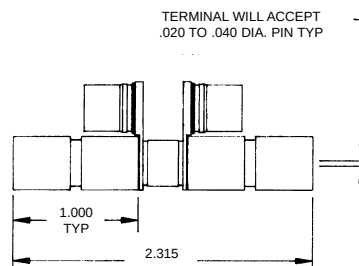


Ordering Information

CATALOG NUMBER	POST I.D.	SLEEVE I.D.	SLEEVE COLOR	TOOL†	INNER PACK	OUTER PACK
81SNS59K	.154	.253	Orange	1+2	20	240
81SNS59QSK	.154	.275	Green	1+2	20	240
81SNS6K	.191	.290	Blue	1+2	20	240
81SNS6QSK	.191	.315	Violet	1+2	20	240

†TOOL: 1 = CST596 OR CST596711, 2 = SNSUTL

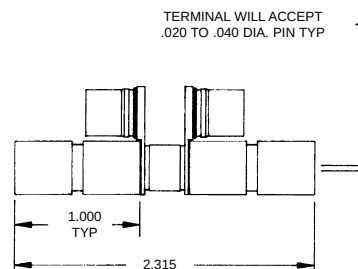
Snap-N-Seal® Splice



Ordering Information

CATALOG NUMBER	RETURN LOSS	INSERTION LOSS	RFI	POST I.D.	SLEEVE I.D.	SLEEVE COLOR	TOOL†	INNER PACK	OUTER PACK
81SNS59	-13.5dB	-.7dB	-95dB	.154	.253	Orange	1+2	20	240
81SNS59QS	-13.5dB	-.7dB	-95dB	.154	.275	Green	1+2	20	240
81SNS6	-13.5dB	-.7dB	-95dB	.191	.290	Blue	1+2	20	240
81SNS6QS	-13.5dB	-.7dB	-95dB	.191	.315	Violet	1+2	20	240


Snap-N-Seal® Splice, Delta



Ordering Information

CATALOG NUMBER	RETURN LOSS	INSERTION LOSS	RFI	POST I.D.	SLEEVE I.D.	SLEEVE CODE	TOOL†	INNER PACK	OUTER PACK
81SNS5959QS	-13.5dB	-.7dB	-95dB	.154	.253 (59)/.275 (59QS)	Orange(59)/Green(59QS)	1+2	20	240
81SNS596QS	-13.5dB	-.7dB	-95dB	.154(59)/.191(6QS)	.253(59)/.315(6QS)	Orange(59)/Violet(6QS)	1+2	20	240
81SNS659	-13.5dB	-.7dB	-95dB	.191(6)/0.154(59)	.290(6)/.253(59)	Blue(6)/Orange(59)	1+2	20	240
81SNS659QS	-13.5dB	-.7dB	-95dB	.191(6)/.154(59QS)	.290(6)/.275(59QS)	Blue(6)/Green(59QS)	1+2	20	240
81SNS66QS	-13.5dB	-.7dB	-95dB	.191	.290(6)/.315(6QS)	Blue(6)/Violet(6QS)	1+2	20	240
81SNS6QS59QS	-13.5dB	-.7dB	-95dB	0.191(6QS)/0.154(59QS)	0.315(6QS)/0.275(59QS)	Violet(6QS)/Green(59QS)	1+2	20	240

Snap-N-Seal® Splice, Auto Seize



Ordering Information

CATALOG NUMBER	RETURN LOSS	INSERTION LOSS	RFI	POST I.D.	SLEEVE I.D.	SLEEVE COLOR	TOOL†	INNER PACK	OUTER PACK
SNS8159AS	-13.5dB	-.7dB	-95dB	.154	.253	Orange	1+2	20	240
SNS816AS	-13.5dB	-.7dB	-95dB	.191	.290	Blue	1+2	20	240

†TOOL: 1 = CST596 OR CST596711, 2 = SNSUTL

Snap-N-Seal® Precision Ground Block



PROPERTIES

PHYSICAL

CONNECTOR POST AND COLLAR: BRASS CDA360
 CONNECTOR BODY AND COLLAR FINISH: CADMIUM
 PLATED WITH IRIDESCENT CHROMATE COATING
 CONNECTOR POST FINISH: TIN PLATED
 CONNECTOR O-RING: ETHYLENE PROPYLENE
 GROUNDING BLOCK: ALUMINUM WITH CLEAR CHROMATE
 COATING
 GROUND SCREW: STEEL, ZINC PLATED WITH GREEN
 CHROMATE COATING PER NEC
 MOUNTING SCREWS(2): STAINLESS STEEL

ELECTRICAL

RETURN LOSS: -30 dB UP TO 1 GHz TYPICAL
 INSERTION LOSS: -0.27 dB UP TO 1 GHz TYPICAL
 RFI SHIELDING: -85 dB TYPICAL (60% BONDED FOIL
 CABLE)

MECHANICAL

CABLE RETENTION: 40 LBS. MIN. COMPLIES TO SCTE
 IPS-SP-404
 CABLE INSERTION FORCE: <20 LBS.


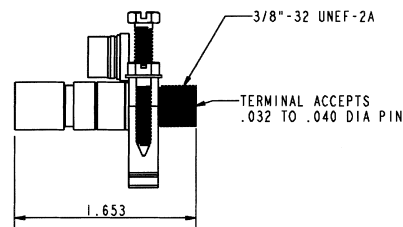
ENVIRONMENTAL

TEMPERATURE RATING: -40° F (-40°C) TO 140° F
 (60°C)

Snap-N-Seal® Precision Ground Blocks use the same proven 360° compression design, installation tools and procedures as other Snap-N-Seal® products. With its precision integral center contact, the Snap-N-Seal® Precision Ground Block ensures reliable, high frequency return loss performance for ground block and MDU grounding applications.

DESIGN ADVANTAGES



- Precision coaxial contact provides superior signal transmission.
- Standard one-step 1/4" - 1/4" cable preparation.
- True 360° compression for optimum performance.
- Superb return loss performance of -30 dB to 1GHz.
- Cable retention exceeds 40 lb. minimum as specified by the SCTE.
- Permanently stamped part numbers and color coded sleeves for easy identification before and after installation.
- Will accept up to 6 gauge ground wire.



Ordering Information

CATALOG NUMBER	POST I.D.	SLEEVE I.D.	SLEEVE COLOR	TOOL†	INNER PACK	OUTER PACK
GB59SNSK	.154	.253	Orange	1+2	25	300
GB59QSNSK	.154	.275	Green	1+2	25	300
GB6SNSK	.191	.290	Blue	1+2	25	300
GB6QSNSK	.191	.315	Violet	1+2	25	300

Snap-N-Seal® Ground Block



Ordering Information

CATALOG NUMBER	RETURN LOSS	INSERTION LOSS	RFI*	POST I.D.	SLEEVE I.D.	SLEEVE COLOR	TOOL†	INNER PACK	OUTER PACK
GB59SNS	-13.5dB	-7dB	-95dB	.154	.253	Orange	1+2	25	350
GB59QSNS	-13.5dB	-7dB	-95dB	.154	.275	Green	1+2	25	350
GB6SNS	-13.5dB	-7dB	-95dB	.191	.290	Blue	1+2	25	350
GB6QSNS	-13.5dB	-7dB	-95dB	.191	.315	Violet	1+2	25	350

†TOOL: 1 = CST596 OR CST596711, 2 = SNSUTL

ALL SUPPLIED SCREWS HAVE SLOTTED - 1/4" HEX COMBINATION HEAD

*RFI SHIELDING - USING 60% BRAID CABLE.

Snap-N-Seal® Headend, Cable to "F" Female Precision Connector



PROPERTIES

PHYSICAL

POST, COLLAR, AND BODY: BRASS CDA360
COLLAR, AND BODY FINISH: CADMIUM WITH IRIDESCENT
CHROMATE COATING
POST FINISH: TIN PLATED
SLEEVE: DELRIN
O-RINGS: ETHYLENE PROPYLENE
INSULATORS: TPX
CONTACTS: BERYLLIUM COPPER WITH SILVER PLATE

ELECTRICAL

RETURN LOSS: -30 dB UP TO 1 GHz TYPICAL
INSERTION LOSS: -0.3 dB UP TO 1 GHz TYPICAL
RFI SHIELDING: -95 dB TYPICAL

MECHANICAL

CABLE RETENTION: 40 LBS. MIN. COMPLIES TO SCTE
IPS-SP-404
CABLE INSERTION FORCE: <20 LBS.

ENVIRONMENTAL

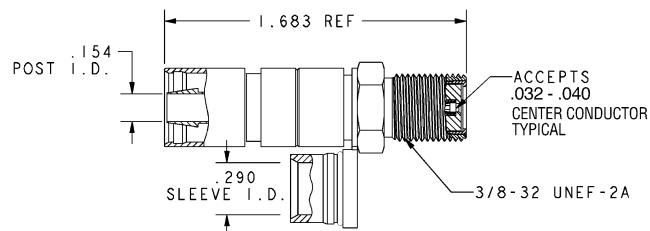
TEMPERATURE RATING: -40°F (-40°C) TO 140°F
(60°C)

The Snap-N-Seal® headend, cable to "F" female precision connector is designed for use in space-limited applications such as Headend Video Combiners. It is a single connector, thus eliminating the need for separate "F" male and panel mount "F" splice connectors.

Specifically designed for applications using CommScope® series F59HEC-2 Headend Cable or Times Fiber Communications, Inc. 02240V and 02241V Headend Cables.

DESIGN ADVANTAGES

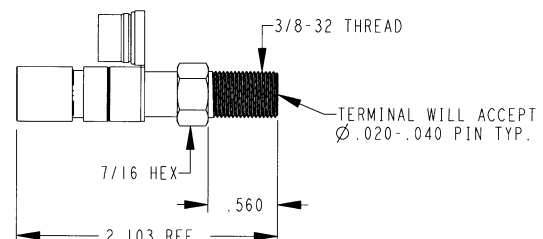
- Incorporates silver plated precision center contact providing high frequency performance.
- Superb Return Loss performance of -30dB up to 1 GHz.
- Extended panel mount thread length of .458" allows for thick panel mounting.
- Installation requires one-step 1/4" - 1/4" cable preparation and standard compression tools used for all 59 & 6 series Snap-N-Seal® product families, saving installation time.
- Optional panel mounting hardware includes Lock Washer 6155LW or Flat Washer 6155 plus 1/2" Hex Panel Nut 6150.



Ordering Information

CATALOG NUMBER	POST I.D.	SLEEVE I.D.	SLEEVE COLOR	TOOL†	DIM A	DIM B	INNER PACK	OUTER PACK
SNS6KF81	.191	.290	Blue	1 + 2	.379	1.554	36	432
SNS59HECKF81	.154	.290	White	1+2	.458	1.683	20	240

Snap-N-Seal® Cable to "F" Female Connector



Ordering Information

CATALOG NUMBER	RETURN LOSS	INSERTION LOSS	RFI*	POST I.D.	SLEEVE I.D.	SLEEVE COLOR	TOOL†	INNER PACK	OUTER PACK
SNS59FF	-13.5dB	-7dB	-95dB	.154	.253	Orange	1+2	20	240
SNS59QSFF	-13.5dB	-7dB	-95dB	.154	.275	Green	1+2	20	240
SNS6FF	-13.5dB	-7dB	-95dB	.191	.290	Blue	1+2	50	1000
SNS6QSFF	-13.5dB	-7dB	-95dB	.191	.315	Violet	1+2	20	240

†TOOL: 1 = CST596 OR CST596711, 2 = SNSUTL

*RFI SHIELDING - USING 60% BRAID CABLE.

Thomas & Betts


Snap-N-Seal®
Accessories

FIG. A



FIG. B


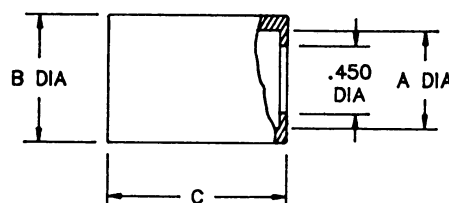


FIG. C

Ordering Information

CATALOG NUMBER	FIG.	DESCRIPTION	USE	DIM A	INNER PACK	OUTER PACK
NS500	A	Nut Seal	All 59 & 6 Connectors	1/2	50	15000
NS625	A	Nut Seal	All 7 & 11 Connectors	5/8	36	5400
TP275	B	Thread Protector	3/8 Threaded Ports	.275	50	2500
TP450	B	Thread Protector	3/8 Threaded Ports	.450	50	2500
SNS375P	C	Weather Plug	All "F" Male Connectors	-	50	2000

Snap-N-Seal®
Security Shield

Ordering Information

CATALOG NUMBER	MATERIAL	TOOL	DIMENSION			INNER PACK	OUTER PACK
			A	B	C		
FCSSNS	Plastic	SSTSNS	.658	.858	1.230	50	800
FCSSNS11	Plastic	SSTSNS11	.803	.995	1.766	25	400

LRC® MULTI-FIT™ SYSTEM



The Multi-Fit™ System is the most extensive premium performance connector product family available in the industry. Offered in both indoor and outdoor versions, the system includes “F” males, one-piece splices, ground blocks, “F” females, and 90° products.

The Multi-Fit™ System products are premium one-piece, hex crimp “F” connectors designed to fit a wide range of cables – only one connector is required for each series of cable.

ADVANTAGES

- Universal design simplifies connector selection, ensures proper installation on all standard cables and reduces inventory.
- Design reduces cable insertion force and crimp force, which minimizes installer fatigue and allows for full installation onto the cable.
- One step 1/4” – 1/4” cable preparation saves time and reduces chances for error.

- Installation requires .360” (Series 59 & 6) and .470” (Series 7 & 11) hex crimp tools, which are widely used and available.
- Part numbers are permanently stamped on the connectors to ensure use of correct connector.
- Weather resistant connectors include silicone gel in the crimp collar and an O-ring between the collar and nut to impede moisture migration.
- Heavy duty anti-corrosive finish offers excellent protection against environmental degradation.

PERFORMANCE

- Excellent RF shielding performance provides RF tight connections for two-way and digital systems.
- Superb return loss performance provides better than -30 dB up to 1 GHz for all 59, 6, 7 and 11 series standard cables.
- Cable retention exceeds 40 lb. minimum as specified by SCTE.

Multi-Fit™ "F" Series Male Connectors



PROPERTIES

PHYSICAL

NUT, POST AND COLLAR: BRASS CDA360

NUT, POST AND COLLAR:

AMF59, AMF6, AMF7, AMF11 - CADMIUM PLATED

WITH IRIDESCENT CHROMATE CONVERSION COATING

AMF59S - CADMIUM PLATED WITH OLIVE DRAB

CHROMATE CONVERSION COATING

AMF6S, AMF7S, AMF11S - CADMIUM PLATED WITH

BLACK CHROMATE CONVERSION COATING

POST FINISH: CADMIUM PLATED WITH CLEAR CHROMATE COATING.

PIN TERMINAL: AMF7, AMF7S, AMF11, AMF11S -

BRASS CDA360 WITH SILVER PLATE OVER COPPER

INSULATORS: AMF7, AMF7S, AMF11, AMF11S - TPX

ENVIRONMENTAL

TEMPERATURE RATING: -40° F (-40°C) TO 140° F (60°C)

ELECTRICAL

RETURN LOSS: -32 dB UP TO 1 GHz TYPICAL

INSERTION LOSS: -.14 dB UP TO 1 GHz TYPICAL

RFI SHIELDING: -105 dB TYPICAL (QUAD SHIELD CABLE)

MECHANICAL

CABLE RETENTION: 40 LBS. MIN. COMPLIES TO SCTE IPS-SP-405

CABLE INSERTION FORCE: < 20 LBS.

F MALE INTERFACE: COMPLIES TO SCTE IPS-SP-401

The Multi-Fit™ connector family is the most extensive premium performance connector family available in the industry and includes "F" male, one-piece splice, ground block, "F" female and 90 degree products.

DESIGN ADVANTAGES

- Universal design simplifies connector selection, ensures proper installation on all standard cables and reduces inventory.
- Improved design reduces cable insertion force and crimp force, which minimizes installer fatigue and allows for full installation onto the cable.
- Cable retention exceeds 40 lb. minimum as specified by SCTE.
- Excellent RF shielding performance provides RF tight connections for two-way and digital systems.
- Superb return loss performance provides better than -30dB up to 1 GHz for all 59, 6, 7 and 11 series standard cables.
- One step 1/4"-1/4" cable preparation, same as Snap-N-Seal® products, saves time and reduces chances for error.
- Installation requires .360" (Series 59 and 6) and .470" (Series 7 and 11) hex crimp tools, which are widely used and available.
- Part numbers are permanently stamped on the connectors to ensure use of correct connector.
- Weather-Resistant Multi-Fit™ Universal "F" Male connectors include silicone gel in the crimp collar and an O-ring between the collar and nut to impede moisture migration.
- Heavy duty anti-corrosive finish offers excellent protection against environmental degradation.

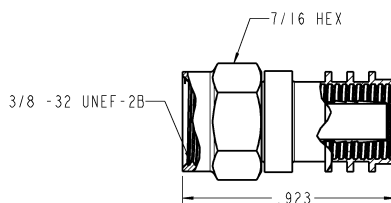


FIG. A

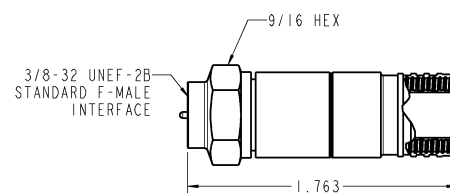


FIG. B

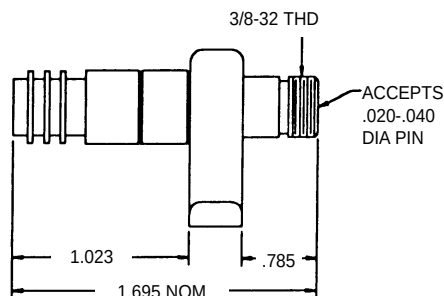
Ordering Information

CATALOG NUMBER	FIG.	POST I.D.	COLLAR I.D.	TOOL†	DESCRIPTION	COLOR CODE	INNER PACK	OUTER PACK
AMF59	A	.154	.309	1 + 2	—	Gold	100	1500
AMF6	A	.191	.346	1 + 2	—	Gold	100	1500
AMF7	B	.238	.428	1 + 3	—	Gold	36	288
AMF11	B	.295	.477	1 + 3	—	Gold	36	288
AMF59S	A	.154	.309	1 + 2	with Gel	Olive Drab	100	1500
AMF6S	A	.191	.346	1 + 2	with Gel	Black	100	1500
AMF7S	B	.238	.428	1 + 3	with Gel	Black	36	288
AMF11S	B	.295	.477	1 + 3	with Gel	Black	36	288

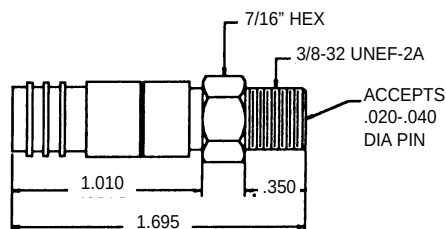
†TOOL: 1=CST596711 2=CT2460 3=CT611QS

Ground Blocks, Splices & Cable to “F” Female Connectors**Multi-Fit™
Ground Block, Single**

Weather resistant versions include silicon gel in the crimp collar and an O-ring between the collar and nut to impede moisture migration (Part number includes “S” suffix).

**Ordering Information**


CATALOG NUMBER	POST I.D.	COLLAR I.D.	TOOL†	DESCRIPTION	COLOR CODE	INNER PACK	OUTER PACK
GB59AMF	.154	.309	1 + 2	—	Gold	-	1
GB6AMF	.191	.346	1 + 2	—	Gold	-	1
GB59AMFS	.154	.309	1 + 2	with Gel	Olive Drab	-	1
GB6AMFS	.191	.346	1 + 2	with Gel	Black	-	1

**Multi-Fit™ Cable to
“F” Female Connectors****Ordering Information**

CATALOG NUMBER	POST I.D.	COLLAR I.D.	TOOL†	DESCRIPTION	COLOR CODE	INNER PACK	OUTER PACK
AMF6FF	.191	.346	1 + 2	—	Gold	-	1
AMF59FF	.154	.309	1 + 2	—	Gold	-	1
AMF6FFS	.191	.346	1 + 2	with Gel	Black	-	1

**Multi-Fit™
Splice Connectors**

81AMF6

**Ordering Information**

CATALOG NUMBER	POST I.D.	COLLAR I.D.	TOOL†	DESCRIPTION	COLOR CODE	INNER PACK	OUTER PACK
81AMF59	.154	.309	1 + 2	—	Gold	50	800
81AMF6	.191	.346	1 + 2	—	Gold	25	500
81AMF59S	.154	.309	1 + 2	with Gel	Olive Drab	50	800
81AMF6S	.191	.346	1 + 2	with Gel	Black	50	500

†TOOL: 1 = CST596 OR CST596711, 2 = CT2460

Thomas & Betts

Multi-Fit™ Cable to “F” Male, Right Angle Connectors



PROPERTIES

PHYSICAL PROPERTIES

BODY AND NUT: BRASS CDA360

BODY FINISH:

AMF906, AMF9011- CADMIUM PLATED WITH
IRIDESCENT CHROMATE CONVERSION COATING

AMF906S, AMF9011S- CADMIUM PLATED WITH BLACK
CONVERSION COATING

TERMINAL: BRASS CDA360, SILVER PLATED

POST: BRASS CDA360, CADMIUM PLATED WITH CLEAR
CHROMATE CONVERSION COATING

O-RING: ETHYLENE PROPYLENE

ENVIRONMENTAL PROPERTIES

TEMPERATURE RATING: -40° F (-40° C) TO 140° F
(60° C)

ELECTRICAL PROPERTIES

RETURN LOSS: -33 dB UP TO 1 GHz TYPICAL

INSERTION LOSS: -.13 dB UP TO 1 GHz TYPICAL

RFI SHIELDING: -92 dB TYPICAL (60% BONDED FOIL
CABLE)

MECHANICAL PROPERTIES

CABLE RETENTION: 40 LBS. MINIMUM. COMPLIES TO
SCTE IPS-SP-405

CABLE INSERTION FORCE: < 20 LBS.

F MALE INTERFACE: COMPLIES TO SCTE IPS-SP-401

Cable to “F” Male, Right Angle Connectors

The Multi-Fit™ right angle connectors are designed for tight fitting drop applications or situations where space is at a premium.

DESIGN ADVANTAGES

- Universal design simplifies connector selection, ensures proper installation on all standard cables and reduces inventory.
- Improved design reduces cable insertion force and crimp force, which minimizes installer fatigue and allows for full installation on to the cable.
- Cable retention exceeds 40lb. minimum as specified by SCTE.
- Excellent RF shielding performance provides RF tight connections for two-way and digital systems.
- Superb return loss performance provides better than -30dB up to 1 GHz for all 6 and 11 series standard cables.
- One step 1/4"-1/4" cable preparation, same as Snap-N-Seal products, saves time and reduces chances for error.
- Installation requires .360" (Series 6) and .470" (Series 11) hex crimp tools, which are widely used and available.
- Part numbers are permanently stamped on the connectors to ensure use of correct connector.

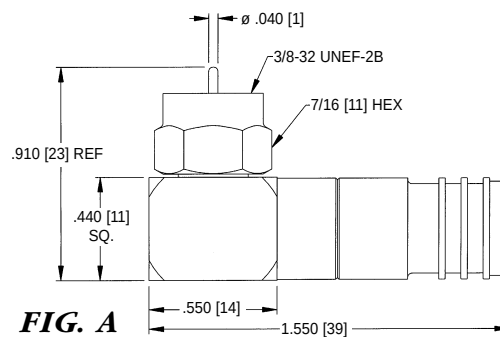


FIG. A

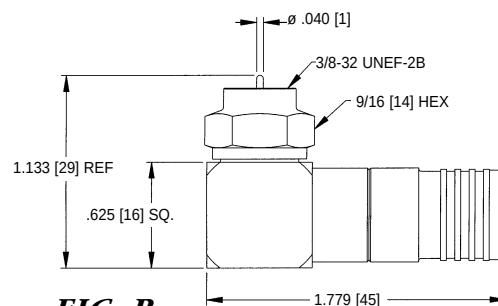


FIG. B

Ordering Information

CATALOG NUMBER	FIG.	POST I.D.	COLLAR I.D.	TOOL†	DESCRIPTION	COLOR CODE	INNER PACK	OUTER PACK
AMF906	A	.191	.346	1 + 2	—	Gold	30	240
AMF9011	B	.295	.477	1 + 3	—	Gold	1	1
AMF906S	A	.191	.346	1 + 2	with Gel	Black	30	240
AMF9011S	B	.295	.477	1 + 3	with Gel	Black	1	1

†TOOL: 1 = CST596 OR CST596711 2 = CT2460 3 = CT611QS

Thomas&Betts


LRC® HEX CRIMP “F” CONNECTORS

One piece, hex crimp “F” connectors are available for all 59, 6, 611, 7 and 11 series drop requirements. They are designed to provide maximum cable connector retention.

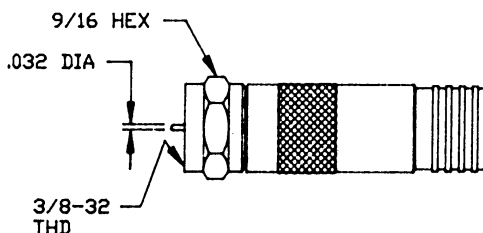
- One piece construction of high quality 360 brass, cadmium plated with clear or iridescent chromate coating for maximum corrosion resistance.
- Excellent RF integrity and shield effectiveness.
- Connector to cable retention 40 lbs. minimum.

F Series Male Crimp Connectors**“F” Series Male
Male Crimp On**

One piece crimp on connectors, offered in a wide variety of sizes to properly fit all cables, providing maximum cable connector retention.

**Ordering Information**

CATALOG NUMBER	POST I.D.	COLLAR I.D.	CRIMP SIZE	TOOL†	INNER PACK	OUTER PACK
F59CD	.149	.316	.324	1+2 or 3	100	2000
F59CDB	.149	.339	.324	1+2 or 3	100	2000
F59CH	.154	.290	.324	1+2 or 3	100	2000
F59CHI	.154	.290	.324	1+2 or 3	100	2000
F59HB	.154	.302	.324	1+2 or 3	100	2000
F59HEC	.157	.339	.324	1+2 or 3	100	2000
F59QS	.154	.316	.324	1+2 or 3	100	2000
F56CD	.186	.339	.324	1+2 or 3	100	2000
F56CH	.194	.339	.324	1+2 or 3	100	2000
F56CHI	.194	.339	.324	1+2 or 3	100	2000
F56CHT	.194	.316	.324	1+2 or 3	100	2000
F56QS	.194	.356	.360	1+3 or 4	100	2000
F60CH	.087	.196	.260	1+6	100	2000
F304VC	.204	.388	.384	1+5	100	2000

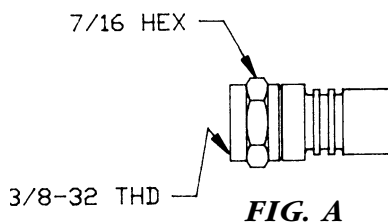
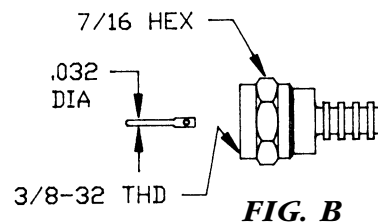
**“F” Series Male
One Piece
Crimp On****Ordering Information**

CATALOG NUMBER	DESCRIPTION	POST I.D.	COLLAR I.D.	CRIMP SIZE	TOOL††	INNER PACK	OUTER PACK
F611CHP	-	.238	.391	.470	1 or 3	36	288
F611QSP	-	.238	.416	.470	1 or 3	36	288
F7CH	-	.251	.428	.470	1 or 3	36	288
F7QS	-	.251	.428	.470	1 or 3	36	288
F11DB	w/ Sep. Crimp Pin	.295	.475	.100 & .470	2	36	288
F11QS	-	.295	.477	.470	1	36	288
F11QST	-	.295	.500	.470	1	36	288

†Tool: 1 = CST596 or CST596711, 2 = CT2460,
3 = HCT6QS, 4 = CT611QS, 5 = HCT660,
6 = CT596

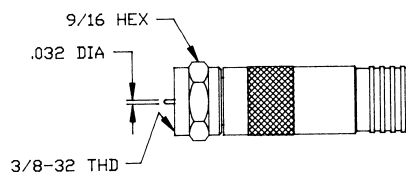
††Tool: 1 = CT611QS, 2 = HCT211, 3 = CT214

Thomas & Betts

F Series Male Plenum Crimp & Twist On**"F" Series Male
Plenum Crimp On for
RG59 and RG6 Cables****FIG. A****FIG. B****Ordering Information**


CATALOG NUMBER	FIG.	POST I.D.	COLLAR I.D.	CRIMP SIZE	TOOL†	INNER PACK	OUTER PACK
PL59CD	A	.148	.240	.260	2	100	2000
PL59CH	A	.143	.218	.260	2	100	2000
PL59CS	A	.158	.240	.260	2	100	2000
PL59TQ	A	.158	.266	.260	2	100	2000
PL56CH	A	.199	.250	.324	1,3	100	2000
PL56CS	A	.188	.266	.260	2	100	2000
PL56QS	A	.199	.307	.324	1,3	100	2000
PL120HB	B	.066	.120	.178	5	100	2000

† Tool: 1 = CT2460, 2 = CT596, 3 = HCT6QS, 4 = CT611QS, 5 = HCT178

**"F" Series Male
Plenum Crimp On
for RG11 Cables****Ordering Information**

CATALOG NUMBER	POST I.D.	COLLAR I.D.	CRIMP SIZE	TOOL††	INNER PACK	OUTER PACK
PL11CS	.302	.394	.470	1	36	288
PL11QS	.302	.413	.470	1	36	288

†† Tool: 1 = CT611QS


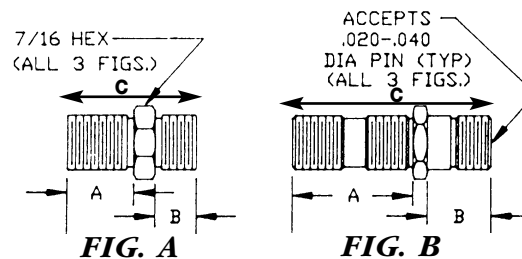
**"F" Series Male
Twist On****Ordering Information**

CATALOG NUMBER	COLLAR I.D.	CABLE USE	INNER PACK	OUTER PACK
FT58	.192	Series 58 Solid CC	1	1
FT5962	.237	Series 59 or Series 62	50	1600
FT59QS	.254	Series 59 Quad Shield	1	1
FT6	.265	Series 6	50	1600
FT6QS	.289	Series 6 Quad Shield	1	1

Thomas & Betts

"F" Series Female Splice Connectors

"F" Female Splice connector used to join two "F" Male connectors.



Ordering Information

CATALOG NUMBER	FIG.	DESCRIPTION	DIMENSION			INNER PACK	OUTER PACK
			A	B	C		
F81	A	Splice	.460	.345	.955	100	2000
F81BE†	A	AC/DC Blocking	1.038	.312	1.475	1	1
F81D	A	Single D Flat	.376	.429	.955	100	2000
F81DF	A	Double D Flat	.460	.345	.955	100	2000
F81HDW†	A	W/ Mounting Hardware	.460	.345	.955	100	1500
F81LS	C	Long Body	.500	.490	1.390	50	1200
F81PM†	B	Panel Mount Splice	.735	.490	1.390	50	1000
KF81D	A	Precision Splice*	.458	.352	.960	100	2000
KF81DI	A	Precision Splice* ¹	.458	.352	.960	100	2000
KF81PM†	B	Precision Panel Mount*	.735	.510	1.380	1	1
KF81PMI†	B	Precision Splice* ¹	.735	.510	1.380	1	1

†MOUNTING HARDWARE INCLUDED

*ACCEPTS .032-.040 DIA PIN

¹IRIDESCENT CHROMATE COATING FOR OUTDOOR USE.

Thomas & Betts

"F" Series Hardware




FIG. A




FIG. B




FIG. C


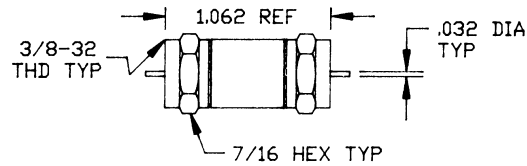


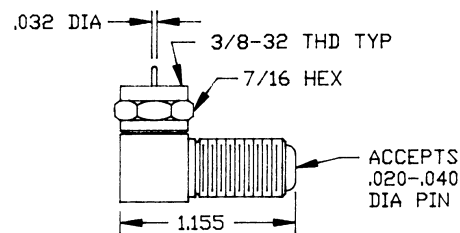
FIG. D

Ordering Information

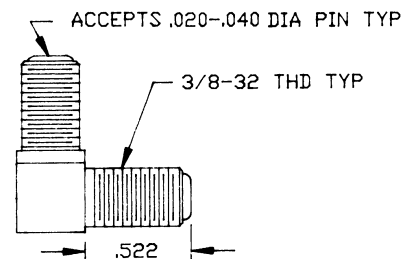
CATALOG NUMBER	FIG.	DESCRIPTION	DIMENSION			INNER PACK	OUTER PACK
			A	B	C		
6155	A	Washer	.500	.382	.025	100	20,000
6150	B	Nut	1/2	3/8-32	.093	100	10,000
F550	B	Nut	5/8	1/2-28	.095	100	10,000
6155LW	C	Lock Washer	.500	.382	.022	100	10,000
F555LW	C	Lock Washer	.630	.508	.022	100	10,000
6155SL	D	Solder Lug	.500	.375	.032	100	10,000

"F" Series Male Splice

Ordering Information

CATALOG NUMBER	INNER PACK	OUTER PACK
F71-LRC	72	1152

**"F" Series Adaptor
Right Angle - Male**

Ordering Information

CATALOG NUMBER	INNER PACK	OUTER PACK
FF90FM	50	1000

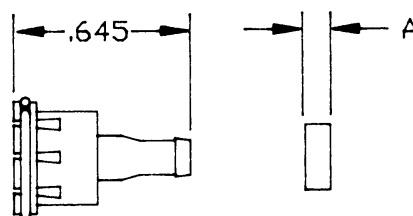
**"F" Series Adaptor
Right Angle - Female**

Ordering Information

CATALOG NUMBER	INNER PACK	OUTER PACK
FF90FF†	100	800

†MOUNTING HARDWARE INCLUDED

Thomas & Betts

"F" Series Quick Disconnect

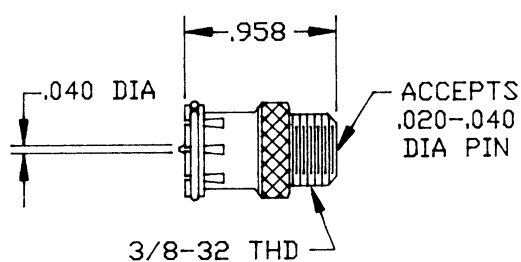


Ordering Information

CATALOG NUMBER	I.D.	POST I.D.	CRIMP RING SIZE	CRIMP TOOL†	DIM. A	INNER PACK	OUTER PACK
PF59S	.154	.300	.260 Dia.	3,4	.110	1	1
PF59SCR316	.154	.316	.324 Hex	1,2	.400	1	1

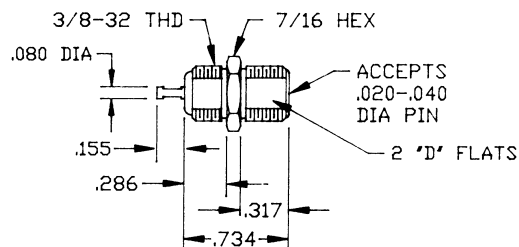
†Tool: 1 = CT2460, 2 = HCT6QS, 3 = CT603, 4 = CT596

"F" Series Connector Push On

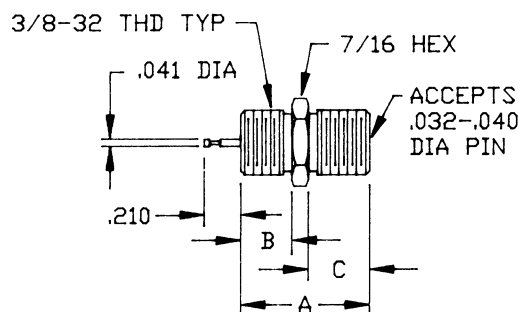


Ordering Information

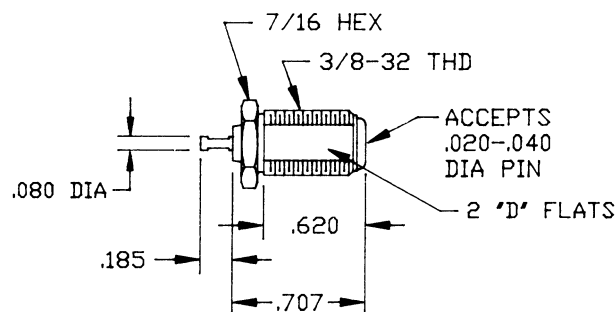
CATALOG NUMBER	DESCRIPTION	INNER PACK	OUTER PACK
PF59	Push On Male To "F" Female Adaptor	50	1000

"F" Series Chassis Adaptors**"F" Series Female Chassis Adaptor****Ordering Information**

CATALOG NUMBER	DESCRIPTION	INNER PACK	OUTER PACK
F61†	-	100	2500
F61SL†	With Solder Lug	1	1

"F" Series Female Precision Chassis Adaptor**Ordering Information**

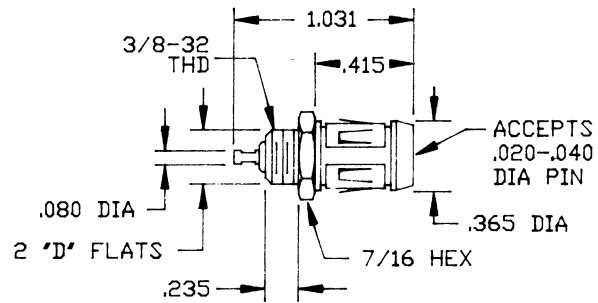
CATALOG NUMBER	A	DIMENSION B	C	INNER PACK	OUTER PACK
KF61†	.702	.286	.317	1	100

"F" Series Female Chassis Adaptor**Ordering Information**

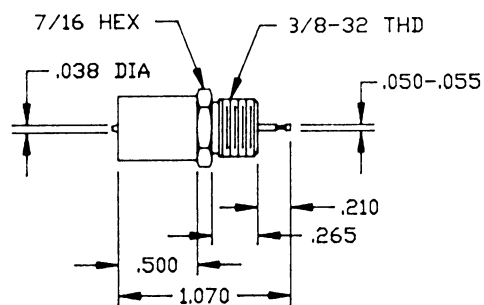
CATALOG NUMBER	INNER PACK	OUTER PACK
F61L†	100	2500

†MOUNTING HARDWARE INCLUDED

Thomas & Betts

**"F" Series Female Chassis
Connector Push On**

Ordering Information

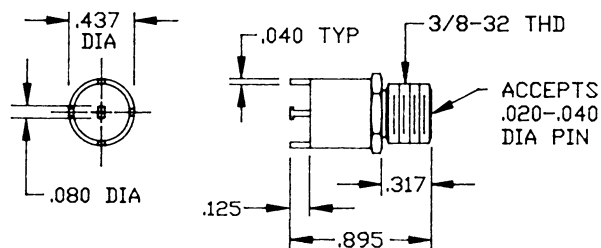
CATALOG NUMBER	INNER PACK	OUTER PACK
F61PF†	100	2000

**"F" Series Male Chassis
Connector Push On**

Ordering Information

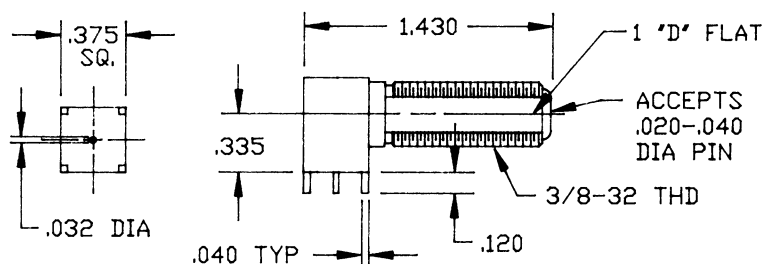
CATALOG NUMBER	INNER PACK	OUTER PACK
F61PM†	1	1

†MOUNTING HARDWARE INCLUDED

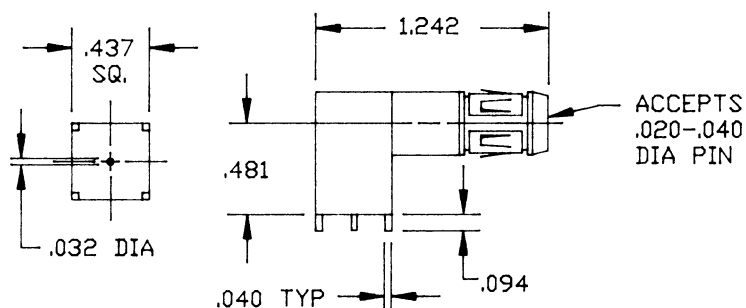
Thomas & Betts

"F" Series Printed Circuit Board Connectors**"F" Series Printed Circuit Connector****Ordering Information**

CATALOG NUMBER	INNER PACK	OUTER PACK
F61PC†	-	1

"F" Series Printed Circuit Connector - Right Angle**Ordering Information**

CATALOG NUMBER	INNER PACK	OUTER PACK
PCB90FF†	20	320

"F" Series Printed Circuit Connector - Right Angle Push On**Ordering Information**

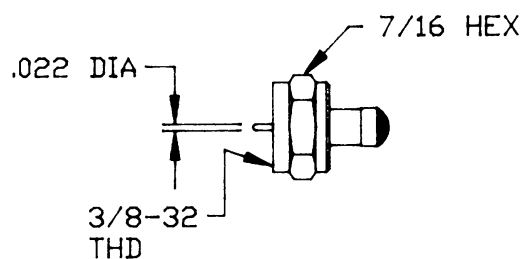
CATALOG NUMBER	INNER PACK	OUTER PACK
PC90481	72	576

†MOUNTING HARDWARE INCLUDED (ONE 6150 NUT.
ONE 6155 WASHER.)

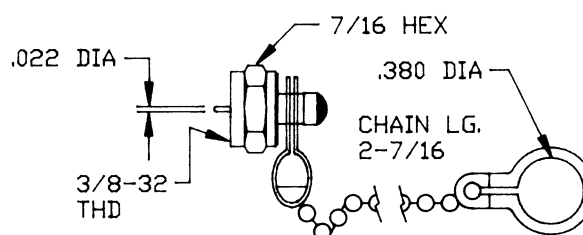
Thomas & Betts

"F" Series Terminators

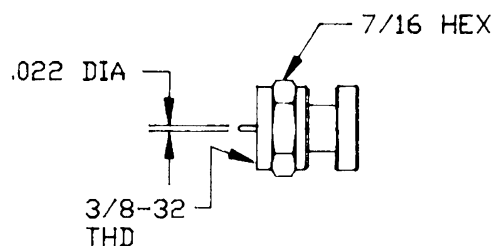
"F" series terminators for terminating RF signals.

**Ordering Information**

CATALOG NUMBER	TERMINATION	DESCRIPTION	INNER PACK	OUTER PACK
TRF	75 Ohm	-	100	1000
TRFD	75 Ohm	With Weather Seal	100	3000
TRFP	-	No Resistor	100	3000

"F" Series Chain Terminator**Ordering Information**

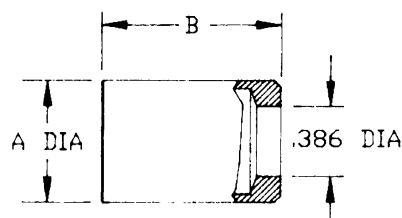
CATALOG NUMBER	TERMINATION	INNER PACK	OUTER PACK
CTRF	75 Ohm	100	2000

"F" Series Security Terminator**Ordering Information**

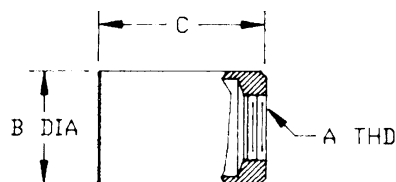
CATALOG NUMBER	TERMINATION	DESCRIPTION	INNER PACK	OUTER PACK
TRFSM	75 Ohm	-	100	2500
TRFSMP	-	No Resistor	100	3000

USED IN CONJUNCTION WITH SECURITY SHIELD

Thomas&Betts

"F" Series Security Shield & Locking Terminator**"F" Series
Security Shield Slip On****Ordering Information**

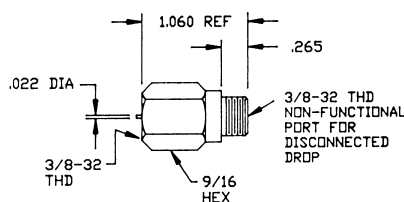
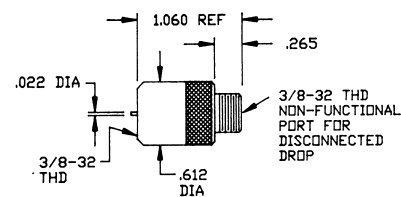
CATALOG NUMBER	MATERIAL	TOOL	DIMENSION		INNER PACK	OUTER PACK
			A	B		
FCS3S	Steel	SST59U	.671	.75	50	800
FCS9S	Steel	SST59U	.671	1.03	50	600
FCS10S	Steel	SST5910	.865	1.50	25	250
FCS11S	Steel	SST11	.865	2.00	25	200

**"F" Series
Security Shield Threaded****Ordering Information**

CATALOG NUMBER	MATERIAL	TOOL	A	DIMENSION		INNER PACK	OUTER PACK
				B	C		
FCS5T	Steel	SST59U	3/8-32	.671	.750	50	800
FCS9T	Steel	SST59U	3/8-32	.687	1.075	50	600

**"F" Series
Locking Terminator**

Locking terminators terminate RF signals and secure "F" connectors from unwanted tampering.

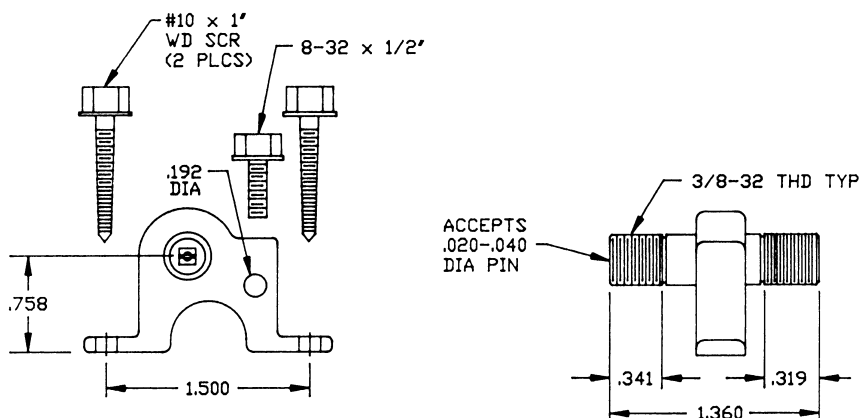
**FIG. A****FIG. B****Ordering Information**

CATALOG NUMBER	FIG.	TERMINATION	MATERIAL	DESCRIPTION	TOOL	INNER PACK	OUTER PACK
CLF	A	-	Brass	No Resistor	LTF	50	900
CLFA	B	-	Aluminum	No Resistor	LTF	50	900
TRLF	A	75 Ohm	Brass	-	LTF	50	900
TRLFA	B	75 Ohm	Aluminum	-	LTF	50	900

Thomas&Betts

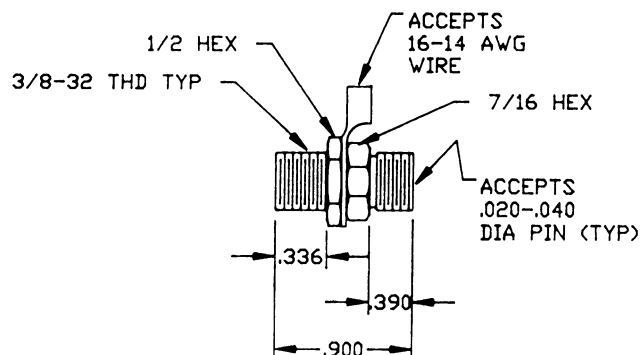
"F" Series Ground Blocks & Splices**"F" Series
Ground Block Single**

Ground blocks made from high-quality, die cast material are available for use with environmentally sealed products (i.e. thread protectors).

**Ordering Information**

CATALOG NUMBER	INNER PACK	OUTER PACK
GB81BS	25	500


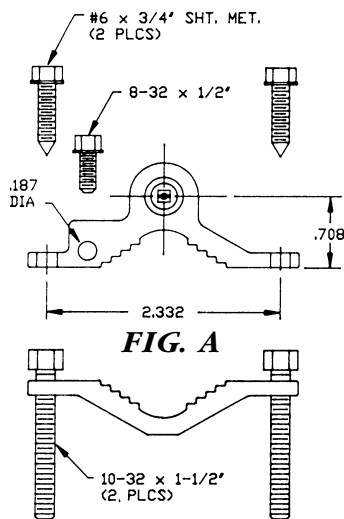
ALL SUPPLIED SCREWS HAVE SLOTTED - 1/4" HEX COMBINATION HEAD

**"F" Series Female
Splice with Ground Lug****Ordering Information**

CATALOG NUMBER	INNER PACK	OUTER PACK
GL81	100	1500

F Series Die Cast Ground Blocks**“F” Series Die Cast Ground Block Single**


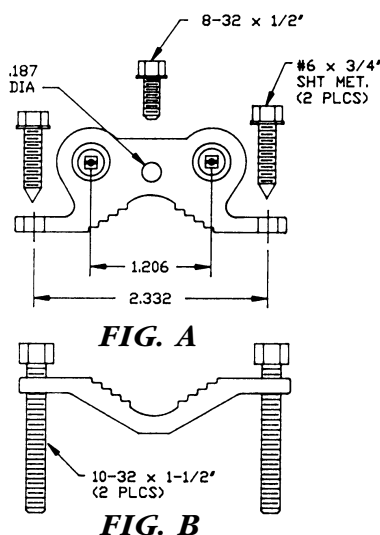
Single die cast ground blocks are available with or without water pipe attachment feature.

**Ordering Information**

CATALOG NUMBER	FIG.	DESCRIPTION	INNER PACK	OUTER PACK
GB81	A	-	25	500
GB81PC †	A+B	Pipe Clamp Ground Block 3/4" Min. Pipe Dia.	25	300

“F” Series Die Cast Ground Block Double

Double die cast ground blocks are available with or without water pipe attachment feature.

**Ordering Information**

CATALOG NUMBER	FIG.	DESCRIPTION	INNER PACK	OUTER PACK
DGB81	A	-	25	350
DGB81PC †	A+B	Pipe Clamp Ground Block 3/4" Min. Pipe Dia.	1	1

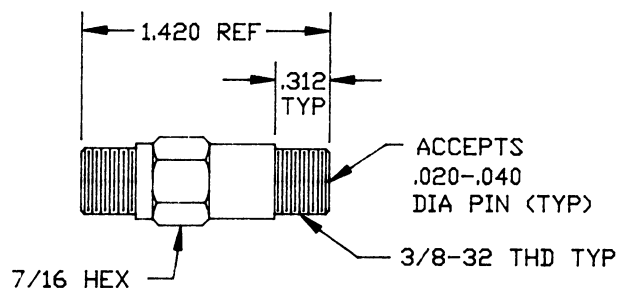
ALL SUPPLIED SCREWS HAVE SLOTTED - 1/4" HEX COMBINATION HEAD

† INCLUDES SLOTTED PAN HEAD SCREWS

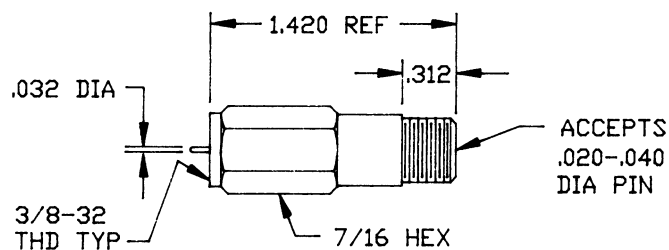
Thomas & Betts

**"F" Series
Attenuator Pads
Female to Female**


Attenuator pads for applications where attenuation of signal is required.


Ordering Information

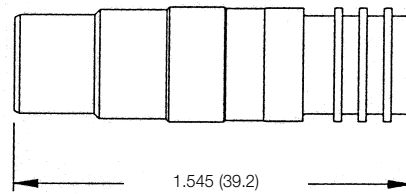
CATALOG NUMBER	ATTENUATION	INNER PACK	OUTER PACK
AP1FF	1 dB	24	288
AP3FF	3 dB	24	288
AP6FF	6 dB	24	288
AP10FF	10 dB	24	288
AP20FF	20 dB	24	288

**"F" Series
Attenuator Pads
Male to Female**

Ordering Information

CATALOG NUMBER	ATTENUATION	INNER PACK	OUTER PACK
AP1FM	1 dB	24	288
AP3FM	3 dB	24	288
AP6FM	6 dB	24	288
AP10FM	10 dB	24	288
AP20FM	20 dB	24	288
AP30FM	30 dB	24	288

**EDC (IEC)
Male Connector**

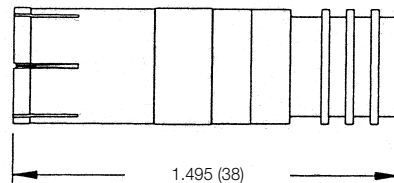
EDC (IEC) male connectors for 59 and 6 series cable.


Ordering Information

CATALOG NUMBER	POST I.D.	COLLAR I.D.	TOOL†	INNER PACK	OUTER PACK
EDC59M	.154	.309	1 + 2	50	1000
EDC6M	.191	.346	1 + 2	50	1000

**EDC (IEC)
Female Connector**

EDC (IEC) female connectors for 59 and 6 series cable.

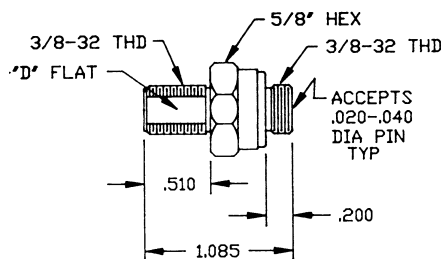
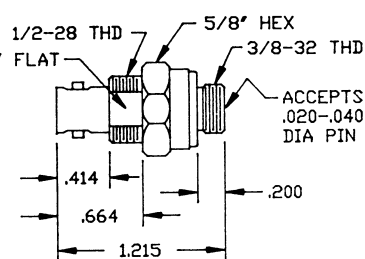

Ordering Information

CATALOG NUMBER	POST I.D.	COLLAR I.D.	TOOL†	INNER PACK	OUTER PACK
EDC59F	.154	.309	1+2	50	1000
EDC6F	.191	.346	1+2	50	1000

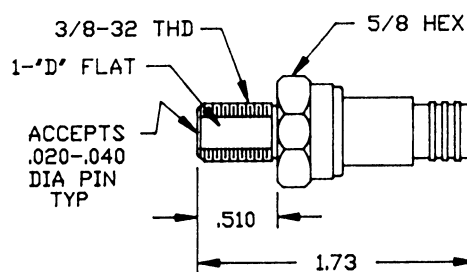
†TOOL: 1=CST596 OR CST596711, 2=CT2460

Self Terminating Connectors
"F" and BNC

Provides automatic termination of interface when mating connector is disconnected. Eliminates ingress and egress due to non-terminated ports.

**FIG. A****FIG. B****Ordering Information**

CATALOG NUMBER	FIG.	TERMINATION	INNER PACK	OUTER PACK
TF81†	A	75 Ohm	20	320
TBF81†	B	75 Ohm	20	320

Self Terminating Connectors
**Ordering Information**

CATALOG NUMBER	TERMINATION	I.D.	POST I.D.	COLLAR SIZE	CRIMP TOOL*	INNER PACK	OUTER PACK
TF8159CH†	75 Ohm	.154	.290	.324	1,2	20	320
TF816CH†	75 Ohm	.194	.339	.324	1,2	20	320
TF816QS†	75 Ohm	.194	.360	.360	1,2	20	320

*TOOL: 1 = CT2460, 2 = HCT6QS

†MOUNTING HARDWARE INCLUDED

"N" Series Male Crimp On Connectors

50 and 75 Ohm "N" interface adaptors and crimp on connectors.





FIG. A

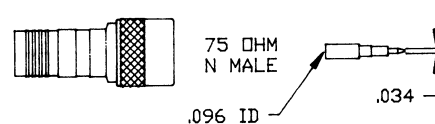


FIG. B





FIG. C

Ordering Information

CATALOG NUMBER	FIG.	POST I.D.	COLLAR I.D.	CRIMP SIZE	TOOL†	INNER PACK	OUTER PACK
59CHNM	A	.154	.290	.324	1,2,3	20	320
59QSNM	A	.154	.316	.324	1,2,3	20	320
56CDNM	A	.186	.339	.324	1,2,3	20	320
56CHNM	A	.194	.339	.324	1,2,3	20	320
56QSNM	A	.194	.365	.360	1,3,4	20	320
11QSNM	B	.295	.477	.470	4,5	20	320
11QSTNM	B	.295	.500	.470	4,5	20	320
NM213	C	.288	.477	.470	5	20	240
NM214	C	.288	.500	.470	5	20	240
NM8HB10	C	.288	.477	.470	5	20	240

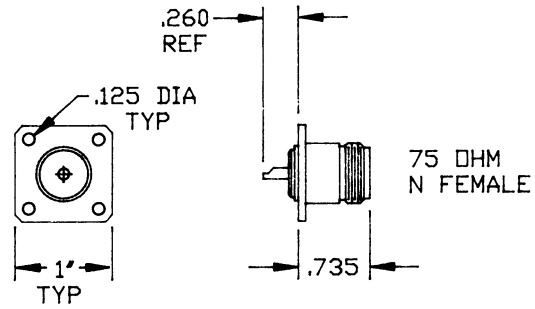
"N" Male to "F" Female



Ordering Information

CATALOG NUMBER	INNER PACK	OUTER PACK
NMFF	20	240

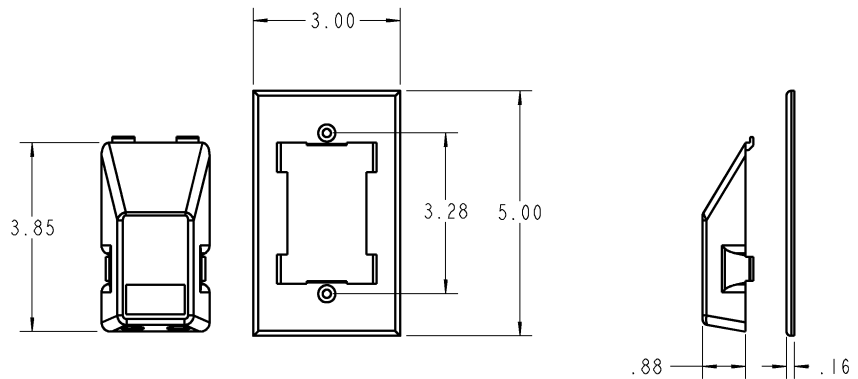
†Tool: 1 = CT2460, 2 = CT596, 3 = HCT6QS, 4 = CT611QS, 5 = CT214

"N" Female Panel Mount**Ordering Information**

CATALOG NUMBER	INNER PACK	OUTER PACK
NF75PM	1	1

**Multi-Purpose Easy
Access Wall Plate****DESIGN ADVANTAGES**

- Two piece design that allows easy access without removing screws.
- Sized for direct mounting of a Viewsonics directional coupler while maintaining [in wall] bend radius of the cable.
- Cover knockouts also allows installation of one piece Cable to "F" Female or "F" Female splice connectors for single or dual cable applications.
- Available as beige or white color.
- Includes two mounting screws and user-affixed label set.
- Dimensions: 3" width x 5" height. Protrudes 1-1/6" from wall surface.
- Offers added protection to the drop installation in applications using close to wall furniture and entertainment centers.
- Faceplate accepts mud ring while maintaining flush installations against wall.

**Ordering Information**

CATALOG NUMBER	DESCRIPTION	INNER PACK	OUTER PACK
WP23752PW	Wallplate White	25	100
WP23752PB	Wallplate Beige	25	100



Table of Contents

Tools	Page 82-87
Drop Connector Installation Tools	84-85
Crimp Tools - Ratchet & Non-Ratchet	86
Locking Terminator & Security Shield Tools	87-88

Cable Preparation Tool CST596711



PROPERTIES

PHYSICAL

Body: Delrin, Yellow Color

59 & 6 MODULE: Polycarbonate, Black Color

7 & 11 MODULE: Polycarbonate, Gray Color

MECHANICAL

CABLE PREPARATION: Complies to industry standards
1/4" x 1/4"

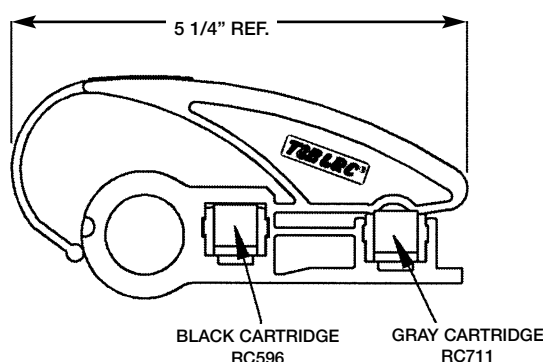
NOMINAL CENTER CONDUCTOR EXPOSURE: 1/4" to
5/16"

NOMINAL BRAID EXPOSURE: 1/4"

This cable preparation tool provides a reliable and effective method to prepare cable. Two color-coded modules in one tool provide reliable cable preparation for the family of 59, 6, 7 and 11 series drop cables. Each module will prepare cable to comply with industry standard 1/4" x 1/4" cable preparation. The black color-coded module prepares 59 and 6 series drop cable and the gray colored module prepares 7 and 11 series drop cable.

DESIGN ADVANTAGES


- A single tool prepares 59, 6, 7 and 11 series drop cables.
- Consistent one-step cable preparation.
- Compatible with all Snap-N-Seal® and Multi-Fit™ products.
- Color-coded replacement modules available.
- Built-in storage area for the unused module.
- High strength polymer tool body.
- Bright yellow for easy identification.
- Ergonomically designed to fit the hand.
- Features a finger loop for easy cable preparation.



Ordering Information


CATALOG NUMBER	DESCRIPTION	USE	INNER PACK	OUTER PACK
CST596711	Coax Stripping Tool	59, 6, 7 & 11 Series	1	130
RC596	Replacement Cartridge, Black	59 & 6 Series	1	5000
RC711	Replacement Cartridge, Gray	7 & 11 Series	1	5000

CST596



Ordering Information

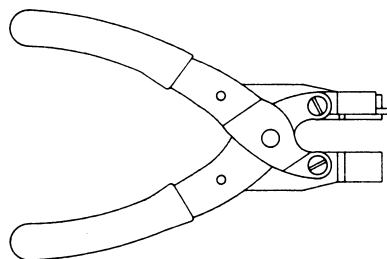
CATALOG NUMBER	DESCRIPTION	USE	INNER PACK	OUTER PACK
CST596	Strips	59 & 6 Series	1	145
RM596	Replacement Module	59 & 6 Series	1	5000



Ordering Information

CATALOG NUMBER	DESCRIPTION	USE	INNER PACK	OUTER PACK
IT1000	Strips & Installs	Series 59, 59QS, 59HEC, 6, 6QS	1	100
IT10002	Replacement Blade Cassette	IT1000	1	300

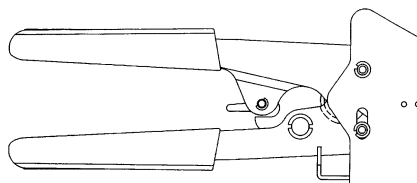
SNSUTL



Ordering Information

CATALOG NUMBER	DESCRIPTION	USE	INNER PACK	OUTER PACK
SNSUTL	Installs, Non-Ratchet	Series 59, 59QS, 59HEC, 6, 6QS, BNC, RCA	1	50

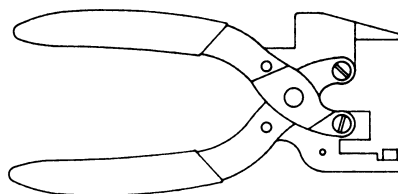
SNSIT



Ordering Information

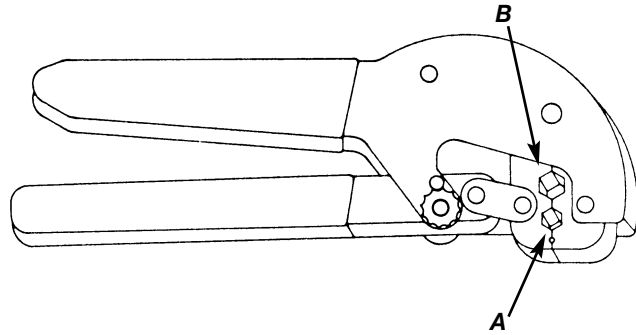
CATALOG NUMBER	DESCRIPTION	USE	INNER PACK	OUTER PACK
SNSIT	Installs, Ratchet	Series 59, 59QS, 59HEC, 6, 6QS	1	38

L3011B



Ordering Information

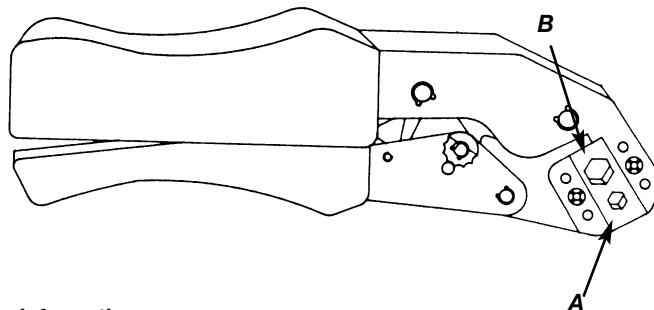
CATALOG NUMBER	DESCRIPTION	USE	INNER PACK	OUTER PACK
L3011B	Installs	Series 7, 7QS, 11, 11QS, 320QR	1	50

Crimp Tools Ratchet & Non-Ratchet**Crimp Tool
Non-Ratchet****Ordering Information**

CATALOG NUMBER	CRIMP TYPE	CAVITY SIZE		INNER PACK	OUTER PACK
		A	B		
CT214	Hex	.162	.470	1	1
CT596	Hex	.260	.324	1	1
HCT6QS	Hex	.324	.360	1	1
HCT211	Hex	.100	.475	1	1
HCT660	Hex	.324	.384	1	1

**Crimp Tool
Ratchet****Ordering Information**

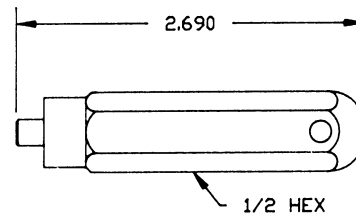
CATALOG NUMBER	CRIMP TYPE	CAVITY SIZE		INNER PACK	OUTER PACK
		A	B		
CT611QS	Hex	.360	.470	1	18

**Crimp Tool
Ratchet****Ordering Information**

CATALOG NUMBER	CRIMP TYPE	CAVITY SIZE		INNER PACK	OUTER PACK
		A	B		
CT2460	Hex	.324	.360	1	25


Thomas & Betts

Locking Terminator Tool




Ordering Information

CATALOG NUMBER	INNER	OUTER
LTF	25	400

Snap-N-Seal®
Installation/Security Tool

Ordering Information

CATALOG NUMBER	DESCRIPTION	DIMENSION		INNER PACK	OUTER PACK
		A	B		
SSTSNS	Security Shield Tool 59 & 6	7/16	1/2	10	100
SSTSNS11	Security Shield Tool 7 & 11	9/16	5/8	10	100

Snap-N-Seal® Combination
Wrench

Ordering Information

CATALOG NUMBER	DESCRIPTION	DIMENSION		INNER PACK	OUTER PACK
		A	B		
W5437	Combination Wrench			1	1

CROSS

INDEX

REFERENCE &

CROSS REFERENCE

DROP CABLE TO CONNECTOR

CABLE MFG	CABLE NUMBER	SNAP-N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER	PAGE
Alpha	9105	-	-	-	-	PL11CS	.23		
Alpha	9804	-	-	-	-	F56CHT	.22		
AT&T	743A	SNS59	.7	AMF59	.18	F59CH	.22		
Belden	1151A	-	-	-	-	PL59TQ	.23		
Belden	1152A	-	-	-	-	PL56QS	.23		
Belden	1153A	-	-	-	-	PL11QS	.23		
Belden	1168A	-	-	-	-	CF141	.22		
Belden	1186A	SNS59QS	.7	AMF59	.18	F59QS	.22		
Belden	1189A	SNS6QS	.7	AMF6	.18	F56QS	.22		
Belden	1426A	-	-	-	-	F59CN	.23		
Belden	82108	-	-	-	-	PL59CS	.23		
Belden	8219	-	-	-	-	FT58S20	.23		
Belden	8221	SNS59	.7	AMF59	.18	F59CD	.22		
Belden	82241	-	-	-	-	PL59CH	.23		
Belden	82248	-	-	-	-	PL56CH	.23		
Belden	8228	-	-	-	-	F56CHT	.23		
Belden	8233	-	-	-	-	F11475TRX	.23		
Belden	8240	-	-	-	-	FT58	.23		
Belden	8241	-	-	-	-	F59CN	.23	Use SNS59HECBNCB when contact is rated .023-.032	.11
Belden	8259	-	-	-	-	FT58S20	.23		
Belden	8263	SNS59	.7	AMF59	.18	F59HB	.22		
Belden	8281	-	-	-	-	F304VC	.22		
Belden	83264	-	-	-	-	PL120HB	.23		
Belden	86262	-	-	-	-	PL59CS	.23		
Belden	87108	-	-	-	-	PL59CS	.23		
Belden	87120	-	-	-	-	PL56CS	.23		
Belden	87241	-	-	-	-	PL59CH	.23		
Belden	87292	-	-	-	-	PL11CS	.23		
Belden	88241	-	-	-	-	PL59CH	.23		
Belden	88281	-	-	-	-	PL304VC	.23		
Belden	89108	-	-	-	-	PL59CS	.23		
Belden	89120	-	-	-	-	PL56CS	.23		
Belden	89248	-	-	-	-	PL56CH	.23		
Belden	89269	-	-	-	-	PL59CD	.23		
Belden	89292	-	-	-	-	PL11CS	.23		
Belden	9011	SNS11AS	.8	AMF11	.18	F11QS	.22		
Belden	9012	SNS11AS	.8	AMF11	.18	F11QS	.22		
Belden	9050	SNS59	.7	AMF59	.18	F59CH	.22		
Belden	9051	SNS59	.7	AMF59	.18	F59CH	.22		
Belden	9052	SNS59	.7	AMF59	.18	F59CH	.22		
Belden	9053	SNS59	.7	AMF59	.18	F59CH	.22		
Belden	9054	SNS59	.7	AMF59	.18	F59HB	.22		
Belden	9055	SNS59	.7	AMF59	.18	F59HB	.22		
Belden	9056	SNS6	.7	AMF6	.18	F56CH	.22		
Belden	9057	SNS6	.7	AMF6	.18	F56CH	.22		
Belden	9058	SNS6	.7	AMF6	.18	F56CH	.22		
Belden	9059	SNS6	.7	AMF6	.18	F56CH	.22		
Belden	9060	SNS6	.7	AMF6	.18	F56CH	.22		
Belden	9061	SNS6	.7	AMF6	.18	F56CH	.22		
Belden	9062	SNS6	.7	AMF6	.18	F56CH	.22		
Belden	9063	SNS59	.7	AMF59	.18	F59CH	.22		
Belden	9064	SNS11AS	.8	AMF11	.18	F11QS	.22		
Belden	9065	SNS11AS	.8	AMF11	.18	F11QS	.22		
Belden	9066	SNS6	.7	AMF6	.18	F56CH	.22		
Belden	9067	SNS59	.7	AMF59	.18	F59CH	.22		
Belden	9068	-	-	-	-	F60CH	.22		
Belden	9069	SNS59	.7	AMF59	.18	F59CH	.22		
Belden	9070	SNS59	.7	AMF59	.18	F59CH	.22		
Belden	9071	SNS6	.7	AMF6	.18	F56CH	.22		
Belden	9072	SNS6	.7	AMF6	.18	F56CH	.22		
Belden	9073	SNS59	.7	AMF59	.18	F59CH	.22		
Belden	9074	SNS6	.7	AMF6	.18	F56CH	.22		
Belden	1841A	SNS6	.7	AMF6	.18	F56CH	.22		

CABLE MFG	CABLE NUMBER	SNAP- N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
Belden	9077	SNS6	7	AMF6	18	F56CH	22	
Belden	9078	SNS6	7	AMF6	18	F56CH	22	
Belden	9081	SNS59	7	AMF59	18	F59CH	22	
Belden	9082	SNS59	7	AMF59	18	F59CH	22	
Belden	9083	SNS6	7	AMF6	18	F56CH	22	
Belden	9084	SNS6	7	AMF6	18	F56CH	22	
Belden	9100	SNS59	7	AMF59	18	F59CH	22	
Belden	9101	SNS59	7	AMF59	18	F59CH	22	
Belden	9102	SNS59	7	AMF59	18	F59CH	22	
Belden	9103	SNS59	7	AMF59	18	F59CH	22	
Belden	9104	SNS59	7	AMF59	18	F59CH	22	
Belden	9105	SNS59	7	AMF59	18	F59CH	22	
Belden	9106	SNS59	7	AMF59	18	F59CH	22	
Belden	9107	SNS59	7	AMF59	18	F59CH	22	
Belden	9108	SNS59	7	AMF59	18	F59HB	22	
Belden	9109	SNS59	7	AMF59	18	F59HB	22	
Belden	9110	SNS59	7	AMF59	18	F59CH	22	
Belden	9111	SNS59	7	AMF59	18	F59CH	22	
Belden	9112	SNS59	7	AMF59	18	F59CH	22	
Belden	9113	SNS59	7	AMF59	18	F59CH	22	
Belden	9114	SNS6	7	AMF6	18	F56CH	22	
Belden	9115	SNS6	7	AMF6	18	F56CH	22	
Belden	9116	SNS6	7	AMF6	18	F56CH	22	
Belden	9117	SNS6	7	AMF6	18	F56CH	22	
Belden	9118	SNS6	7	AMF6	18	F56CH	22	
Belden	9119	SNS6	7	AMF6	18	F56CH	22	
Belden	9121	SNS59	7	AMF59	18	F59CH	22	
Belden	9123	SNS6	7	AMF6	18	F56CH	22	
Belden	9124	SNS59	7	AMF59	18	F59CH	22	
Belden	9134	SNS59	7	AMF59	18	F59CH	22	
Belden	9146	-		-		F56CC		
Belden	9167	SNS59	7	AMF59	18	F59HB	22	SNS59HECBNCB11
Belden	9168	SNS6	7	AMF6	18	F56CH	22	
Belden	9230	-		-		PL11WG		
Belden	9231	-		-		F304VC	22	
Belden	9240	SNS59	7	AMF59	18	F59CD	22	
Belden	9243	SNS59	7	AMF59	18	F59CH	22	
Belden	9244	SNS59	7	AMF59	18	F59CD	22	
Belden	9248	SNS6	7	AMF6	18	F56CC		
Belden	9266	SNS59	7	AMF59	18	F59CH	22	
Belden	9274	-		-		F59CN		
Belden	9275	SNS59	7	AMF59	18	F59CH	22	SNS59HECBNCB11
Belden	9276	SNS59	7	AMF59	18	F59CH	22	
Belden	9277	SNS59	7	AMF59	18	F59CH	22	
Belden	9291	-		-		F59CN		
Belden	9292	SNS11AS	8	AMF11	18	F11QS	22	
Belden	9301	SNS59	7	AMF59	18	F59CH	22	
Belden	9303	SNS59	7	AMF59	18	F59CH	22	
Belden	9381	SNS6	7	AMF6	18	F56CH	22	
Belden	9382	SNS6	7	AMF6	18	F56CH	22	
Belden	9383	SNS6	7	AMF6	18	F56CH	22	
Belden	9555	SNS59	7	AMF59	18	F59HB	22	
Belden	9586	SNS6	7	AMF6	18	F56CH	22	
Belden	9587	SNS6	7	AMF6	18	F56CH	22	
Belden	9588	SNS59	7	AMF59	18	F59CH	22	
Belden	9589	SNS59	7	AMF59	18	F59CH	22	
Belden	9590	SNS59	7	AMF59	18	F59CH	22	
Belden	9764	SNS11AS	8	AMF11	18	F11QS	22	
Belden	9864	SNS11AS	8	AMF11	18	F11QS	22	
CommScope	4100100	-		-		PL56CS	23	
CommScope	4100200	-		-		PL59CS	23	
CommScope	6612	SNS59	7	AMF59	18	F59HB	22	
CommScope	F1160BEF	SNS11AS	8	AMF11	18	F11QS	22	
CommScope	F1160BTP	-		-		PL11CS	23	
CommScope	F1160BV	SNS11AS	8	AMF11	18	F11QS	22	
CommScope	F1160BV-APD	SNS11AS	8	AMF11	18	F11QS	22	
CommScope	F1160BV-CRD	SNS11AS	8	AMF11	18	F11QS	22	
CommScope	F1160BVM	SNS11AS	8	AMF11	18	F11QS	22	

CABLE MFG	CABLE NUMBER	SNAP-N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
CommScope	F1160BVM-APD	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F1160BVM-CRD	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F1160BVR	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F1160EF	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F1160V	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F1160VM	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F11SSEF	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F11SSTP	-		-		PL11QS	.23	
CommScope	F11SSV	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F11SSVM	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F11SSVR	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F2-1160BV	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F2-1160BVM	SNS11AS	.8	AMF11	.18	F11QS	.22	
CommScope	F2-5940BV	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F2-5940BVM	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F2-5967BEF	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F2-5967BV	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F2-5967BVM	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F2-5967EF	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F2-5967V	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F2-5967VM	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F2-5995BV	SNS59	.7	AMF59	.18	F59HB	.22	
CommScope	F2-5995V	SNS59	.7	AMF59	.18	F59HB	.22	
CommScope	F2-59SSEF	SNS59QS	.7	AMF59	.18	F59QS	.22	
CommScope	F2-59SSV	SNS59QS	.7	AMF59	.18	F59QS	.22	
CommScope	F2-59SSVM	SNS59QS	.7	AMF59	.18	F59QS	.22	
CommScope	F2-59TSV	SNS59	.7	AMF59	.18	F59HB	.22	
CommScope	F2-59TSVM	SNS59	.7	AMF59	.18	F59HB	.22	
CommScope	F2-660BEF	SNS6	.7	AMF6	.18	F56CH	.22	
CommScope	F2-660BV	SNS6	.7	AMF6	.18	F56CH	.22	
CommScope	F2-660BVM	SNS6	.7	AMF6	.18	F56CH	.22	
CommScope	F2-660EF	SNS6	.7	AMF6	.18	F56CH	.22	
CommScope	F2-660V	SNS6	.7	AMF6	.18	F56CH	.22	
CommScope	F2-690BEF	SNS6	.7	AMF6	.18	F56CH	.22	
CommScope	F2-690BV	SNS6	.7	AMF6	.18	F56CH	.22	
CommScope	F2-690BVM	SNS6	.7	AMF6	.18	F56CH	.22	
CommScope	F2-6SSEF	SNS6QS	.7	AMF6	.18	F56QS	.22	
CommScope	F2-6SSV	SNS6QS	.7	AMF6	.18	F56QS	.22	
CommScope	F2-6SSVM	SNS6QS	.7	AMF6	.18	F56QS	.22	
CommScope	F2-6TSV	SNS6	.7	AMF6	.18	F56CH	.22	
CommScope	F5940BEF	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5940BV	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5940BVM	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5940EF	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5940V	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5940VM	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5953BEF	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5953BV	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5953BVM	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5953EF	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5953V	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5953VM	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967BEF	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967BTP	-		-		PL59CS	.23	
CommScope	F5967BV	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967BV-APD	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967BV-CRD	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967BVM	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967BVM-APD	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967BVM-CRD	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967BVR	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967BVV	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967BVX	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967EF	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967V	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5967VM	SNS59	.7	AMF59	.18	F59CH	.22	
CommScope	F5977RSVV	SNS59	.7	AMF59	.18	F59HB	.22	
CommScope	F5995BV	SNS59	.7	AMF59	.18	F59HB	.22	

CABLE MFG	CABLE NUMBER	SNAP- N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER	PAGE
CommScope	F5995BVM	SNS59	7	AMF59	18	F59HB	22		
CommScope	F5995BVR	SNS59	7	AMF59	18	F59HB	22		
CommScope	F5995BVV	SNS59	7	AMF59	18	F59HB	22		
CommScope	F5995BVX	SNS59	7	AMF59	18	F59HB	22		
CommScope	F5995EF	SNS59	7	AMF59	18	F59HB	22		
CommScope	F5995V	SNS59	7	AMF59	18	F59HB	22		
CommScope	F5995VM	SNS59	7	AMF59	18	F59HB	22		
CommScope	F59HEC2 PR770	SNS59HEC	7	-	-	F59HEC	22	SNS59HECBNC	11
CommScope	F59PR39	-	-	-	-	F59HEC	22		
CommScope	F59SSEF	SNS59QS	7	AMF59	18	F59QS	22		
CommScope	F59SSTP	-	-	-	-	PL59TQ	23		
CommScope	F59SSV	SNS59QS	7	AMF59	18	F59QS	22		
CommScope	F59SSVM	SNS59QS	7	AMF59	18	F59QS	22		
CommScope	F59SSVR	SNS59QS	7	AMF59	18	F59QS	22		
CommScope	F59SSVV	SNS59QS	7	AMF59	18	F59QS	22		
CommScope	F59SSVX	SNS59QS	7	AMF59	18	F59QS	22		
CommScope	F59TSV	SNS59	7	AMF59	18	F59HB	22		
CommScope	F59TSVM	SNS59	7	AMF59	18	F59HB	22		
CommScope	F59TSVV	SNS59	7	AMF59	18	F59HB	22		
CommScope	F640BEF	SNS6	7	AMF6	18	F56CH	22		
CommScope	F640BV	SNS6	7	AMF6	18	F56CH	22		
CommScope	F640BVM	SNS6	7	AMF6	18	F56CH	22		
CommScope	F640EF	SNS6	7	AMF6	18	F56CH	22		
CommScope	F640V	SNS6	7	AMF6	18	F56CH	22		
CommScope	F640VM	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660BEF	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660BTP	-	-	-	-	PL56CH	23		
CommScope	F660BV	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660BV-APD	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660BV-CRD	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660BVM	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660BVM-APD	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660BVM-CRD	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660BVR	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660BVV	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660BVX	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660EF	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660V	SNS6	7	AMF6	18	F56CH	22		
CommScope	F660VM	SNS6	7	AMF6	18	F56CH	22		
CommScope	F677TSEF	SNS6	7	AMF6	18	F56CH	22		
CommScope	F690BEF	SNS6	7	AMF6	18	F56CH	22		
CommScope	F690BV	SNS6	7	AMF6	18	F56CH	22		
CommScope	F690BVM	SNS6	7	AMF6	18	F56CH	22		
CommScope	F690BVR	SNS6	7	AMF6	18	F56CH	22		
CommScope	F690BVV	SNS6	7	AMF6	18	F56CH	22		
CommScope	F690BVX	SNS6	7	AMF6	18	F56CH	22		
CommScope	F690EF	SNS6	7	AMF6	18	F56CH	22		
CommScope	F690V	SNS6	7	AMF6	18	F56CH	22		
CommScope	F690VM	SNS6	7	AMF6	18	F56CH	22		
CommScope	F6SSEF	SNS6QS	7	AMF6	18	F56QS	22		
CommScope	F6SSTP	-	-	-	-	PL56QS	23		
CommScope	F6SSV	SNS6QS	7	AMF6	18	F56QS	22		
CommScope	F6SSVM	SNS6QS	7	AMF6	18	F56QS	22		
CommScope	F6SSVR	SNS6QS	7	AMF6	18	F56QS	22		
CommScope	F6SSVV	SNS6QS	7	AMF6	18	F56QS	22		
CommScope	F6SSVX	SNS6QS	7	AMF6	18	F56QS	22		
CommScope	F6TSV	SNS6	7	AMF6	18	F56CH	22		
CommScope	F6TSVM	SNS6	7	AMF6	18	F56CH	22		
CommScope	F760BEF	SNS7B	8	AMF7	18	F611CHP	22		
CommScope	F760BV	SNS7B	8	AMF7	18	F611CHP	22		
CommScope	F760BV-APD	SNS7B	8	AMF7	18	F611CHP	22		
CommScope	F760BV-CRD	SNS7B	8	AMF7	18	F611CHP	22		
CommScope	F760BVM	SNS7B	8	AMF7	18	F611CHP	22		
CommScope	F760BVM-APD	SNS7B	8	AMF7	18	F611CHP	22		
CommScope	F760BVM-CRD	SNS7B	8	AMF7	18	F611CHP	22		
CommScope	F7SSEF	SNS7BQ	8	AMF7	18	F611QSP	22		
CommScope	F7SSV	SNS7BQ	8	AMF7	18	F611QSP	22		
CommScope	F7SSVM	SNS7BQ	8	AMF7	18	F611QSP	22		

Drop Cable to Connector

CABLE MFG	CABLE NUMBER	SNAP-N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER	PAGE
CommScope	S2-5967EF	SNS59 7		AMF59 18		F59CH 22			
CommScope	S2-660EF	SNS6 7		AMF6 18		F56CH 22			
CommScope	S59HEC	SNS59HEC 7		-		F59HEC 22		Use SNS59HECBNC when contact is rated .023-.032 11	
CommScope	S5940EF	SNS59 7		AMF59 18		F59CH 22			
CommScope	S5953EF	SNS59 7		AMF59 18		F59CH 22			
CommScope	S5967EF	SNS59 7		AMF59 18		F59CH 22			
CommScope	S5995EF	SNS59 7		AMF59 18		F59HB 22			
CommScope	S640EF	SNS6 7		AMF6 18		F56CH 22			
CommScope	S660EF	SNS6 7		AMF6 18		F56CH 22			
CommScope	S690EF	SNS6 7		AMF6 18		F56CH 22			
CommScope	0132K	-		-		PL56CS 23			
CommScope	2020	-		-		PL59CS 23			
CommScope	2020K	-		-		PL59CS 23			
CommScope	2022	-		-		PL59TQ 23			
CommScope	2039	-		-		PL59CH 23			
CommScope	2040	-		-		PL59CH 23			
CommScope	2041	-		-		PL59CH 23			
CommScope	2045	-		-		PL59CD 23			
CommScope	2095	-		-		PL59CH 23			
CommScope	2096	-		-		PL59CS 23			
CommScope	2227	-		-		PL56QS 23			
CommScope	2250	-		-		PL59CS 23			
CommScope	2251	-		-		PL59CS 23			
CommScope	2275	-		-		PL56CS 23			
CommScope	2275K	SNS6PLA 7		-		PL56CS 23			
CommScope	2279	-		-		PL56CS 23			
CommScope	2285	-		-		PL11CS 23			
CommScope	2287	-		-		PL11QS 23			
CommScope	2525	-		-		PL304VC			
CommScope	5540	SNS59QS 7		AMF59 18		F59QS 22			
CommScope	5552	SNS59 7		AMF59 18		F59HB 22			
CommScope	5553	SNS59 7		AMF59 18		F59HB 22			
CommScope	5555	SNS59 7		AMF59 18		F59HB 22			
CommScope	5556	SNS59 7		AMF59 18		F59HB 22			
CommScope	5557	SNS59 7		AMF59 18		F59HB 22			
CommScope	5559	SNS59 7		AMF59 18		F59HB 22			
CommScope	5560	SNS59 7		AMF59 18		F59HB 22			
CommScope	5563	SNS59 7		AMF59 18		F59HB 22			
CommScope	5567	SNS59 7		AMF59 18		F59HB 22			
CommScope	5569	SNS59 7		AMF59 18		F59CH 22			
CommScope	5571	SNS59 7		AMF59 18		F59CH 22			
CommScope	5572	SNS59 7		AMF59 18		F59CH 22			
CommScope	5573	SNS59 7		AMF59 18		F59HB 22			
CommScope	5575	SNS59 7		AMF59 18		F59CH 22			
CommScope	5585	SNS59 7		AMF59 18		F59HB 22			
CommScope	5586	SNS59 7		AMF59 18		F59CH 22			
CommScope	5589	SNS59 7		AMF59 18		F59HB 22			
CommScope	5700	-		AMF6 18		-			
CommScope	5715	SNS6 7		AMF6 18		F56CH 22			
CommScope	5725	SNS6 7		AMF6 18		F56CH 22			
CommScope	5726	SNS6 7		AMF6 18		F56CH 22			
CommScope	5727	SNS6 7		AMF6 18		F56CH 22			
CommScope	5730	SNS6 7		AMF6 18		F56CH 22			
CommScope	5740	SNS6QS 7		AMF6 18		F56QS 22			
CommScope	5750	SNS6QS 7		AMF6 18		F56QS 22			
CommScope	5786	SNS6 7		AMF6 18		F56CH 22			
CommScope	5903	-		-		F11CD			
CommScope	5913	SNS11AS 8		AMF11 18		F11QS 22			
CommScope	5915	SNS11AS 8		AMF11 18		F11QS 22			
CommScope	5916	SNS11AS 8		AMF11 18		F11QS 22			
CommScope	5917	SNS11AS 8		AMF11 18		F11QS 22			
CommScope	5918	SNS11AS 8		AMF11 18		F11QS 22			
CommScope	5940	SNS11AS 8		AMF11 18		F11QS 22			
CommScope	6200	SNS59 7		AMF59 18		F59HB 22			
CommScope	6201	SNS59 7		AMF59 18		F59HB 22			
CommScope	6205	SNS59QS 7		AMF59 18		F59QS 22			
CommScope	6605	SNS59QS 7		AMF59 18		F59QS 22			

CABLE MFG	CABLE NUMBER	SNAP-N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
CommScope	6608	SNS59	7	AMF59	18	F59HB	.22	
CommScope	6609	SNS59	7	AMF59	18	F59HB	.22	
CommScope	6611	SNS59	7	AMF59	18	F59HB	.22	
CommScope	6615	SNS59	7	AMF59	18	F59HB	.22	
CommScope	7500	-		-		F304VC	.22	
CommScope	7505	-		-		F304VC	.22	
CommScope	7555	-		-		F59HEC	.22	
CommScope	7820	-		-		F11475TRX		
Mohawk	LT17657	SNS6QS.	7	AMF6	18	F56QS	.22	
Saxton	1601	-		-		F56CHT	.22	
Saxton	68266	-		-		PL59CH	.23	
Saxton	8292	SNS59	7	AMF59	18	F59CD	.22	
Scientific-Atlanta	31-375CX	-		-		F375CX		
Scientific-Atlanta	32-375CX	-		-		F375CX		
Scientific-Atlanta	5-1008	SNS59	7	AMF59	18	F59CH	.22	
Scientific-Atlanta	5-1008M	SNS59	7	AMF59	18	F59CH	.22	
Scientific-Atlanta	5-1009	SNS59	7	AMF59	18	F59CH	.22	
Scientific-Atlanta	5-1009M	SNS59	7	AMF59	18	F59CH	.22	
Scientific-Atlanta	5-1010	SNS59	7	AMF59	18	F59HB	.22	
Scientific-Atlanta	5-1010M	SNS59	7	AMF59	18	F59HB	.22	
Scientific-Atlanta	5-1013	SNS59QS.	7	AMF59	18	F59QS	.22	
Scientific-Atlanta	5-2001	SNS59QS.	7	AMF59	18	F59HEC	.22	
Scientific-Atlanta	6-1008	SNS6	7	AMF6	18	F56CH	.22	
Scientific-Atlanta	6-1008M	SNS6	7	AMF6	18	F56CH	.22	
Scientific-Atlanta	6-1010	SNS6	7	AMF6	18	F56CH	.22	
Scientific-Atlanta	6-1010M	SNS6	7	AMF6	18	F56CH	.22	
Scientific-Atlanta	6-1013	SNS6QS.	7	AMF6	18	F56QS	.22	
Scientific-Atlanta	7-1002	SNS11AS.	8	AMF11	18	F11QS	.22	
Times Fiber	2040	SNS59QS.	7	AMF59	18	F59HEC	.22	
Times Fiber	2045	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2047	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2048	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2050	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2055	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2056	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2060	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2062	SNS11AS.	8	AMF11	18	F11QS	.22	
Times Fiber	2064	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2066	SNS11AS.	8	AMF11	18	F11QS	.22	
Times Fiber	2069	SNS11AS.	8	AMF11	18	F11QS	.22	
Times Fiber	2070	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2074	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2082	SNS11AS.	8	AMF11	18	F11QS	.22	
Times Fiber	2084	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2086	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2091	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2096	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2150	-		-		F60CH	.22	
Times Fiber	2183	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2184	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2185	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2186	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2240	SNS59HEC.	7	-		F59HEC	.22	SNS59HECBNC11
Times Fiber	2240V	SNS59HEC.	7	-		F59HEC	.22	SNS59HECBNC11
Times Fiber	2245	SNS59QS.	7	AMF59	18	F59QS	.22	
Times Fiber	2247	SNS59QS.	7	AMF59	18	F59QS	.22	
Times Fiber	2248	SNS59QS.	7	AMF59	18	F59QS	.22	
Times Fiber	2250	SNS59QS.	7	AMF59	18	F59QS	.22	
Times Fiber	2252	SNS59QS.	7	AMF59	18	F59QS	.22	
Times Fiber	2253	SNS6QS.	7	AMF6	18	F56QS	.22	
Times Fiber	2255	SNS59QS.	7	AMF59	18	F59QS	.22	
Times Fiber	2256	SNS6QS.	7	AMF6	18	F56QS	.22	
Times Fiber	2258	SNS7BQ.	8	AMF7	18	F611QSP	.22	
Times Fiber	2260	SNS6QS.	7	AMF6	18	F56QS	.22	
Times Fiber	2262	SNS11AS.	8	AMF11	18	F11QS	.22	
Times Fiber	2264	SNS6QS.	7	AMF6	18	F56QS	.22	
Times Fiber	2266	SNS11AS.	8	AMF11	18	F11QS	.22	
Times Fiber	2269	SNS11AS.	8	AMF11	18	F11QS	.22	

Drop Cable to Connector

CABLE MFG	CABLE NUMBER	SNAP-N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
Times Fiber	2270	SNS59QS.....	7	AMF59	18	F59QS	.22	
Times Fiber	2271	SNS7BQ.....	8	AMF7	18	F611QSP	.22	
Times Fiber	2272	SNS7BQ.....	8	AMF7	18	F611QSP	.22	
Times Fiber	2274	SNS59QS.....	7	AMF59	18	F59QS	.22	
Times Fiber	2282	SNS11AS.....	8	AMF11	18	F11QS	.22	
Times Fiber	2284	SNS6QS.....	7	AMF6	18	F56QS	.22	
Times Fiber	2286	SNS6QS.....	7	AMF6	18	F56QS	.22	
Times Fiber	2291	SNS6QS.....	7	AMF6	18	F56QS	.22	
Times Fiber	2296	SNS6QS.....	7	AMF6	18	F56QS	.22	
Times Fiber	2309	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2316	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2317	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2319	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2345	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2347	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2348	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2350	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2352	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2353	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2355	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2356	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2358	SNS7B	8	AMF7	18	F611CHP	.22	
Times Fiber	2360	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2362	SNS11AS.....	8	AMF11	18	F11QS	.22	
Times Fiber	2364	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2366	SNS11AS.....	8	AMF11	18	F11QS	.22	
Times Fiber	2369	SNS11AS.....	8	AMF11	18	F11QS	.22	
Times Fiber	2370	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2371	SNS7B	8	AMF7	18	F611CHP	.22	
Times Fiber	2372	SNS7B	8	AMF7	18	F611CHP	.22	
Times Fiber	2374	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2382	SNS11AS.....	8	AMF11	18	F11QS	.22	
Times Fiber	2384	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2386	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2391	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2396	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2545	SNS59	7	AMF59	18	F59HB	.22	
Times Fiber	2547	SNS59	7	AMF59	18	F59HB	.22	
Times Fiber	2548	SNS59	7	AMF59	18	F59HB	.22	
Times Fiber	2560	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2564	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2570	SNS59	7	AMF59	18	F59HB	.22	
Times Fiber	2574	SNS59	7	AMF59	18	F59HB	.22	
Times Fiber	2586	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2591	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2600	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2602	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2603	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2604	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	2607	SNS59	7	AMF59	18	F59HB	.22	
Times Fiber	2608	SNS59	7	AMF59	18	F59HB	.22	
Times Fiber	2609	SNS59	7	AMF59	18	F59HB	.22	
Times Fiber	2620	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2622	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2623	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2624	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2627	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2628	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	2629	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	26A6V	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	32045	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	32047	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	32048	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	32050	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	32060	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	32062	SNS11AS.....	8	AMF11	18	F11QS	.22	
Times Fiber	32064	SNS6	7	AMF6	18	F56CH	.22	

CABLE MFG	CABLE NUMBER	SNAP- N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
Times Fiber	32066	SNS11AS.....	8	AMF11.....	18	F11QS.....	.22	
Times Fiber	32069	SNS11AS.....	8	AMF11.....	18	F11QS.....	.22	
Times Fiber	32084	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	32096	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	32183	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	32185	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	32245	SNS59QS.....	7	AMF59.....	18	F59QS.....	.22	
Times Fiber	32247	SNS59QS.....	7	AMF59.....	18	F59QS.....	.22	
Times Fiber	32248	SNS59QS.....	7	AMF59.....	18	F59QS.....	.22	
Times Fiber	32250	SNS59QS.....	7	AMF59.....	18	F59QS.....	.22	
Times Fiber	32258	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	.22	
Times Fiber	32260	SNS6QS.....	7	AMF6.....	18	F56QS.....	.22	
Times Fiber	32262	SNS11AS.....	8	AMF11.....	18	F11QS.....	.22	
Times Fiber	32264	SNS6QS.....	7	AMF6.....	18	F56QS.....	.22	
Times Fiber	32266	SNS11AS.....	8	AMF11.....	18	F11QS.....	.22	
Times Fiber	32269	SNS11AS.....	8	AMF11.....	18	F11QS.....	.22	
Times Fiber	32271	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	.22	
Times Fiber	32284	SNS6QS.....	7	AMF6.....	18	F56QS.....	.22	
Times Fiber	32296	SNS6QS.....	7	AMF6.....	18	F56QS.....	.22	
Times Fiber	32316	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	32317	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	32345	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	32347	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	32348	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	32350	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	32358	SNS7B.....	8	AMF7.....	18	F611CHP.....	.22	
Times Fiber	32360	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	32362	SNS11AS.....	8	AMF11.....	18	F11QS.....	.22	
Times Fiber	32364	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	32366	SNS11AS.....	8	AMF11.....	18	F11QS.....	.22	
Times Fiber	32369	SNS11AS.....	8	AMF11.....	18	F11QS.....	.22	
Times Fiber	32371	SNS7B.....	8	AMF7.....	18	F611CHP.....	.22	
Times Fiber	32384	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	32396	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	32545	SNS59.....	7	AMF59.....	18	F59HB.....	.22	
Times Fiber	32547	SNS59.....	7	AMF59.....	18	F59HB.....	.22	
Times Fiber	32548	SNS59.....	7	AMF59.....	18	F59HB.....	.22	
Times Fiber	32560	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	32564	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	32602	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	32603	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	32607	SNS59.....	7	AMF59.....	18	F59HB.....	.22	
Times Fiber	32608	SNS59.....	7	AMF59.....	18	F59HB.....	.22	
Times Fiber	32622	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	32623	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	32627	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	32628	SNS6.....	7	AMF6.....	18	F56CH.....	.22	
Times Fiber	4006	SNS59QS.....	7	AMF59.....	18	F59HEC.....	.22	
Times Fiber	4007	-		-		F60CH.....	.22	
Times Fiber	42183	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	42183V	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	42184V	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	42185	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	42186	SNS59.....	7	AMF59.....	18	F59CH.....	.22	
Times Fiber	42240V	SNS59HEC.....	7	-		F59HEC.....	.22	SNS59HECBNC.....11
Times Fiber	42245	SNS59QS.....	7	AMF59.....	18	F59QS.....	.22	
Times Fiber	42245V	SNS59QS.....	7	AMF59.....	18	F59QS.....	.22	
Times Fiber	42247	SNS59QS.....	7	AMF59.....	18	F59QS.....	.22	
Times Fiber	42248V	SNS59QS.....	7	AMF59.....	18	F59QS.....	.22	
Times Fiber	42253	SNS6QS.....	7	AMF6.....	18	F56QS.....	.22	
Times Fiber	42260	SNS6QS.....	7	AMF6.....	18	F56QS.....	.22	
Times Fiber	42260V	SNS6QS.....	7	AMF6.....	18	F56QS.....	.22	
Times Fiber	42264	SNS6QS.....	7	AMF6.....	18	F56QS.....	.22	
Times Fiber	42270V	SNS59QS.....	7	AMF59.....	18	F59QS.....	.22	
Times Fiber	42286	SNS6QS.....	7	AMF6.....	18	F56QS.....	.22	
Times Fiber	42291V	SNS6QS.....	7	AMF6.....	18	F56QS.....	.22	
Times Fiber	42316V	SNS59.....	7	AMF59.....	18	F59CH.....	.22	

Drop Cable to Connector

CABLE MFG	CABLE NUMBER	SNAP- N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
Times Fiber	42345	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	42345V	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	42347	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	42353	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42360	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42360V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42364	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42374	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	42384V	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	42386	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42391V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42396V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42545V	SNS59	7	AMF59	18	F59HB	.22	
Times Fiber	42560V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42564	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42586	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42591V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42607V	SNS59	7	AMF59	18	F59HB	.22	
Times Fiber	42620V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42623	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42625V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42627V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42628	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	42629	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	52003	-	-	-	-	PL56QS	.23	
Times Fiber	52008	-	-	-	-	PL11QS	.23	
Times Fiber	52012	-	-	-	-	PL59CS	.23	
Times Fiber	52013	-	-	-	-	PL59TQ	.23	
Times Fiber	52103	-	-	-	-	PL56QS	.23	
Times Fiber	52108	-	-	-	-	PL11QS	.23	
Times Fiber	52112	-	-	-	-	PL59CS	.23	
Times Fiber	52113	-	-	-	-	PL59TQ	.23	
Times Fiber	92183V	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	92185	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	92260V	SNS6QS	7	AMF6	18	F56QS	.22	
Times Fiber	92264	SNS6QS	7	AMF6	18	F56QS	.22	
Times Fiber	92316V	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	92345	SNS59	7	AMF59	18	F59CH	.22	
Times Fiber	92360V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	92364	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	92560V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	92564	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	92622V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	92623	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	92627V	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	92628	SNS6	7	AMF6	18	F56CH	.22	
Times Fiber	E86650	SNS59HEC	7	-	-	F59HEC	.22	
Times Fiber	PL59	-	-	-	-	PL59CS	.23	
Times Fiber	PLF59	-	-	-	-	PL59CS	.23	
Times Fiber	PLQ11	-	-	-	-	PL11TQ		
Times Fiber	PLQ59	-	-	-	-	PL59TQ	.23	
Times Fiber	PLQ6	-	-	-	-	PL56QS	.23	
Trilogy	1100	SNS11AS	8	AMF11	18	F11QS	.22	
Trilogy	1101	SNS11AS	8	AMF11	18	F11QS	.22	
Trilogy	1102	SNS11AS	8	AMF11	18	F11QS	.22	
Trilogy	1103	SNS11AS	8	AMF11	18	F11QS	.22	
Trilogy	1120	SNS11AS	8	AMF11	18	F11QS	.22	
Trilogy	1121	SNS11AS	8	AMF11	18	F11QS	.22	
Trilogy	1122	SNS11AS	8	AMF11	18	F11QS	.22	
Trilogy	1123	SNS11AS	8	AMF11	18	F11QS	.22	
Trilogy	1150	SNS11AS	8	AMF11	18	F11QS	.22	
Trilogy	1151	SNS11AS	8	AMF11	18	F11QS	.22	
Trilogy	1152	SNS11AS	8	AMF11	18	F11QS	.22	
Trilogy	5900	SNS59	7	AMF59	18	F59CH	.22	
Trilogy	5901	SNS59	7	AMF59	18	F59CH	.22	
Trilogy	5902	SNS59	7	AMF59	18	F59CH	.22	
Trilogy	5903	SNS59	7	AMF59	18	F59CH	.22	
Trilogy	5906	SNS59	7	AMF59	18	F59CH	.22	

CABLE MFG	CABLE NUMBER	SNAP-N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
Trilogy	5907	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5908	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5909	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5910	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5911	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5912	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5913	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5916	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5917	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5918	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5919	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5920	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5921	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5922	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5923	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5940	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5941	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5942	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5943	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5946	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5947	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5948	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5949	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5950	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5951	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5952	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5953	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5956	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5957	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5958	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5959	SNS59QS	7	AMF59	18	F59QS	22	
Trilogy	5960	SNS59	7	AMF59	18	F59HB	22	
Trilogy	5961	SNS59	7	AMF59	18	F59HB	22	
Trilogy	5962	SNS59	7	AMF59	18	F59HB	22	
Trilogy	5963	SNS59	7	AMF59	18	F59HB	22	
Trilogy	5970	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5971	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5972	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5973	SNS59	7	AMF59	18	F59CH	22	
Trilogy	5980	SNS59	7	AMF59	18	F59HB	22	
Trilogy	5981	SNS59	7	AMF59	18	F59HB	22	
Trilogy	5982	SNS59	7	AMF59	18	F59HB	22	
Trilogy	5983	SNS59	7	AMF59	18	F59HB	22	
Trilogy	5990	SNS59	7	AMF59	18	F59HB	22	
Trilogy	5991	SNS59	7	AMF59	18	F59HB	22	
Trilogy	5992	SNS59	7	AMF59	18	F59HB	22	
Trilogy	5993	SNS59	7	AMF59	18	F59HB	22	
Trilogy	6000	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6001	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6002	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6003	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6006	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6007	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6008	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6009	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6020	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6021	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6022	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6023	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6040	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	6041	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	6042	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	6043	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	6046	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	6047	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	6048	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	6049	SNS6QS	7	AMF6	18	F56QS	22	

CABLE MFG	CABLE NUMBER	SNAP- N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
Trilogy	6050	SNS6QS.....7		AMF6.....18		F56QS.....22		
Trilogy	6051	SNS6QS.....7		AMF6.....18		F56QS.....22		
Trilogy	6052	SNS6QS.....7		AMF6.....18		F56QS.....22		
Trilogy	6053	SNS6QS.....7		AMF6.....18		F56QS.....22		
Trilogy	6056	SNS6QS.....7		AMF6.....18		F56QS.....22		
Trilogy	6057	SNS6QS.....7		AMF6.....18		F56QS.....22		
Trilogy	6058	SNS6QS.....7		AMF6.....18		F56QS.....22		
Trilogy	6059	SNS6QS.....7		AMF6.....18		F56QS.....22		
Trilogy	6060	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6061	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6062	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6063	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6070	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6071	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6072	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6073	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6080	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6081	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6082	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6083	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6090	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6091	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6092	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	6093	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	7000	SNS7B.....8		AMF7.....18		F611CHP.....22		
Trilogy	7001	SNS7B.....8		AMF7.....18		F611CHP.....22		
Trilogy	7002	SNS7B.....8		AMF7.....18		F611CHP.....22		
Trilogy	7003	SNS7B.....8		AMF7.....18		F611CHP.....22		
Trilogy	7006	SNS7B.....8		AMF7.....18		F611CHP.....22		
Trilogy	7007	SNS7B.....8		AMF7.....18		F611CHP.....22		
Trilogy	7008	SNS7B.....8		AMF7.....18		F611CHP.....22		
Trilogy	7009	SNS7B.....8		AMF7.....18		F611CHP.....22		
Trilogy	7050	SNS7BQ.....8		AMF7.....18		F611QSP.....22		
Trilogy	7051	SNS7BQ.....8		AMF7.....18		F611QSP.....22		
Trilogy	7053	SNS7BQ.....8		AMF7.....18		F611QSP.....22		
Trilogy	8060	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	C1100	SNS11AS.....8		AMF11.....18		F11QS.....22		
Trilogy	C1101	SNS11AS.....8		AMF11.....18		F11QS.....22		
Trilogy	C5910	SNS59.....7		AMF59.....18		F59CH.....22		
Trilogy	C5911	SNS59.....7		AMF59.....18		F59CH.....22		
Trilogy	C6000	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	C6001	SNS6.....7		AMF6.....18		F56CH.....22		
Trilogy	C7001	SNS7B.....8		AMF7.....18		F611CHP.....22		
West Penn	25806	-		-		PL56CS.....23		
West Penn	25811	-		-		PL11CS.....23		
West Penn	25814	-		-		PL59CH.....23		
West Penn	25815	-		-		PL59CD.....23		
West Penn	25Q841S	SNS6QS.....7		AMF6.....18		F56QS.....22		
West Penn	2821	SNS11AS.....8		AMF11.....18		F11QS.....22		
West Penn	4811	SNS11AS.....8		AMF11.....18		F11QS.....22		
West Penn	806	-		-		F56CD.....22		
West Penn	811	SNS11AS.....8		AMF11.....18		F11QS.....22		
West Penn	815	SNS59.....7		AMF59.....18		F59HB.....22		
Belden	1224A	SNS11AS.....8		AMF11.....18		F11QS.....22		
Belden	1523A	SNS11AS.....8		AMF11.....18		F11QS.....22		
Belden	1530A	SNS6.....7		AMF6.....18		F56CH.....22		
Belden	1548A	SNS7B.....8		AMF7.....18		F611CHP.....22		
Belden	1551A	SNS7B.....8		AMF7.....18		F611CHP.....22		
Belden	1613A	SNS6.....7		AMF6.....18		F56CH.....22		
Belden	1614A	SNS6.....7		AMF6.....18		F56CH.....22		
Belden	1615A	SNS6.....7		AMF6.....18		F56CH.....22		
West Penn	25Q841	SNS6QS.....7		AMF6.....18		F56QS.....22		
CommScope	0359K	-		-		PL56CS.....23		
Belden	1616A	SNS6.....7		AMF6.....18		F56CH.....22		
Belden	1617A	SNS11AS.....8		AMF11.....18		F11QS.....22		
Belden	1618A	SNS11AS.....8		AMF11.....18		F11QS.....22		
Belden	1619A	SNS11AS.....8		AMF11.....18		F11QS.....22		

CABLE MFG	CABLE NUMBER	SNAP-N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
Belden	1620A	SNS11AS.....	8	AMF11	18	F11QS	22	
Belden	1187A	SNS59QS.....	7	AMF59	18	F59QS	22	
Belden	1188A	SNS59QS.....	7	AMF59	18	F59QS	22	
Belden	1190A	SNS6QS.....	7	AMF6	18	F56QS	22	
Belden	1191A	SNS6QS.....	7	AMF6	18	F56QS	22	
Belden	1258A	SNS6	7	AMF6	18	F56CH	22	
Belden	1260A	SNS6	7	AMF6	18	F56CH	22	
Belden	1524A	SNS11AS.....	8	AMF11	18	F11QS	22	
Belden	1525A	SNS11AS.....	8	AMF11	18	F11QS	22	
Belden	1531A	SNS6	7	AMF6	18	F56CH	22	
Belden	1532A	SNS6	7	AMF6	18	F56CH	22	
Belden	1542A	SNS59	7	AMF59	18	F59CH	22	
Belden	1543A	SNS59	7	AMF59	18	F59CH	22	
Belden	1544A	SNS59	7	AMF59	18	F59CH	22	
Belden	1545A	SNS6	7	AMF6	18	F56CH	22	
Belden	1546A	SNS6	7	AMF6	18	F56CH	22	
Belden	1547A	SNS6	7	AMF6	18	F56CH	22	
Belden	1549A	SNS7B.....	8	AMF7	18	F611CHP ...	22	
Belden	1550A	SNS7B.....	8	AMF7	18	F611CHP ...	22	
Belden	1552A	SNS7B.....	8	AMF7	18	F611CHP ...	22	
Belden	1553A	SNS7B.....	8	AMF7	18	F611CHP ...	22	
Belden	8218	-		-		F62CD		
Belden	8281B	-		-		F304VC	22	
Belden	82292	-		-		PL11CS	23	
CommScope	F5995BEF	SNS59	7	AMF59	18	F59HB	22	
CommScope	F59TSEF	SNS59	7	AMF59	18	F59HB	22	
CommScope	F5977TSV	SNS59	7	AMF59	18	F59HB	22	
CommScope	F5977TSVM	SNS59	7	AMF59	18	F59HB	22	
CommScope	F5977TSEF	SNS59	7	AMF59	18	F59HB	22	
CommScope	F6TSEF	SNS6	7	AMF6	18	F56CH	22	
CommScope	F677TSV	SNS6	7	AMF6	18	F56CH	22	
CommScope	F677TSVM	SNS6	7	AMF6	18	F56CH	22	
CommScope	F677BSFV	SNS6	7	AMF6	18	F56CH	22	
CommScope	F677BSFVM	SNS6	7	AMF6	18	F56CH	22	
CommScope	F677BSFEF	SNS6	7	AMF6	18	F56CH	22	
CommScope	F660DFBOV	SNS6	7	AMF6	18	F56CH	22	
CommScope	F660DFBOVM	SNS6	7	AMF6	18	F56CH	22	
CommScope	F660DFBOEF	SNS6	7	AMF6	18	F56CH	22	
CommScope	F690DFBOV	SNS6	7	AMF6	18	F56CH	22	
CommScope	F690DFBOVM	SNS6	7	AMF6	18	F56CH	22	
CommScope	F690DFBOEF	SNS6	7	AMF6	18	F56CH	22	
CommScope	F760BEF-2/24	SNS7B.....	8	AMF7	18	F611CHP ...	22	
CommScope	F1190BV	SNS11AS.....	8	AMF11	18	F11QS	22	
CommScope	F1190BVM	SNS11AS.....	8	AMF11	18	F11QS	22	
CommScope	F1190BEF	SNS11AS.....	8	AMF11	18	F11QS	22	
CommScope	F59HEC	SNS59HEC.....	7	-		F59HEC	22	SNS59HECBNC11
CommScope	F59HEC-3/22	SNS59HEC.....	7	-		F59HEC	22	SNS59HECBNC11
CommScope	F59HEC2	SNS59HEC.....	7	-		F59HEC	22	SNS59HECBNC11
CommScope	S59VHEC	SNS59HEC.....	7	-		F59HEC	22	Use SNS59HECBNC if contact becomes .023-.03211
CommScope	F660BVT1	SNS6	7	AMF6	18	F56CH	22	
CommScope	2527K	-		-		PL56QS	23	
CommScope	2427K	-		-		PL11CS	23	
CommScope	5951	SNS11AS.....	8	AMF11	18	F11QS	22	
Times Fiber	623AA	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	623AB	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	623BA	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	623BB	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	623CA	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	623CB	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	623GA	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	623GB	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	623HA	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	623HB	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	623JA	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	623JB	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	623NA	SNS7B.....	8	AMF7	18	F611CHP ...	22	

CABLE MFG	CABLE NUMBER	SNAP- N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
Times Fiber	623NB	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
Times Fiber	623PA	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
Times Fiber	623PB	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
Times Fiber	623QA	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
Times Fiber	623QB	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
Times Fiber	623UA	SNS11AS..... 8		AMF11..... 18		F11QS22		
Times Fiber	623UB	SNS11AS..... 8		AMF11..... 18		F11QS22		
Times Fiber	623VA	SNS11AS..... 8		AMF11..... 18		F11QS22		
Times Fiber	623VB	SNS11AS..... 8		AMF11..... 18		F11QS22		
Times Fiber	623WA	SNS11AS..... 8		AMF11..... 18		F11QS22		
Times Fiber	623WB	SNS11AS..... 8		AMF11..... 18		F11QS22		
Times Fiber	2373	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
Times Fiber	2380	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
West Penn	Q841	SNS6QS..... 7		-		-		
West Penn	841	SNS6..... 7		AMF6..... 18		F56CH22		
West Penn	25841	-		-		PL56CS23		
CommScope	0333	SNS11AS..... 8		AMF11..... 18		F11QS22		
CommScope	0349	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
CommScope	0350	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
Times Fiber	T661160	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
Times Fiber	T661160/36	SNS7BQ..... 8		AMF7..... 18		F611QSP ...22		
Times Fiber	T61153	SNS11AS..... 8		AMF11..... 18		F11QS22		
Times Fiber	T61153/32	SNS11AS..... 8		AMF11..... 18		F11QS22		
Belden	1505A	SNS59..... 7		AMF59..... 18		F59HB22		SNS59HECBNCB11
Belden	1694A	SNS6..... 7		AMF6..... 18		F56CH22		
Belden	1506A	-		-		PL59CH23		
Belden	82281	-		-		PL304VC23		
Belden	89248	-		-		PL56CH23		
Belden	1695A	-		-		PL56CS23		
CommScope	F2-5967BVV	SNS59..... 7		AMF59..... 18		F59CH22		
CommScope	F5967BVV-APD	SNS59..... 7		AMF59..... 18		F59CH22		
CommScope	F5967BVV-CRD	SNS59..... 7		AMF59..... 18		F59CH22		
CommScope	F2-5995BVV	SNS59..... 7		AMF59..... 18		F59HB22		
Belden	9290	-		AMF6..... 18		F56QS22		
CommScope	7470504	SNS59HEC..... 7		-		-		
Genesis	5018	SNS11AS..... 8		AMF11..... 18		F11QS22		
CommScope	F59TSEF	SNS59..... 7		AMF59..... 18		F59HB22		
CommScope	F2-59TSVV	SNS59..... 7		AMF59..... 18		F59HB22		
CommScope	F59TSVV-APD	SNS59..... 7		AMF59..... 18		F59HB22		
CommScope	F59TSVV-CRD	SNS59..... 7		AMF59..... 18		F59HB22		
CommScope	F5977TSVV	SNS59..... 7		AMF59..... 18		F59HB22		
CommScope	F2-5977TSVV	SNS59..... 7		AMF59..... 18		F59HB22		
CommScope	F2-59SSVV	SNS59QS..... 7		AMF59..... 18		F59QS22		
CommScope	F59SSVV-APD	SNS59QS..... 7		AMF59..... 18		F59QS22		
CommScope	F59SSVV-CRD	SNS59QS..... 7		AMF59..... 18		F59QS22		
CommScope	F2-660BVV	SNS6..... 7		AMF6..... 18		F56CH22		
CommScope	F660BVV-APD	SNS6..... 7		AMF6..... 18		F56CH22		
CommScope	F660BVV-CRD	SNS6..... 7		AMF6..... 18		F56CH22		
CommScope	F2-690BVV	SNS6..... 7		AMF6..... 18		F56CH22		
CommScope	F6TSVV	SNS6..... 7		AMF6..... 18		F56CH22		
CommScope	F6TSEF	SNS6..... 7		AMF6..... 18		F56CH22		
CommScope	F2-6TSVV	SNS6..... 7		AMF6..... 18		F56CH22		
CommScope	F6TSVV-APD	SNS6..... 7		AMF6..... 18		F56CH22		
CommScope	F6TSVV-CRD	SNS6..... 7		AMF6..... 18		F56CH22		
CommScope	F677TSVV	SNS6..... 7		AMF6..... 18		F56CH22		
CommScope	F2-677TSVV	SNS6..... 7		AMF6..... 18		F56CH22		
CommScope	F2-6SSVV	SNS6QS..... 7		AMF6..... 18		F56QS22		
CommScope	F6SSVV-APD	SNS6QS..... 7		AMF6..... 18		F56QS22		
CommScope	F6SSVV-CRD	SNS6QS..... 7		AMF6..... 18		F56QS22		
CommScope	F760BVV	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
CommScope	F2-760BVV	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
CommScope	F760BVV-APD	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
CommScope	F760BVV-CRD	SNS7B..... 8		AMF7..... 18		F611CHP ...22		
CommScope	F7SSVV	SNS7BQ..... 8		AMF7..... 18		F611QSP ...22		
CommScope	F2-7SSVV	SNS7BQ..... 8		AMF7..... 18		F611QSP ...22		
CommScope	F7SSVV-APD	SNS7BQ..... 8		AMF7..... 18		F611QSP ...22		
CommScope	F7SSVV-CRD	SNS7BQ..... 8		AMF7..... 18		F611QSP ...22		

CABLE MFG	CABLE NUMBER	SNAP- N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
CommScope	F1160BV	SNS11AS.....	8	AMF11.....	18	F11QS.....	22	
CommScope	F2-1160BVV	SNS11AS.....	8	AMF11.....	18	F11QS.....	22	
CommScope	F1160BVV-APD	SNS11AS.....	8	AMF11.....	18	F11QS.....	22	
CommScope	F1160BVV-CRD	SNS11AS.....	8	AMF11.....	18	F11QS.....	22	
CommScope	F11SSVV	SNS11AS.....	8	AMF11.....	18	F11QS.....	22	
CommScope	F2-11SSVM	SNS11AS.....	8	AMF11.....	18	F11QS.....	22	
CommScope	F11SSVV-APD	SNS11AS.....	8	AMF11.....	18	F11QS.....	22	
CommScope	F11SSVV-CRD	SNS11AS.....	8	AMF11.....	18	F11QS.....	22	
CommScope	F2-5967BVR	SNS59.....	7	AMF59.....	18	F59CH.....	22	
CommScope	F59TSVR	SNS59.....	7	AMF59.....	18	F59HB.....	22	
CommScope	F2-660BVR	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	2020V	-		-		PL59CS.....	23	
CommScope	2022K	-		-		PL59TQ.....	23	
CommScope	2022V	-		-		PL59TQ.....	23	
CommScope	2227K	-		-		PL56QS.....	23	
CommScope	2227V	-		-		PL56QS.....	23	
Times Fiber	622H3	SNS6QS.....	7	AMF6.....	18	-		
CommScope	2287K	-		-		PL11QS.....	23	
CommScope	2276V	-		-		PL56CS.....	23	
CommScope	F660BVM-1/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F660BVM-2/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F660BVM-3/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F660BVM-4/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F660BVM-5/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F660BVM-6/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F660BEAPD-1/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F660BEAPD-2/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F660BEAPD-3/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F660BEAPD-4/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F660BEAPD-5/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F660BEAPD-6/22	SNS6.....	7	AMF6.....	18	F56CH.....	22	
CommScope	F6SSVM-1/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F6SSVM-2/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F6SSVM-3/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F6SSVM-4/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F6SSVM-5/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F6SSVM-6/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F6SSEAPD-1/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F6SSEAPD-2/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F6SSEAPD-3/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F6SSEAPD-4/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F6SSEAPD-5/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F6SSEAPD-6/22	SNS6QS.....	7	AMF6.....	18	F56QS.....	22	
CommScope	F760BVM-1/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F760BVM-2/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F760BVM-3/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F760BVM-4/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F760BVM-5/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F760BVM-6/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F760BEAPD-1/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F760BEAPD-2/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F760BEAPD-3/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F760BEAPD-4/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F760BEAPD-5/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F760BEAPD-6/22	SNS7B.....	8	AMF7.....	18	F611CHP.....	22	
CommScope	F7SSVM-1/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F7SSVM-2/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F7SSVM-3/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F7SSVM-4/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F7SSVM-5/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F7SSVM-6/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F7SSEAPD-1/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F7SSEAPD-2/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F7SSEAPD-3/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F7SSEAPD-4/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F7SSEAPD-5/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F7SSEAPD-6/22	SNS7BQ.....	8	AMF7.....	18	F611QSP.....	22	
CommScope	F1160BVM-1/22	SNS11AS.....	8	AMF11.....	18	F11QS.....	22	

CABLE MFG	CABLE NUMBER	SNAP- N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
CommScope	F1160BVM-2/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F1160BVM-3/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F1160BVM-4/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F1160BVM-5/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F1160BVM-6/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F1160BEAPD-1/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F1160BEAPD-2/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F1160BEAPD-3/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F1160BEAPD-4/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F1160BEAPD-5/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F1160BEAPD-6/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSVM-1/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSVM-2/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSVM-3/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSVM-4/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSVM-5/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSVM-6/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSEAPD-1/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSEAPD-2/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSEAPD-3/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSEAPD-4/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSEAPD-5/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	F11SSEAPD-6/22	SNS11AS.....8	AMF11.....18	F11QS.....22				
CommScope	0288	SNS6.....7	AMF6.....18	F56CH.....22				
CommScope	0317	SNS6.....7	AMF6.....18	F56CH.....22				
CommScope	0344	SNS6.....7	AMF6.....18	F56CH.....22				
CommScope	0382	SNS6.....7	AMF6.....18	F56CH.....22				
CommScope	0366	SNS11AS.....8	AMF11.....18	F11QS.....22				
Trilogy	7053V	SNS7BQ.....8	AMF7.....18	F611QSP.....22				
Trilogy	1100V	SNS11AS.....8	AMF11.....18	F11QS.....22				
Trilogy	C1100V	SNS11AS.....8	AMF11.....18	F11QS.....22				
Trilogy	C1151	SNS11AS.....8	AMF11.....18	F11QS.....22				
Trilogy	1159V	SNS11AS.....8	AMF11.....18	F11QS.....22				
Trilogy	1151V	SNS11AS.....8	AMF11.....18	F11QS.....22				
Trilogy	5900V	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	5903V	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	5910V	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	5913V	SNS59.....7	AMF59.....18	F59CH.....22				
CommScope	2065V	-	-	PL59CD.....23				
West Penn	25821	-	-	PL11CS.....23				
Belden	7731A	SNS11AS.....8	AMF11.....18	F11QS.....22				
Trilogy	5916V	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	5919V	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	C5910V	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	C5916V	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	C5919V	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	C5960	SNS59.....7	AMF59.....18	F59HB.....22				
Trilogy	C5961	SNS59.....7	AMF59.....18	F59HB.....22				
Trilogy	5960V	SNS59.....7	AMF59.....18	F59HB.....22				
Trilogy	5963V	SNS59.....7	AMF59.....18	F59HB.....22				
Trilogy	C5960V	SNS59.....7	AMF59.....18	F59HB.....22				
Trilogy	C5970	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	5970V	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	5973V	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	C5970V	SNS59.....7	AMF59.....18	F59CH.....22				
Trilogy	C5990	SNS59.....7	AMF59.....18	F59HB.....22				
Trilogy	5990V	SNS59.....7	AMF59.....18	F59HB.....22				
Trilogy	C5990V	SNS59.....7	AMF59.....18	F59HB.....22				
Trilogy	C5950	SNS59QS.....7	AMF59.....18	F59QS.....22				
Trilogy	C5951	SNS59QS.....7	AMF59.....18	F59QS.....22				
Trilogy	5950V	SNS59QS.....7	AMF59.....18	F59QS.....22				
Trilogy	5953V	SNS59QS.....7	AMF59.....18	F59QS.....22				
Trilogy	C5950V	SNS59QS.....7	AMF59.....18	F59QS.....22				
Trilogy	C6007	SNS6.....7	AMF6.....18	F56CH.....22				
Trilogy	6000V	SNS6.....7	AMF6.....18	F56CH.....22				
Trilogy	6003V	SNS6.....7	AMF6.....18	F56CH.....22				
Trilogy	6006V	SNS6.....7	AMF6.....18	F56CH.....22				

CABLE MFG	CABLE NUMBER	SNAP-N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
Trilogy	6009V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6000V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6003V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6006V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6060	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6061	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6060V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6063V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6060V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6070	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6071	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6070V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6073V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6070V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6090	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6090V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	6093V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6090V	SNS6	7	AMF6	18	F56CH	22	
Trilogy	C6050	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	C6051	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	6050V	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	6053V	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	C6050V	SNS6QS	7	AMF6	18	F56QS	22	
Trilogy	C6053V	SNS6QS	7	AMF6	18	F56QS	22	
Times Fiber	2373	SNS7B	8	AMF7	18	F611CHP	22	
Times Fiber	2380	SNS7B	8	AMF7	18	F611CHP	22	
Times Fiber	2273	SNS7BQ	8	AMF7	18	F611QSP	22	
Times Fiber	2381	SNS11AS	8	AMF11	18	F11QS	22	
Times Fiber	2281	SNS11AS	8	AMF11	18	F11QS	22	
Times Fiber	2375	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2345V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2370V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2348V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2355V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	32345V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	32348V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2315	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2183V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2184V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2316V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2319V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	32183V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	32184V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	32316V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2575	SNS59	7	AMF59	18	F59HB	22	
Times Fiber	2545V	SNS59	7	AMF59	18	F59HB	22	
Times Fiber	2570V	SNS59	7	AMF59	18	F59HB	22	
Times Fiber	2548V	SNS59	7	AMF59	18	F59HB	22	
Times Fiber	32545V	SNS59	7	AMF59	18	F59HB	22	
Times Fiber	32548V	SNS59	7	AMF59	18	F59HB	22	
Times Fiber	2605	SNS59	7	AMF59	18	F59HB	22	
Times Fiber	2602V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2600V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	32602V	SNS59	7	AMF59	18	F59CH	22	
Times Fiber	2607V	SNS59	7	AMF59	18	F59HB	22	
Times Fiber	2605V	SNS59	7	AMF59	18	F59HB	22	
Times Fiber	32607V	SNS59	7	AMF59	18	F59HB	22	
Times Fiber	2215	SNS59QS	7	AMF59	18	F59QS	22	
Times Fiber	2245V	SNS59QS	7	AMF59	18	F59QS	22	
Times Fiber	2270V	SNS59QS	7	AMF59	18	F59QS	22	
Times Fiber	2248V	SNS59QS	7	AMF59	18	F59QS	22	
Times Fiber	2255V	SNS59QS	7	AMF59	18	F59QS	22	
Times Fiber	32245V	SNS59QS	7	AMF59	18	F59QS	22	
Times Fiber	32248V	SNS59QS	7	AMF59	18	F59QS	22	
Times Fiber	2321	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2360V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2391V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2396V	SNS6	7	AMF6	18	F56CH	22	

CABLE MFG	CABLE NUMBER	SNAP-N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
Times Fiber	2356V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	32360V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	32391V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	32396V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2553	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2521	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2560V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2591V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2596V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	32560V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	32591V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	32596V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	26H6	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2622V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2620V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	32622V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2625	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2637	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2635	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2638	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	26K0	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	32638	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2627V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2625V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2637V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	2635V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	32627V	SNS6	7	AMF6	18	F56CH	22	
Times Fiber	32625V	SNS6	7	AMF6	18	F56CH	22	
Belden	1829A	SNS6	7	AMF6	18	F56CH	22	
CommScope	2277V	-	-	-	-	PL56CS	23	
Belden	533945	SNS6	7	AMF6	18	F56CH	22	
CommScope	2227K	-	-	-	-	PL56QS	23	
CommScope	2227V	-	-	-	-	PL56QS	23	
CommScope	2275V	SNS6PLA		-	-	PL56CS	23	
CommScope	2279K	-	-	-	-	PL56CS	23	
CommScope	2279V	-	-	-	-	PL56CS	23	
CommScope	2285K	-	-	-	-	PL11CS	23	
CommScope	2288K	-	-	-	-	PL11QS	23	
CommScope	5901	SNS11AS	8	AMF11	18	F11QS	22	
Belden	89292	-	-	-	-	PL11CS	23	
Belden	9292	SNS11AS	8	AMF11	18	F11QS	22	
CommScope	S59 Head-End	SNS59HEC	7	-	-	F59HEC	22	Use SNS59HECBNC if contact becomes .023-.03211
CommScope	5565	SNS59	7	AMF59	18	F59HB	22	
Gepco	5565	SNS59	7	AMF59	18	F59HB	22	
Times Fiber	MI-021G9V	-	-	-	-	F59SECR375SE	...	
Belden	9116P	-	-	-	-	PL56CS	23	
CommScope	F1190BVV	SNS11AS	8	-	-	-	-	
Times Fiber	2241V	SNS59HEC	7	-	-	F59HEC	22	SNS59HECBNC11
CommScope	2037V	-	-	-	-	PL59CH	23	
West Penn	25843	-	-	-	-	PL59CS	23	
Belden	8213	-	-	-	-	F11QST	22	
CommScope	5729	SNS6	7	AMF6	18	F56CH	22	
CommScope	2229V	-	-	-	-	PL56QS	23	
CommScope	2286K	-	-	-	-	PL11CS	23	
CommScope	5914	SNS11AS	8	-	-	-	-	
Belden	643948	-	-	-	-	PL59CH	23	
CommScope	2054K	-	-	-	-	PL59CD	23	
Belden	7721A	SNS59	7	AMF59	18	F59HB	22	
CommScope	2278K	-	-	-	-	PL56CS	23	
CommScope	2278V	-	-	-	-	PL56CS	23	
CommScope	5731	SNS6	7	AMF6	18	F56CH	22	
CommScope	5781	SNS6QS	7	AMF6	18	F56QS	22	
CommScope	2045K	-	-	-	-	PL59CD	23	
CommScope	2065	-	-	-	-	PL59CD	23	
CommScope	2065K	-	-	-	-	PL59CD	23	
Belden	3094A	SNS11AS	8	AMF11	18	F11QS	22	

CABLE MFG	CABLE NUMBER	SNAP-N-SEAL	PAGE	MULTI-FIT	PAGE	F MALE	PAGE	OTHER
Times Fiber	02240V	SNS59HEC7	-	-	-	F59HEC22	-	SNS59HECBNC11
Times Fiber	02241V	SNS59HEC7	-	-	-	F59HEC22	-	SNS59HECBNC11
CommScope	2312K	-	-	-	-	-	-	EI500K344 EFI500W351
Belden	6339Q8	-	-	AMF618	-	PL56CS23	-	-
CommScope	F7TSV	SNS7B8	-	AMF718	-	F611CHP22	-	-
CommScope	F7TSVV	SNS7B8	-	AMF718	-	F611CHP22	-	-
CommScope	F7TSVM	SNS7B8	-	AMF718	-	F611CHP22	-	-
CommScope	F7TSEF	SNS7B8	-	AMF718	-	F611CHP22	-	-
CommScope	F2-7TSVV	SNS7B8	-	AMF718	-	F611CHP22	-	-
CommScope	F7TSVV-APD	SNS7B8	-	AMF718	-	F611CHP22	-	-
CommScope	F7TSVV-CRD	SNS7B8	-	AMF718	-	F611CHP22	-	-
Belden	513945	SNS11AS8	-	AMF1118	-	F11QS22	-	-
Belden	82120	-	-	-	-	PL56CS23	-	-
Belden	1829AC	SNS67	-	AMF618	-	F56CH22	-	-
Belden	1523AP	-	-	-	-	PL11CS23	-	-
Canare Cable	L4CFB	SNS597	-	AMF5918	-	F59CH22	-	-
CommScope	MDU 320 JCA	SNS320QR59	-	-	-	-	-	-
CommScope	MDU 320 JCAM109	SNS320QR59	-	-	-	-	-	-
CommScope	MDU 320 JCASS	SNS320QR59	-	-	-	-	-	-
CommScope	MDU 320 JCAR	SNS320QR59	-	-	-	-	-	-
Corning Cable Systems	R06BVN	SNS67	-	AMF618	-	-	-	-
Corning Cable Systems	R06BVV	SNS67	-	AMF618	-	-	-	-
Corning Cable Systems	M06BPN	SNS67	-	AMF618	-	-	-	-
Corning Cable Systems	M06BVN	SNS67	-	AMF618	-	-	-	-
Corning Cable Systems	R06BPN	SNS67	-	AMF618	-	-	-	-
CommScope	2220V	-	-	-	-	PL56QS23	-	-
CommScope	0359V	-	-	-	-	PL56CS23	-	-
CommScope	0132V	-	-	-	-	PL56CS23	-	-
Clark Wire & Cable	CV7559	SNS597	-	-	-	-	-	-

CROSS REFERENCE

CABLE TYPE - TRILOGY MC²

CONNECTOR TYPE	2 PIECE "K" SERIES	PAGE #	3 PIECE "W" SERIES	PAGE #
Pin Connectors				
	EI440MC2	.44	EFI440MC2	.51
	EI500MC2	.44	EFI500MC2	.51
	EI650MC2	.44	EFI650MC2	.51
	EI750MC2	.44	EFI750MC2	.51
	EI1000MC2	.44	EFI1000MC2	.51
Splice Connectors				
	SI440MC2	.45	SFI440MC2	.52
	SI500MC2	.45	SFI500MC2	.52
	SI650MC2	.45	SFI650MC2	.52
	SI750MC2	.45	SFI750MC2	.52
	SI1000MC2	.45	SFI1000MC2	.52
Pin Type Extensions 3", 6" or 9"				
	EI440MC2LB	.46	EFI440MC2LB	.53
	EI500MC2LB	.46	EFI500MC2LB	.53
	EI650MC2LB	.46	EFI650MC2LB	.53
	EI750MC2LB	.46	EFI750MC2LB	.53
	EI1000MC2LB	.46	EFI1000MC2LB	.53
Cable to Female Bulkhead Adaptors				
	BI440FFMC2	.47	BAI440FFMC2	.54
	BI500FFMC2	.47	BAI500FFMC2	.54
	BI650FFMC2	.47	BAI650FFMC2	.54
	BI750FFMC2	.47	BAI750FFMC2	.54
	BI1000FFMC2	.47	BAI1000FFMC2	.54
Cable to "F" Male Adaptors				
	AI440FMMC2	.48	AI440FMWMC2	.55
	AI500FMMC2	.48	AI500FMWMC2	.55
	AI650FMMC2	.48	AI650FMWMC2	.55
	AI750FMMC2	.48	AI750FMWMC2	.55
	AI1000FMWMC2	.55		
Cable Terminators				
	AI440TRBMC2	.49	AI440TRBWMC2	.56
	AI500TRBMC2	.49	AI500TRBWMC2	.56
	AI650TRBMC2	.49	AI650TRBWMC2	.56
	AI750TRBMC2	.49	AI750TRBWMC2	.56
	AI1000TRBMC2	.49	AI1000TRBWMC2	.56
Feed Thru Entry Connectors				
	EMI440MC2	.60		
	EMI500MC2	.60		
	EMI650MC2	.60		

INDEX

PART NUMBER	DESCRIPTION	PAGE
6150	Nut	25
6155	Washer	25
115642	Distribution Amplifier Plug	79
11QSNM	N Series Male Crimp On Connector	38
11QSTNM	N Series Male Crimp On Connector	38
51A002	Fiber Entry Connector	61
51A006	Fiber Entry Connector	61
51A011	Fiber Entry Connector	61
51A012	Fiber Entry Connector	61
51A013	Fiber Entry Connector	61
51A014	Fiber Entry Connector	61
56CDNM	N Series Male Crimp On Connector	38
56CHNM	N Series Male Crimp On Connector	38
56QSNM	N Series Male Crimp On Connector	38
59CHNM	N Series Male Crimp On Connector	38
59QSNM	N Series Male Crimp On Connector	38
6155LW	Lock Washer	25
6155SL	Solder Lug	25
625HP	Plug with "O" Ring	79
625P	Plug with "O" Ring	79
625TRB	Housing Terminator	74
625TRBHV	High Voltage Terminator	73
750P	Plug, Hex with "O" Ring	79
81AMF59	Multi-Fit Splice Connector	19
81AMF59S	Multi-Fit Splice Connector - Weather Resistant	19
81AMF6	Multi-Fit Splice Connector	19
81AMF6S	Multi-Fit Splice Connector - Weather Resistant	19
81SNS59	Snap-N-Seal Two Piece Splice	12
81SNS5959QS	Snap-N-Seal Two Piece Splice - Delta	12
81SNS5959QS	Snap-N-Seal Two Piece Splice - Delta	12
81SNS596QS	Snap-N-Seal Two Piece Splice - Delta	12
81SNS596QS	Snap-N-Seal Two Piece Splice - Delta	12
81SNS59K	Snap-N-Seal Two Piece Splice - Precision	11
81SNS59QS	Snap-N-Seal Two Piece Splice	12
81SNS59QSK	Snap-N-Seal Two Piece Splice - Precision	11
81SNS6	Snap-N-Seal Two Piece Splice	12
81SNS659	Snap-N-Seal Two Piece Splice - Delta	12
81SNS659	Snap-N-Seal Two Piece Splice - Delta	12
81SNS659QS	Snap-N-Seal Two Piece Splice - Delta	12
81SNS659QS	Snap-N-Seal Two Piece Splice - Delta	12
81SNS66	Snap-N-Seal Two Piece Splice - Delta	12
81SNS6K	Snap-N-Seal Two Piece Splice - Precision	11
81SNS6QS	Snap-N-Seal Two Piece Splice	12
81SNS6QSK	Snap-N-Seal Two Piece Splice - Precision	11
AFMAS	Precision Auto Seize Universal "F" Male to Hardline Adaptor	78
AI1000FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI1000FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI1000FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI1000FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI1000FMWMC2	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI1000TRBK3	2 Piece Cable Terminator - "K" Series	49
AI1000TRBK3	2 Piece Cable Terminator - "K" Series	49
AI1000TRBMC2	2 Piece Cable Terminator - "K" Series	49
AI1000TRBWMC2	3 Piece Cable Terminator - "W" Series	56
AI1125FMQQR	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI1125FMWQQR	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI1125TRBWQQR	3 Piece Cable Terminator - "W" Series	56
AI1160FMTX	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI1160FMWTX	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI1160TRBTX	2 Piece Cable Terminator - "K" Series	49

PART NUMBER	DESCRIPTION	PAGE
AI1160TRBWTX	3 Piece Cable Terminator - "W" Series	56
AI412FMK	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI412FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI412FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI412FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI412FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI412TRBK	2 Piece Cable Terminator - "K" Series	49
AI412TRBK3	2 Piece Cable Terminator - "K" Series	49
AI412TRBK3	2 Piece Cable Terminator - "K" Series	49
AI412TRBW	3 Piece Cable Terminator - "W" Series	56
AI440FMMC2	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI440FMWMC2	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI440TRBMC2	2 Piece Cable Terminator - "K" Series	49
AI440TRBWMC2	3 Piece Cable Terminator - "W" Series	56
AI500FMK	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI500FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI500FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI500FMMC2	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI500FMQR	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI500FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI500FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI500FMWMC2	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI500TRBK	2 Piece Cable Terminator - "K" Series	49
AI500TRBK3	2 Piece Cable Terminator - "K" Series	49
AI500TRBK3	2 Piece Cable Terminator - "K" Series	49
AI500TRBMC2	2 Piece Cable Terminator - "K" Series	49
AI500TRBQR	2 Piece Cable Terminator - "K" Series	49
AI500TRBW3	3 Piece Cable Terminator - "W" Series	56
AI500TRBW3	3 Piece Cable Terminator - "W" Series	56
AI500TRBWMC2	3 Piece Cable Terminator - "W" Series	56
AI540FMQR	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI540FMWQQR	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI540TRBQR	2 Piece Cable Terminator - "K" Series	49
AI540TRBWQQR	3 Piece Cable Terminator - "W" Series	56
AI565FMTX	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI565FMWTX	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI565TRBTX	2 Piece Cable Terminator - "K" Series	49
AI565TRBWTX	3 Piece Cable Terminator - "W" Series	56
AI625FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI625FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI625FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI625FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI625TRBK3	2 Piece Cable Terminator - "K" Series	49
AI625TRBK3	2 Piece Cable Terminator - "K" Series	49
AI625TRBW3	3 Piece Cable Terminator - "W" Series	56
AI625TRBW3	3 Piece Cable Terminator - "W" Series	56
AI650FMMC2	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI650FMWMC2	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI650TRBMC2	2 Piece Cable Terminator - "K" Series	49
AI650TRBWMC2	3 Piece Cable Terminator - "W" Series	56
AI700FMTX	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI700FMWTX	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI700TRBTX	2 Piece Cable Terminator - "K" Series	49
AI700TRBWTX	3 Piece Cable Terminator - "W" Series	56
AI715FMQR	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI715FMWQQR	3 Piece Hardline to "F" Male Adaptor - "W" Series	55
AI715TRBQR	2 Piece Cable Terminator - "K" Series	49
AI715TRBWQQR	3 Piece Cable Terminator - "W" Series	56
AI750FMK	2 Piece Cable to "F" Male Adaptor - "K" Series	48
AI750FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48

PART NUMBER	DESCRIPTION	PAGE	PART NUMBER	DESCRIPTION	PAGE
AI750FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48	BAI412FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750FMMC2	2 Piece Cable to "F" Male Adaptor - "K" Series	48	BAI440FFMC2	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55	BAI500FFMC2	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55	BAI500FFW	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750FMWMC2	3 Piece Hardline to "F" Male Adaptor - "W" Series	55	BAI500FFW2	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750TRBK	2 Piece Cable Terminator - "K" Series	49	BAI500FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750TRBK3	2 Piece Cable Terminator - "K" Series	49	BAI500FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750TRBK3	2 Piece Cable Terminator - "K" Series	49	BAI540FFQRG	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750TRBMC2	2 Piece Cable Terminator - "K" Series	49	BAI565FFTX	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750TRBW	3 Piece Cable Terminator - "W" Series	56	BAI625FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750TRBW3	3 Piece Cable Terminator - "W" Series	56	BAI625FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750TRBW3	3 Piece Cable Terminator - "W" Series	56	BAI650FFMC2	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI750TRBWMC2	3 Piece Cable Terminator - "W" Series	56	BAI700FFTX	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI840FMTX	2 Piece Cable to "F" Male Adaptor - "K" Series	48	BAI715FFQRG	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI840FMWTX	3 Piece Hardline to "F" Male Adaptor - "W" Series	55	BAI750FFMC2	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI840TRBTX	2 Piece Cable Terminator - "K" Series	49	BAI750FFW	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI840TRBWTX	3 Piece Cable Terminator - "W" Series	56	BAI750FFW2	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI860FMQR	2 Piece Cable to "F" Male Adaptor - "K" Series	48	BAI750FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI860FMWQRG	3 Piece Hardline to "F" Male Adaptor - "W" Series	55	BAI750FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI860TRBQR	2 Piece Cable Terminator - "K" Series	49	BAI840FFTX	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI860TRBWQRG	3 Piece Cable Terminator - "W" Series	56	BAI860FFQRG	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI875FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48	BAI875FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI875FMK3	2 Piece Cable to "F" Male Adaptor - "K" Series	48	BAI875FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54
AI875FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55	BI1000FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AI875FMW3	3 Piece Hardline to "F" Male Adaptor - "W" Series	55	BI1000FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AI875TRBK3	2 Piece Cable Terminator - "K" Series	49	BI1000FFMC2	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AI875TRBK3	2 Piece Cable Terminator - "K" Series	49	BI1125FFQR	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AI875TRBW3	3 Piece Cable Terminator - "W" Series	56	BI1160FFTX	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AI875TRBW3	3 Piece Cable Terminator - "W" Series	56	BI412FFK	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF11	Multi-Fit F Male Connector	18	BI412FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF11S	Multi-Fit F Male Connector - Weather Resistant	18	BI412FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF59	Multi-Fit F Male Connector	18	BI440FFMC2	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF59FF	Multi-Fit F Female Connector	19	BI500FFK	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF59S	Multi-Fit F Male Connector - Weather Resistant	18	BI500FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF6	Multi-Fit F Male Connector	18	BI500FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF6FF	Multi-Fit F Female Connector	19	BI500FFMC2	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF6FFS	Multi-Fit F Female Connector - Weather Resistant	19	BI500FFQR	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF6S	Multi-Fit F Male Connector - Weather Resistant	18	BI540FFQR	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF7	Multi-Fit F Male Connector	18	BI565FFTX	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF7S	Multi-Fit F Male Connector - Weather Resistant	18	BI625FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF9011	Multi-Fit Right Angle Connector	20	BI625FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF9011S	Multi-Fit Right Angle Connector - Weather Resistant	20	BI650FFMC2	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF906	Multi-Fit Right Angle Connector	20	BI700FFTX	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AMF906S	Multi-Fit Right Angle Connector - Weather Resistant	20	BI715FFQR	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AP10FF	F Series Attenuator Pads - Female to Female	35	BI750FFK	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AP10FM	F Series Attenuator Pads - Male to Female	35	BI750FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AP1FF	F Series Attenuator Pads - Female to Female	35	BI750FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AP1FM	F Series Attenuator Pads - Male to Female	35	BI750FFMC2	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AP20FF	F Series Attenuator Pads - Female to Female	35	BI840FFTX	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AP20FM	F Series Attenuator Pads - Male to Female	35	BI860FFQR	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AP30FM	F Series Attenuator Pads - Male to Female	35	BI875FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AP3FF	F Series Attenuator Pads - Female to Female	35	BI875FFK3	2 Piece Cable to Female Bulkhead Adaptor - "K" Series	47
AP3FM	F Series Attenuator Pads - Male to Female	35	CLF	F Series Locking Terminator	32
AP6FF	F Series Attenuator Pads - Female to Female	35	CLFA	F Series Locking Terminator	32
AP6FM	F Series Attenuator Pads - Male to Female	35	CST596	Stripping Tool	85
BAFF	5/8" - 24 Female to "F" Female Adaptor	76	CST596	Stripping Tool	85
BAI1000FFMC2	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54	CST596	Stripping Tool	85
BAI1000FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54	CST596	Stripping Tool	85
BAI1000FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54	CST596	Stripping Tool	85
BAI1125FFQRG	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54	CST596711	Coax Stripping Tool	83
BAI412FFW	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54	CST596711	Coax Stripping Tool	83
BAI412FFW2	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54	CST596711	Coax Stripping Tool	83
BAI412FFW3	3 Piece Cable to "F" Female Bulkhead Adaptor - "W" Series	54	CST596711	Coax Stripping Tool	83

PART NUMBER	DESCRIPTION	PAGE	PART NUMBER	DESCRIPTION	PAGE
CT214	Crimp Tool Non-Ratchet	86	EFI750W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53
CT2460	Ratchet Crimp Tool	86	EFI750WLB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53
CT596	Crimp Tool Non-Ratchet	86	EFI840TX	.3 Piece Pin Type Connector - "W" Series	51
CT611QS	Ratchet Crimp Tool	86	EFI840TXLB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53
CTRF	F Series Chain Terminator	31	EFI860QQR	.3 Piece Pin Type Connector - "G" Series	51
DGB81	F Series Die Cast Ground Block - Double	34	EFI875W3	.3 Piece Pin Type Connector - "W" Series	51
DGB81PC	F Series Die Cast Ground Block - Double	34	EFI875W3	.3 Piece Pin Type Connector - "W" Series	51
ECR11	.5/8" - 24 Entry Adaptor to 11 Series Crimp On	66	EFI875W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53
EDC59F	EDC (IEC) Female Connector	36	EFI875W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53
EDC59M	EDC (IEC) Male Connector	36	EI1000K3	.2 Piece Pin Connector - "K" Series	44
EDC6F	EDC (IEC) Female Connector	36	EI1000K3	.2 Piece Pin Connector - "K" Series	44
EDC6M	EDC (IEC) Male Connector	36	EI1000K3LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI1000MC2	.3 Piece Pin Type Connector - "W" Series	51	EI1000K3LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI1000MC2LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI1000MC2	.2 Piece Pin Connector - "K" Series	44
EFI1000W	.3 Piece Pin Type Connector - "W" Series	51	EI1000MC2LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI1000W2	.3 Piece Pin Type Connector - "W" Series	51	EI1125QR	.2 Piece Pin Connector - "K" Series	44
EFI1000W3	.3 Piece Pin Type Connector - "W" Series	51	EI1125QR	.2 Piece Pin Connector - "K" Series	44
EFI1000W3	.3 Piece Pin Type Connector - "W" Series	51	EI1125QRLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI1000W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI1160TX	.2 Piece Pin Connector - "K" Series	44
EFI1000W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI1160TXLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI1125QQR	.3 Piece Pin Type Connector - "G" Series	51	EI412K	.2 Piece Pin Connector - "K" Series	44
EFI412W	.3 Piece Pin Type Connector - "W" Series	51	EI412K3	.2 Piece Pin Connector - "K" Series	44
EFI412W2	.3 Piece Pin Type Connector - "W" Series	51	EI412K3	.2 Piece Pin Connector - "K" Series	44
EFI412W2LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI412K3LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI412W3	.3 Piece Pin Type Connector - "W" Series	51	EI412K3LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI412W3	.3 Piece Pin Type Connector - "W" Series	51	EI412KLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI412W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI440MC2	.2 Piece Pin Connector - "K" Series	44
EFI412W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI440MC2LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI412WLB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI500K	.2 Piece Pin Connector - "K" Series	44
EFI440MC2	.3 Piece Pin Type Connector - "W" Series	51	EI500K3	.2 Piece Pin Connector - "K" Series	44
EFI440MC2LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI500K3	.2 Piece Pin Connector - "K" Series	44
EFI500MC2	.3 Piece Pin Type Connector - "W" Series	51	EI500K3LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI500MC2LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI500K3LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI500W	.3 Piece Pin Type Connector - "W" Series	51	EI500KLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI500W2	.3 Piece Pin Type Connector - "W" Series	51	EI500MC2	.2 Piece Pin Connector - "K" Series	44
EFI500W2LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI500MC2LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI500W3	.3 Piece Pin Type Connector - "W" Series	51	EI500QR	.2 Piece Pin Connector - "K" Series	44
EFI500W3	.3 Piece Pin Type Connector - "W" Series	51	EI500QRLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI500W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI540QR	.2 Piece Pin Connector - "K" Series	44
EFI500W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI540QRLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI500WLB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI565TX	.2 Piece Pin Connector - "K" Series	44
EFI540QQR	.3 Piece Pin Type Connector - "G" Series	51	EI565TXLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI565TX	.3 Piece Pin Type Connector - "W" Series	51	EI625K3	.2 Piece Pin Connector - "K" Series	44
EFI565TXLB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI625K3	.2 Piece Pin Connector - "K" Series	44
EFI625PF	.3 Piece 20 Ohm Power Connector - Pin Type	57	EI625K3LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI625PF	.3 Piece 20 Ohm Power Connector - Pin Type	57	EI625K3LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI625W3	.3 Piece Pin Type Connector - "W" Series	51	EI650MC2	.2 Piece Pin Connector - "K" Series	44
EFI625W3	.3 Piece Pin Type Connector - "W" Series	51	EI650MC2LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI625W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI700TX	.2 Piece Pin Connector - "K" Series	44
EFI625W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI700TXLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI650MC2	.3 Piece Pin Type Connector - "W" Series	51	EI715QR	.2 Piece Pin Connector - "K" Series	44
EFI650MC2LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI715QRLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI700TX	.3 Piece Pin Type Connector - "W" Series	51	EI750K	.2 Piece Pin Connector - "K" Series	44
EFI700TXLB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI750K3	.2 Piece Pin Connector - "K" Series	44
EFI715QQR	.3 Piece Pin Type Connector - "G" Series	51	EI750K3	.2 Piece Pin Connector - "K" Series	44
EFI750MC2	.3 Piece Pin Type Connector - "W" Series	51	EI750K3LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI750MC2LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI750K3LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI750W	.3 Piece Pin Type Connector - "W" Series	51	EI750KLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI750W2	.3 Piece Pin Type Connector - "W" Series	51	EI750MC2	.2 Piece Pin Connector - "K" Series	44
EFI750W2LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI750MC2LB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI750W3	.3 Piece Pin Type Connector - "W" Series	51	EI840TX	.2 Piece Pin Connector - "K" Series	44
EFI750W3	.3 Piece Pin Type Connector - "W" Series	51	EI840TXLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46
EFI750W3LB	.3 Piece Pin Type Extension 3", 6" and 9" - "W" Series	53	EI860QR	.2 Piece Pin Connector - "K" Series	44
			EI860QRLB	.2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46

PART NUMBER	DESCRIPTION	PAGE	PART NUMBER	DESCRIPTION	PAGE
EI875K3	2 Piece Pin Connector - "K" Series	44	F625BE	.5/8" - 24 Entry to "F" Female Adaptor (AC Block)	66
EI875K3	2 Piece Pin Connector - "K" Series	44	F625E	.5/8" - 24 Entry to "F" Female Adaptor	66
EI875K3LB	2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46	F71-LRC	.F Series Male Splice Connector	26
EI875K3LB	2 Piece Pin Type Extension 3", 6" or 9" - "K" Series	46	F7CH	Hex Crimp F Male Connector - One Piece	22
EMI11	.5/8" - 24 Entry, Feed Thru Connector, 11 Series	66	F7QS	Hex Crimp F Male Connector - One Piece	22
EMI412P1	Feed Thru Entry Connector	60	F81	.F Female Splice Drop Connector	24
EMI412P3	Feed Thru Entry Connector	60	F81BE	.F Female Splice Drop Connector	24
EMI412P3	Feed Thru Entry Connector	60	F81D	.F Female Splice Drop Connector	24
EMI440MC2	Feed Thru Entry Connector	60	F81DF	.F Female Splice Drop Connector	24
EMI500MC2	Feed Thru Entry Connector	60	F81HDW	.F Female Splice Drop Connector	24
EMI500P1	Feed Thru Entry Connector	60	F81LS	.F Female Splice Drop Connector	24
EMI500P3	Feed Thru Entry Connector	60	F81PM	.F Female Splice Drop Connector	24
EMI500P3	Feed Thru Entry Connector	60	FCS10S	.F Series Security Shield Slip On	32
EMI500QR	Feed Thru Entry Connector	60	FCS11S	.F Series Security Shield Slip On	32
EMI540QR	Feed Thru Entry Connector	60	FCS3S	.F Series Security Shield Slip On	32
EMI625K3	Feed Thru Entry Connector	60	FCS5T	.F Series Security Shield Threaded	32
EMI625K3	Feed Thru Entry Connector	60	FCS9S	.F Series Security Shield Slip On	32
EMI650MC2	Feed Thru Entry Connector	60	FCS9T	.F Series Security Shield Threaded	32
ETE625	Entry To Entry Adaptor	65	FCSSNS	Security Shield - Snap-N-Seal	16
ETE625LR	Entry to Entry Adaptor - Locking Rotational	65	FCSSNS11	Security Shield - Snap-N-Seal	16
ETE625R	Entry to Entry Adaptor - Rotational	65	FF90FF	.F Series Right Angle Adaptor Female	26
ETE625R3	Entry to Entry Adaptor - Rotational	65	FF90M	.F Series Right Angle Adaptor Male	26
EU180	.180° Adaptor	70	FT58	.F Male Twist On - Drop Connector	23
EU1803	.180° Adaptor	70	FT5962	.F Male Twist On - Drop Connector	23
EU18045	.180° Adaptor	70	FT5962	.F Male Twist On - Drop Connector	23
EU180AS	Precision, Auto Seize 180° Adaptor	69	FT59QS	.F Male Twist On - Drop Connector	23
EU180AS3	Precision, Auto Seize 180° Adaptor	69	FT6	.F Male Twist On - Drop Connector	23
EU90	.90° or Right Angle Adaptor	68	FT6QS	.F Male Twist On - Drop Connector	23
EU903	.90° or Right Angle Adaptor	68	GB59QSNS	.Snap-N-Seal Ground Block	13
EU9045	.90° or Right Angle Adaptor	68	GB59QSNSK	.Snap-N-Seal Ground Block - Precision	13
EU906	.90° or Right Angle Adaptor	68	GB59SNS	.Snap-N-Seal Ground Block	13
EU90AS	Precision, Auto Seize 90° or Right Angle Adaptor	67	GB59SNSK	.Snap-N-Seal Ground Block - Precision	13
EU90R	Rotational Right Angle Adaptor	68	GB6QSNS	.Snap-N-Seal Ground Block	13
EU90R3	Rotational Right Angle Adaptor	68	GB6QSNSK	.Snap-N-Seal Ground Block - Precision	13
EXTAS2BP	By-Pass Port Adaptor	80	GB6SNS	.Snap-N-Seal Ground Block	13
EXTAS3	Precision, Auto Seize Extension Adaptor, 3"	72	GB6SNSK	.Snap-N-Seal Ground Block - Precision	13
EXTAS6	Precision, Auto Seize Extension Adaptor, 6"	72	GB81	.F Series Die Cast Ground Block - Single	34
F11DB	Hex Crimp F Male Connector - One Piece	22	GB81BS	.F Series Ground Block	33
F11QS	Hex Crimp F Male Connector - One Piece	22	GB81PC	.F Series Die Cast Ground Block - Single	34
F11QST	Hex Crimp F Male Connector - One Piece	22	GL81	.F Series Female Splice with Ground Lug	33
F304VC	Hex Crimp F Male Connector	22	GN59AMF	.Multi-Fit Ground Block	19
F550	Nut	25	GN59AMFS	.Multi-Fit Ground Block - Weather Resistant	19
F555LW	Lock Washer	25	GN6AMF	.Multi-Fit Ground Block	19
F56CD	Hex Crimp F Male Connector	22	GN6AMFS	.Multi-Fit Ground Block - Weather Resistant	19
F56CH	Hex Crimp F Male Connector	22	HCT211	Crimp Tool Non-Ratchet	86
F56CHI	Hex Crimp F Male Connector	22	HCT660	Crimp Tool Non-Ratchet	86
F56QS	Hex Crimp F Male Connector	22	HCT6QS	Crimp Tool Non-Ratchet	86
F59CD	Hex Crimp F Male Connector	22	HSB	Housing Splice Block	71
F59CDB	Hex Crimp F Male Connector	22	HSBGD	Housing Splice Block, Grounding Lug Feature	71
F59CH	Hex Crimp F Male Connector	22	IT1000	Stripping Tool	84
F59CHI	Hex Crimp F Male Connector	22	IT1000	Stripping Tool	84
F59HB	Hex Crimp F Male Connector	22	IT1000	Stripping Tool	84
F59HEC	Hex Crimp F Male Connector	22	IT1000	Stripping Tool	84
F59QS	Hex Crimp F Male Connector	22	IT1000	Stripping Tool	84
F60CH	Hex Crimp F Male Connector	22	IT10002	Replacement Cartridge - IT1000 Tool	84
F61	.F Series Female Chasis Adaptor	28	IT10002	Replacement Cartridge - IT1000 Tool	84
F611CHP	Hex Crimp F Male Connector - One Piece	22	IT10002	Replacement Cartridge - IT1000 Tool	84
F611QSP	Hex Crimp F Male Connector - One Piece	22	IT10002	Replacement Cartridge - IT1000 Tool	84
F61L	.F Series Female Chasis Adaptor	28	IT10002	Replacement Cartridge - IT1000 Tool	84
F61PC	.F Series Printed Circuit Connector	30	J11KSMF100	.Male to Female Flexible Cable Adaptor	81
F61PF	.F Series Female Chasis Adaptor - Push On	29	J11KSMF140	.Male to Female Flexible Cable Adaptor	81
F61PM	.F Series Male Chasis Connector - Push On	29	J11KSMF15	.Male to Female Flexible Cable Adaptor	81
F61SL	.F Series Female Chasis Adaptor	28	J11KSMF160	.Male to Female Flexible Cable Adaptor	81

PART NUMBER	DESCRIPTION	PAGE	PART NUMBER	DESCRIPTION	PAGE
J11KSMF1800	Male to Female Flexible Cable Adaptor	81	PL56QS	Hex Crimp F Male Connector - Plenum	23
J11KSMF220	Male to Female Flexible Cable Adaptor	81	PL59CD	Hex Crimp F Male Connector - Plenum	23
J11KSMF25	Male to Female Flexible Cable Adaptor	81	PL59CH	Hex Crimp F Male Connector - Plenum	23
J11KSMF30	Male to Female Flexible Cable Adaptor	81	PL59CS	Hex Crimp F Male Connector - Plenum	23
J11KSMF360	Male to Female Flexible Cable Adaptor	81	PL59TQ	Hex Crimp F Male Connector - Plenum	23
J11KSMF40	Male to Female Flexible Cable Adaptor	81	RC596	Replacement Cartridge - Coax Stripping Tool	83
J11KSMF50	Male to Female Flexible Cable Adaptor	81	RC596	Replacement Cartridge - Coax Stripping Tool	83
J11KSMF65	Male to Female Flexible Cable Adaptor	81	RC711	Replacement Cartridge - Coax Stripping Tool	83
J11KSMF75	Male to Female Flexible Cable Adaptor	81	RC711	Replacement Cartridge - Coax Stripping Tool	83
J11KSMF85	Male to Female Flexible Cable Adaptor	81	RM596	Replacement Module - CST596 Stripping Tool	85
J11KSMM100	Male to Male Flexible Cable Adaptor	81	RM596	Replacement Module - CST596 Stripping Tool	85
J11KSMM140	Male to Male Flexible Cable Adaptor	81	RM596	Replacement Module - CST596 Stripping Tool	85
J11KSMM15	Male to Male Flexible Cable Adaptor	81	RM596	Replacement Module - CST596 Stripping Tool	85
J11KSMM160	Male to Male Flexible Cable Adaptor	81	RM596	Replacement Module - CST596 Stripping Tool	85
J11KSMM1800	Male to Male Flexible Cable Adaptor	81	SFI1000MC2	3 Piece Splice Connector - "W" Series	52
J11KSMM220	Male to Male Flexible Cable Adaptor	81	SFI1000W	3 Piece Splice Connector - "W" Series	52
J11KSMM25	Male to Male Flexible Cable Adaptor	81	SFI1000W3	3 Piece Splice Connector - "W" Series	52
J11KSMM30	Male to Male Flexible Cable Adaptor	81	SFI1000W3	3 Piece Splice Connector - "W" Series	52
J11KSMM360	Male to Male Flexible Cable Adaptor	81	SFI1125QRG	3 Piece Splice Connector - "G" Series	52
J11KSMM40	Male to Male Flexible Cable Adaptor	81	SFI412W	3 Piece Splice Connector - "W" Series	52
J11KSMM50	Male to Male Flexible Cable Adaptor	81	SFI412W2	3 Piece Splice Connector - "W" Series	52
J11KSMM65	Male to Male Flexible Cable Adaptor	81	SFI412W3	3 Piece Splice Connector - "W" Series	52
J11KSMM75	Male to Male Flexible Cable Adaptor	81	SFI412W3	3 Piece Splice Connector - "W" Series	52
J11KSMM85	Male to Male Flexible Cable Adaptor	81	SFI440MC2	3 Piece Splice Connector - "W" Series	52
KF61	F Series Female Chasis Adaptor - Precision	28	SFI500MC2	3 Piece Splice Connector - "W" Series	52
KF625E	5/8" - 24 Entry to "F" Female Adaptor (1 GHz)	66	SFI500W	3 Piece Splice Connector - "W" Series	52
KF81D	F Female Splice Drop Connector	24	SFI500W2	3 Piece Splice Connector - "W" Series	52
KF81DI	F Female Splice Drop Connector	24	SFI500W3	3 Piece Splice Connector - "W" Series	52
KF81PM	F Female Splice Drop Connector	24	SFI500W3	3 Piece Splice Connector - "W" Series	52
KF81PMI	F Female Splice Drop Connector	24	SFI540QRG	3 Piece Splice Connector - "G" Series	52
KS625	5/8" - 24 Adaptor	79	SFI565TX	3 Piece Splice Connector - "W" Series	52
KSFAS	5/8" - 24 Female to Female Adaptor, Auto Seize	75	SFI625PF	3 Piece 20 Ohm Power Splice Connector	58
KSMASR	5/8" - 24 Male to Female Adaptor, Rotational	77	SFI625W3	3 Piece Splice Connector - "W" Series	52
KSMASRC	5/8" - 24 Male to Female Adaptor, Rotational	77	SFI625W3	3 Piece Splice Connector - "W" Series	52
L3011B	Installation Tool	84	SFI650MC2	3 Piece Splice Connector - "W" Series	52
L3011B	Installation Tool	85	SFI700TX	3 Piece Splice Connector - "W" Series	52
L3011B	Installation Tool	85	SFI715QRG	3 Piece Splice Connector - "G" Series	52
L3011B	Installation Tool	85	SFI750MC2	3 Piece Splice Connector - "W" Series	52
L3011B	Installation Tool	85	SFI750W	3 Piece Splice Connector - "W" Series	52
LTF	Locking Terminator Tool	86	SFI750W2	3 Piece Splice Connector - "W" Series	52
NF75PM	N Female Panel Mount	39	SFI750W3	3 Piece Splice Connector - "W" Series	52
NM213	N Series Male Crimp On Connector	38	SFI750W3	3 Piece Splice Connector - "W" Series	52
NM214	N Series Male Crimp On Connector	38	SFI840TX	3 Piece Splice Connector - "W" Series	52
NM8HB10	N Series Male Crimp On Connector	38	SFI860QRG	3 Piece Splice Connector - "G" Series	52
NMFF	N Male to F Female Connector	38	SFI875W3	3 Piece Splice Connector - "W" Series	52
NS500	Nut Seal	16	SFI875W3	3 Piece Splice Connector - "W" Series	52
NS500	Nut Seal	16	SI1000K3	2 Piece Splice Connector - "K" Series	45
NS500	Nut Seal	16	SI1000K3	2 Piece Splice Connector - "K" Series	45
NS500	Nut Seal	16	SI1000MC2	2 Piece Splice Connector - "K" Series	45
NS625	Nut Seal	16	SI1125QR	2 Piece Splice Connector - "K" Series	45
NS625	Nut Seal	16	SI1160TX	2 Piece Splice Connector - "K" Series	45
NS625	Nut Seal	16	SI412K	2 Piece Splice Connector - "K" Series	45
PC90481	F Series Printed Circuit Connector - Right Angle Push On	30	SI412K3	2 Piece Splice Connector - "K" Series	45
PCB90FF	F Series Printed Circuit Connector - Right Angle	30	SI412K3	2 Piece Splice Connector - "K" Series	45
PF59	F Series Connector - Push On	27	SI440MC2	2 Piece Splice Connector - "K" Series	45
PF59S	F Series Quick Disconnect	27	SI500K	2 Piece Splice Connector - "K" Series	45
PF59SCR316	F Series Quick Disconnect	27	SI500K3	2 Piece Splice Connector - "K" Series	45
PL11CS	Hex Crimp F Male Connector - Plenum	23	SI500K3	2 Piece Splice Connector - "K" Series	45
PL11QS	Hex Crimp F Male Connector - Plenum	23	SI500MC2	2 Piece Splice Connector - "K" Series	45
PL120HB	Hex Crimp F Male Connector - Plenum	23	SI500QR	2 Piece Splice Connector - "K" Series	45
PL56CH	Hex Crimp F Male Connector - Plenum	23	SI540QR	2 Piece Splice Connector - "K" Series	45
PL56CH	Hex Crimp F Male Connector - Plenum	23	SI565TX	2 Piece Splice Connector - "K" Series	45
PL56CS	Hex Crimp F Male Connector - Plenum	23	SI625K3	2 Piece Splice Connector - "K" Series	45

PART NUMBER	DESCRIPTION	PAGE	PART NUMBER	DESCRIPTION	PAGE
SI625K3	2 Piece Splice Connector - "K" Series	45	SNS6TP275	Snap-N-Seal Two Piece Drop Connector	7
SI650MC2	2 Piece Splice Connector - "K" Series	45	SNS6TP450	Snap-N-Seal Two Piece Drop Connector	7
SI700TX	2 Piece Splice Connector - "K" Series	45	SNS7B	Snap-N-Seal Two Piece Drop Connector	8
SI715QR	2 Piece Splice Connector - "K" Series	45	SNS7BNS	Snap-N-Seal Two Piece Drop Connector	8
SI750K	2 Piece Splice Connector - "K" Series	45	SNS7BQ	Snap-N-Seal Two Piece Drop Connector	8
SI750K3	2 Piece Splice Connector - "K" Series	45	SNS7BQNS	Snap-N-Seal Two Piece Drop Connector	8
SI750K3	2 Piece Splice Connector - "K" Series	45	SNS7BQTP275	Snap-N-Seal Two Piece Drop Connector	8
SI750MC2	2 Piece Splice Connector - "K" Series	45	SNS7BQTP450	Snap-N-Seal Two Piece Drop Connector	8
SI840TX	2 Piece Splice Connector - "K" Series	45	SNS7BTP275	Snap-N-Seal Two Piece Drop Connector	8
SI860QR	2 Piece Splice Connector - "K" Series	45	SNS7BTP450	Snap-N-Seal Two Piece Drop Connector	8
SI875K3	2 Piece Splice Connector - "K" Series	45	SNS8159AS	Snap-N-Seal Two Piece Splice - Auto-Seize	12
SI875K3	2 Piece Splice Connector - "K" Series	45	SNS816AS	Snap-N-Seal Two Piece Splice - Auto-Seize	12
SNS11AS	Snap-N-Seal Two Piece Drop Connector	8	SNSIT	Ratchet Installation Tool	84
SNS11ASNS	Snap-N-Seal Two Piece Drop Connector	8	SNSIT	Ratchet Installation Tool	84
SNS11ASTP275	Snap-N-Seal Two Piece Drop Connector	8	SNSIT	Ratchet Installation Tool	84
SNS11ASTP450	Snap-N-Seal Two Piece Drop Connector	8	SNSIT	Ratchet Installation Tool	84
SNS1P59	Snap-N-Seal One Piece Drop Connector	6	SNSIT	Ratchet Installation Tool	84
SNS1P59HEC	Snap-N-Seal One Piece Drop Connector	6	SNSUTL	Non-Ratchet Installation Tool	84
SNS1P59QS	Snap-N-Seal One Piece Drop Connector	6	SNSUTL	Non-Ratchet Installation Tool	84
SNS1P6	Snap-N-Seal One Piece Drop Connector	6	SNSUTL	Non-Ratchet Installation Tool	84
SNS1P6QS	Snap-N-Seal One Piece Drop Connector	6	SNSUTL	Non-Ratchet Installation Tool	84
SNS1P6RMBK	Snap-N-Seal One Piece Connector - RCA Type	10	SNSUTL	Non-Ratchet Installation Tool	84
SNS1P6RMBL	Snap-N-Seal One Piece Connector - RCA Type	10	SST11	Security Shield Tool	87
SNS1P6RMG	Snap-N-Seal One Piece Connector - RCA Type	10	SST5910	Security Shield Tool	87
SNS1P6RMR	Snap-N-Seal One Piece Connector - RCA Type	10	SST59U	Security Shield Tool	87
SNS1P6RMW	Snap-N-Seal One Piece Connector - RCA Type	10	SSTSNS	Security Shield Tool	87
SNS1P6RMY	Snap-N-Seal One Piece Connector - RCA Type	10	SSTSNS	Security Shield Tool	87
SNS320QR	F Connector	59	SSTSNS11	Security Shield Tool	87
SNS375P	Weather Plug	16	SSTSNS11	Security Shield Tool	87
SNS375P	Weather Plug	16	TBF81	Self Terminating Connector F & BNC	37
SNS375P	Weather Plug	16	TF81	Self Terminating Connector F & BNC	37
SNS375P	Weather Plug	16	TF8159CH	Self Terminating Connector	37
SNS375P	Weather Plug	16	TF816CH	Self Terminating Connector	37
SNS375P	Weather Plug	16	TF816QS	Self Terminating Connector	37
SNS375P	Weather Plug	16	TP275	Thread Protector	16
SNS59	Snap-N-Seal Two Piece Drop Connector	7	TP275	Thread Protector	16
SNS59FF	Snap-N-Seal Two Piece Drop Connector - Female	15	TP275	Thread Protector	16
SNS59HEC	Snap-N-Seal Two Piece Drop Connector	7	TP275	Thread Protector	16
SNS59HECBNC	Snap-N-Seal Precision BNC Plug Connectors	14	TP275	Thread Protector	16
SNS59HECBNCB	Snap-N-Seal Precision BNC Plug Connectors	14	TP275	Thread Protector	16
SNS59HECID	Snap-N-Seal Two Piece Drop Connector - Indoor	9	TP275	Thread Protector	16
SNS59HECKF81	Snap-N-Seal Two Piece Drop Connector - Female Precision	15	TP450	Thread Protector	16
SNS59ID	Snap-N-Seal Two Piece Drop Connector - Indoor	9	TP450	Thread Protector	16
SNS59NS	Snap-N-Seal Two Piece Drop Connector	7	TP450	Thread Protector	16
SNS59QS	Snap-N-Seal Two Piece Drop Connector	7	TP450	Thread Protector	16
SNS59QSFF	Snap-N-Seal Two Piece Drop Connector - Female	15	TP450	Thread Protector	16
SNS59QSID	Snap-N-Seal Two Piece Drop Connector - Indoor	9	TP450	Thread Protector	16
SNS59QSNS	Snap-N-Seal Two Piece Drop Connector	7	TP450	Thread Protector	16
SNS59QSTP275	Snap-N-Seal Two Piece Drop Connector	7	TRBF	Terminator	74
SNS59QSTP450	Snap-N-Seal Two Piece Drop Connector	7	TRF	F Series Terminator	31
SNS59TP275	Snap-N-Seal Two Piece Drop Connector	7	TRFD	F Series Terminator	31
SNS59TP450	Snap-N-Seal Two Piece Drop Connector	7	TRFP	F Series Terminator	31
SNS6	Snap-N-Seal Two Piece Drop Connector	7	TRFS	Terminator	74
SNS6FF	Snap-N-Seal Two Piece Drop Connector - Female	15	TRFSM	F Series Security Terminator	31
SNS6ID	Snap-N-Seal Two Piece Drop Connector - Indoor	9	TRFSMP	F Series Security Terminator	31
SNS6KF81	Snap-N-Seal Two Piece Drop Connector - Female Precision	15	TRLF	F Series Locking Terminator	32
SNS6NS	Snap-N-Seal Two Piece Drop Connector	7	TRLFA	F Series Locking Terminator	32
SNS6QS	Snap-N-Seal Two Piece Drop Connector	7	TSB	Through Splice Block	71
SNS6QSFF	Snap-N-Seal Two Piece Drop Connector - Female	15			
SNS6QSID	Snap-N-Seal Two Piece Drop Connector - Indoor	9			
SNS6QSNS	Snap-N-Seal Two Piece Drop Connector	7			
SNS6QSTP275	Snap-N-Seal Two Piece Drop Connector	7			
SNS6QSTP450	Snap-N-Seal Two Piece Drop Connector	7			