



2014

LS 600h L

OWNER'S MANUAL

	Pictorial index	Search by illustration
1	For safety and security	Make sure to read through them
2	Instrument cluster	How to read the gauges and meters, the variety of warning lights and indicators, etc.
3	Operation of each component	Opening and closing the doors and windows, adjustment before driving, etc.
4	Driving	Operations and advices which are necessary for driving
5	Interior features	Usage of the interior features, etc.
6	Maintenance and care	Caring for your vehicle and maintenance procedures
7	When trouble arises	What to do in case of malfunction or emergency
8	Vehicle specifications	Vehicle specifications, customizable features, etc.
9	For owners	Reporting safety defects for U.S. owners, and seat belt, SRS airbag and headlight aim instructions for Canadian owners
	Index	Search by symptom
		Search alphabetically

For your information	8
Reading this manual.....	14
How to search	15
Pictorial index	16

1 For safety and security

1-1. For safe use

Before driving.....	34
For safety drive.....	36
Seat belts	38
SRS airbags.....	44
Front passenger occupant classification system.....	57
Safety information for children	63
Child restraint systems	64
Installing child restraints.....	68
Exhaust gas precautions.....	77

1-2. Hybrid system

Hybrid system features.....	78
Hybrid system precautions.....	83

1-3. Theft deterrent system

Immobilizer system	90
Alarm.....	92

2 Instrument cluster

2. Instrument cluster

Warning lights and indicators.....	96
Gauges and meters.....	101
Multi-information display	107
Energy monitor/consumption screen	114

3 Operation of each component

3-1. Key information

Keys	122
------------	-----

3-2. Opening, closing and locking the doors and trunk

Smart access system with push-button start	127
Wireless remote control	142
Doors	146
Trunk.....	150

3-3. Adjusting the seats

Front seats.....	157
Power rear seat.....	164
Driving position memory.....	177
Rear seat position memory	182
Head restraints	184

3-4. Adjusting the steering wheel and mirrors

Steering wheel.....	187
Inside rear view mirror	188
Outside rear view mirrors.....	190

3-5. Opening, closing the windows and moon roof

Power windows.....	194
Moon roof.....	197

4 Driving

4-1. Before driving

Driving the vehicle	202
Cargo and luggage.....	213
Vehicle load limits	217
Trailer towing	218
Dinghy towing	219

4-2. Driving procedures

Power (ignition) switch	220
EV drive mode.....	225
Hybrid transmission.....	227
Turn signal lever	231
Parking brake	232
Brake Hold	235
Horn	237

4-3. Operating the lights and wipers

Headlight switch	238
Automatic High Beam.....	242
Fog light switch	247
Windshield wipers and washer	248
Headlight cleaner switch.....	252

4-4. Refueling

Opening the fuel tank cap	253
---------------------------------	-----

4-5. Using the driving support systems

Cruise control	257
Dynamic radar cruise control with full-speed range.....	261
LKA (Lane-Keeping Assist).....	277
Intuitive parking assist.....	287
Rear view monitor system.....	298
Driving mode select switch.....	309
Electronically modulated air suspension	313
Driving assist systems	315
PCS (Pre-Collision System)	322
BSM (Blind Spot Monitor)	334
• The Blind Spot Monitor function	338
• The Rear Cross Traffic Alert function	341
Lexus night view	344

4-6. Driving tips

Hybrid vehicle driving tips	349
Winter driving tips	351

5 Interior features

5-1. Remote Touch screen

Remote Touch	358
Remote Touch screen	360
Set up screen	366
12.3-inch display operation	382
Voice command system	391
Mobile Assistant	401

5-2. Lexus Climate Concierge

Lexus Climate Concierge	403
-------------------------------	-----

5-3. Using the air conditioning system and defogger

Front automatic air conditioning system	404
Rear air conditioning system	418
Rear window and outside rear view mirror defoggers	425
Windshield wiper de-icer	426

5-4. Using the audio system

Audio system type	427
Using the radio	449
Using the CD/DVD player	467
Playing an audio CD and MP3/WMA discs	469
Playing DVD video	475
CD/DVD player and DVD video disc information	486
Listening to Bluetooth® audio	498
Listening to a USB memory	508

Listening to an iPod	518
Using the AUX port	528
Optimal use of the audio/ video system	530
Using the rear seat audio controls	531
Using the steering wheel audio switches	534

5-5. Using the rear seat entertainment system

Rear seat entertainment system features	537
Playing a Blu-ray Disc™ (BD) and DVD disc	554
Playing an audio CD and MP3/WMA discs	582
Playing an SD card	587
Using the front audio system	593
Using the video mode	595
Changing other setting	597

5-6. Using the hands-free phone system (for cellular phone)

Hands-free system (for cellular phone)	601
Using a Bluetooth® phone	608
Setting the hands-free system (for cellular phone)	628
Setting the Bluetooth®	652

5-7. Using the interior lights

Interior lights list	665
• Interior lights	666
• Personal lights	667

5-8. Using the storage features

List of storage features	669
• Glove box	671
• Coin holder	672
• Door pockets.....	672
• Cup holders.....	673
• Console box	675
• Auxiliary boxes	677
Trunk features.....	680

5-9. Other interior features

Sun visors and vanity mirrors	682
Clock	684
Ashtrays.....	685
Cigarette lighters.....	686
Power outlets	688
Heated steering wheel	692
Climate control seats	694
Armrest.....	699
Retractable table.....	700
Rear sunshade.....	702
Rear door sunshades	705
Coat hooks	708
Assist grips	709
Garage door opener	710
Safety Connect.....	716

6 Maintenance and care

6-1. Maintenance and care

Cleaning and protecting the vehicle exterior	724
Cleaning and protecting the vehicle interior.....	728

6-2. Maintenance

Maintenance requirements....	731
General maintenance.....	734
Emission inspection and maintenance (I/M) programs.....	738

6-3. Do-it-yourself maintenance

Do-it-yourself service precautions.....	739
Hood.....	742
Positioning a floor jack.....	743
Engine compartment	745
12-volt battery	756
Tires.....	760
Tire inflation pressure	770
Wheels	773
Air conditioning filter	775
Electronic key battery.....	778
Checking and replacing fuses.....	780
Headlight aim	785
Light bulbs	787

7 When trouble arises

7-1. Essential information

Emergency flashers	790
If your vehicle has to be stopped in an emergency	791

7-2. Steps to take in an emergency

If your vehicle needs to be towed	792
If you think something is wrong	798
If a warning light turns on or a warning buzzer sounds	799
If a warning message is displayed	809
If you have a flat tire	812
If the hybrid system will not start	821
If the shift lever cannot be shifted from P	823
If the parking brake cannot be released	824
If the electronic key does not operate properly	826
If the 12-volt battery is discharged	829
If your vehicle overheats	832
If the vehicle becomes stuck	837

8 Vehicle specifications

8-1. Specifications

Maintenance data (fuel, oil level, etc.)	840
Fuel information	851
Tire information	854

8-2. Customization

Customizable features	865
-----------------------------	-----

9 For owners

Reporting safety defects for U.S. owners	876
Seat belt instructions for Canadian owners (in French)	877
SRS airbag instructions for Canadian owners (in French)	879
Headlight aim instructions for Canadian owners (in French)	888

Index

What to do if...	
(Troubleshooting).....	892
Alphabetical index	898

1

2

3

4

5

6

7

8

9

For vehicles with a navigation system, refer to the “Navigation System Owner’s Manual” for information regarding the navigation system.

For your information

Main Owner's Manual

Please note that this manual applies to all models and explains all equipment, including options. Therefore, you may find some explanations for equipment not installed on your vehicle.

All specifications provided in this manual are current at the time of printing. However, because of the Lexus policy of continual product improvement, we reserve the right to make changes at any time without notice.

Depending on specifications, the vehicle shown in the illustrations may differ from your vehicle in terms of color and equipment.

Noise from under vehicle after turning off the hybrid system

Approximately five hours after the hybrid system is turned off, you may hear sound coming from under the vehicle for several minutes. This is the sound of a fuel evaporation leakage check and, it does not indicate a malfunction.

Accessories, spare parts and modification of your Lexus

A wide variety of non-genuine spare parts and accessories for Lexus vehicles are currently available in the market. You should know that Toyota does not warrant these products and is not responsible for their performance, repair, or replacement, or for any damage they may cause to, or adverse effect they may have on, your Lexus vehicle.

This vehicle should not be modified with non-genuine Lexus products. Modification with non-genuine Lexus products could affect its performance, safety or durability, and may even violate governmental regulations. In addition, damage or performance problems resulting from the modification may not be covered under warranty.

Installation of a mobile two-way radio system

The installation of a mobile two-way radio system in your vehicle could affect electronic systems such as:

- Hybrid system
- Multiport fuel injection system/sequential multiport fuel injection system
- Dynamic radar cruise control with full-speed range
- Cruise control system
- Anti-lock brake system
- Vehicle dynamics integrated management
- SRS airbag system
- Seat belt pretensioner system

Be sure to check with your Lexus dealer for precautionary measures or special instructions regarding installation of a mobile two-way radio system.

High voltage parts and cables on the hybrid vehicles emit approximately the same amount of electromagnetic waves as the conventional gasoline powered vehicles or home electronic appliances despite of their electromagnetic shielding.

Unwanted noise may occur in the reception of the mobile two-way radio.

Vehicle data recordings

Your Lexus is equipped with several sophisticated computers that will record certain data, such as:

- Engine speed
- Electric motor speed (traction motor speed)
- Accelerator status
- Brake status
- Vehicle speed
- Shift position
- Hybrid battery (traction battery) status

The recorded data varies according to the vehicle grade level and options with which it is equipped. Furthermore, these computers do not record conversations, sounds or pictures.

● Data usage

Lexus may use the data recorded in these computers to diagnose malfunctions, conduct research and development, and improve quality.

Lexus will not disclose the recorded data to a third party except:

- With the consent of the vehicle owner or with the consent of the lessee if the vehicle is leased
- In response to an official request by the police, a court of law or a government agency
- For use by Lexus in a law suit
- For research purposes where the data is not tied to a specific vehicle or vehicle owner

● Usage of data collected through Safety Connect / Lexus Enform (U.S. mainland only)

If your Lexus has Safety Connect or Lexus Enform and if you have subscribed to those services, please refer to the Safety Connect / Lexus Enform Telematics Subscription Service Agreement for information on data collected and its usage.

Event data recorder

This vehicle is equipped with an event data recorder (EDR). The main purpose of an EDR is to record, in certain crash or near crash-like situations, such as an air bag deployment or hitting a road obstacle, data that will assist in understanding how a vehicle's systems performed. The EDR is designed to record data related to vehicle dynamics and safety systems for a short period of time, typically 30 seconds or less.

The EDR in this vehicle is designed to record such data as:

- How various systems in your vehicle were operating;
- Whether or not the driver and passenger safety belts were buckled/fastened;
- How far (if at all) the driver was depressing the accelerator and/or brake pedal; and,
- How fast the vehicle was traveling.

These data can help provide a better understanding of the circumstances in which crashes and injuries occur.

NOTE: EDR data are recorded by your vehicle only if a non-trivial crash situation occurs; no data are recorded by the EDR under normal driving conditions and no personal data (e.g., name, gender, age, and crash location) are recorded. However, other parties, such as law enforcement, could combine the EDR data with the type of personally identifying data routinely acquired during a crash investigation.

To read data recorded by an EDR, special equipment is required, and access to the vehicle or the EDR is needed. In addition to the vehicle manufacturer, other parties, such as law enforcement, that have the special equipment, can read the information if they have access to the vehicle or the EDR.

● Disclosure of the EDR data

Lexus will not disclose the data recorded in an EDR to a third party except when:

- An agreement from the vehicle's owner (or the lessee for a leased vehicle) is obtained
- In response to an official request by the police, a court of law or a government agency
- For use by Lexus in a law suit

However, if necessary, Lexus may:

- Use the data for research on vehicle safety performance
- Disclose the data to a third party for research purposes without disclosing information about the specific vehicle or vehicle owner

Scrapping of your Lexus

The SRS airbag and seat belt pretensioner devices in your Lexus contain explosive chemicals. If the vehicle is scrapped with the airbags and seat belt pretensioners left as they are, this may cause an accident such as fire. Be sure to have the systems of the SRS airbag and seat belt pretensioner removed and disposed of by a qualified service shop or by your Lexus dealer before you scrap your vehicle.

Perchlorate Material

Special handling may apply, See www.dtsc.ca.gov/hazardouswaste/perchlorate.

Your vehicle has components that may contain perchlorate. These components may include airbag, seat belt pretensioners, and wireless remote control batteries.

CAUTION

■ General precautions while driving

Driving under the influence: Never drive your vehicle when under the influence of alcohol or drugs that have impaired your ability to operate your vehicle. Alcohol and certain drugs delay reaction time, impair judgment and reduce coordination, which could lead to an accident that could result in death or serious injury.

Defensive driving: Always drive defensively. Anticipate mistakes that other drivers or pedestrians might make and be ready to avoid accidents.

Driver distraction: Always give your full attention to driving. Anything that distracts the driver, such as adjusting controls, talking on a cellular phone or reading can result in a collision with resulting death or serious injury to you, your occupants or others.

■ General precaution regarding children's safety

Never leave children unattended in the vehicle, and never allow children to have or use the key.

Children may be able to start the vehicle or shift the vehicle into neutral. There is also a danger that children may injure themselves by playing with the windows, the moon roof, or other features of the vehicle. In addition, heat build-up or extremely cold temperatures inside the vehicle can be fatal to children.

Reading this manual



CAUTION:

Explains something that, if not obeyed, could cause death or serious injury to people.



NOTICE:

Explains something that, if not obeyed, could cause damage to or a malfunction in the vehicle or its equipment.




1 2 3... Indicates operating or working procedures. Follow the steps in numerical order.



Indicates the action (pushing, turning, etc.) used to operate switches and other devices.




Indicates the outcome of an operation (e.g. a lid opens).

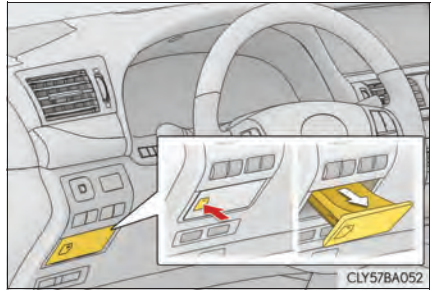

Indicates the component or position being explained.




Means "Do not", "Do not do this", or "Do not let this happen".

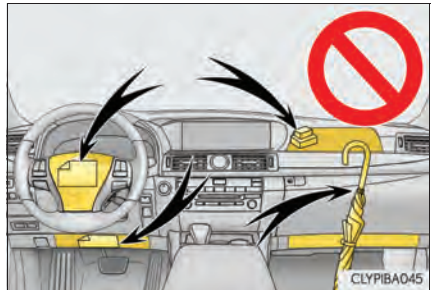

How to search


■ Searching by name

- Alphabetical index P. 898

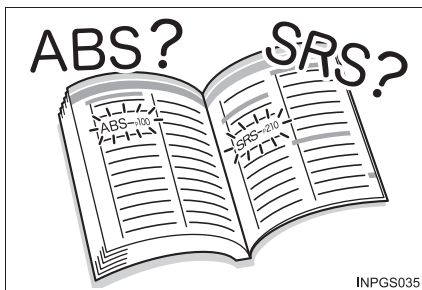

■ Searching by installation position

- Pictorial index P. 16

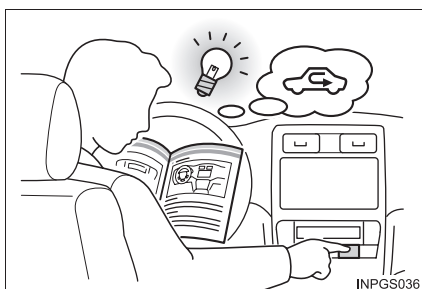


■ Searching by symptom or sound

- What to do if...
(Troubleshooting) P. 892




■ Searching by title

- Table of contents P. 2

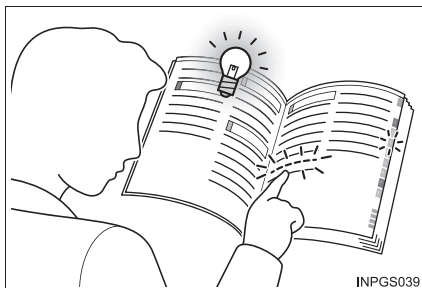

Pictorial index

Exterior

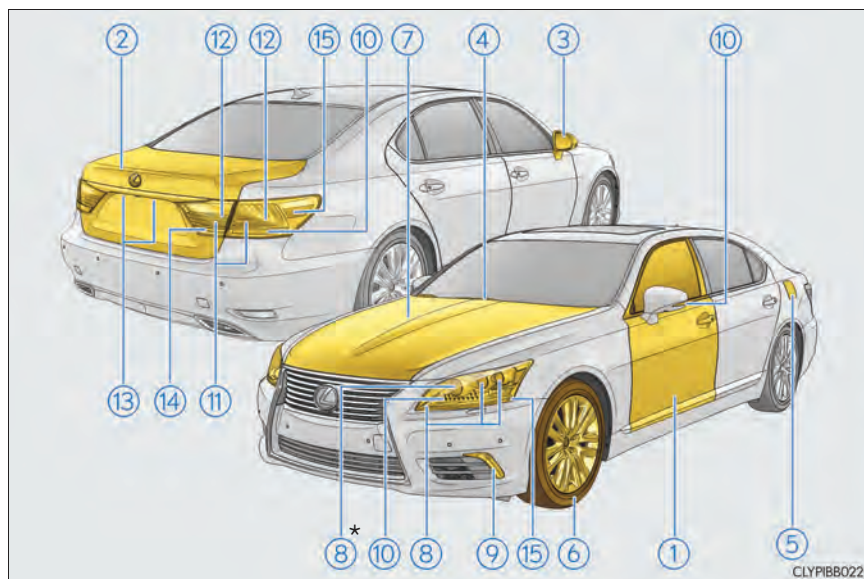

- ① **Doors** P.146
 Locking/unlocking..... P.129, 142
 Opening/closing the door glasses P.194
 Locking/unlocking by using the mechanical key P. 826
 Warning lights/warning messages P. 802, 809
- ② **Trunk** P.150
 Opening from inside the cabin..... P.150
 Opening from outside P.129, 142
 Opening by using the mechanical key P. 827
 Warning lights/warning messages P. 802, 809
- ③ **Outside rear view mirrors**..... P.190
 Adjusting the mirror angle..... P.190
 Folding the mirrors P.191
 Driving position memory P.177
 Defogging the mirrors P. 425

④	Windshield wipers	P. 248
	Precautions against winter season	P. 351
	To prevent freezing (windshield wiper de-icer)*	P. 426
	Precautions against car wash	P. 726
⑤	Fuel filler door	P. 253
	Refueling method	P. 253
	Fuel type/fuel tank capacity	P. 842
⑥	Tires	P. 760
	Tire size/inflation pressure	P. 848
	Winter tires/tire chain	P. 351
	Checking/rotation/tire pressure warning system	P. 760
	Coping with flat tires	P. 812
⑦	Hood	P. 742
	Opening	P. 742
	Engine compartment cover	P. 746
	Engine oil	P. 843
	Coping with overheat	P. 832
	Warning messages	P. 809


Light bulbs of the exterior lights for driving

(Replacing method: P. 787)

⑧	Headlights/parking lights/daytime running lights	P. 238
⑨	Fog lights	P. 247
⑩	Turn signal lights	P. 231
⑪	Tail lights	P. 238
⑫	Stop lights	
	Hill-start assist control	P. 315
⑬	License plate lights	P. 238
⑭	Back-up lights	
	Shifting the shift lever to R	P. 227
⑮	Side marker lights	P. 238

*: If equipped

Instrument panel

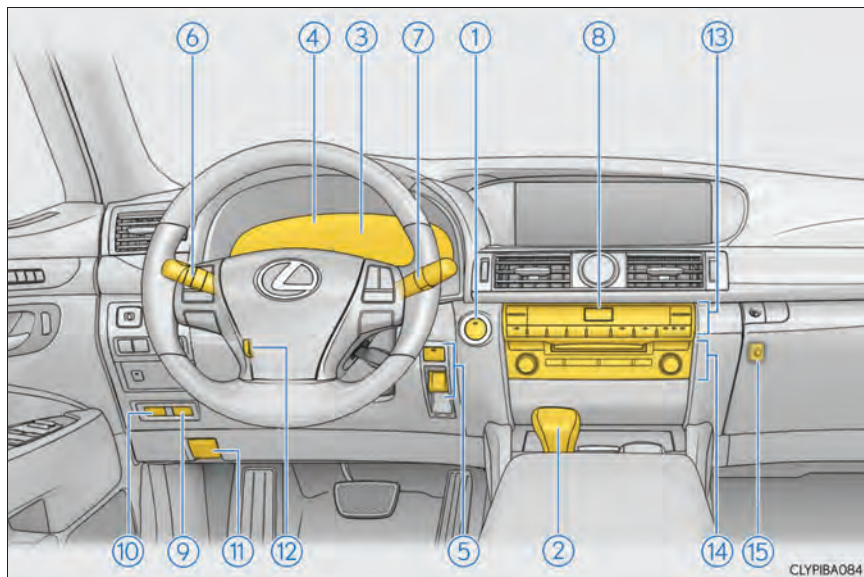


CLYPIBA084


- ① **Power switch** P. 220
 - Starting the hybrid system/changing the modes. P. 220
 - Emergency stop of the hybrid system P. 791
 - When the hybrid system will not start P. 821
 - Warning messages P. 809
- ② **Shift lever** P. 227
 - Changing the shift position P. 227
 - Precautions against towing P. 792
 - When the shift lever does not move. P. 823
- ③ **Meters** P. 101
 - Reading the meters/adjusting the instrument panel light P. 101
 - Warning lights/indicator lights P. 96
 - When the warning lights come on P. 799

④	Multi-information display	P. 107
	Display	P. 107
	Energy monitor	P. 114
	When the warning messages are displayed	P. 809
⑤	Parking brake switches	P. 232
	Applying/releasing	P. 232
	Precautions against winter season	P. 352
	Warning buzzer/message	P. 809
⑥	Turn signal lever	P. 231
	Headlight switch	P. 238
	Headlights/parking lights/tail lights/daytime running lights	P. 238
	Fog lights	P. 247
⑦	Windshield wiper and washer switch	P. 248
	Usage	P. 248
	Adding washer fluid	P. 755
	Warning messages	P. 809
⑧	Emergency flasher switch	P. 790
⑨	Trunk opener	P. 150
⑩	Fuel filler door opener	P. 255
⑪	Hood lock release lever	P. 742
⑫	Tilt and telescopic steering control switch	P. 187
	Adjustment	P. 187
	Driving position memory	P. 177
⑬	Air conditioning system	P. 404
	Usage	P. 404
	Rear window defogger	P. 425
⑭	Audio system	P. 427
	Audio system	P. 427
	Hands-free system	P. 601
⑮	Trunk opener main switch	P. 151

Instrument panel switches

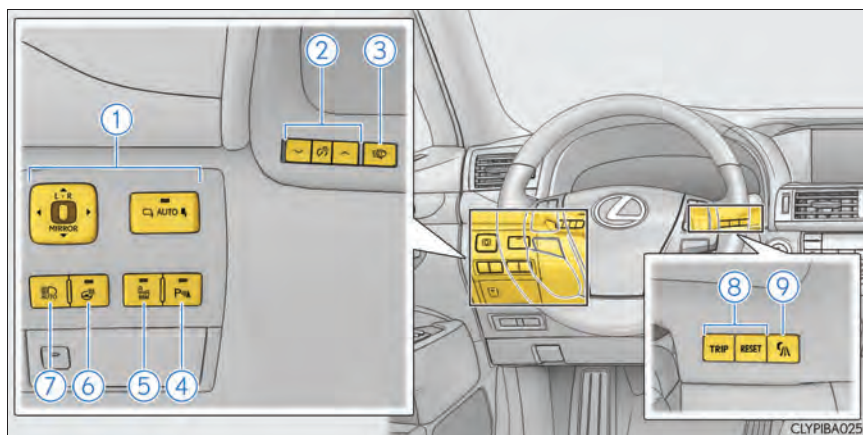


- ① Outside rear view mirror switches P.190
- ② Instrument panel light control switches P.103
- ③ Headlight cleaner switch P.252
- ④ Intuitive parking assist switch P.287
- ⑤ BSM (Blind Spot Monitor) main switch* P.334
- ⑥ Heated steering wheel switch P.692
- ⑦ Automatic High Beam switch P.242
- ⑧ Odometer/trip meter and trip meter reset switches P.103
- ⑨ Lexus night view switch* P.344

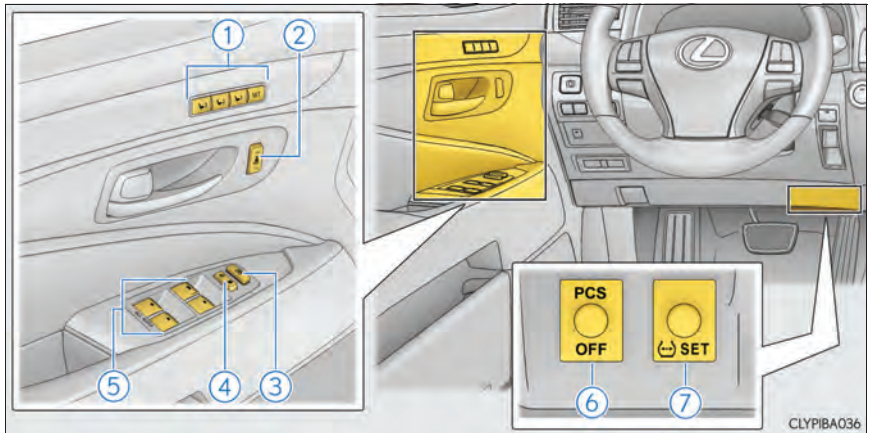


- ① Driving position memory switches P.177
- ② Shoulder anchor control switches P. 39
- ③ Window lock switch P.194
- ④ Door lock switches P.146
- ⑤ Power window switches P.194
- ⑥ Pre-collision braking off switch* P. 324
- ⑦ Tire pressure warning reset switch..... P. 762

*: If equipped

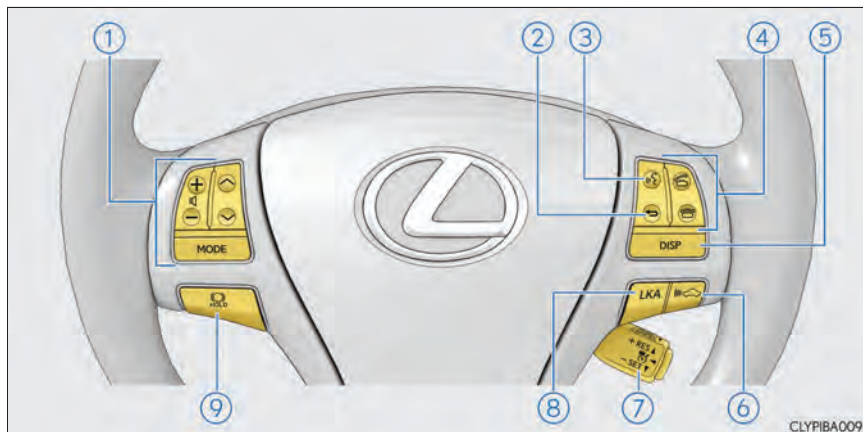

CLYPIBA009

- ① Audio remote control switches P. 534
- ② Back switch ^{*1} P. 391
- ③ Talk switch ^{*1} P. 391
- ④ Telephone switches..... P. 401, 601
- ⑤ "DISP" button..... P. 108
- ⑥ Vehicle-to-vehicle distance button ^{*2} P. 264
- ⑦ Cruise control switch
 - Cruise control ^{*2} P. 257
 - Dynamic radar cruise control with full-speed range ^{*2} P. 261
- ⑧ LKA (Lane-Keeping Assist) switch ^{*2} P. 279
- ⑨ Brake hold switch..... P. 235

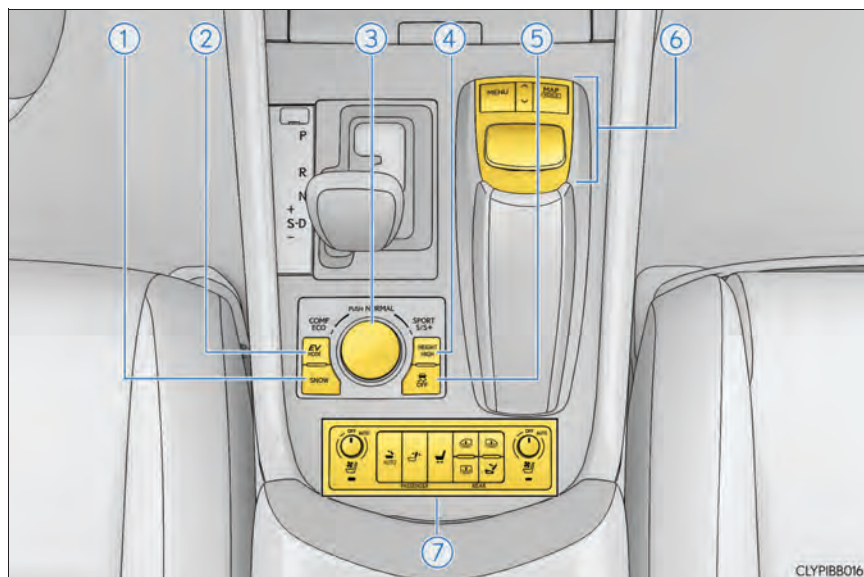


- ① Snow mode switch P. 229
- ② EV drive mode switch P. 225
- ③ Driving mode select switch. P. 309
- ④ Vehicle height adjustment switch P. 313
- ⑤ VSC (Vehicle Stability Control) OFF switch. P. 317
- ⑥ Remote Touch P. 358
- ⑦ **Seat and interior feature switches**^{*3}
 - Rear sunshade switch. P. 702
 - Rear door sunshade switches. P. 705
 - Front climate control seat switches P. 694
 - Rear seat return switch P. 167
 - Front passenger's power seat switches^{*2} P. 158

^{*1}: Refer to "Navigation System Owner's Manual".

^{*2}: If equipped


^{*3}: Location of the switches varies according to the vehicle grade level.

Front interior

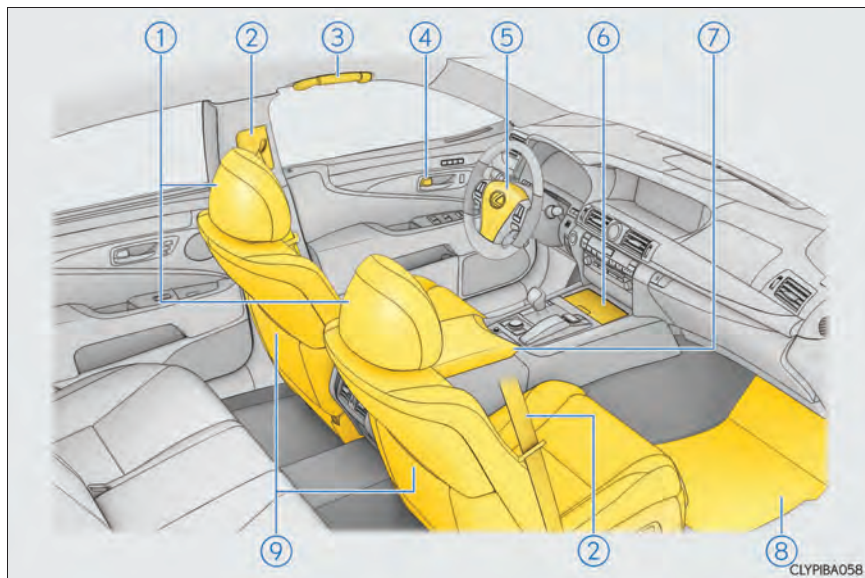

CLYPIBA058


- ① Head restraints P.184
- ② Seat belts P.38
- ③ Assist grips..... P.709
- ④ Inside lock buttons.....P.146
- ⑤ SRS airbags.....P.44
- ⑥ Cup holders..... P.673
 - Power outlet*P.688
 - Cigarette lighter*P.686
- ⑦ Console box P.675
 - Power outlet.....P.688
 - AUX portP.528
 - USB port P.508, 518
- ⑧ Floor mats.....P.34
- ⑨ Front seatsP.157

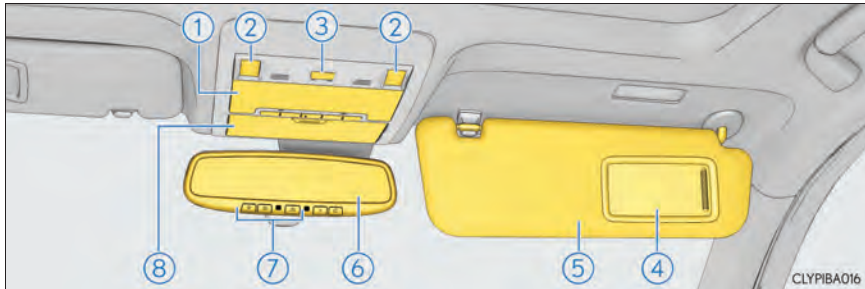

① Interior light	P. 666
Personal lights	P. 667
② Moon roof switches	P. 197
③ "SOS" button*	P. 716
④ Vanity mirrors	P. 682
⑤ Sun visors	P. 682
⑥ Inside rear view mirror	P. 188
⑦ Garage door opener switches	P. 710
⑧ Auxiliary box	P. 677

*: If equipped

Rear interior (5-seat models)

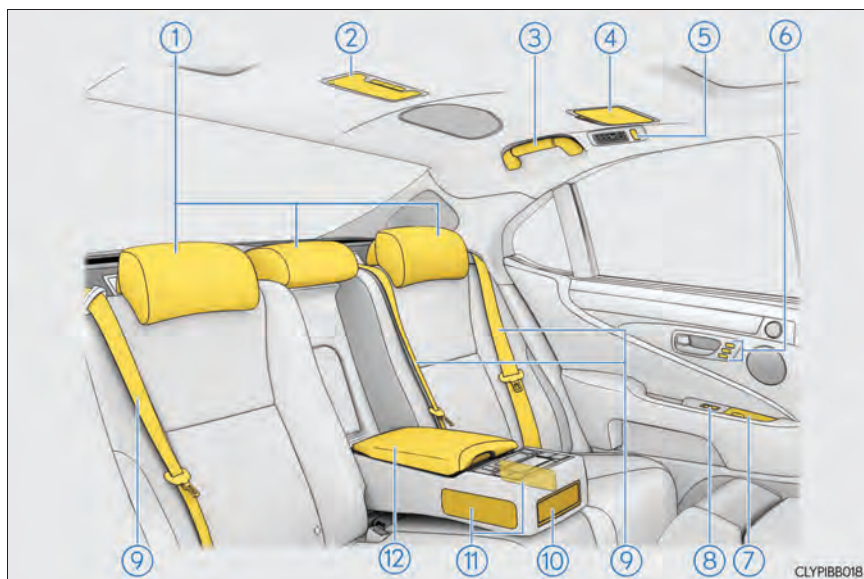


- ① Head restraints P.184
- ② Interior light P.666
- Personal lights P.667
- ③ Assist grips..... P.709
- ④ Vanity mirrors..... P.682
- ⑤ Coat hooks P.708
- ⑥ Seat position memory switches P.182

⑦	Auxiliary boxes*	P. 677
	Ashtrays*	P. 685
⑧	Power window switches	P. 194
⑨	Seat belts	P. 38
⑩	Cup holders.	P. 673
⑪	Pelvic support seat switches*	P. 169
	Rear seat relaxation system/pelvic support seat switches*	P. 169, 171
⑫	Auxiliary box.	P. 677
	Rear seat entertainment system controller*	P. 539
	Headphone jacks*	P. 544

*: If equipped

Rear interior (4-seat models)

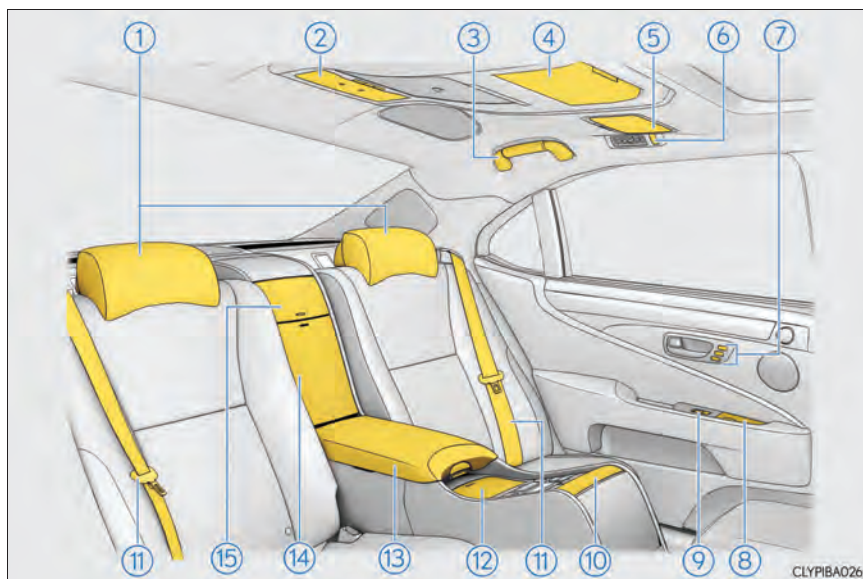


CLYPIBA026

- ① Head restraints P.184
- ② Interior light P.666
- Personal lights P.667
- ③ Assist grips..... P.709
- ④ Rear seat entertainment system P.537
- ⑤ Vanity mirrors..... P.682
- ⑥ Coat hooks P.708
- ⑦ Seat position memory switches P.182


⑧	Auxiliary boxes*	P. 677
	Ashtrays*	P. 685
⑨	Power window switches	P. 194
⑩	Retractable table	P. 700
⑪	Seat belts	P. 38
⑫	Cup holders	P. 673
⑬	Rear seat console	
	Rear seat relaxation system/pelvic support seat controller	P. 169, 171
	Rear seat entertainment system controller	P. 539
	Cigarette lighter*	P. 686
	Power outlet*	P. 688
	A/V input port	P. 596
	Auxiliary box	P. 677
⑭	Auxiliary box	P. 677
⑮	BD/DVD player	
	Disc slot	P. 541
	SD card slot	P. 542
	Headphone jacks	P. 544

*: If equipped

Rear interior switches

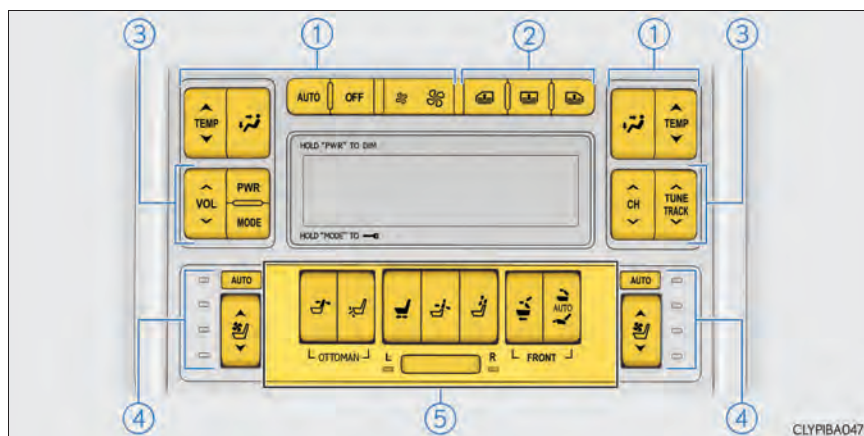

- ① Rear air conditioning switches P. 418
- ② Rear sunshade switch P. 702
 Rear door sunshade switches P. 705
- ③ Rear audio switches P. 531
- ④ Rear climate control seat switches P. 695
- ⑤ Power rear seat switches ^{*2} P. 164
 Front passenger's seat control switches ^{*1,2} P. 159, 168
 Pelvic support seat switches ^{*2} P. 169

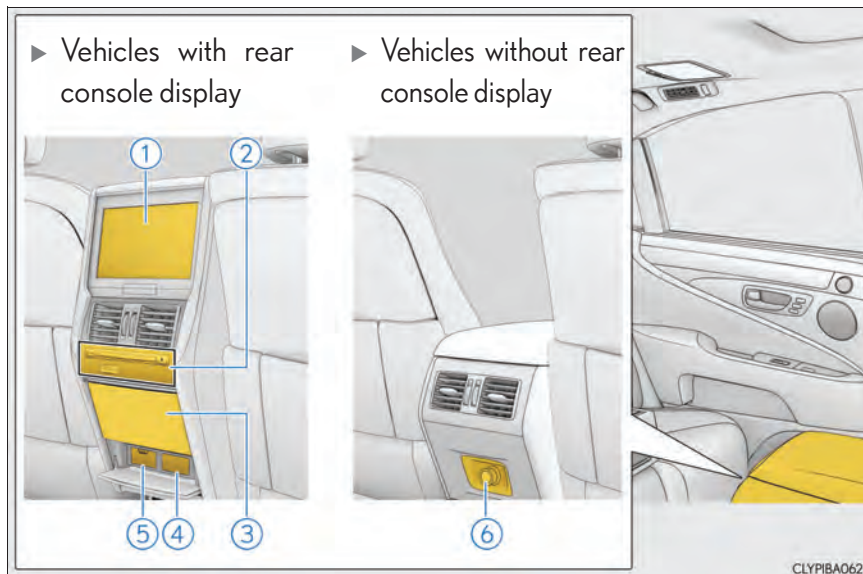

- ① Rear seat entertainment system P.537
- ② BD/DVD player
 - Disc slot P.541
 - SD card slot P.542
- ③ Auxiliary box P.677
- ④ Power outlet P.688
- ⑤ A/V input port P.596
- ⑥ Cigarette lighter*¹ P.686
- Power outlet*¹ P.688

*¹: If equipped

*²: Location of the switches varies according to the vehicle grade level.

For safety and security

1


1-1. For safe use	
Before driving.....	34
For safety drive.....	36
Seat belts	38
SRS airbags	44
Front passenger occupant classification system.....	57
Safety information for children	63
Child restraint systems	64
Installing child restraints.....	68
Exhaust gas precautions.....	77
1-2. Hybrid system	
Hybrid system features.....	78
Hybrid system precautions	83
1-3. Theft deterrent system	
Immobilizer system	90
Alarm	92

Before driving

Floor mat


Use only floor mats designed specifically for vehicles of the same model and model year as your vehicle. Fix them securely in place onto the carpet.

- 1 Insert the retaining hooks (clips) into the floor mat eyelets.

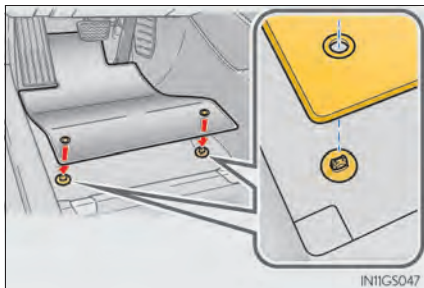

- 2 Turn the upper knob of each retaining hook (clip) to secure the floor mats in place.

*: Always align the $\triangle$ marks.

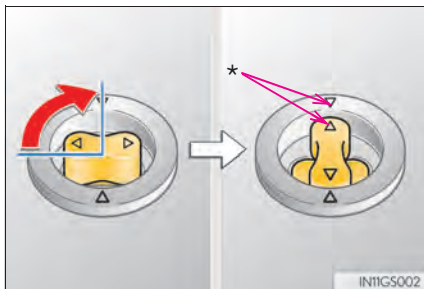

The shape of the retaining hooks (clips) may differ from that shown in the illustration.

⚠ CAUTION

Observe the following precautions.

Failure to do so may cause the driver's floor mat to slip, possibly interfering with the pedals while driving. An unexpectedly high speed may result or it may become difficult to stop the vehicle, leading to an accident, or leading to death or a serious injury.

■ When installing the driver's floor mat

- Do not use floor mats designed for other models or different model year vehicles, even if they are Lexus Genuine floor mats.
- Only use floor mats designed for the driver's seat.
- Always install the floor mat securely using the retaining hooks (clips) provided.
- Do not use two or more floor mats on top of each other.
- Do not place the floor mat bottom-side up or upside-down.

■ Before driving

- Check that the floor mat is securely fixed in the correct place with all the provided retaining hooks (clips). Be especially careful to perform this check after cleaning the floor.
- With the hybrid system stopped and the shift lever in P, fully depress each pedal to the floor to make sure it does not interfere with the floor mat.




For safety drive

For safe driving, adjust the seat and mirror to an appropriate position before driving.

Correct driving posture

- ① Adjust the angle of the seatback so that you are sitting straight up and so that you do not have to lean forward to steer. (→P. 157)
- ② Adjust the seat so that you can depress the pedals fully and so that your arms bend slightly at the elbow when gripping the steering wheel. (→P. 157)
- ③ Lock the head restraint in place with the center of the head restraint closest to the top of your ears. (→P. 184)
- ④ Wear the seat belt correctly. (→P. 38)

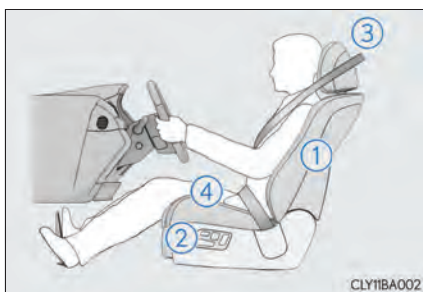

Correct use of the seat belts

Make sure that all occupants are wearing their seat belts before driving the vehicle. (→P. 38)

Use a child restraint system appropriate for the child until the child becomes large enough to properly wear the vehicle's seat belt. (→P. 64)

Adjusting the mirrors

Make sure that you can see backward clearly by adjusting the inside and outside rear view mirrors properly. (→P. 188, 190)

CAUTION

Observe the following precautions.

Failure to do so may result in death or serious injury.

- Do not adjust the position of the driver's seat while driving.
Doing so could cause the driver to lose control of the vehicle.
- Do not place a cushion between the driver or passenger and the seatback.
A cushion may prevent correct posture from being achieved, and reduce the effectiveness of the seat belt and head restraint.
- Do not place anything under the front seats.
Objects placed under the front seats may become jammed in the seat tracks and stop the seat from locking in place. This may lead to an accident and the adjustment mechanism may also be damaged.
- When driving over long distances, take regular breaks before you start to feel tired.
Also, if you feel tired or sleepy while driving, do not force yourself to continue driving and take a break immediately.

Seat belts

Make sure that all occupants are wearing their seat belts before driving the vehicle.

Correct use of the seat belts


- Extend the shoulder belt so that it comes fully over the shoulder, but does not come into contact with the neck or slide off the shoulder.
- Position the lap belt as low as possible over the hips.
- Adjust the position of the seat-back. Sit up straight and well back in the seat.
- Do not twist the seat belt.



Fastening and releasing the seat belt

- ① To fasten the seat belt, push the plate into the buckle until a click sound is heard.
- ② To release the seat belt, press the release button.

If the seat belt cannot be pulled out of the retractor, firmly pull the belt and release it.

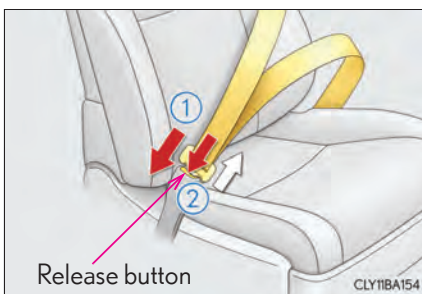

Adjusting the seat belt shoulder anchor height (front seats)

- ① Moves the seat belt shoulder anchor up
- ② Moves the seat belt shoulder anchor down



Seat belt comfort guide (outer rear seats)

For children or smaller-than-average people, slide the seat belt comfort guide forward so that the shoulder belt does not sit close to the person's neck.




Seat belt pretensioners (front and outer rear seats)

The pretensioners help the seat belts to quickly restrain the occupants by retracting the seat belts when the vehicle is subjected to certain types of severe frontal collision.

The front seat belt pretensioners also activate when the vehicle is subjected to certain types of severe side collision.

The pretensioners do not activate in the event of a minor frontal impact, a minor side impact, a rear impact or a vehicle rollover.

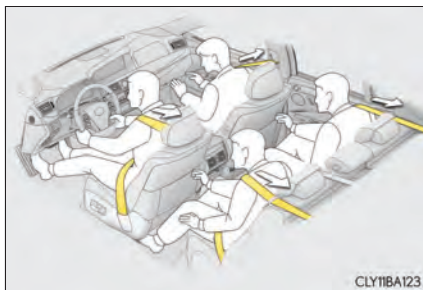

Pre-collision seat belts (front seats of vehicles with pre-collision system)

If the system determines that a collision is unavoidable, the front seat belts will retract before the collision. (→P. 322)

■ Child seat belt usage

The seat belts of your vehicle were principally designed for persons of adult size.

- Use a child restraint system appropriate for the child, until the child becomes large enough to properly wear the vehicle's seat belt. (→P. 64)
- When the child becomes large enough to properly wear the vehicle's seat belt, follow the instructions regarding seat belt usage. (→P. 38)

■ Automatic adjustment of the seat belt shoulder anchor height (front seats)

A desired seat belt shoulder anchor height can be entered to memory and recalled automatically by the driving position memory and seat position memory. (→P. 177)

■ Emergency locking retractor (ELR)

The retractor will lock the belt during a sudden stop or on impact. It may also lock if you lean forward too quickly. A slow, easy motion will allow the belt to extend so that you can move around fully.

■ Automatic locking retractor (ALR)

When a passenger's shoulder belt is completely extended and then retracted even slightly, the belt is locked in that position and cannot be extended. This feature is used to hold the child restraint system (CRS) firmly. To free the belt again, fully retract the belt and then pull the belt out once more. (→P. 68)

■ Replacing the belt after the pretensioner has been activated

If the vehicle is involved in multiple collisions, the pretensioner will activate for the first collision, but will not activate for the second or subsequent collisions.

■ Seat belt extender

If your seat belts cannot be fastened securely because they are not long enough, a personalized seat belt extender is available from your Lexus dealer free of charge.



⚠ CAUTION

Observe the following precautions to reduce the risk of injury in the event of sudden braking, sudden swerving or an accident.

Failure to do so may cause death or serious injury.

■ Wearing a seat belt


- Ensure that all passengers wear a seat belt.
- Always wear a seat belt properly.
- Each seat belt should be used by one person only. Do not use a seat belt for more than one person at once, including children.
- Lexus recommends that children be seated in the rear seat and always use a seat belt and/or an appropriate child restraint system.
- To achieve a proper seating position, do not recline the seat more than necessary. The seat belt is most effective when the occupants are sitting up straight and well back in the seats.
- Do not wear the shoulder belt under your arm.
- Always wear your seat belt low and snug across your hips.

■ Pregnant women

Obtain medical advice and wear the seat belt in the proper way. (→P. 38)

Women who are pregnant should position the lap belt as low as possible over the hips in the same manner as other occupants, extending the shoulder belt completely over the shoulder and avoiding belt contact with the rounding of the abdominal area.

If the seat belt is not worn properly, not only the pregnant woman, but also the fetus could suffer death or serious injury as a result of sudden braking or a collision.

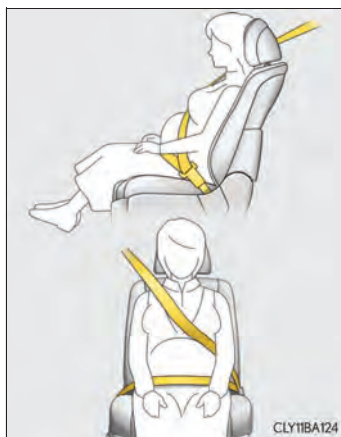**■ People suffering illness**

Obtain medical advice and wear the seat belt in the proper way. (→P. 38)

 CAUTION**■ When children are in the vehicle**

Do not allow children to play with the seat belt. If the seat belt becomes twisted around a child's neck, it may lead to choking or other serious injuries that could result in death.

If this occurs and the buckle cannot be unfastened, scissors should be used to cut the belt.

■ Seat belt pretensioners

- Do not place anything, such as a cushion, on the front passenger's seat. Doing so will disperse the passenger's weight, which prevents the sensor from detecting the passenger's weight properly. As a result, the seat belt pretensioner for the front passenger's seat may not activate in the event of a collision.

- If the pretensioner has activated, the SRS warning light will come on. In that case, the seat belt cannot be used again and must be replaced at your Lexus dealer.

■ Adjustable shoulder anchor

Always make sure the shoulder belt is positioned across the center of your shoulder. The belt should be kept away from your neck, but not falling off your shoulder. Failure to do so could reduce the amount of protection in an accident and cause death or serious injuries in the event of a sudden stop, sudden swerve or accident. (→P. 39)

■ Seat belt damage and wear

- Do not damage the seat belts by allowing the belt, plate, or buckle to be jammed in the door.

- Inspect the seat belt system periodically. Check for cuts, fraying, and loose parts. Do not use a damaged seat belt until it is replaced. Damaged seat belts cannot protect an occupant from death or serious injury.

- Ensure that the belt and plate are locked and the belt is not twisted. If the seat belt does not function correctly, immediately contact your Lexus dealer.

- Replace the seat assembly, including the belts, if your vehicle has been involved in a serious accident, even if there is no obvious damage.

- Do not attempt to install, remove, modify, disassemble or dispose of the seat belts. Have any necessary repairs carried out by your Lexus dealer. Inappropriate handling may lead to incorrect operation.

**CAUTION****■ Using a seat belt extender**

- Do not wear the seat belt extender if you can fasten the seat belt without the extender.
- Do not use the seat belt extender when installing a child restraint system because the belt will not securely hold the child restraint system, increasing the risk of death or serious injury in the event of an accident.
- The personalized extender may not be safe on another vehicle, when used by another person, or at a different seating position other than the one originally intended.


**NOTICE****■ When using a seat belt extender**

When releasing the seat belt, press on the buckle release button on the extender, not on the seat belt.

This helps prevent damage to the vehicle interior and the extender itself.

SRS airbags

The SRS airbags inflate when the vehicle is subjected to certain types of severe impacts that may cause significant injury to the occupants. They work together with the seat belts to help reduce the risk of death or serious injury.

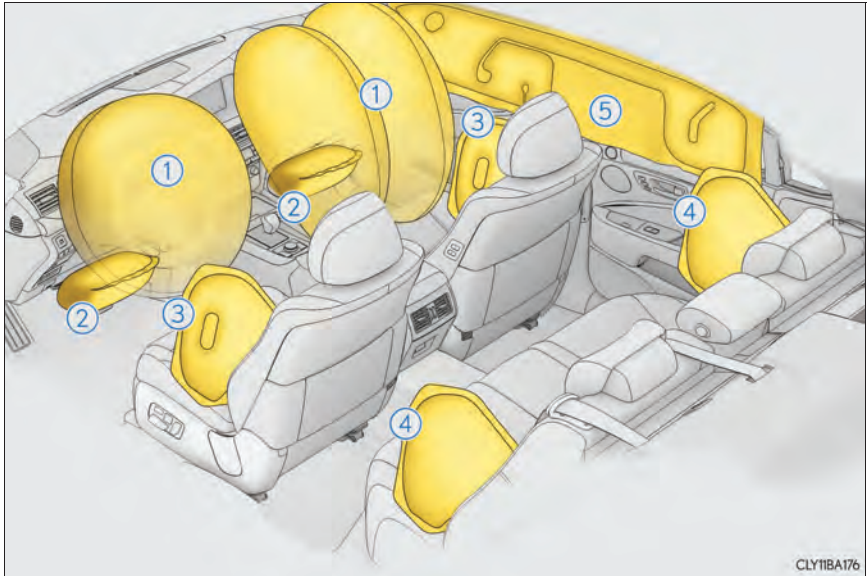


◆ SRS front airbags

- ① SRS driver airbag/front passenger airbag
Can help protect the head and chest of the driver and front passenger from impact with interior components
- ② SRS knee airbags
Can help provide driver and front passenger protection


◆ SRS side and curtain shield airbags

- ③ SRS front side airbags
Can help protect the torso of the front seat occupants
- ④ SRS rear side airbags
Can help protect the torso of occupants in the rear outer seats
- ⑤ SRS curtain shield airbags
Can help protect primarily the head of occupants in the outer seats

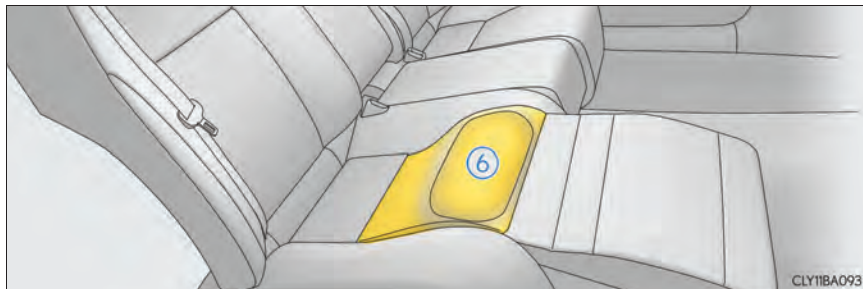

- ⑥ SRS seat cushion airbag (relaxation seat)
Can help restrain the relaxation seat occupant

SRS airbag system components

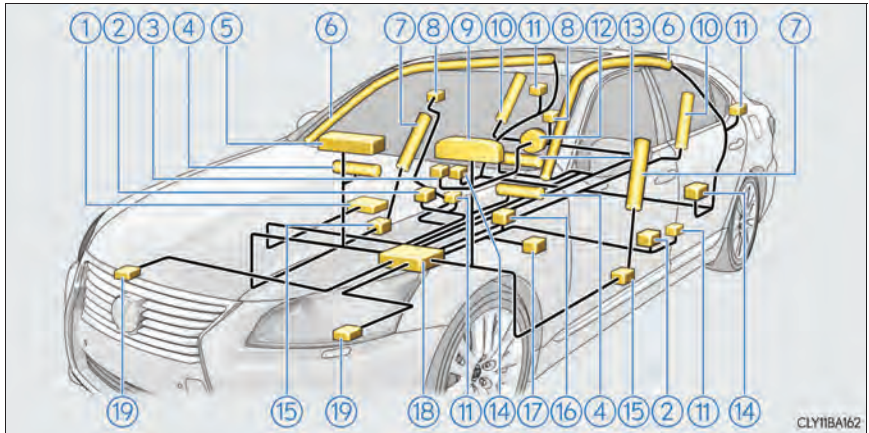

- | | |
|--|--|
| ① Front passenger occupant classification system (ECU and sensors) | ⑩ Rear side airbags |
| ② Side impact sensors (front) | ⑪ Seat belt pretensioners and force limiters |
| ③ "AIR BAG ON" and "AIR BAG OFF" indicator lights | ⑫ Driver airbag |
| ④ Knee airbags | ⑬ Seat cushion airbag (if equipped) |
| ⑤ Front passenger airbag | ⑭ Side impact sensors (rear) |
| ⑥ Curtain shield airbags | ⑮ Side impact sensors (front door) |
| ⑦ Front side airbags | ⑯ Driver's seat belt buckle switch |
| ⑧ Active head restraints | ⑰ Driver's seat position sensor |
| ⑨ SRS warning light | ⑱ Airbag sensor assembly |
| | ⑲ Front impact sensors |

Your vehicle is equipped with ADVANCED AIRBAGS designed based on the US motor vehicle safety standards (FMVSS208). The airbag sensor assembly (ECU) controls airbag deployment based on information obtained from the sensors etc. shown in the system components diagram above. This information includes crash severity and occupant information. As the airbags deploy, a chemical reaction in the inflators quickly fills the airbags with non-toxic gas to help restrain the motion of the occupants.

CAUTION

■ SRS airbag precautions

Observe the following precautions regarding the SRS airbags.

Failure to do so may cause death or serious injury.

- The driver and all passengers in the vehicle must wear their seat belts properly. The SRS airbags are supplemental devices to be used with the seat belts.
- The SRS driver airbag deploys with considerable force, and can cause death or serious injury especially if the driver is very close to the airbag. The National Highway Traffic Safety Administration (NHTSA) advises:



Since the risk zone for the driver's airbag is the first 2 - 3 in. (50 - 75 mm) of inflation, placing yourself 10 in. (250 mm) from your driver airbag provides you with a clear margin of safety. This distance is measured from the center of the steering wheel to your breastbone. If you sit less than 10 in. (250 mm) away now, you can change your driving position in several ways:

- Move your seat to the rear as far as you can while still reaching the pedals comfortably.
- Slightly recline the back of the seat.
Although vehicle designs vary, many drivers can achieve the 10 in. (250 mm) distance, even with the driver seat all the way forward, simply by reclining the back of the seat somewhat. If reclining the back of your seat makes it hard to see the road, raise yourself by using a firm, non-slippery cushion, or raise the seat if your vehicle has that feature.
- If your steering wheel is adjustable, tilt it downward. This points the airbag toward your chest instead of your head and neck.

The seat should be adjusted as recommended by NHTSA above, while still maintaining control of the foot pedals, steering wheel, and your view of the instrument panel controls.

⚠ CAUTION**■ SRS airbag precautions**


- If the seat belt extender has been connected to the front seat belt buckle but the seat belt extender has not also been fastened to the latch plate of the seat belt, the SRS front airbags will judge that the driver and front passenger are wearing the seat belt even though the seat belt has not been connected. In this case, the SRS front airbags may not activate correctly in a collision, resulting in death or serious injury in the event of a collision. Be sure to wear the seat belt with the seat belt extender.
- The SRS front passenger airbag also deploys with considerable force, and can cause death or serious injury especially if the front passenger is very close to the airbag. The front passenger seat should be as far from the airbag as possible with the seatback adjusted, so the front passenger sits upright.
- Improperly seated and/or restrained infants and children can be killed or seriously injured by a deploying airbag. An infant or child who is too small to use a seat belt should be properly secured using a child restraint system. Lexus strongly recommends that all infants and children be placed in the rear seats of the vehicle and properly restrained. The rear seats are safer for infants and children than the front passenger seat. (→P. 64)
- Do not sit on the edge of the seat or lean against the dashboard.



⚠ CAUTION

■ SRS airbag precautions

- Do not allow a child to stand in front of the SRS front passenger airbag unit or sit on the knees of a front passenger.
- Do not allow the front seat occupants to hold items on their knees.
- Do not lean against the door, the roof side rail or the front, side and rear pillars.
- Do not allow anyone to kneel on the passenger seats toward the door or put their head or hands outside the vehicle.
- Do not attach anything to or lean anything against areas such as the dashboard, steering wheel pad and lower portion of the instrument panel.
These items can become projectiles when the SRS driver, front passenger and knee airbags deploy.
- Do not attach anything to areas such as a door, windshield glass, side door glass, front and rear pillar, roof side rail and assist grip.



 CAUTION**■ SRS airbag precautions**

- Do not hang coat hangers or hard objects on the coat hooks. All of these items could become projectiles and may cause death or serious injury, should the SRS curtain shield airbags deploy.
- If a vinyl cover is put on the area where the SRS knee airbag will deploy, be sure to remove it.
- Do not use seat accessories which cover the parts where the SRS side airbags and seat cushion airbag inflate as they may interfere with inflation of the SRS airbags. Such accessories may prevent the side airbags and seat cushion airbag from activating correctly, disable the system or cause the side airbags and seat cushion airbag to inflate accidentally, resulting in death or serious injury.
- Do not strike or apply significant levels of force to the area of the SRS airbag components. Doing so can cause the SRS airbags to malfunction.
- Do not touch any of the component parts immediately after the SRS airbags have deployed (inflated) as they may be hot.
- If breathing becomes difficult after the SRS airbags have deployed, open a door or window to allow fresh air in, or leave the vehicle if it is safe to do so. Wash off any residue as soon as possible to prevent skin irritation.
- If the areas where the SRS airbags are stored, such as the steering wheel pad and front and rear pillar garnishes are damaged or cracked, have them replaced by your Lexus dealer.
- Do not place anything, such as a cushion, on the front passenger's seat. Doing so will disperse the passenger's weight, which prevents the sensor from detecting the passenger's weight properly. As a result, the SRS front passenger airbag may not deploy in the event of a collision.

 CAUTION**■ Modification and disposal of SRS airbag system components**

Do not dispose of your vehicle or perform any of the following modifications without consulting your Lexus dealer. The SRS airbags may malfunction or deploy (inflate) accidentally, causing death or serious injury.

- Installation, removal, disassembly and repair of the SRS airbags
- Repairs, modifications, removal or replacement of the steering wheel, instrument panel, dashboard, seats or seat upholstery, front, side and rear pillars or roof side rails
- Repairs or modifications of the front fender, front bumper, or side of the occupant compartment
- Installation of a grille guard (bull bars, kangaroo bar, etc.), snow plows, winches
- Modifications to the vehicle's suspension system
- Installation of electronic devices such as mobile two-way radios and CD players
- Modifications to your vehicle for a person with a physical disability

■ If the SRS airbags deploy (inflate)

- Bruising and slight abrasions may result from contact with a deploying (inflating) SRS airbag.
- A loud noise and white powder will be emitted.
- Parts of the airbag module (steering wheel hub, airbag cover and inflator) as well as the seats, parts of the front and rear pillars, and roof side rails may be hot for several minutes. The airbag itself may also be hot.
- The windshield may crack.
- For Safety Connect subscribers, if the SRS airbags deploy or in the event of a severe rear-end collision, the system is designed to send an emergency call to the response center, notifying them of the vehicle's location (without needing to push the "SOS" button) and an agent will attempt to speak with the occupants to ascertain the level of emergency and assistance required. If the occupants are unable to communicate, the agent automatically treats the call as an emergency and helps to dispatch the necessary emergency services. (→P. 716)

■ SRS airbag deployment conditions (SRS front airbags and SRS seat cushion airbag)

- The SRS front airbags and SRS seat cushion airbag will deploy in the event of an impact that exceeds the set threshold level (the level of force corresponding to an approximately 12 - 18 mph [20 - 30 km/h] frontal collision with a fixed wall that does not move or deform).

However, this threshold velocity will be considerably higher in the following situations:

- If the vehicle strikes an object, such as a parked vehicle or sign pole, which can move or deform on impact
- If the vehicle is involved in an underride collision, such as a collision in which the front of the vehicle "underrides", or goes under, the bed of a truck
- Depending on the type of collision, it is possible that only the seat belt pretensioners will activate.
- The SRS front airbags for the front passenger will not activate if there is no passenger sitting in the front passenger seat. However, the SRS front airbags for the front passenger may deploy if luggage is put in the seat, even if the seat is unoccupied. (→P. 57)


■ SRS airbag deployment conditions (SRS side and curtain shield airbags)

- The SRS side and curtain shield airbags will deploy in the event of an impact that exceeds the set threshold level (the level of force corresponding to the impact force produced by an approximately 3300 lb. [1500 kg] vehicle colliding with the vehicle cabin from a direction perpendicular to the vehicle orientation at an approximate speed of 12 - 18 mph [20 - 30 km/h]).
- The SRS curtain shield airbags may also deploy in the event of a severe frontal collision.

■ Conditions under which the SRS airbags may deploy (inflate), other than a collision (SRS front airbags, SRS curtain shield airbag and SRS seat cushion airbag)

The SRS front airbags, SRS curtain shield airbag and SRS seat cushion airbag may also deploy if a serious impact occurs to the underside of your vehicle. Some examples are shown in the illustration.


- Hitting a curb, edge of pavement or hard surface
- Falling into or jumping over a deep hole
- Landing hard or falling



■ Types of collisions that may not deploy the SRS airbags (SRS front airbags and SRS seat cushion airbag)

The SRS front airbags and SRS seat cushion airbag do not generally inflate if the vehicle is involved in a side or rear collision, if it rolls over, or if it is involved in a low-speed frontal collision. But, whenever a collision of any type causes sufficient forward deceleration of the vehicle, deployment of the SRS front airbags and SRS seat cushion airbag may occur.

- Collision from the side
- Collision from the rear
- Vehicle rollover



■ Types of collisions that may not deploy the SRS airbags (SRS side and curtain shield airbags)


The SRS side and curtain shield airbags may not activate if the vehicle is subjected to a collision from the side at certain angles, or a collision to the side of the vehicle body other than the passenger compartment.

- Collision from the side to the vehicle body other than the passenger compartment
- Collision from the side at an angle




The SRS side airbags do not generally inflate if the vehicle is involved in a frontal or rear collision, if it rolls over, or if it is involved in a low-speed side collision.

- Collision from the front
- Collision from the rear
- Vehicle rollover



The SRS curtain shield airbags do not generally inflate if the vehicle is involved in a rear collision, if it rolls over, or if it is involved in a low-speed side or low-speed frontal collision.


- Collision from the rear
- Vehicle rollover




■ When to contact your Lexus dealer

In the following cases, the vehicle will require inspection and/or repair. Contact your Lexus dealer as soon as possible.


- Any of the SRS airbags have been inflated.
- The front of the vehicle is damaged or deformed, or was involved in an accident that was not severe enough to cause the SRS airbags to inflate.



- A portion of a door is damaged or deformed, or the vehicle was involved in an accident that was not severe enough to cause the SRS side and curtain shield airbags to inflate.




- The pad section of the steering wheel, dashboard near the front passenger airbag or lower portion of the instrument panel is scratched, cracked, or otherwise damaged.




- Relaxation seat: The seat cushion surface is scratched, cracked, or otherwise damaged.



- The surface of the seats with the side airbag is scratched, cracked, or otherwise damaged.




- The portion of the front pillars, rear pillars or roof side rail garnishes (padding) containing the curtain shield airbags inside is scratched, cracked, or otherwise damaged.



Front passenger occupant classification system

Your vehicle is equipped with a front passenger occupant classification system. This system detects the conditions of the front passenger seat and activates or deactivates the devices for the front passenger.

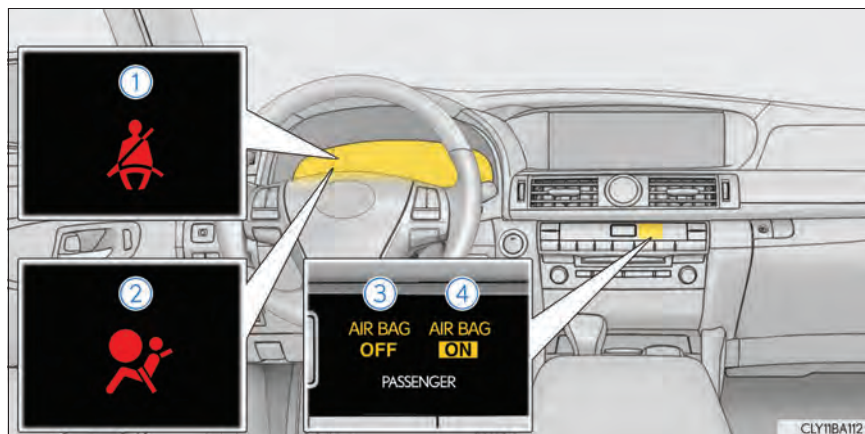

- ① Seat belt reminder light
- ② SRS warning light
- ③ "AIR BAG OFF" indicator light
- ④ "AIR BAG ON" indicator light

Condition and operation in the front passenger occupant classification system

■ Adult*1

Indicator/ warning light	"AIR BAG ON" and "AIR BAG OFF" indicator lights	"AIR BAG ON"
	SRS warning light	Off
	Front passenger's seat belt reminder light	Flashing*2
Devices	Front passenger airbag	Activated
	Side airbag on the right side passenger seats	
	Curtain shield airbag in the front passenger side	
	Front passenger knee airbag	
	Front passenger's seat belt pretensioner	
	Active head restraints	

■ Child*3 or child restraint system*4

Indicator/ warning light	"AIR BAG ON" and "AIR BAG OFF" indicator lights	"AIR BAG OFF"*5
	SRS warning light	Off
	Front passenger's seat belt reminder light	Flashing*2
Devices	Front passenger airbag	Deactivated
	Side airbag on the right side passenger seats	Activated
	Curtain shield airbag in the front passenger side	
	Front passenger knee airbag	Deactivated
	Front passenger's seat belt pretensioner	Activated
	Active head restraints	

■ Unoccupied

Indicator/ warning light	"AIR BAG ON" and "AIR BAG OFF" indicator lights	Not illuminated
	SRS warning light	Off
	Front passenger's seat belt reminder light	
Devices	Front passenger airbag	Deactivated
	Side airbag on the right side passenger seats	Activated
	Curtain shield airbag in the front passenger side	
	Front passenger knee airbag	Deactivated
	Front passenger's seat belt pretensioner	Deactivated or activated*6
	Active head restraints	Deactivated

■ There is a malfunction in the system

Indicator/ warning light	"AIR BAG ON" and "AIR BAG OFF" indicator lights	"AIR BAG OFF"
	SRS warning light	On
	Front passenger's seat belt reminder light	Off
Devices	Front passenger airbag	Deactivated
	Side airbag on the right side passenger seats	Activated
	Curtain shield airbag in the front passenger side	
	Front passenger knee airbag	Deactivated
	Front passenger's seat belt pretensioner	Activated
	Active head restraints	

- *1: The system judges a person of adult size as an adult. When a smaller adult sits in the front passenger seat, the system may recognize him/her as a child depending on his/her physique and posture.
- *2: In the event the front passenger does not wear a seat belt
- *3: When a larger child who has outgrown a child restraint system sits in the front passenger seat, the system may recognize him/her as an adult depending on his/her physique or posture.
- *4: Never install a rear-facing child restraint system on the front passenger seat. A forward-facing child restraint system should only be installed on the front passenger seat when it is unavoidable. (→P. 64)
- *5: In case the indicator light is not illuminated, consult this manual on how to install the child restraint system properly. (→P. 68)
- *6: Activated only in cases of side impact

 CAUTION**■ Front passenger occupant classification system precautions**

Observe the following precautions regarding the front passenger occupant classification system.

Failure to do so may cause death or serious injury.

- Wear the seat belt properly.
- Make sure the front passenger's seat belt plate has not been left inserted into the buckle before someone sits in the front passenger seat.
- Make sure the "AIR BAG OFF" indicator light is not illuminated when using the seat belt extender for the front passenger seat. If the "AIR BAG OFF" indicator light is illuminated, disconnect the extender tongue from the seat belt buckle, then reconnect the seat belt. Reconnect the seat belt extender after making sure the "AIR BAG ON" indicator light is illuminated. If you use the seat belt extender while the "AIR BAG OFF" indicator light is illuminated, the SRS airbags for the passenger may not activate correctly, which could cause death or serious injury in the event of a collision.
- Do not apply a heavy load to the front passenger seat or equipment (e.g. seat-back pockets or armrest).
- Do not put weight on the front passenger seat by putting your hands or feet on the front passenger seat seatback from the rear passenger seat.
- Do not let a rear passenger lift the front passenger seat with their feet or press on the seatback with their legs.
- Do not put objects under the front passenger seat.

 CAUTION**■ Front passenger occupant classification system precautions**

- Do not recline the front passenger seatback so far that it touches a rear seat. This may cause the “AIR BAG OFF” indicator light to be illuminated, which indicates that the passenger’s airbags will not deploy in the event of a severe accident. If the seatback touches the rear seat, return the seatback to a position where it does not touch the rear seat. Keep the front passenger seatback as upright as possible when the vehicle is moving. Reclining the seatback excessively may lessen the effectiveness of the seat belt system.
- If an adult sits in the front passenger seat, the “AIR BAG ON” indicator light is illuminated. If the “AIR BAG OFF” indicator is illuminated, ask the passenger to sit up straight, well back in the seat, feet on the floor, and with the seat belt worn correctly. If the “AIR BAG OFF” indicator still remains illuminated, either ask the passenger to move to the rear seat, or if that is not possible, move the front passenger seat fully rearward.
- When it is unavoidable to install a forward-facing child restraint system on the front passenger seat, install the child restraint system on the front passenger seat in the proper order. (→P. 68)
- Do not modify or remove the front seats.
- Do not kick the front passenger seat or subject it to severe impact. Otherwise, the SRS warning light may come on to indicate a malfunction of the detection system. In this case, contact your Lexus dealer immediately.
- Child restraint systems installed on the rear seat should not contact the front seatbacks.
- Do not use a seat accessory, such as a cushion or seat cover, that covers the seat cushion surface.
- Do not modify or replace the upholstery of the front seat.

Safety information for children

Observe the following precautions when children are in the vehicle.
Use a child restraint system appropriate for the child, until the child becomes large enough to properly wear the vehicle's seat belt.

- It is recommended that children sit in the rear seats to avoid accidental contact with the shift lever, wiper switch etc.
- Use the rear door child-protector lock or the window lock switch to avoid children opening the door while driving or operating the power window accidentally.
- Do not let small children operate equipment which may catch or pinch body parts, such as the power window, hood, trunk, seats etc.

CAUTION

Never leave children unattended in the vehicle, and never allow children to have or use the key.

Children may be able to start the vehicle or shift the vehicle into neutral. There is also a danger that children may injure themselves by playing with the cigarette lighter, the windows, the moon roof, or other features of the vehicle. In addition, heat build-up or extremely cold temperatures inside the vehicle can be fatal to children.

Child restraint systems

A child restraint system for a small child or baby must itself be properly restrained on the seat with the lap portion of the lap/shoulder belt.

The laws of all 50 states of the U.S.A. and Canada now require the use of child restraint systems.

Points to remember

Studies have shown that installing a child restraint on a rear seat is much safer than installing one on the front passenger seat.


- Choose a child restraint system that suits your vehicle and is appropriate to the age and size of the child.
- For installation details, follow the instructions provided with the child restraint system.

General installation instructions are provided in this manual. (→P. 68)

Types of child restraints

Child restraint systems are classified into the following 3 types according to the age and size of the child:

- ▶ Rear facing — Infant seat/convertible seat
- ▶ Forward facing — Convertible seat

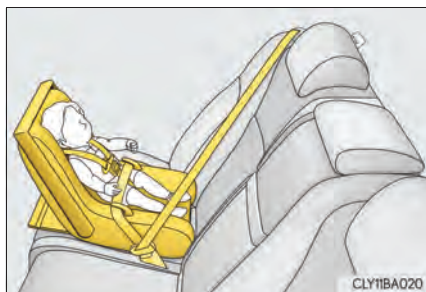

- ▶ Booster seat



■ Selecting an appropriate child restraint system

- Use a child restraint system appropriate for the child until the child becomes large enough to properly wear the vehicle's seat belt.
- If the child is too large for a child restraint system, sit the child on a rear seat and use the vehicle's seat belt. (→P. 38)

 CAUTION**■ Child restraint precautions**

- For effective protection in automobile accidents and sudden stops, a child must be properly restrained, using a seat belt or child restraint system depending on the age and size of the child. Holding a child in your arms is not a substitute for a child restraint system. In an accident, the child can be crushed against the windshield, or between you and the vehicle's interior.
- Lexus strongly urges the use of a proper child restraint system that conforms to the size of the child, installed on the rear seat. According to accident statistics, the child is safer when properly restrained in the rear seat than in the front seat.
- Never install a rear-facing child restraint system on the front passenger seat even if the "AIR BAG OFF" indicator light is illuminated.
In the event of an accident, the force of the rapid inflation of the front passenger airbag can cause death or serious injury to the child if the rear-facing child restraint system is installed on the front passenger seat.
- A forward-facing child restraint system may be installed on the front passenger seat only when it is unavoidable. A child restraint system that requires a top tether strap should not be used in the front passenger seat since there is no top tether strap anchor for the front passenger seat. Adjust the seatback as upright as possible and always move the seat as far back as possible even if the "AIR BAG OFF" indicator light is illuminated, because the front passenger airbag could inflate with considerable speed and force. Otherwise, the child may be killed or seriously injured.
- Do not use the seat belt extender when installing a child restraint system on the front or rear passenger seat. If installing a child restraint system with the seat belt extender connected to the seat belt, the seat belt will not securely hold the child restraint system, which could cause death or serious injury to the child or other passengers in the event of an accident.
- Do not allow the child to lean his/her head or any part of his/her body against the door or the area of the seat, front and rear pillars or roof side rails from which the SRS side airbags or SRS curtain shield airbags deploy even if the child is seated in the child restraint system. It is dangerous if the SRS side airbags and curtain shield airbags inflate, and the impact could cause death or serious injury to the child.
- Make sure you have complied with all installation instructions provided by the child restraint manufacturer and that the system is properly secured. If it is not secured properly, it may cause death or serious injury to the child in the event of a sudden stop or accident.

 CAUTION**■ When children are in the vehicle**

Do not allow children to play with the seat belt. If the seat belt becomes twisted around a child's neck, it may lead to choking or other serious injuries that could result in death.

If this occurs and the buckle cannot be unfastened, scissors should be used to cut the belt.

■ When the child restraint system is not in use

- Keep the child restraint system properly secured on the seat even if it is not in use. Do not store the child restraint system unsecured in the passenger compartment.
- If it is necessary to detach the child restraint system, remove it from the vehicle or store it securely in the trunk. This will prevent it from injuring passengers in the event of a sudden stop or accident.

Installing child restraints

Follow the child restraint system manufacturer's instructions. Firmly secure child restraints to the outer rear seats using the LATCH anchors or a seat belt. Attach the top tether strap when installing a child restraint.

The lap/shoulder belt can be used if your child restraint system is not compatible with the LATCH (Lower Anchors and Tethers for Children) system.

Child restraint LATCH anchors

LATCH anchors are provided for the outer rear seats. (Buttons displaying the location of the anchors are attached to the seats.)




Seat belts equipped with a child restraint locking mechanism (ALR/ELR belts except driver's seat belt) (→P. 40)



► 5-seat models

Anchor brackets (for top tether strap)

An anchor bracket is provided for each rear seat.

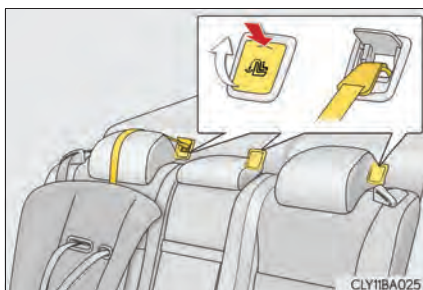

► 4-seat models

Anchor brackets (for top tether strap)


An anchor bracket is provided for each rear seat.



Before installing a child restraint system on an outer rear seat

When using a child restraint system in an outer rear seat, adjust the following:

- The seat cushion to the fully rearward position
- The upper seatback to the rear-most position
- The head restraint to the lowest and rearmost position
- Relaxation seat: The seatback to the most upright position and ottoman (footrest) to the stowed position

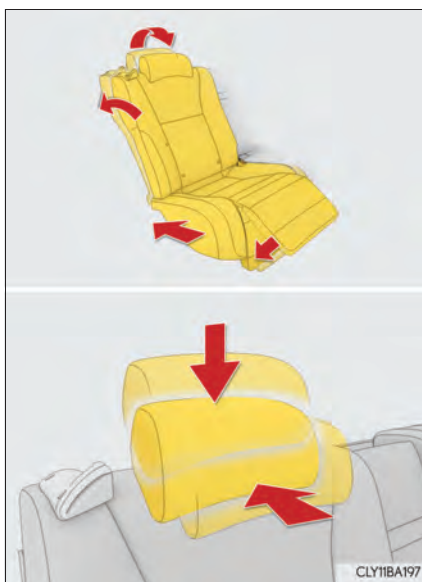

Installation with LATCH system


- 1 Widen the gap between the seat cushion and seatback slightly.

► Type A

- 2 Latch the hooks of the lower straps onto the LATCH anchors. If the child restraint has a top tether strap, the top tether strap should be latched onto the top tether strap anchor.

For owners in Canada:

The symbol on a child restraint system indicates the presence of a lower connector system.

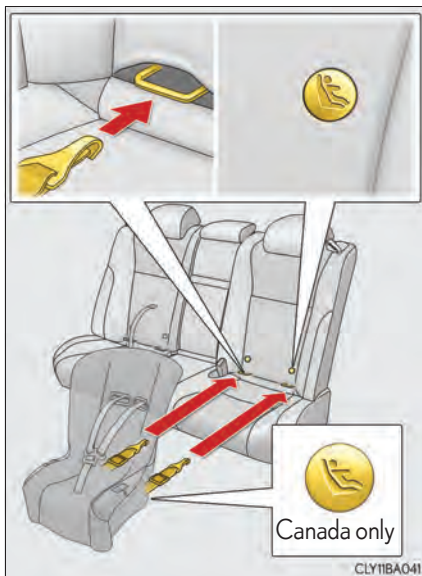


► Type B

- 2 Latch the buckles onto the LATCH anchors. If the child restraint has a top tether strap, the top tether strap should be latched onto the top tether strap anchor.

For owners in Canada:


The symbol on a child restraint system indicates the presence of a lower connector system.

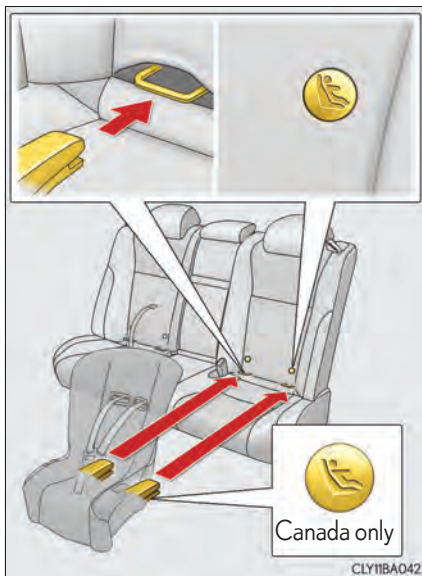


Installing child restraints using a seat belt (child restraint lock function belt)

■ Rear-facing — Infant seat/convertible seat


- 1 Place the child restraint system on the rear seat facing the rear of the vehicle.

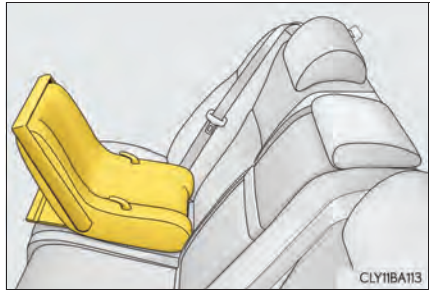

- 2 Run the seat belt through the child restraint system and insert the plate into the buckle. Make sure that the belt is not twisted.

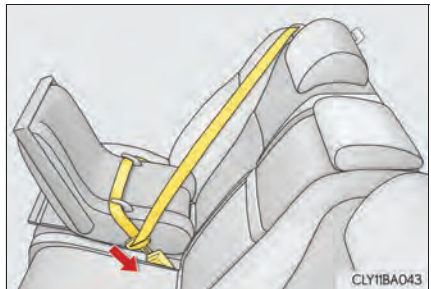


- 3 Fully extend the shoulder belt and allow it to retract to put it in lock mode. In lock mode, the belt cannot be extended.

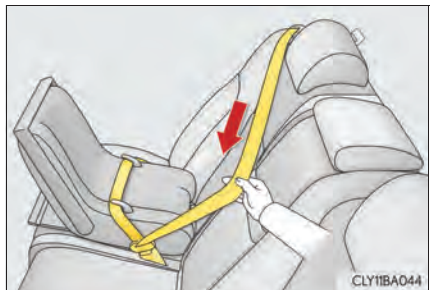

- 4 While pushing the child restraint system down into the rear seat, allow the shoulder belt to retract until the child restraint system is securely in place.

After the shoulder belt has retracted to a point where there is no slack in the belt, pull the belt to check that it cannot be extended.

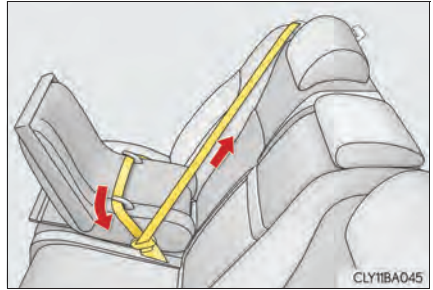

■ Forward-facing— Convertible seat

- 1 Place the child restraint system on the seat facing the front of the vehicle.



- 2 Run the seat belt through the child restraint system and insert the plate into the buckle. Make sure that the belt is not twisted.




- 3 Fully extend the shoulder belt and allow it to retract to put it in lock mode. In lock mode, the belt cannot be extended.



- 4** While pushing the child restraint system into the rear seat, allow the shoulder belt to retract until the child restraint system is securely in place.

After the shoulder belt has retracted to a point where there is no slack in the belt, pull the belt to check that it cannot be extended.

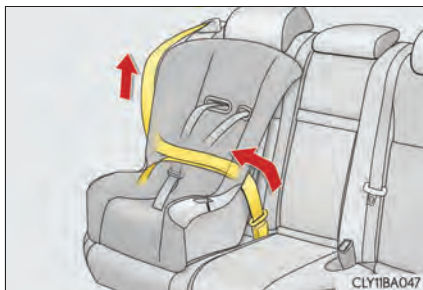

- 5** If the child restraint has a top tether strap, the top tether strap should be latched onto the top tether strap anchor. (→P. 74)

■ Booster seat

- 1** Place the child restraint system on the seat facing the front of the vehicle.




- 2** Sit the child in the child restraint system. Fit the seat belt to the child restraint system according to the manufacturer's instructions and insert the plate into the buckle. Make sure that the belt is not twisted.



Check that the shoulder belt is correctly positioned over the child's shoulder and that the lap belt is as low as possible. (→P. 38)

Removing a child restraint installed with a seat belt

Push the buckle release button and fully retract the seat belt.

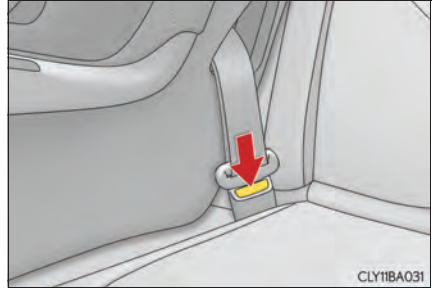


Child restraint systems with a top tether strap

- 1 Secure the child restraint system using the seat belt or the LATCH anchors and move the head restraint to the lowest position (outer rear seats) or fold the head restraint (rear center seat).
(→P. 184)



- 2 Open the anchor bracket cover, latch the hook onto the anchor bracket and tighten the top tether strap.

Make sure the top tether strap is securely latched.

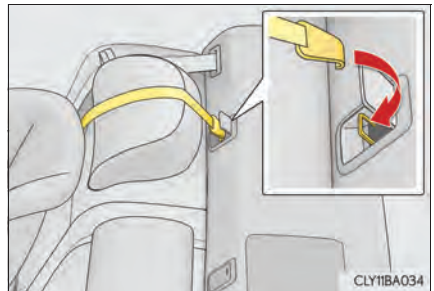

■ Laws and regulations pertaining to anchorages

The LATCH system conforms to FMVSS225 or CMVSS210.2.

Child restraint systems conforming to FMVSS213 or CMVSS213 specifications can be used.

This vehicle is designed to conform to the SAE J1819.

⚠ CAUTION

■ When installing a booster seat

To prevent the belt from going into ALR lock mode, do not fully extend the shoulder belt. ALR mode causes the belt to tighten only. This could cause injury or discomfort to the child. (→P. 40)

■ When installing a child restraint system

Follow the directions given in the child restraint system installation manual and fix the child restraint system securely in place.

If the child restraint system is not correctly fixed in place, the child or other passengers may be seriously injured or even killed in the event of sudden braking or an accident.

- If the driver's seat interferes with the child restraint system and prevents it from being attached correctly, attach the child restraint system to the right-hand rear seat.



- Adjust the front passenger seat or rear seats so that it does not interfere with the child restraint system.

- Only put a forward-facing child restraint system on the front seat when unavoidable. When installing a forward-facing child restraint system on the front passenger seat, move the seat as far back as possible even if the "AIR BAG OFF" indicator light is illuminated. Failure to do so may result in death or serious injury if the airbags deploy (inflate).



 CAUTION**■ When installing a child restraint system**

- When a booster seat is installed, always ensure that the shoulder belt is positioned across the center of the child's shoulder. The belt should be kept away from the child's neck, but not so that it could fall off the child's shoulder. Failing to do so may result in death or serious injury in the event of an accident or sudden braking.
- When using the LATCH anchors for a child restraint system, adjust the seatback as upright as possible.
- Ensure that the belt and plate are securely locked and the seat belt is not twisted.
- Shake the child restraint system left and right, and forward and backward to ensure that it has been securely installed.
- After securing a child restraint system, never adjust the seat.
- Follow all installation instructions provided by the child restraint system manufacturer.

■ Do not use a seat belt extender

If a seat belt extender is used when installing a child restraint system, the seat belt will not securely hold the child restraint system, which could cause death or serious injury to the child or other passengers in the event of a sudden braking, sudden swerving or an accident.

■ To correctly attach a child restraint system to the anchors

When using the LATCH anchors, be sure that there are no foreign objects around the anchors and that the seat belt is not caught behind the child restraint system. Make sure the child restraint system is securely attached, or it may cause death or serious injury to the child or other passengers in the event of sudden braking or an accident.

Exhaust gas precautions

Substances in the exhaust gases are harmful to the human body if inhaled.

CAUTION

Exhaust gases include harmful carbon monoxide (CO), which is colorless and odorless. Observe the following precautions.

Failure to do so may cause exhaust gases enter the vehicle and may lead to an accident caused by light-headedness, or may lead to death or a serious health hazard.

■ Important points while driving

Keep the trunk lid closed.

If you smell exhaust gases in the vehicle even when the trunk lid is closed, open the windows and have the vehicle inspected at your Lexus dealer as soon as possible.

■ When parking

- If the vehicle is in a poorly ventilated area or a closed area, such as a garage, stop the hybrid system.
- Do not leave the vehicle with the hybrid system on for a long time.
If such a situation cannot be avoided, park the vehicle in an open space and ensure that exhaust fumes do not enter the vehicle interior.
- Do not leave the hybrid system operating in an area with snow build-up, or where it is snowing. If snowbanks build up around the vehicle while the hybrid system is operating, exhaust gases may collect and enter the vehicle.


■ Exhaust pipe

The exhaust system needs to be checked periodically. If there is a hole or crack caused by corrosion, damage to a joint or abnormal exhaust noise, be sure to have the vehicle inspected and repaired by your Lexus dealer.

Hybrid system features

Your vehicle is a hybrid vehicle. It has characteristics different from conventional vehicles. Be sure you are closely familiar with the characteristics of your vehicle, and operate with care.

The hybrid system combines the use of a gasoline engine and an electric motor (traction motor) according to driving conditions, improving fuel efficiency and reducing exhaust emissions.

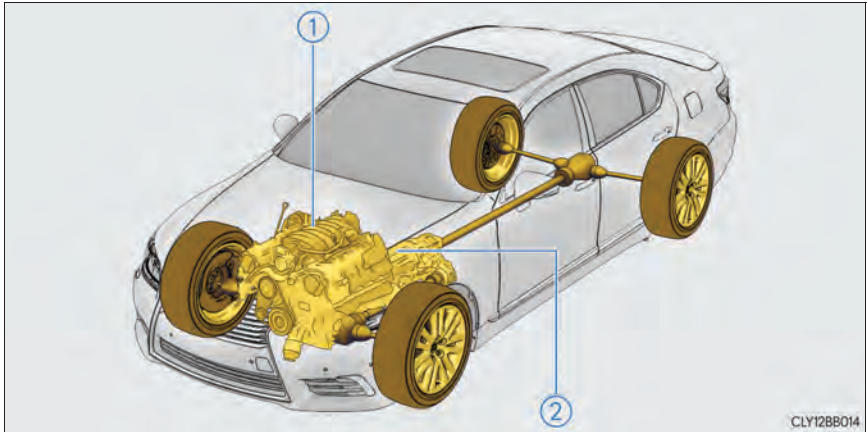

- ① Gasoline engine
- ② Electric motor (traction motor)

◆ When stopped/during start off

The gasoline engine stops when the vehicle is stopped. During start off, the electric motor (traction motor) drives the vehicle. At slow speeds or when traveling down a gentle slope, the engine is stopped and the electric motor (traction motor) is used.

◆ During normal driving

The gasoline engine is predominantly used. The electric motor (traction motor) charges the hybrid battery (traction battery) as necessary.

◆ When accelerating sharply

When the accelerator pedal is depressed heavily, the power of the hybrid battery (traction battery) is added to that of the gasoline engine via the electric motor (traction motor).

◆ When braking (regenerative braking)

The electric motor (traction motor) charges the hybrid battery (traction battery).

Vehicle proximity notification system

When driving with the gasoline engine stopped, a sound, which changes in accordance with the driving speed, will be played in order to warn people nearby of the vehicle's approach. The sound will stop when the vehicle speed exceeds approximately 15 mph (25 km/h).


■ Regenerative braking

In the following situations, kinetic energy is converted to electric energy and deceleration force can be obtained in conjunction with the recharging of the hybrid battery (traction battery).

- The accelerator pedal is released while driving with the shift position in D or S.
- The brake pedal is depressed while driving with the shift position in D or S.

■ EV indicator

The EV indicator comes on when the vehicle is driven using only the electric motor (traction motor) or the gasoline engine is stopped.



■ Conditions in which the gasoline engine may not stop

The gasoline engine starts and stops automatically. However, it may not stop automatically in the following conditions:

- During gasoline engine warm-up
- During hybrid battery (traction battery) charging
- When the temperature of the hybrid battery (traction battery) is high or low
- When the heater is switched on

■ Charging the hybrid battery (traction battery)

- As the gasoline engine charges the hybrid battery (traction battery), the battery does not need to be charged from an outside source. However, if the vehicle is left parked for a long time the hybrid battery will slowly discharge. For this reason, be sure to drive the vehicle at least once every few months for at least 30 minutes or 10 miles (16 km). If the hybrid battery becomes fully discharged and you are unable to jump-start the vehicle with the 12-volt battery, contact your Lexus dealer.
- If the shift lever is in N, the hybrid battery (traction battery) will not be charged. Always put the shift lever in P when the vehicle is stopped. When driving in heavy traffic, operate the vehicle with the shift lever in D or S to avoid discharging the battery.
- To help prevent the 12-volt battery from becoming discharged, drive the vehicle at least once a month, and operate the accessories only when the "READY" indicator is on. When parking the vehicle, make sure the doors and trunk are closed and all lights are turned off.

■ Charging the 12-volt battery

→P. 830

■ After the 12-volt battery has discharged or has been changed or removed

The gasoline engine may not stop even if the vehicle is running on the hybrid battery (traction battery). If this continues for a few days, contact your Lexus dealer.

■ Sounds and vibrations specific to a hybrid vehicle

There may be no engine sounds or vibration even though the vehicle is able to move. For safety, apply the parking brake and make sure to shift the shift lever to P when parked.

The following sounds or vibrations may occur when the hybrid system is operating and are not a malfunction:

- Motor sounds may be heard from the engine compartment.
- Sounds may be heard from the hybrid battery (traction battery) behind the rear seats when the hybrid system starts or stops.
- Sounds from the hybrid system may be heard when the trunk lid is open.
- Sounds may be heard from the hybrid transmission when the hybrid system starts or stops.
- Engine sounds may be heard when accelerating sharply.
- Sounds may be heard due to regenerative braking when the accelerator pedal is released or the brake pedal is depressed.
- Vibration may be felt or sounds may be heard when the gasoline engine starts or stops.
- Cooling fan sounds may be heard from the air intake vents on the package tray.

■ Vehicle proximity notification system

In the following cases, the vehicle proximity notification system may be difficult for surrounding people to hear.

- In very noisy areas
- In the wind or the rain

Also, as the vehicle proximity notification system is installed on the front of the vehicle, it may be more difficult to hear from the rear of the vehicle compared to the front.

■ Hybrid battery (traction battery) cooling

The air conditioning system may operate automatically to cool the hybrid battery (traction battery).

■ Maintenance, repair, recycling, and disposal


Contact your Lexus dealer regarding maintenance, repair, recycling and disposal. Do not dispose of the vehicle yourself.

■ Customization

Settings (e.g. on/off operation of the EV indicator) can be changed.
(Customizable features → P. 865)

Hybrid system precautions


Take care when handling the hybrid system, as it contains a high voltage system (about 650 V at maximum) as well as parts that become extremely hot when the hybrid system is operating. Obey the caution labels attached to the vehicle.

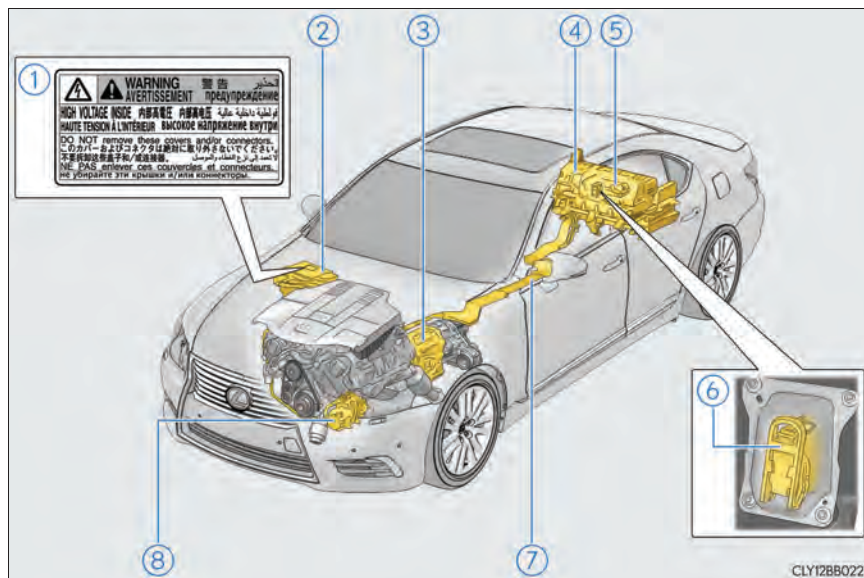

- | | |
|-------------------------------------|--------------------------------|
| ① Caution label | ⑤ DC/DC converter |
| ② Power control unit | ⑥ Service plug |
| ③ Electric motor (traction motor) | ⑦ High voltage cables (orange) |
| ④ Hybrid battery (traction battery) | ⑧ Air conditioning compressor |

Hybrid battery (traction battery) air vents

There are air intake vents on the package tray for the purpose of cooling the hybrid battery (traction battery). If the vents become blocked, the hybrid battery may overheat, leading to a reduction in hybrid battery output.

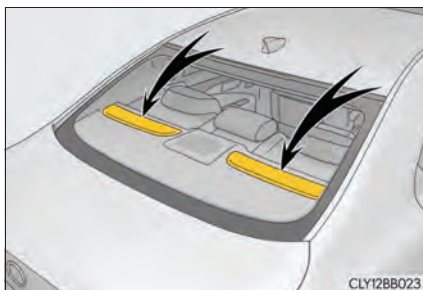

Emergency shut off system

When a certain level of impact is detected by the impact sensor, the emergency shut off system blocks off the high voltage current and stops the fuel pump to minimize the risk of electrocution and fuel leakage. If the emergency shut off system activates, your vehicle will not restart. To restart the hybrid system, contact your Lexus dealer.

Hybrid warning message

A message is automatically displayed when a malfunction occurs in the hybrid system or an improper operation is attempted.

If a warning message is shown on the multi-information display, read the message and follow the instructions.



■ **If a warning light comes on, a warning message is displayed, or the 12-volt battery is disconnected**

The hybrid system may not start. In that case, try to start the system again. If the "READY" indicator does not come on, contact your Lexus dealer.

■ **Running out of fuel**

When the vehicle has run out of fuel and the hybrid system cannot be started, refuel the vehicle with at least enough gasoline to make the low fuel level warning light (→P. 802) go off. If there is only a small amount of fuel, the hybrid system may not be able to start. (The minimum amount of fuel to add to make the low fuel level warning light go out is about 3.4 gal. [13 L, 2.8 Imp. gal.], when the vehicle is on a level surface. This value may vary when the vehicle is on a slope.)

■ **Electromagnetic waves**

- High voltage parts and cables on the hybrid vehicles incorporate electromagnetic shielding, and therefore emit approximately the same amount of electromagnetic waves as conventional gasoline powered vehicles or home electronic appliances.
- Your vehicle may cause sound interference in some third party-produced radio parts.

■ **Hybrid battery (traction battery)**

The hybrid battery (traction battery) has a limited service life. The lifespan of the hybrid battery (traction battery) can change in accordance with driving style and driving conditions.

⚠ CAUTION**■ High voltage precautions**


The vehicle has high voltage DC and AC systems as well as a 12-volt system. DC and AC high voltage is very dangerous and can cause severe burns and electric shock that may result in death or serious injury.

- Never touch, disassemble, remove or replace the high voltage parts, cables or their connectors.
- The hybrid system will become hot after starting as the system uses high voltage. Be careful of both the high voltage and the high temperature, and always obey the caution labels attached to the vehicle.
- Never try to open the service plug access hole located behind the rear seat. The service plug is used only when the vehicle is serviced and is subject to high voltage.

5-seat models



4-seat models



 CAUTION**■ Road accident cautions**

Observe the following precautions to reduce the risk of death or serious injury:

- Pull your vehicle off the road, apply the parking brake, shift the shift lever to P, and turn the hybrid system off.
- Do not touch the high voltage parts, cables and connectors.
- If electric wires are exposed inside or outside your vehicle, an electric shock may occur. Never touch exposed electric wires.
- If a fluid leak occurs, do not touch the fluid as it may be strong alkaline electrolyte from the hybrid battery (traction battery). If it comes into contact with your skin or eyes, wash it off immediately with a large amount of water or, if possible, boric acid solution. Seek immediate medical attention.
- If a fire occurs in the hybrid vehicle, leave the vehicle as soon as possible. Never use a fire extinguisher that is not meant for electric fires. Using even a small amount of water may be dangerous.
- If your vehicle needs to be towed, do so with four wheels raised. If the wheels connected to the electric motor (traction motor) are on the ground when towing, the motor may continue to generate electricity. This may cause an electricity leakage leading to a fire. (→P. 792)
- Carefully inspect the ground under the vehicle. If you find that liquid has leaked onto the ground, the fuel system may have been damaged. Leave the vehicle as soon as possible.

 CAUTION**■ Hybrid battery (traction battery)**

- Your vehicle contains a sealed nickel-metal hydride battery. Never resell, hand over or modify the hybrid battery. To prevent accidents, hybrid batteries that have been removed from a disposed vehicle are collected through Lexus dealer. Do not dispose of the battery yourself.

Unless the battery is properly collected, the following may occur, resulting in death or serious injury:

- The hybrid battery may be illegally disposed of or dumped, and it is hazardous to the environment or someone may touch a high voltage part, resulting in an electric shock.
- The hybrid battery is intended to be used exclusively with your hybrid vehicle. If the hybrid battery is used outside of your vehicle or modified in any way, accidents such as electric shock, heat generation, smoke generation, an explosion and electrolyte leakage may occur.

When reselling or handing over your vehicle, the possibility of an accident is extremely high because the person receiving the vehicle may not be aware of these dangers.

- If your vehicle is disposed of without the hybrid battery having been removed, there is a danger of serious electric shock if high voltage parts, cables and their connectors are touched. In the event that your vehicle must be disposed of, the hybrid battery must be disposed of by your Lexus dealer or a qualified service shop. If the hybrid battery is not disposed of properly, it may cause electric shock that can result in death or serious injury.

■ Emergency shut off system

- Carefully check to see if there are exposed high voltage parts or cables. Never touch the parts or cables. (→P. 83)
- Carefully inspect the ground under the vehicle. If you find that liquid has leaked onto the ground, the fuel system may have been damaged. Leave the vehicle as soon as possible.

**NOTICE****■ Hybrid battery air vents**

- Do not put foreign objects over the air vents. The hybrid battery (traction battery) may overheat and be damaged.
- Clean the air vents regularly to prevent the hybrid battery (traction battery) from overheating.
- Do not wet or allow foreign substances to enter the air vents as this may cause a short circuit and damage the hybrid battery (traction battery).
- Do not carry large amounts of water such as water cooler bottles in the vehicle. If water spills onto the hybrid battery (traction battery), the battery may be damaged. Have the vehicle inspected by your Lexus dealer.

Immobilizer system


The vehicle's keys have built-in transponder chips that prevent the hybrid system from starting if a key has not been previously registered in the vehicle's on-board computer.

Never leave the keys inside the vehicle when you leave the vehicle.

This system is designed to help prevent vehicle theft but does not guarantee absolute security against all vehicle thefts.

The indicator light flashes after the power switch has been turned off to indicate that the system is operating.

The indicator light stops flashing after the power switch has been turned to ACCESSORY or ON mode to indicate that the system has been canceled.

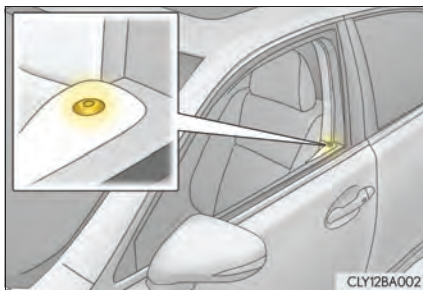

■ System maintenance

The vehicle has a maintenance-free type immobilizer system.

■ Conditions affecting operation

Depending on the surrounding environment and conditions, the immobilizer system may not operate properly. This may prevent the hybrid system from starting.
(→P. 136)

■ Certifications for the immobilizer system

- For vehicles sold in the U.S.A.

FCC ID: NI4TMIMB-1

NOTE:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- For vehicles sold in Canada

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.



NOTICE

■ To ensure the system operates correctly

Do not modify or remove the system. If modified or removed, the proper operation of the system cannot be guaranteed.

Alarm

The alarm

The alarm uses light and sound to give an alert when an intrusion is detected.


The alarm is triggered in the following situations when the alarm is set:

- A locked door or trunk is unlocked or opened in any way other than using the entry function, wireless remote control or mechanical key. (The doors will lock again automatically.)
- The hood is opened.

Setting the alarm system

Close the doors, trunk and hood, and lock all the doors. The system will be set automatically after 30 seconds.

The indicator light changes from being on to flashing when the system is set.

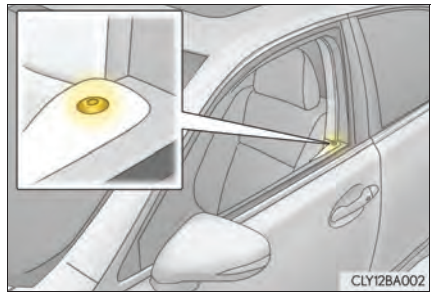

Deactivating or stopping the alarm

Do one of the following to deactivate or stop the alarms:

- Unlock the doors or open the trunk.
- Turn the power switch to ACCESSORY or ON mode, or start the hybrid system. (The alarm will be deactivated or stopped after a few seconds.)

■ System maintenance

The vehicle has a maintenance-free type alarm system.

■ Items to check before locking the vehicle

To prevent unexpected triggering of the alarm and vehicle theft, make sure of the following:

- Nobody is in the vehicle.
- The windows and moon roof are closed before the alarm is set.
- No valuables or other personal items are left in the vehicle.


■ Triggering of the alarm

The alarm may be triggered in the following situations:
(Stopping the alarm deactivates the alarm system.)

- A person inside the vehicle opens a door, the trunk or hood.



- The 12-volt battery is recharged or replaced when the vehicle is locked. (→P. 830)



■ Alarm-operated door lock

- When the alarm is operating, the doors are locked automatically to prevent intruders.
- Do not leave the key inside the vehicle when the alarm is operating, and make sure the key is not inside the vehicle when recharging or replacing the 12-volt battery.



NOTICE

■ To ensure the system operates correctly

Do not modify or remove the system. If modified or removed, the proper operation of the system cannot be guaranteed.

Instrument cluster

2

2. Instrument cluster

Warning lights and indicators	96
Gauges and meters	101
Multi-information display	107
Energy monitor/consumption screen	114

Warning lights and indicators

The warning lights and indicators on the instrument cluster, center panel and outside rear view mirrors inform the driver of the status of the vehicle's various systems.

For the purpose of explanation, the following illustration displays all warning lights and indicators illuminated.

◆ Instrument cluster



The units used on the speedometer, the tachometer and some indicators may differ depending on the target region.

◆ Center panel



◆ Outside rear view mirrors (vehicles with BSM)



Warning lights

Warning lights inform the driver of malfunctions in the indicated vehicle's systems.



Brake system warning light
(→P. 799)



Slip indicator (→P. 801)



Brake system warning light
(→P. 799)



Brake hold operated
indicator (→P. 801)



Charging system warning
light (→P. 800)



Parking brake indicator
(→P. 801)



Malfunction indicator
lamp (→P. 800)



Parking brake indicator
(→P. 801)



Malfunction indicator
lamp (→P. 800)



Brake system warning light
(→P. 801)



SRS warning light
(→P. 800)



Open door warning light
(→P. 802)



(U.S.A.)

ABS warning light
(→P. 800)



Low fuel level warning light
(→P. 802)



(Canada)

ABS warning light
(→P. 800)



Seat belt reminder light
(→P. 802)



Electric power steering
system warning light
(→P. 800)



Master warning light
(→P. 802)



(if equipped)

Pre-collision system warn-
ing light (→P. 801)



Tire pressure warning light
(→P. 803)

^{*1}: These lights come on when the power switch is turned to ON mode to indicate that a system check is being performed. They will go off after the hybrid system is on, or after a few seconds. There may be a malfunction in a system if the lights do not come on, or go off. Have the vehicle inspected by your Lexus dealer.

^{*2}: The light flashes to indicate a malfunction.

Indicators

The indicators inform the driver of the operating state of the vehicle's various systems.



Turn signal indicator
(→P. 231)



(U.S.A.)

Headlight indicator
(→P. 238)



(Canada)

Tail light indicator
(→P. 238)



Headlight high beam indicator
(→P. 239)



Automatic High Beam indicator
(→P. 242)



Front fog light indicator
(→P. 247)



"READY" indicator
(→P. 220)



EV indicator (→P. 80)



EV drive mode indicator
(→P. 225)



Snow mode indicator
(→229)



*1

Brake hold standby indicator
(→P. 235)



*1

Brake hold operated indicator
(→P. 235)



Cruise control "SET" indicator
(→P. 257, 261)



Cruise control indicator
(→P. 257, 261)



(if equipped)

Radar cruise control indicator
(→P. 261)



(if equipped)

LKA (Lane-Keeping Assist) indicator
(→P. 277)



*1

"HEIGHT HIGH" indicator
(→P. 313)



*1, 2

Slip indicator (→P. 317)



*1

VSC (Vehicle Stability Control) OFF indicator
(→P. 317)



*1, 3

(if equipped)

Pre-collision system warning light
(→P. 324)



Parking brake indicator
(→ P. 232)



BSM (Blind Spot Monitor)
outside rear view mirror
indicators (→P. 334)



Parking brake indicator
(→P. 232)



"AIR BAG ON/
OFF" indicator
(→P. 57)

^{*1}: These lights come on when the power switch is turned to ON mode to indicate that a system check is being performed. They will go off after the hybrid system is on, or after a few seconds. There may be a malfunction in a system if the lights do not come on, or go off. Have the vehicle inspected by your Lexus dealer.

^{*2}: The light flashes to indicate that the system is operating.

^{*3}: The light comes on when the system is turned off. The light flashes faster than usual to indicate that the system is operating.

^{*4}: In order to confirm operation, the BSM outside rear view mirror indicators illuminate in the following situations:

- When the power switch is turned to ON mode while the BSM main switch is set to ON.
- When the BSM main switch is set to ON while the power switch is in ON mode.

If the system is functioning correctly, the BSM outside rear view mirror indicators will turn off after a few seconds.

If the BSM outside rear view mirror indicators do not illuminate or do not turn off, there may be a malfunction with the system.

If this occurs, have the vehicle inspected by your Lexus dealer.


CAUTION

If a safety system warning light does not come on


Should a safety system light such as the ABS and SRS warning light not come on when you start the hybrid system, this could mean that these systems are not available to help protect you in an accident, which could result in death or serious injury. Have the vehicle inspected by your Lexus dealer immediately if this occurs.

Gauges and meters

- When driving mode is in other than sport mode (→P. 309)

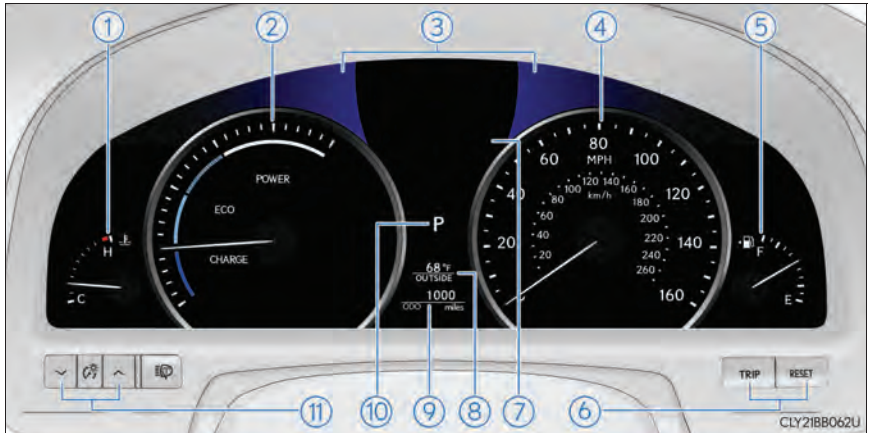

- When driving mode is in sport mode (→P. 309)

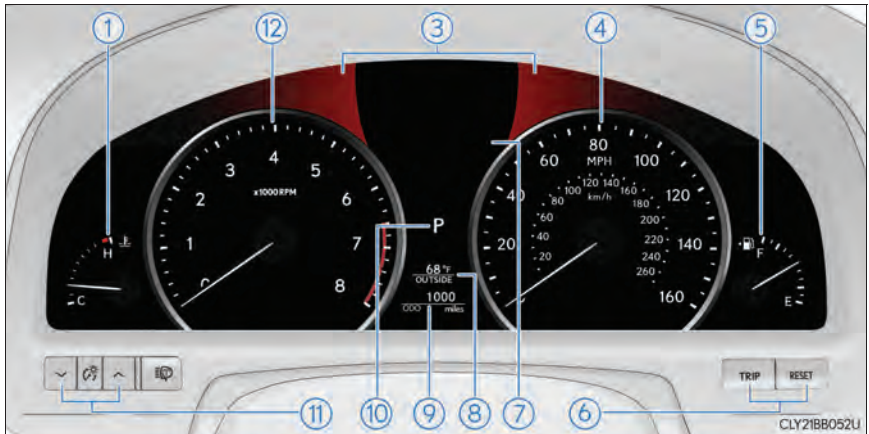


The units used on the speedometer and the tachometer may differ depending on the target region.

- ① Engine coolant temperature gauge
Displays the engine coolant temperature
- ② Hybrid System Indicator
Displays hybrid system output or regeneration level (→P. 105)
- ③ ECO lamp and SPORT lamp
Changes colors or brightness according to driving mode or way of driving (→P. 105)
- ④ Speedometer
Displays the vehicle speed
- ⑤ Fuel gauge
Displays the quantity of fuel remaining in the tank
- ⑥ Odometer/trip meter and trip meter reset switches
- ⑦ Multi-information display
Presents the driver with a variety of driving-related data (→P. 107)
- ⑧ Outside Temperature
Displays the outside temperature within the range of -40°F (-40°C) to 122°F (50°C)
- ⑨ Odometer and trip meter display
Odometer:
Displays the total distance the vehicle has been driven
Trip meter:
Displays the distance the vehicle has been driven since the meter was last reset.
Trip meters "A" and "B" can be used to record and display different distances independently.
- ⑩ Shift position and shift range
Displays the selected shift position or selected shift range (→P. 227)
- ⑪ Instrument panel light control switches
- ⑫ Tachometer
Displays the engine speed in revolutions per minute

Changing the odometer and trip meter display


- ① Switches the display
- ② Resets the trip meter currently displayed to "0"

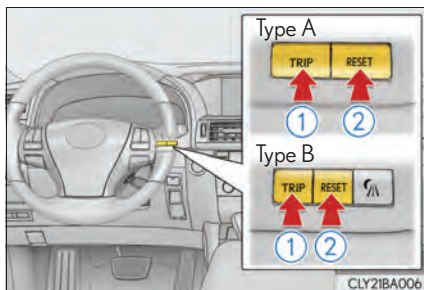

Instrument panel light control

The brightness of the instrument panel lights can be adjusted.

- ① Darker
- ② Brighter

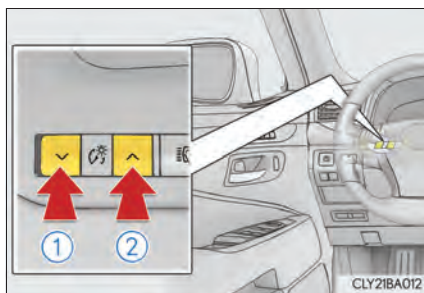

■ The meters and display illuminate when

The power switch is in ON mode.

■ Instrument panel brightness adjustment**● Meters:**

The brightness level of the meters when the surroundings are bright (day mode) and dark (night mode) can be adjusted individually. However, when in day mode, adjusting the brightness level will also change the brightness level of night mode.

● Clock, air conditioning temperature display and switch lights:

The brightness level of the clock, air conditioning temperature display and switch lights are linked with the brightness level of meter night mode.

■ Light dimmer control (Changing to night mode)

The brightness level of the meter, clock and air conditioning temperature display lights will change to night mode only when the surroundings are dark and the tail lights are on.

■ Automatic adjustment of the brightness level of the meters

The brightness level of the meters will be adjusted automatically according to the brightness of the surroundings detected by the light sensor. However, the brightness level of the meters will not be adjusted automatically in the following conditions.

- Day mode: When the brightness of the meter is adjusted to the brightest manually
- Night mode: When the brightness of the meter is adjusted to the brightest or darkest manually

■ Hybrid System Indicator

① Charge area

Shows regenerative charging.

② Hybrid Eco area

Shows that gasoline engine power is not being used very often.

The gasoline engine will automatically stop and restart under various conditions.

③ Eco area

Shows that the vehicle is being driven in an Eco-friendly manner.

④ Power area

Shows that an Eco-friendly driving range is being exceeded (during full power driving etc.)



- Hybrid System Indicator is displayed when the driving mode is other than the sport mode.
 - By keeping the indicator needle within Eco area, more Eco-friendly driving can be achieved.
 - Charge area indicates regeneration* status. Regenerated energy will be used to charge the battery.
- *: When used in this manual, "regeneration" refers to the conversion of energy created by the movement of the vehicle into electrical energy.

■ ECO lamp and SPORT lamp

- When all of the following conditions are satisfied and Eco-friendly driving is being performed, ECO lamp (blue) will illuminate. (ECO lamp will become brighter the more Eco-friendly your driving is. Also, while the vehicle is stopped or the acceleration exceeds Zone of Eco driving, ECO lamp turns off. (→P. 105) However, when Eco drive mode is selected, while the vehicle is stopped or the acceleration exceeds Zone of Eco driving, ECO lamp does not turn off.):
 - Driving with the shift lever in D.
 - Normal mode, comfort mode or Eco drive mode is selected, and EV drive mode and snow mode is not in use.
 - The vehicle speed is approximately 80 mph (130 km/h) or below.
- When sport mode is selected, SPORT lamp (red) will illuminate.

■ Tachometer

Hybrid System Indicator switches to the tachometer when driving mode is in sport mode.

■ Engine speed

On hybrid vehicles, engine speed is precisely controlled in order to help improve fuel efficiency and reduce exhaust emissions etc.

There are times when the engine speed that is displayed may differ even when vehicle operation and driving conditions are the same.

■ Outside temperature display

In the following situations, the correct outside temperature may not be displayed, or the display may take longer than normal to change.

- When stopped, or driving at low speeds (less than 12 mph [20 km/h])
- When the outside temperature has changed suddenly (at the entrance/exit of a garage, tunnel, etc.)

■ Customization

Settings (e.g. on/off operation of ECO lamp) can be changed.
(Customizable features →P. 866)



NOTICE

■ To prevent damage to the engine and its components

- Do not let the indicator needle of the tachometer enter the red zone, which indicates the maximum engine speed.
- The engine may be overheating if the engine coolant temperature gauge is in the red zone (H). In this case, immediately stop the vehicle in a safe place, and check the engine after it has cooled completely. (→P. 832)

Multi-information display

Display contents

The multi-information display presents the driver with a variety of driving-related data.

- Trip information (→P. 108)

Displays driving range, fuel consumption and other cruising related information

- Drive monitor (→P. 110)

Displays either the average fuel consumption after refueling or the driving range

- Intuitive parking assist display* (→P. 288)


- Dynamic radar cruise control with full-speed range display* (if equipped) (→P. 261)

- LKA (Lane-Keeping Assist) display* (if equipped) (→P. 281)

- Warning messages (→P. 809)

Automatically displayed when a malfunction occurs in one of the vehicle's systems. Display can be switched by pressing the "DISP" button. (→P. 108)

*: Automatically displayed when the system is used. Display can be switched by pressing the "DISP" button. (→P. 108)

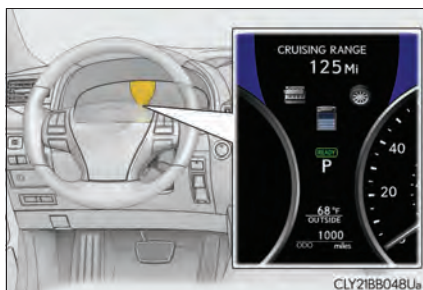

Trip information

■ Switching the display

Items displayed can be switched by pressing the “DISP” button.

The information displayed on the drive monitor will not be displayed on the trip information screen.



■ Energy monitor

→P.115

■ Driving range




Displays the estimated approximate distance that can be driven with the quantity of fuel remaining

- This distance is computed based on your average fuel consumption. As a result, the actual distance that can be driven may differ from that displayed.
- When only a small amount of fuel is added to the tank, the display may not be updated.

When refueling, turn the power switch off. If the vehicle is refueled without turning the power switch off, the display may not be updated.


■ Average fuel consumption



Displays the average fuel consumption since the function was reset


- The function can be reset by pressing the "DISP" button for longer than 1 second when the average fuel consumption is displayed.
On vehicles with a navigation system, the "Past record" screen on the Remote Touch screen will also be updated. (→P. 120)
- Use the displayed average fuel consumption as a reference.

■ Current fuel consumption



Displays the current rate of fuel consumption

■ Average fuel consumption after refueling



Displays the average fuel consumption since the vehicle was last refueled

- Use the displayed average fuel consumption as a reference.

■ Distance after refueling



Displays the distance the vehicle has been driven since the vehicle was last refueled


■ Elapsed time



Displays the elapsed time since it was last reset

- The function can be reset by pressing the "DISP" button for longer than 1 second when the elapsed time is displayed.

■ Average vehicle speed



Displays the average vehicle speed since the function was reset


The function can be reset by pressing the "DISP" button for longer than 1 second when the average vehicle speed is displayed.

■ Tire inflation pressure



Displays inflation pressure of each tire

■ Customization



The multi-information display settings can be changed (→P. 111)

Drive monitor

Either average fuel consumption after refueling or driving range can be selected and displayed.

If displayed on the drive monitor, other trip information or warning messages can be displayed simultaneously.


For display and selection procedures, follow the "Setting up the displays".

The information displayed on the drive monitor will not be displayed on the trip information screen.



Setting up the displays

- 1 While the vehicle is stopped, press the “DISP” button until the “Settings” screen appears.

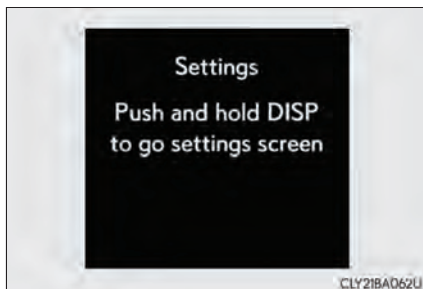

- 2 Press and hold the “DISP” button until the screen changes.




- 3 Press and hold the “DISP” button after selecting the desired setting item by pressing the “DISP” button.



- 4 Press and hold the “DISP” button after selecting the desired setting by pressing the “DISP” button.

The display goes back to step 3.

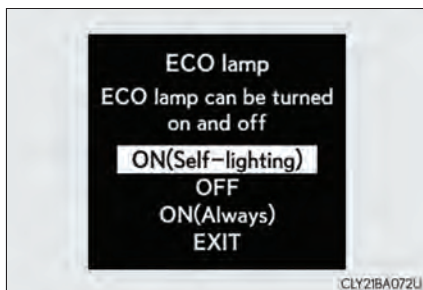

- 5** Press and hold the “DISP” button after selecting the “EXIT” by pressing the “DISP” button.

The display goes back to step **1**.



■ System check display

After turning the power switch to ON mode, “SYSTEM CHECK” is displayed while system operation is checked.

■ Tire inflation pressure

- It may take a few minutes to display the tire inflation pressure after the power switch is turned to ON mode. It may also take a few minutes to display the tire inflation pressure after inflation pressure has been adjusted.
- “---” may be displayed if the tire position information cannot be determined due to unfavorable radio wave conditions.
- Tire inflation pressure changes with temperature. The displayed values may also be different from the values measured using a tire pressure gauge.

■ When disconnecting and reconnecting 12-volt battery terminals

The following information data will be reset:

- Driving range
- Average fuel consumption
- Average fuel consumption after refueling
- Distance after refueling
- Elapsed time
- Average vehicle speed

■ Liquid crystal display

Small spots or light spots may appear on the display. This phenomenon is characteristic of liquid crystal displays, and there is no problem continuing to use the display.

■ Customization

Setting of available languages can be changed. (Customizable features → P. 866)

**CAUTION****■ The information display at low temperatures**

Allow the interior of the vehicle to warm up before using the liquid crystal information display. At extremely low temperatures, the information display monitor may respond slowly, and display changes may be delayed.

For example, there is a lag between the driver's shifting and the new gear number appearing on the display. This lag could cause the driver to downshift again, causing rapid and excessive engine braking and possibly an accident resulting in death or injury.

■ Cautions during setting up the display

As the hybrid system needs to be operating during setting up the display, ensure that the vehicle is parked in a place with adequate ventilation. In a closed area such as a garage, exhaust gases including harmful carbon monoxide (CO) may collect and enter the vehicle. This may lead to death or a serious health hazard.


**NOTICE****■ During setting up the display**

To prevent 12-volt battery discharge, ensure that the hybrid system is operating while setting up the display features.

Energy monitor/consumption screen

You can view the status of your hybrid system on the multi-information display and the Remote Touch screen.

- ① Multi-information display
- ② Remote Touch screen
- ③ Remote Touch knob
- ④ "MENU" button

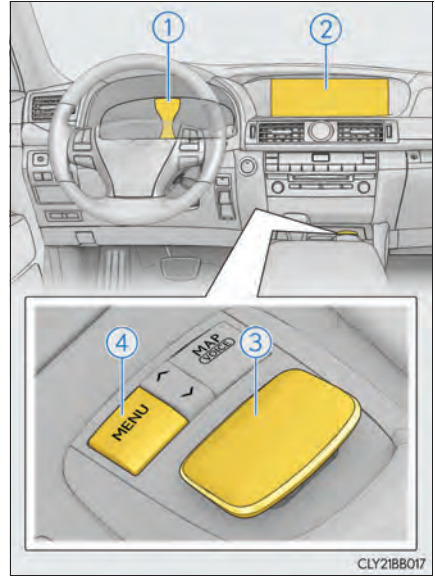

Energy monitor

■ Remote Touch screen

- Vehicles without a navigation system

1 Press the “MENU” button on the Remote Touch.

2 Select “Info” on the “Menu” screen.

If the “Trip Information” or “Past Record” screen is displayed, select “Energy”.




The “Energy Monitor” screen can be displayed on the “Side Display”.
(→P.389)

- Vehicles with a navigation system

1 Press the “MENU” button on the Remote Touch.

2 Select “Info/Apps” on the “Menu” screen.

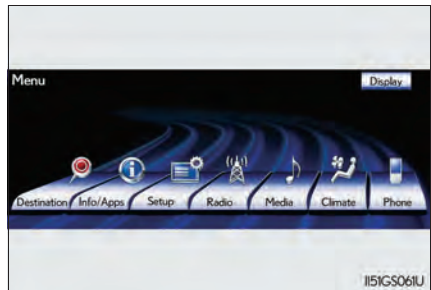

3 Select “Fuel Consumption” on the “Information” screen.

If the “Trip Information” or “Past Record” screen is displayed, select “Energy”.




The “Energy Monitor” screen can be displayed on the “Side Display”.
(→P.389)

■ Multi-information display

Press the “DISP” button on the steering wheel several times to select the energy monitor display.



	Remote Touch screen	Multi-information display
When the vehicle is powered by the electric motor (traction motor)		
When the vehicle is powered by both the gasoline engine and the electric motor (traction motor)		
When the vehicle is powered by the gasoline engine		
When the vehicle is charging the hybrid battery (traction battery)		
		
When there is no energy flow		
Hybrid battery (traction battery) status	Low  Full 	Low  Full 

These images are examples only, and may vary slightly from actual conditions.

Consumption

The consumption screen can be displayed on the "Side Display". (→P. 388)

► Vehicles without a navigation system

1 Press the "MENU" button on the Remote Touch, then select "Info" on the "Menu" screen.

2 If the "Energy Monitor" screen is displayed, select "Fuel Consumption".

► Vehicles with a navigation system

1 Press the "MENU" button on the Remote Touch, then select "Info/Apps" on the "Menu" screen.

2 Select "Fuel Consumption" on the "Information" screen.

3 If the "Energy Monitor" screen is displayed, select "Fuel Consumption".

■ Trip information

If the “Past Record” screen is displayed, select “Trip Information”.


- ① Resetting the consumption data
- ② Fuel consumption in the past 15 minutes
- ③ Regenerated energy in the past 15 minutes

One symbol indicates 30 Wh. Up to 5 symbols are shown.

- ④ Displays the average vehicle speed since the hybrid system was started.
- ⑤ Displays the elapsed time since the hybrid system was started.
- ⑥ Cruising range (→P. 120)

Average fuel consumption for the past 15 minutes is divided by color into past averages and averages attained since the power switch was last turned to ON mode. Use the displayed average fuel consumption as a reference.

The image is an example only, and may vary slightly from actual conditions.

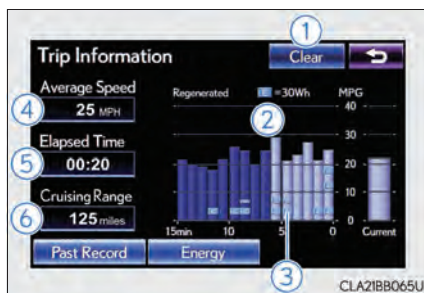

■ Past record

If the “Trip Information” screen is displayed, select “Past Record”.

- ① Updating the average fuel consumption data
- ② Resetting the past record data
- ③ Best recorded fuel consumption
- ④ Average fuel consumption
- ⑤ Previous fuel consumption record



The average fuel consumption history is divided by color into past averages and the average fuel consumption since the last updated. Use the displayed average fuel consumption as a reference.

The image is an example only, and may vary slightly from actual conditions.

■ Updating the past record data

Update the average fuel consumption by selecting “Update” to measure the current fuel consumption again.

■ Resetting the data

The fuel consumption data can be deleted by selecting “Clear”.

■ Cruising range

Displays the estimated maximum distance that can be driven with the quantity of fuel remaining.

This distance is computed based on your average fuel consumption.

As a result, the actual distance that can be driven may differ from that displayed.

Operation of each component

3

3-1. Key information

Keys122

3-2. Opening, closing and locking the doors and trunk

Smart access system with
push-button start127

Wireless remote control142

Doors 146

Trunk..... 150

3-3. Adjusting the seats

Front seats.....157

Power rear seat..... 164

Driving position memory177

Rear seat position memory..... 182

Head restraints 184

3-4. Adjusting the steering wheel and mirrors

Steering wheel187

Inside rear view mirror188

Outside rear view mirrors.....190

3-5. Opening, closing the windows and moon roof

Power windows 194

Moon roof197


Keys

The keys

The following keys are provided with the vehicle.

- ① Electronic keys
 - Operating the smart access system with push-button start (→P. 127)
 - Operating the wireless remote control function (→P. 142)
- ② Mechanical keys
- ③ Key number plate
- ④ Card key (electronic key) (if equipped)

Operating the smart access system with push-button start (→P. 127)

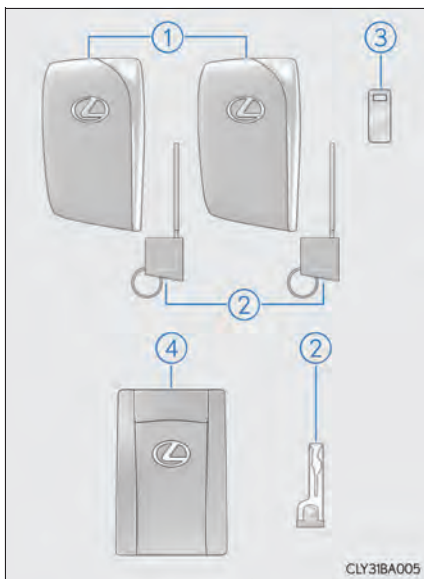

Using the mechanical key

To take out the mechanical key:


Electronic keys: Slide the release lever and take the key out.

Card key: Press the lock release button and take the key out.

The mechanical key can only be inserted in one direction, as the key only has grooves on one side. If the key cannot be inserted in a lock cylinder, turn it over and re-attempt to insert it.

After using the mechanical key, store it in the electronic key. Carry the mechanical key together with the electronic key. If the electronic key battery is depleted or the entry function does not operate properly, you will need the mechanical key.

(→P. 826)

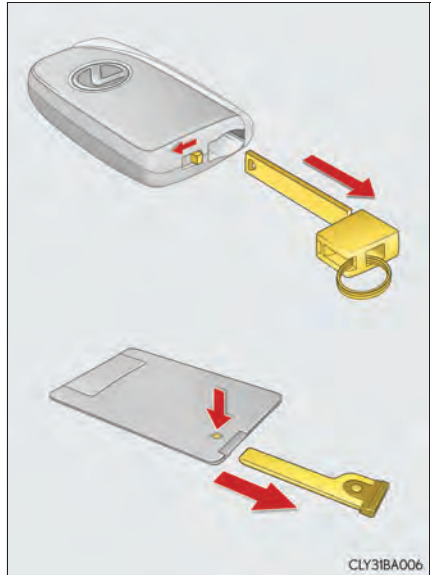


■ Electronic keys


- Part of the electronic key uses leather. Refer to P. 728 for details on cleaning the leather portion.
- When cleaning the metallic portion, wet a cloth and firmly wring out any excess water from it, then thoroughly wipe off any dirt.
- When not using the electronic key for an extended period of time, store it in a dry place of normal temperature away from direct sunlight and interior light after removing any dirt.

■ Card key (if equipped)

- The card key is not waterproof.
- The mechanical key that is stored inside the card key should be used only if a problem arises, such as when the card key does not operate properly.
- If it is difficult to take out the mechanical key, push down the lock release button using a pen tip etc. If it is still difficult to pull it out, use a coin etc.
- To store the mechanical key in the card key, insert it while pressing the lock release button.



- If the battery cover is not installed and the battery falls out or if the battery was removed because the key got wet, reinstall the battery with the positive terminal facing the Lexus emblem.



■ When required to leave the vehicle's key with a parking attendant

Turn the trunk opener main switch off and lock the glove box as circumstances demand. (→P. 151, 671)

Remove the mechanical key for your own use and provide the attendant with the electronic key only.

■ If you lose your mechanical keys

New genuine mechanical keys can be made by your Lexus dealer using the other mechanical key and the key number stamped on your key number plate. Keep the plate in a safe place such as your wallet, not in the vehicle.

■ When riding in an aircraft

When bringing an electronic key onto an aircraft, make sure you do not press any buttons on the electronic key while inside the aircraft cabin. If you are carrying an electronic key in your bag etc., ensure that the buttons are not likely to be pressed accidentally. Pressing a button may cause the electronic key to emit radio waves that could interfere with the operation of the aircraft.



NOTICE

■ To prevent key damage

- Do not drop the keys, subject them to strong shocks or bend them.
- Do not expose the keys to high temperatures for a long period of time.
- Do not get the keys wet or wash them in an ultrasonic washer etc.
- Do not attach metallic or magnetic materials to the keys or place the keys close to such materials.
- Do not disassemble the keys.
- Do not attach a sticker or anything else to the surface of the electronic key.
- Do not place the keys near objects that produce magnetic fields, such as TVs, audio systems and induction cookers, or medical electrical equipment, such as low-frequency therapy equipment.

■ Handling the electronic keys

- Observe the following to prevent deterioration, changes in shape and damage to the leather area.
 - Do not carry the electronic key together with hard objects, such as other keys or accessories.
 - Do not expose the electronic keys to direct sunlight or interior light for extended periods of time.
 - Do not place the electronic key on items made of vinyl, plastic or that contain wax.
They may stick to the leather surface if the items become warm.
 - Do not get the electronic key wet.
Even if the electronic gets slightly wet, dry it with a soft cloth and let it dry in the shade.
 - Do not touch the electronic key with hands that have oil, medicine, hand cream or perfume on them.
 - When cleaning, do not use a leather cleaner, solvents or leather filling agents.
- Because the leather portion is dyed, if the electronic key touches clothing while it has sweat and moisture adhered to it, there is a possibility that the clothing may change color.

**NOTICE****■ In case of a smart access system with push-button start malfunction or other key-related problems**

Take your vehicle with all the electronic keys provided with your vehicle, including the card key to your Lexus dealer.

■ When an electronic key is lost

If the electronic key remains lost, the risk of vehicle theft increases significantly. Visit your Lexus dealer immediately with all remaining electronic keys and the card key that was provided with your vehicle.


■ Handling the card key

- Do not apply excess force when inserting the mechanical key into the card key. Doing so may damage the card key.
- If the battery or card key terminals get wet, the battery may corrode.
If the key is dropped into water, or if drinking water etc. is spilled on the key, immediately remove the battery cover and wipe the battery and terminals. (To remove the battery cover, lightly grasp and pull it.) If the battery is corroded, have your Lexus dealer replace the battery.
- Do not crush the battery cover or use a screwdriver to remove the battery cover. Forcibly removing the battery cover may bend or damage the key.
- If the battery cover is frequently removed, the battery cover may become loose.
- When installing the battery, make sure to check the direction of the battery. Installing the battery in the wrong direction may cause the battery to deplete rapidly.
- The surface of the card key may be damaged, or its coating may peel off in the following situations:
 - The card key is carried together with hard objects, such as coins and keys.
 - The card key is scraped with a sharp object, such as the tip of a mechanical pencil.
 - The surface of the card key is wiped with thinner or benzene.

Smart access system with push-button start

Function summary

The following operations can be performed simply by carrying the electronic key (including the card key) on your person, for example in your pocket. (The driver should always carry the electronic key.)

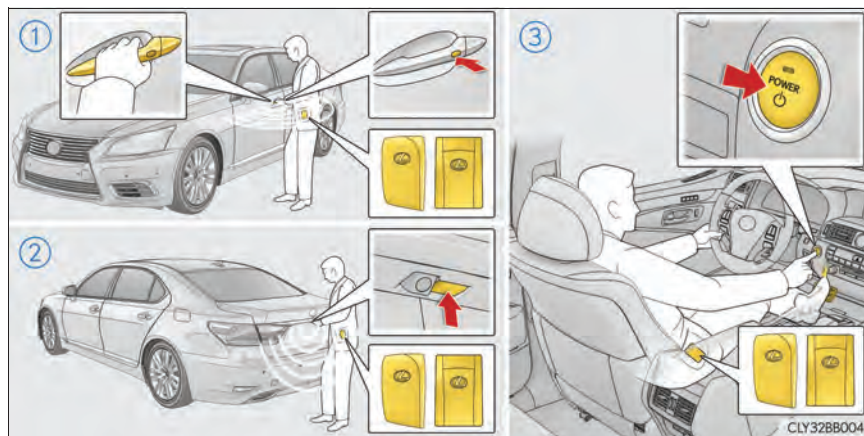

- ① Locks and unlocks the doors (→P. 129)
- ② Opens the trunk (→P. 129)
- ③ Starts the hybrid system (→P. 220)

■ Operation signals

Doors:

A buzzer sounds and the emergency flashers flash to indicate that the doors have been locked/unlocked. (Locked: Once; Unlocked: Twice)

Trunk:

A buzzer sounds to indicate that the trunk has been unlocked.

Windows and moon roof:

A buzzer sounds to indicate that the windows and moon roof are operating.

■ Security feature

If a door is not opened within approximately 60 seconds after the vehicle is unlocked, the security feature automatically locks the vehicle again.

■ Welcome light illumination control

The side marker, parking, tail and license plate lights automatically turn on at night when the doors are unlocked using the entry function or wireless remote control if the headlight switch is in the "AUTO" position.


Unlocking and locking the doors

Grip the driver's door handle to unlock the door. Grip the passenger's door handle to unlock all the doors.*

Make sure to touch the sensor on the back of the handle.


The door cannot be unlocked for 3 seconds after the door is locked.

*: The door unlock settings can be changed. (→P.134)

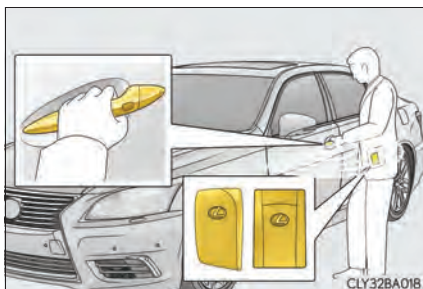

Press the lock button to lock the door.

Pressing and holding the button closes the windows and moon roof.

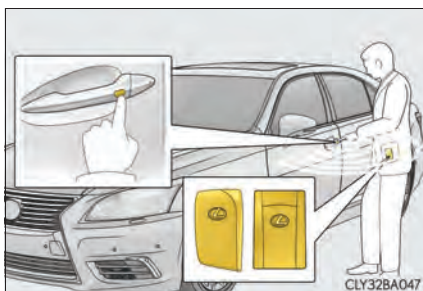


Opening the trunk

Press the button.

The trunk lid automatically opens fully.

When all the doors are unlocked using one of the following methods, the trunk can be opened without the electronic key:


- Entry function
- Wireless remote control
- Door lock switches
- Automatic door unlocking system
- Mechanical key

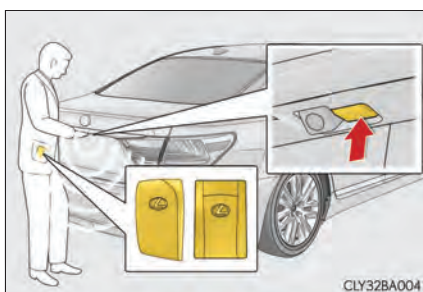

Antenna location and effective range

■ Antenna location


- ① Antennas outside the cabin
- ② Antennas inside the cabin
- ③ Antenna outside the trunk
- ④ Antenna inside the trunk

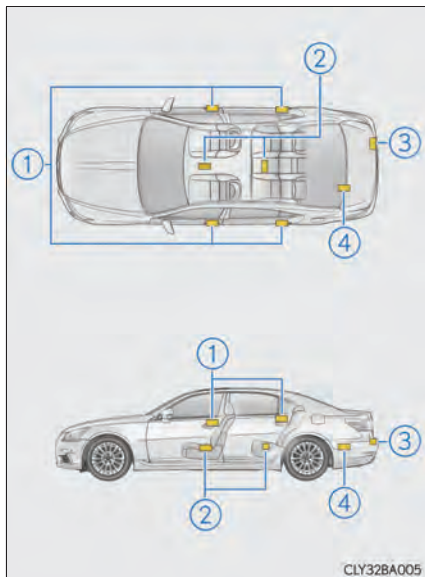

■ Effective range (areas within which the electronic key is detected)

- When locking or unlocking the doors

The system can be operated when the electronic key is within about 2.3 ft. (0.7 m) of an outside door handle. (Only the doors detecting the key can be operated.)

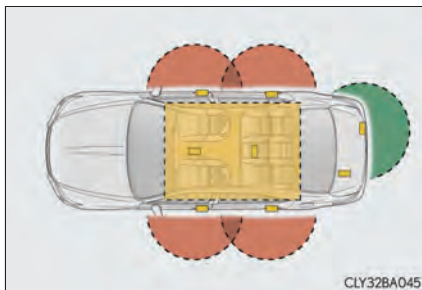

- When opening the trunk

The system can be operated when the electronic key is within about 2.3 ft. (0.7 m) of the trunk release button.

- When starting the hybrid system or changing power switch modes

The system can be operated when the electronic key is inside the vehicle.

■ Alarms and warning indicators

A combination of exterior and interior alarms as well as warnings displayed on the multi-information display is used to prevent theft of the vehicle and unforeseeable accidents resulting from erroneous operation. Perform the appropriate correction procedure described in the following table:

Alarm	Situation	Correction procedure
Exterior alarm sounds once for 2 seconds.	An attempt was made to lock the doors using the entry function while the electronic key was still inside the passenger compartment.	Retrieve the electronic key from the passenger compartment and lock the doors again.
	The trunk was closed with the electronic key inside and all doors were locked.	Retrieve the electronic key from the trunk and close the trunk lid.
Exterior alarm sounds once for 60 seconds.	An attempt was made to exit the vehicle and lock the doors while carrying the electronic key without first turning the power switch off.	Turn the power switch off and lock the doors again.
Exterior alarm sounds once for 5 seconds.	An attempt was made to lock the vehicle while a door was open.	Close all of the doors and lock the doors again.
Interior alarm pings continuously.	The power switch was turned to ACCESSORY mode while the driver's door was open (or the driver's door was opened while the power switch was in ACCESSORY mode).	Turn the power switch off and close the driver's door.
	The power switch was turned off while the driver's door was open.	Close the driver's door.

Alarm	Situation	Correction procedure
Interior alarm sounds continuously.*1	When the power switch is in ON or ACCESSORY mode, an attempt was made to open the door and exit the vehicle, and the shift lever was not in P.	Shift the shift lever to P and turn the power switch off.
Interior and exterior alarms sound continuously.*1	When the power switch is in ON or ACCESSORY mode, the driver's door was closed after the key was carried outside the vehicle, and the shift lever was not in P.	Shift the shift lever to P, turn the power switch off and close the driver's door again.
Interior alarm pings once.*1	The electronic key has a low battery.	Replace the electronic key battery.
	An attempt was made to start the hybrid system without the electronic key being present, or the electronic key was not functioning normally.	Start the hybrid system with the electronic key present.*2
Interior alarm pings once and exterior alarm sounds 3 times.*1	The driver's door was closed after the key was carried outside the vehicle, and the power switch was not turned off.	Turn the power switch off and close the driver's door again.
	An occupant carried the electronic key outside the vehicle and closed the door while the power switch was not off.	Bring the electronic key back into the vehicle.

*1: A warning message will be shown on the multi-information display in the instrument cluster.


*2: If the hybrid system does not start when the electronic key is inside the vehicle, the electronic key battery may be depleted or there may be difficulties receiving the signal from the key. (→P.136)

■ Switching the door unlock function

It is possible to set which doors the entry function unlocks using the wireless remote control.

- 1 Turn the power switch off.
- 2 Press and hold  ,  or  for approximately 5 seconds while pressing and holding  .

The setting changes each time an operation is performed, as shown below. (When changing the setting continuously, release the buttons, wait for at least 5 seconds, and repeat step 2.)

Multi-information display	Unlocking function	Beep
	Hold the driver's door handle to unlock only the driver's door.	Exterior: Beeps 3 times Interior: Rings once
	Hold a passenger's door handle to unlock all the doors.	
	Hold the door handle to unlock the front and rear doors on your side.	Exterior: Beeps 4 times Interior: Rings once
	Hold the door handle to unlock the door.	Exterior: Beeps once Interior: Rings once
	Hold a door handle to unlock all doors.	Exterior: Beeps twice Interior: Rings once

To prevent unintended triggering of the alarm, unlock the doors using the wireless remote control and open and close a door once after the settings have been changed. (If a door is not opened within 60 seconds after  is pressed, the doors will be locked again and the alarm will automatically be set.)

In case that the alarm is triggered, immediately stop the alarm. (→P. 92)

■ Battery-saving function

In the following circumstances, the entry function is disabled in order to prevent the 12-volt battery from discharging and the electronic key battery from depleting.

- When the entry function has not been used for 30 days or more
- When the electronic key has been left within approximately 6 ft. (2 m) of the vehicle for 10 minutes or more

The system will resume operation when

- The vehicle is locked using the door handle lock switch when carrying the electronic key on your person.
- The vehicle is locked/unlocked using the wireless remote control function. (→P. 142)
- The vehicle is locked/unlocked using the mechanical key. (→P. 826)

■ Conditions affecting operation

The smart access system with push-button start uses weak radio waves. In the following situations, the communication between the electronic key and the vehicle may be affected, preventing the smart access system with push-button start, wireless remote control and immobilizer system from operating properly. (Ways of coping: →P. 826)

- When the electronic key battery is depleted
- Near a TV tower, electric power plant, gas station, radio station, large display, airport or other facility that generates strong radio waves or electrical noise
- When carrying a portable radio, cellular phone, cordless phone or other wireless communication device
- When the electronic key is in contact with, or is covered by the following metallic objects
 - Cards to which aluminum foil is attached
 - Cigarette boxes that have aluminum foil inside
 - Metallic wallets or bags
 - Coins
 - Hand warmers made of metal
 - Media such as CDs and DVDs
- When multiple electronic keys are in the vicinity
- When other wireless keys (that emit radio waves) are being used nearby
- When carrying the electronic key together with the following devices that emit radio waves
 - Another vehicle's electronic key or a wireless key that emits radio waves
 - Personal computers or personal digital assistants (PDAs)
 - Digital audio players
 - Portable game systems
- If window tint with a metallic content or metallic objects are attached to the rear window

■ Note for the entry function

- Even when the electronic key is within the effective range (detection areas), the system may not operate properly in the following cases:
 - The electronic key is too close to the window or outside door handle, near the ground, or in a high place when the doors are locked or unlocked.
 - The electronic key is near the ground or in a high place, or too close to the rear bumper center when the trunk is opened.
 - The electronic key is on the instrument panel, rear package tray or floor, or in the door pockets or glove box when the hybrid system is started or power switch modes are changed.
- Do not leave the electronic key on top of the instrument panel or near the door pockets when exiting the vehicle. Depending on the radio wave reception conditions, it may be detected by the antenna outside the cabin and the door will become lockable from the outside, possibly trapping the electronic key inside the vehicle.
- As long as the electronic key is within the effective range, the doors may be locked or unlocked by anyone. However, only the doors detecting the electronic key can be used to unlock the vehicle.
- Even if the electronic key is not inside the vehicle, it may be possible to start the hybrid system if the electronic key is near the window.
- The doors may unlock if a large amount of water splashes on the door handle, such as in the rain or in a car wash when the electronic key is within the effective range. (The doors will automatically be locked after approximately 60 seconds if the doors are not opened and closed.)
- Gripping the door handle when wearing a glove may not unlock the door.
- If the wireless remote control is used to lock the doors when the electronic key is near the vehicle, there is a possibility that the door may not be unlocked by the entry function. (Use the wireless remote control to unlock the doors.)
- A sudden approach to the effective range or door handle may prevent the doors from being unlocked. In this case, return the door handle to the original position and check that the doors unlock before pulling the door handle again.

■ When the vehicle is not driven for extended periods

To prevent theft of the vehicle, do not leave the electronic key within 6 ft. (2 m) of the vehicle.

■ Alarm

Using the smart access system with push-button start to lock the doors will set the alarm system. (→P. 92)

■ To operate the system properly

- Make sure to carry the electronic key when operating the system. Do not get the electronic key too close to the vehicle when operating the system from the outside of the vehicle.

Depending on the position and holding condition of the electronic key, the key may not be detected correctly and the system may not operate properly. (The alarm may go off accidentally, or the door lock prevention function may not operate.)

- Do not leave the electronic key inside the trunk.

The key confinement prevention function may not operate, depending on the location of the key (close to a spare tire, the inside edge of the trunk), conditions (inside a metal bag, close to metallic objects) and the radio waves in the surrounding area. (→P. 152)

■ If the smart access system with push-button start does not operate properly

- Locking and unlocking the doors and trunk: Use the mechanical key. (→P. 826)
- Starting the hybrid system: →P. 828

■ Electronic key battery depletion

- The standard battery life is 1 to 2 years. (The card key battery life is about a year and a half.)
- If the battery is low, an alarm will sound in the cabin when the hybrid system is started or stopped. (→P. 132)
- The battery becomes depleted even if the electronic key is not used because the key always receives radio waves. If the smart access system with push-button start or the wireless remote control does not operate, or the detection area becomes smaller, the battery may be depleted. Replace the battery when necessary. (→P. 778)
- To avoid serious deterioration, do not leave the electronic key within 3 ft. (1 m) of the following electrical appliances that produce a magnetic field:
 - TVs
 - Personal computers
 - Cellular phones, cordless phones and battery chargers
 - Recharging cellular phones or cordless phones
 - Table lamps
 - Induction cookers

■ When the electronic key battery is fully depleted

→P. 778

■ Customization

Settings (e. g. smart access system with push-button start) can be changed. (Customizable features →P. 865)

■ Certification for the smart access system with push-button start

- For vehicles sold in the U.S.A.

FCC ID: NI4TMLF-4

NOTE:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- For vehicles sold in Canada

NOTE:

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

⚠ CAUTION

■ Caution regarding interference with electronic devices

- People with implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should keep away from the smart access system with push-button start antennas. (→P. 130)

The radio waves may affect the operation of such devices. If necessary, the entry function can be disabled. Ask your Lexus dealer for details, such as the frequency of radio waves and timing of the emitted radio waves. Then, consult your doctor to see if you should disable the entry function.

- Users of any electrical medical device other than implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should consult the manufacturer of the device for information about its operation under the influence of radio waves.

Radio waves could have unexpected effects on the operation of such medical devices.


Ask your Lexus dealer for details on disabling the entry function.

⚠ NOTICE

■ When opening the trunk

Do not press the rear view monitor system camera by mistake.

If the camera or surrounding area receives a strong impact, the camera may move off its installed position and/or angle.

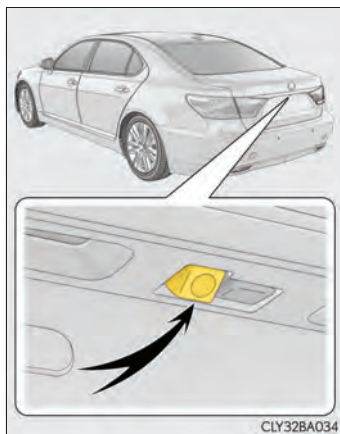

CLY32BA034

Wireless remote control

Function summary

The wireless remote control can be used to lock and unlock the vehicle.

① Locks all the doors

② Unlocks all the doors

Pressing the button unlocks the driver's door. Pressing the button again within 3 seconds unlocks the other doors.


③ Opens the windows and moon roof (press and hold)*

④ Opens the trunk
(press and hold)

The trunk lid automatically opens fully.

⑤ Sounds the alarm
(press and hold) (→P. 143)

*: This setting must be changed using the customize function. (→P. 865)

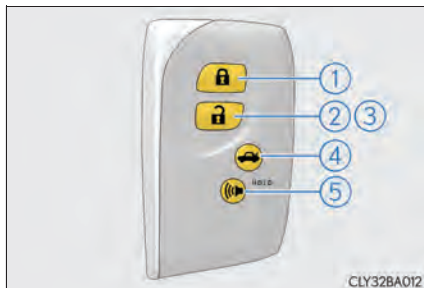

■ Operation signals

Doors:

A buzzer sounds and the emergency flashers flash to indicate that the doors have been locked/unlocked. (Locked: once; Unlocked: twice)

Trunk:

A buzzer sounds to indicate that the trunk has been opened.

Windows and moon roof:

A buzzer sounds to indicate that the windows and moon roof are operating.

■ Welcome light illumination control

→P. 128

■ Door lock buzzer

If an attempt to lock the doors is made when a door is not fully closed, a buzzer sounds continuously for 5 seconds. Fully close the door to stop the buzzer, and lock the vehicle once more.

■ Panic mode

When  is pressed for longer than about one second, an alarm will sound intermittently and the vehicle lights will flash to deter any person from trying to break into or damage your vehicle.

To stop the alarm, press any button on the electronic key.



■ Security feature

→P. 128

■ Alarm

Using the wireless remote control to lock the doors will set the alarm system. (→P. 92)

■ Conditions affecting operation

→P. 136

■ If the wireless remote control does not operate properly

Locking and unlocking the doors and trunk: Use the mechanical key. (→P. 826)

■ Electronic key battery depletion

→P. 139

■ When the electronic key battery is fully depleted

→P. 778

■ Customization

Settings (e.g. wireless remote control system) can be changed.
(Customizable features →P. 865)

■ Certification for wireless remote control

► For vehicles sold in Hawaii, Guam and Puerto Rico

FCC ID: NI4TMRF-002

FCC ID: HYQ14ACX

FCC ID: HYQ14AEB

NOTE:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- For vehicles sold in the mainland U.S.A.

FCC ID: NI4TMRF-002

FCC ID: HYQ14ACX

FCC ID: HYQ14AEB

FCC ID: NI4TMRF-001

FCC ID: HYQ14ADF

FCC ID: HYQ14AEF

NOTE:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- For vehicles sold in Canada

NOTE:

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Doors

Unlocking and locking the doors

The vehicle can be locked and unlocked using the entry function, wireless remote control or door lock switches.

◆ Entry function


→P.127

◆ Wireless remote control

→P.142

◆ Door lock switches


- ① Locks all the doors
- ② Unlocks all the doors

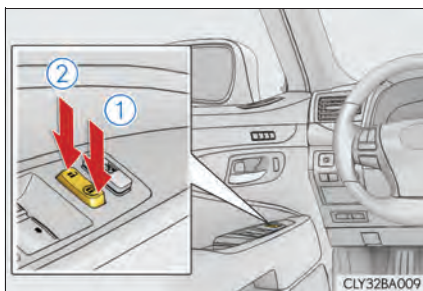

◆ Inside lock buttons

- ① Locks the door
- ② Unlocks the door

The front doors can be opened by pulling the inside handle even if the lock buttons are in the lock position.

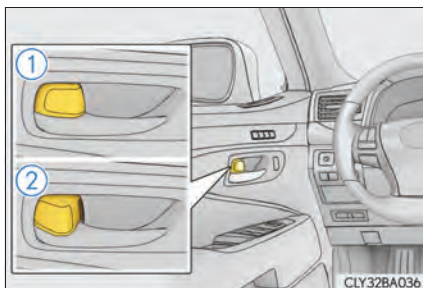

Locking the front doors from the outside without a key

- 1 Move the inside lock button to the lock position.
- 2 Close the door.

The door cannot be locked if the power switch is in ACCESSORY or ON mode, or the electronic key is left inside the vehicle.


The key may not be detected correctly and the door may be locked.

Rear door child-protector lock

The door cannot be opened from inside the vehicle when the lock is set.

- 1 Unlock
- 2 Lock

These locks can be set to prevent children from opening the rear doors. Push down on each rear door switch to lock both rear doors.

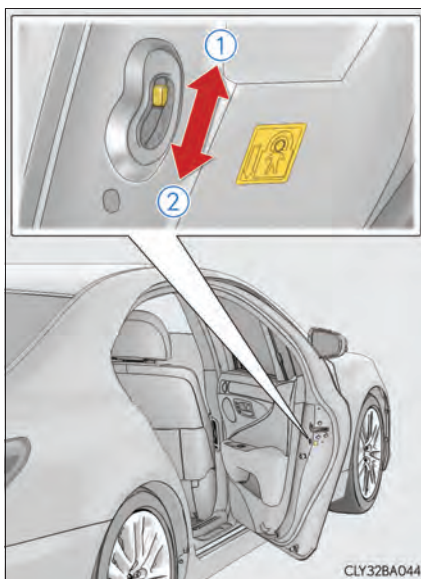

Automatic door locking and unlocking systems

The following functions can be set or canceled:

For instructions on customizing, refer to P. 865.

Function	Operation
Speed linked door locking function	All doors are automatically locked when vehicle speed is approximately 12 mph (20 km/h) or higher.
Shift position linked door locking function	All doors are automatically locked when shifting the shift lever to position other than P.
Shift position linked door unlocking function	All doors are automatically unlocked when shifting the shift lever to P.
Driver's door linked door unlocking function	All doors are automatically unlocked when driver's door is opened.

■ Impact detection door lock release system

In the event that the vehicle is subject to a strong impact, all the doors are unlocked. Depending on the force of the impact or the type of accident, however, the system may not operate.

■ Door closer

In the event that a door is left slightly open, the door closer will automatically close it to the fully closed position.

- The door closer will operate regardless of the power switch mode.
- The door closer will not function if the door has been closed while pulling the inside or outside door handle.
- The door can be opened by pulling the inside or outside door handle, even when the door closer is operating (except when the lock button is in the lock position or the child-protector lock is set).
- The motor sound may be heard for several seconds after the door closer closes the door. This does not indicate a malfunction.

■ Using the mechanical key

The doors can also be locked and unlocked with the mechanical key. (→P. 826)

■ If a wrong key is used

The key cylinder rotates freely to isolate inside mechanism.

■ Customization

Settings (e.g. unlocking function using a key) can be changed.
(Customizable features → P. 865)

CAUTION

■ To prevent an accident

Observe the following precautions while driving the vehicle.

Failure to do so may result in a door opening and an occupant throwing out of the vehicle, resulting in death or serious injury.

- Ensure that all doors are properly closed and locked.
- Do not pull the inside handle of the doors while driving.
Be especially careful for the front doors, as the doors may be opened even if the inside lock buttons are in locked position.
- Set the rear door child-protector locks when children are seated in the rear seats.

■ Door closer

In the event that a door is left slightly open, the door closer will automatically close it to the fully closed position.

If the child-protector lock is set, the door closer will not stop during operation even if an attempt is made to open the door from inside the vehicle. Be careful not to catch fingers or anything else in the door. Failure to do so may result in serious injury.

NOTICE

■ To prevent door closer malfunction

Do not frequently repeat opening and closing of doors, or apply excessive force to a door while the door closer is operating.

Trunk


The trunk can be opened using the trunk opener, entry function or wireless remote control.

The trunk can be closed using the trunk closer.

Opening the trunk from inside the vehicle

Press the opener switch.

The trunk lid automatically opens fully.

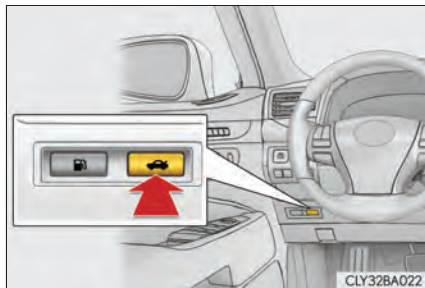

Opening the trunk from outside the vehicle

■ Entry function

→P. 127


■ Wireless remote control

→P. 142

Trunk closer switch


Pressing the switch closes the trunk lid automatically. (A buzzer sounds.)

Pressing the switch while the trunk lid is closing opens the trunk lid again.

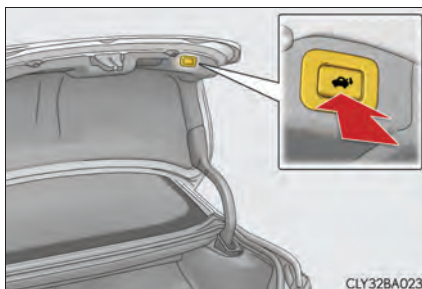

When closing the trunk

Using the trunk grip, lower the trunk without applying force to the side and push the trunk down from the outside to close it.

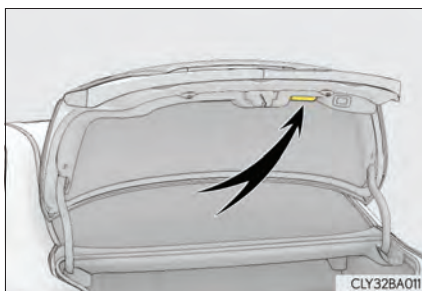


Luggage security system

The trunk opener switch can be temporarily disabled to protect luggage stored in the trunk against theft.

Turn the main switch in the glove box off to disable the trunk opener.

- ① On
- ② Off

The trunk lid cannot be opened even with the wireless remote control or the entry function.

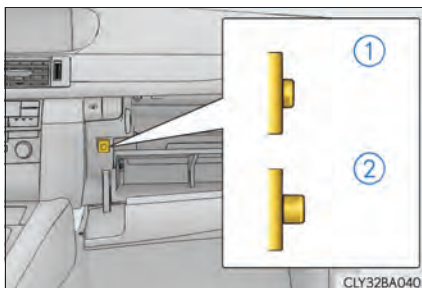

■ Trunk lid light/trunk light

The trunk lid light/trunk light turns on when the trunk is opened.

■ Trunk easy closer

In the event that the trunk lid is left slightly open, the trunk easy closer will automatically close it to the fully closed position.

■ Function to prevent the trunk being locked with the electronic key inside (when all the doors are locked)

Closing the trunk lid with the electronic key left inside the trunk will sound an alarm. In this case, the trunk lid can be opened by pressing the button on the trunk lid.

■ Overload protection function

The trunk lid will not operate when excessive load is present on the top of the trunk lid.

■ Fall-down protection function

While the trunk lid is opening automatically, applying excessive force to it will stop the opening operation to prevent the trunk lid from rapidly falling down.


■ Jam protection function

While the trunk lid is closing automatically, the trunk lid will stop closing and open if something gets caught.

■ Internal trunk release lever

The trunk lid can be opened by pulling the glow-in-the-dark lever located on the inside of the trunk lid to the side.

The lever will continue to glow for some time after the trunk lid is closed.



■ Using the mechanical key

The trunk can be also opened using the mechanical key. (→P. 827)

■ When leaving a key to the vehicle with a parking attendant

→P. 124

 CAUTION

Observe the following precautions.

Failure to do so may result in death or serious injury.

■ Before driving

- Make sure that the trunk lid is fully closed. If the trunk lid is not fully closed, it may open unexpectedly while driving and hit near-by objects or luggage in the trunk may be thrown out, causing an accident.
- Do not allow children to play in the trunk.
If a child is accidentally locked in the trunk, they could suffer from heat exhaustion, suffocation or other injuries.
- Do not allow a child to open or close the trunk lid.
Doing so may cause the trunk lid to open unexpectedly, or cause the child's hands, head, or neck to be caught by the closing trunk lid.

■ Important points while driving



Never let anyone sit in the trunk. In the event of sudden braking or a collision, they are susceptible to death or serious injury.

⚠ CAUTION**■ Using the trunk**

Observe the following precautions.

Failure to do so may cause parts of the body to be caught, resulting in serious injury.


- Remove any heavy loads, such as snow and ice, from the trunk lid before opening it. Failure to do so may cause the trunk lid to suddenly shut again after it is opened.
- When opening or closing the trunk lid, thoroughly check to make sure the surrounding area is safe.
- If anyone is in the vicinity, make sure they are safe and let them know that the trunk is about to open or close.
- Use caution when opening or closing the trunk lid in windy weather as it may move abruptly in strong wind.
- The trunk lid may suddenly shut if it is not opened fully. It is more difficult to open or close the trunk lid on an incline than on a level surface, so beware of the trunk lid unexpectedly opening or closing by itself. Make sure that the trunk lid is fully open and secure before using the trunk.
- When closing the trunk lid, take extra care to prevent your fingers etc. from being caught.
- When closing the trunk lid, make sure to press it lightly on its outer surface. If the trunk handle is used to fully close the trunk lid, it may result in hands or arms being caught.
- Do not attach any accessories other than genuine Lexus parts to the trunk lid. Such additional weight on the trunk lid may cause the lid to suddenly shut again after it is opened.



⚠ CAUTION

■ Trunk easy closer

In the event that the trunk lid is left slightly open, the trunk easy closer will automatically close it to the fully closed position. It takes several seconds before the trunk easy closer begins to operate. Be careful not to catch fingers or anything else in the trunk lid, as this may cause bone fractures or other serious injuries.



■ Power trunk opener and closer

Observe the following precautions when operating the power trunk opener and closer.

Failure to do so may cause serious injury.

- Check the safety of the surrounding area to make sure there are no obstacles or anything that could cause any of your belongings to get caught.
- If anyone is in the vicinity, make sure they are safe and let them know that the trunk is about to open or close.
- If the trunk closer switch is pressed while the trunk lid is opening during automatic operation, the trunk lid stops opening. Take extra care when on an incline, as the trunk lid may open or close suddenly.
- On an incline, the trunk lid may suddenly shut after it opens automatically. Make sure the trunk lid is fully open and secure before using the trunk.
- In the following situations, the power trunk opener and closer may detect an abnormality and automatic operation may be stopped. In this case, the trunk lid has to be operated manually. Take extra care in this situation, as the stopped trunk lid may suddenly shut, causing an accident.
 - When the trunk lid contacts an obstacle
 - When the 12-volt battery voltage suddenly drops, such as when the power switch is turned to ON mode or the hybrid system is started during automatic operation
- Do not attach any accessories other than genuine Lexus parts to the trunk lid. The power trunk opener and closer may not operate, causing itself to malfunction, or the trunk lid may suddenly shut again after it is opened.

 CAUTION**■ Jam protection function**

Observe the following precautions.
Failure to do so may cause serious injury.

- Never use any part of your body to intentionally activate the jam protection function.
- The jam protection function may not work if something gets caught just before the trunk lid fully closes. Be careful not to catch fingers or anything else in the trunk lid.
- The jam protection function may not work depending on the shape of the object that is caught. Be careful not to catch fingers or anything else.

 NOTICE**■ To prevent trunk easy closer malfunctions**


Do not apply force to the trunk lid while the trunk easy closer is operating.

■ To prevent damage to the power trunk opener and closer

- Make sure that there is no luggage or snow on the trunk lid before operating the power trunk opener and closer. In addition, make sure that there is no ice between the trunk lid and frame that prevents movement of the trunk lid. Operating the power trunk opener and closer when excessive load is present on the trunk lid may cause a malfunction.
- Do not apply excessive force to the trunk lid while the power trunk opener and closer is operating.

Front seats

Adjustment procedure

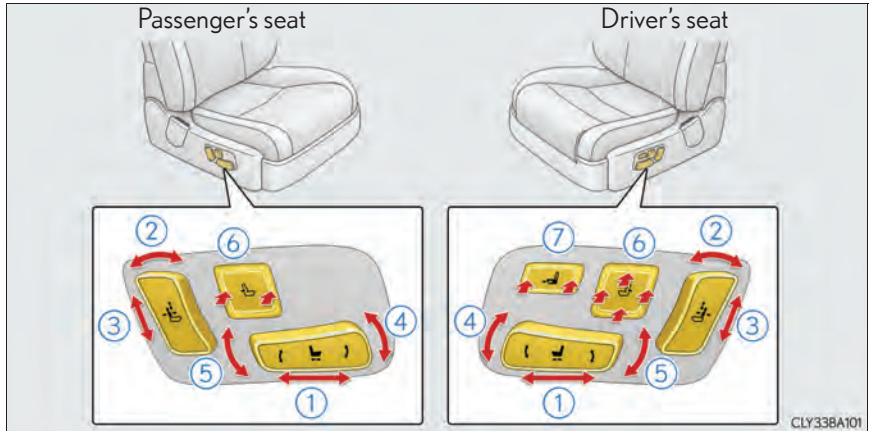

① Seat position adjustment switch

The height of the driver's head restraint is automatically adjusted simultaneously with the seat position adjustment operation.

② Seatback angle adjustment switch

③ Head restraint height adjustment switch (→P. 184)

④ Seat cushion (front) angle adjustment switch

⑤ Vertical height adjustment switch

⑥ Lumbar/pelvic support adjustment switch

Driver's seat: firmness, vertical, backward and forward positioning

Front passenger's seat: firmness, backward and forward positioning

⑦ Seat cushion length adjustment switch

Operating the front passenger's seat from the driver's seat

► Vehicles without relaxation seat

- ① Tilts the seatback forward
- ② Tilts the seatback backward
- ③ Moves the seat forward
- ④ Moves the seat backward




► Vehicles with relaxation seat

- ① Tilts the seatback forward and moves the seat forward
- ② Tilts the seatback backward and moves the seat backward

If the rear seat is not in the neutral position, pressing the button once will move the rear seat to the neutral position. Pressing the button again will move the front passenger's seat to the neutral position.

- ③ Tilts the seatback forward
- ④ Tilts the seatback backward
- ⑤ Moves the seat forward
- ⑥ Moves the seat backward

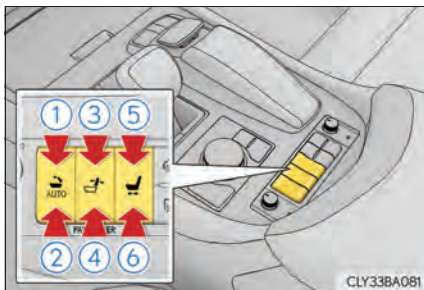

Operating the front passenger's seat from the rear seat (vehicles with relaxation seat)


► 5-seat models

- ① Moves the front passenger's seat forward

The signal beeps when the seat operation stops at the forward limit.

- ② Moves the front passenger's seat backward

The seatback will return to the neutral position. If the head restraint is folded, it will rise before the seatback moves.

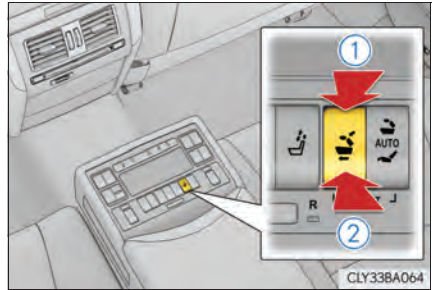

► 4-seat models

- ① Moves the front passenger's seat forward

The signal beeps when the seat operation stops at the forward limit.

- ② Moves the front passenger's seat backward

The seatback will return to the neutral position. If the head restraint is folded, it will rise before the seatback moves.




Power easy access system

The seat and steering wheel are automatically adjusted to allow the driver or front passenger to enter and exit the vehicle easily.

■ Driver's seat

When all of the following have been performed, the driver's seat and steering wheel are automatically adjusted to a position that allows driver to enter and exit the vehicle easily.

- The shift lever has been shifted to P.
- The power switch has been turned off.
- The driver's seat belt has been unfastened.

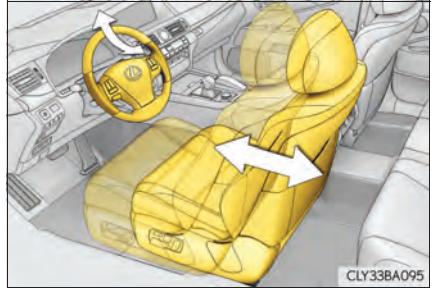

When any of the following has been performed, the driver's seat and steering wheel automatically return to their original positions.

- The power switch has been turned to ACCESSORY mode.
- The driver's seat belt has been fastened.

■ Front passenger's seat

If the front passenger's door is opened while the vehicle is stopped, the adjusted lumbar/pelvic support, etc. will return to its original position.

■ Operating the foldable head restraint (vehicles with relaxation seat)

- If the seatback angle is adjusted using the switches located on the side of the front passenger's seat or center console when the power switch is in ON mode, the head restraint will operate as follows:
 - When tilting the seatback forward:
After the seatback movement ends, the head restraint starts to rise and fold. A signal beeps once operation is complete. If the switch is released during the operation, the head restraint will return to the neutral position.
 - When tilting the seatback backward:
If the head restraint is folded, it will return to the neutral position.
- In the following situations, the head restraint will not operate even when the seat-back angle adjustment switch is operated:
 - The power switch is off.
 - The weight of an occupant or heavy object, etc. is detected on the front passenger's seat.
 - The front passenger's seat belt is fastened.
 - The front passenger's door is open.

■ Operating the front passenger's seat from the rear seat (vehicles with relaxation seat)

The front passenger's seat can be operated when the power switch is in ON mode. However, in the following situations, the front passenger's seat does not move even when the switch is operated:

- The weight of an occupant or heavy object etc. is detected on the front passenger's seat.
- The front passenger's seat belt is fastened.
- The front passenger's door is open. (The front seat will not move forward.)

■ Seat cushion automatic length adjustment (driver's seat)

If the front of the cushion gets too close to the area around the instrument panel when the seat position is being adjusted, the seat cushion will automatically retract.

■ Seat operation automatic stop function (vehicles with relaxation seat)

If a front seat is likely to come into contact with the retractable table (4-seat models) or the ottoman during seat operation or activation of the power easy access system, a buzzer will sound and seat slide operation will be stopped partway. (A warning message will be shown on the multi-information display.)

■ Power easy access system operations

- When exiting the vehicle, the power easy access system may not operate if the seat is already close to the rearmost position, etc.
- If the seat position is adjusted during the power easy access system operation, the operation will stop.
- If the seat position is adjusted during or after the power easy access system operation when the driver is exiting the vehicle, the power easy access system will not operate when entering the vehicle.

■ Customization

The distance that the driver's seat moves backward during the power easy access system can be changed. (Customizable features →P. 865)



CAUTION

■ When adjusting the seat position

- Take care when adjusting the seat position to ensure that other passengers are not injured by the moving seat.
- Do not put your hands under the seat or near the moving parts to avoid injury. Fingers or hands may become jammed in the seat mechanism.

■ Seat adjustment

To reduce the risk of sliding under the lap belt during a collision, do not recline the seat more than necessary.

If the seat is too reclined, the lap belt may slide past the hips and apply restraint forces directly to the abdomen, or your neck may contact the shoulder belt, increasing the risk of death or serious injury in the event of an accident.

Adjustments should not be made while driving as the seat may unexpectedly move and cause the driver to lose control of the vehicle.

■ Operating the front passenger's seat from the driver's seat or rear seat

Do not operate the front passenger's seat when a passenger is seated in it. In addition, do not let anyone sit down in the front passenger's seat while the seat is being operated or when the head restraint is being folded. The front passenger may catch their legs between the instrument panel and seat, or the head restraint may interfere with their head, resulting in injury.

■ When adjusting the seat positions


Make sure to leave enough space around the feet so they do not get stuck.

**NOTICE****■ Operating the front passenger's seat from the driver's seat or rear seat**

Before operating the front passenger's seat, make sure that there is no luggage or any other objects on the seat or in the footwell that could prevent its operation. Failure to do so may result in excess force being applied, causing damage to the seat and/or the luggage.

Power rear seat

- 5-seat models without relaxation seat

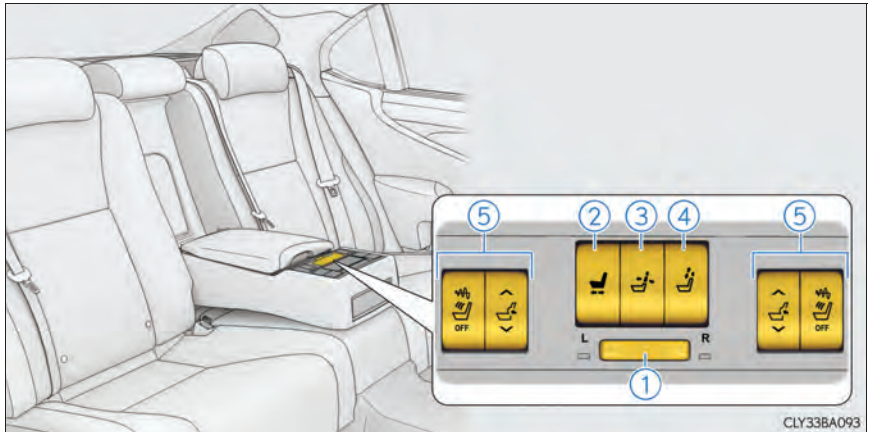

① Seat selection switch

The indicator light for the seat that can be operated comes on.


② Seat position adjustment switch

③ Seatback upper angle adjustment switch

④ Head restraint height adjustment switch (→P. 184)

⑤ Pelvic support seat switches

► 5-seat models with relaxation seat

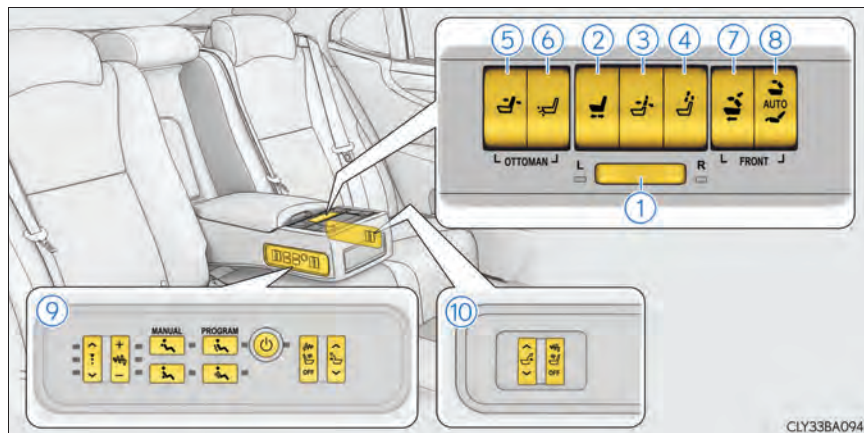

The right-hand rear seat is a relaxation seat, which is equipped with a seat-back angle adjustment function and an ottoman.

① Seat selection switch

The indicator light for the seat that can be operated comes on.

② Seat position adjustment switch

③ Seatback upper angle adjustment switch

④ Head restraint height adjustment switch (→P. 184)

⑤ Seatback angle adjustment switch

⑥ Ottoman angle adjustment switch


⑦ Front passenger's seat control switch (→P. 159)

⑧ Relaxation mode switch

⑨ Rear seat relaxation system/pelvic support seat switches

⑩ Pelvic support seat switches

► 4-seat models

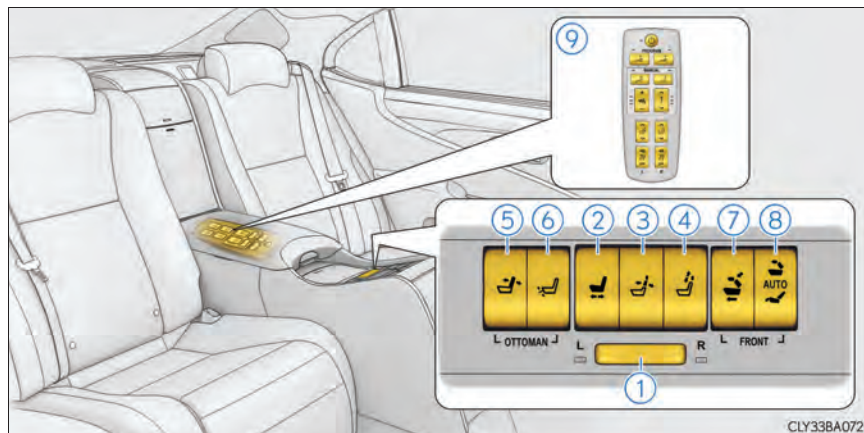

CLY33BA072

The right-hand rear seat is a relaxation seat, which is equipped with a seat-back angle adjustment function and an ottoman.

① Seat selection switch

The indicator light for the seat that can be operated comes on.

② Seat position adjustment switch

③ Seatback upper angle adjustment switch

④ Head restraint height adjustment switch (→P. 184)

⑤ Seatback angle adjustment switch

⑥ Ottoman angle adjustment switch

⑦ Front passenger's seat control switch (→P. 159)

⑧ Relaxation mode switch

⑨ Rear seat relaxation system/pelvic support seat controller


Seat return function linked to the door opening operation

The seat will return to the neutral position automatically when the door is opened for easier entry and exit of the vehicle.

Returning the rear seat from the front seats

► Vehicles without relaxation seat

The seat will return to the neutral position while the button is pressed and held.

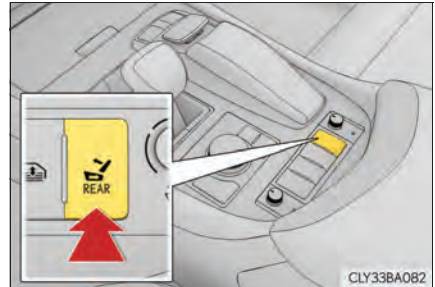

► Vehicles with relaxation seat

The seat will return to the neutral position while the button is pressed and held.



Relaxation mode operation (relaxation seat)


Relaxation mode can be entered by operating a switch. The front passenger seat will move forward, and then the seatback of the relaxation seat will recline and the ottoman will simultaneously rise.

► 5-seat models

Pressing the switch will cause a beep to sound and operation will start.

- ① Enters relaxation mode
- ② Returns to the neutral position

To stop the operation part-way through, press either side of the switch again, or press any other seat adjustment button.

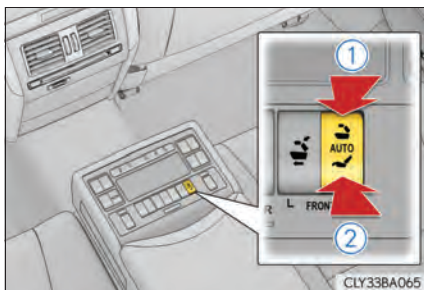


► 4-seat models

Pressing the switch will cause a beep to sound and operation will start.

- ① Enters relaxation mode
- ② Returns to the neutral position

To stop the operation part-way through, press either side of the switch again, or press any other seat adjustment button.

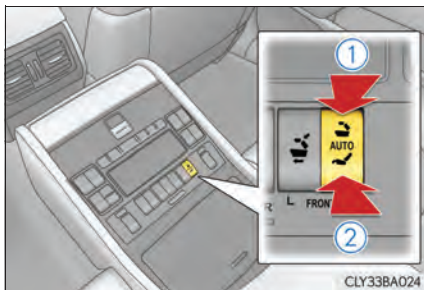

Pelvic support seat with seat vibrator

Pelvic support seat with seat vibrator, which features a support plate mounted in the seatback and a vibration function, is equipped on each outer rear seat. The support plate position and vibration speed can be adjusted according to the occupant's preferences.

► 5-seat models without relaxation seat




① Support plate position adjustment switch

② Vibration switch

Press  to operate the vibration function. Vibration will start in the same speed level as when previously operated. Each time  is pressed, the speed changes between 3 levels. Pressing "OFF" stops the vibration function.

► 5-seat models with relaxation seat

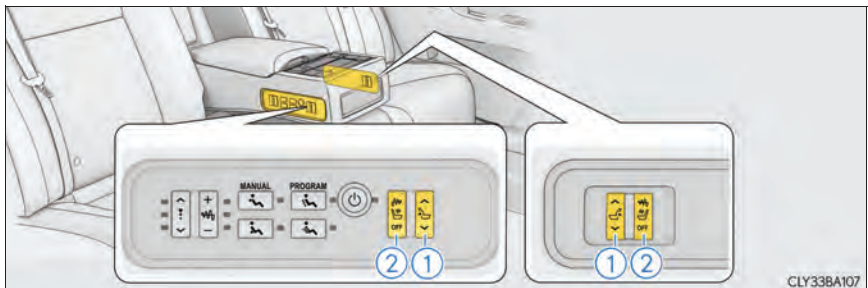

① Support plate position adjustment switch


② Vibration switch

Press  to operate the vibration function. Vibration will start in the same speed level as when previously operated. Each time  is pressed, the speed changes between 3 levels. Pressing "OFF" stops the vibration function.

► 4-seat models

- ① Support plate position adjustment switch
- ② Vibration switch


Press to  operate the vibration function. Vibration will start in the same speed level as when previously operated. Each time  is pressed, the speed changes between 3 levels. Pressing "OFF" stops the vibration function.

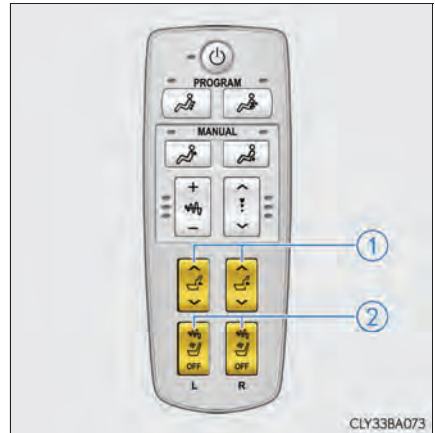

Rear seat relaxation system (vehicles with relaxation seat)

Pneumatic chambers built into the right-hand rear seat provide the occupant with pressure of different speeds and intensities.

► 5-seat models

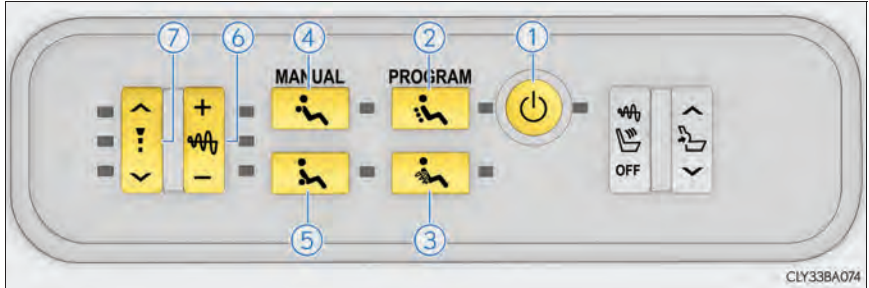

- | | |
|---|---|
| <p>① Turns the system on and off
If no buttons are selected within approximately 3 minutes of operating this switch, the system will automatically turn off.</p> <p>② Starts the  program
Partial pressure for the whole back</p> <p>③ Starts the  program
Stretches and relaxes the lower back</p> | <p>④ Starts operation for the upper back</p> <p>⑤ Starts operation for the lower back</p> <p>⑥ Adjusts the intensity of the air pressure
3 intensity levels are available.</p> <p>⑦ Adjusts the speed of the air unit
3 speed levels are available.</p> |
|---|---|

► 4-seat models

① Turns the system on and off

If no buttons are selected within approximately 3 minutes of operating this switch, the system will automatically turn off.

② Starts the program

Partial pressure for the whole back

③ Starts the program

Stretches and relaxes the lower back

④ Starts operation for the upper back


⑤ Starts operation for the lower back

⑥ Adjusts the intensity of the air pressure

3 intensity levels are available.

⑦ Adjusts the speed of the air unit


3 speed levels are available.

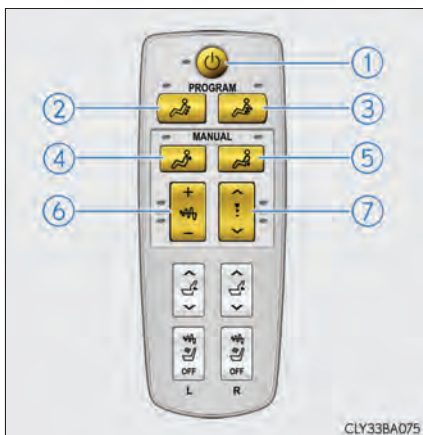

■ Seat return function linked to the door opening operation

- Operating conditions
The power switch is in ON mode.
- Canceling operation partway through
During the seat return operation, performing either of the following actions cancels the operation:
 - Pressing the “SET”, “M” or “C” button (→P. 182)
 - Pressing any of the seat adjustment switches

- Disabling the seat return function
Pressing the “C” button will disable the seat return function.
The indicator light comes on when the seat return function is disabled.
Pressing the button again will enable the seat return function.

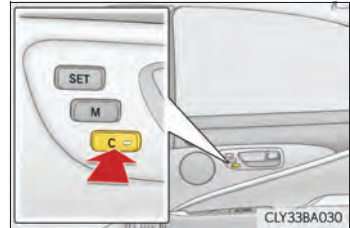

- Seat return operation after turning the power switch off
The seat will automatically return to the neutral position if the door is opened within approximately 45 seconds of the power switch being turned off.

■ Relaxation mode (relaxation seat)

- Operating conditions
Relaxation mode can be entered when the power switch is in ON mode. However, in the following situations, relaxation mode cannot be entered even when the switch is operated:
 - The weight of an occupant or heavy object etc. is detected on the front passenger's seat.
 - The front passenger's seat belt is fastened.
 - The front passenger's door is open. (The front seat will not move forward.)
- Operation after turning the power switch off
The rear seat can be returned to the neutral position as long as the relaxation mode switch is operated within approximately 45 seconds of the power switch being turned off.

■ Pelvic support seat with seat vibrator**● Operating conditions**

The power switch is in ON mode.

● Automatic stop function

- Vibration will automatically stop approximately 15 minutes after starting.
- Vibration will automatically stop if the adjacent rear door is opened.

● Pelvic support seat return function

The position of the support plate will automatically return to the neutral position if the adjacent rear door is opened.

■ Rear seat relaxation system (vehicles with relaxation seat)**● Operating conditions**

The power switch is in ON mode.

● Automatic stop function

Each operation will automatically stop approximately 15 minutes after starting.

CAUTION

■ Power rear seats

● Seat adjustment

To reduce the risk of sliding under the lap belt during a collision, do not recline the seat more than necessary.

If the seat is too reclined, the lap belt may slide past the hips and apply restraint forces directly to the abdomen, or your neck may contact the shoulder belt, increasing the risk of death or serious injury in the event of an accident.

Adjustments should not be made while driving as the seat may unexpectedly move and cause the driver to lose control of the vehicle.

● When adjusting the seat position and ottoman angle (vehicles with relaxation seat)

Keep sufficient footwell space to prevent your feet from being caught by the front seat.

● When returning the rear seats to the neutral position

To avoid injuring the rear passengers, wait until they have gotten out of the vehicle before operating the switch.

● Using the ottoman (vehicles with relaxation seat)

- Do not sit on the ottoman.

If someone sits on the ottoman, the seat belt cannot be fitted properly, and they may be thrown from the seat, resulting in death or serious injury in the event of an accident or sudden braking.

- When getting in or out of the vehicle, retract the ottoman. If the ottoman is not retracted, it may cause a fall, resulting in injury.
- Do not operate the ottoman when the vehicle is moving.
- Do not allow anyone to put their hands or feet under the passenger seat when stowing the ottoman.

■ Using the pelvic support seat with seat vibrator and rear seat relaxation system

- Those who are pregnant, have recently given birth, or suffer from ailments requiring rest (heart disease etc.) should consult a doctor before use.

- Do not allow children to use the pelvic support seat vibration function or the rear seat relaxation function.

- Do not use immediately after consuming a meal or alcohol, or for an extended period of time.

- If you feel sick while using the pelvic support seat vibration function or the rear seat relaxation function, immediately discontinue use.

**NOTICE****■ To prevent an ottoman malfunction (vehicles with relaxation seat)**

- Do not place any objects in the rear seat footwell that could prevent the operation of the ottoman.
- Do not place heavy luggage on the ottoman.
- Do not place any objects under the ottoman while it is raised for use. These objects may interfere with the ottoman being folded, causing damage to the ottoman or the objects themselves.

Driving position memory

This feature automatically adjusts the front seats, steering wheel, outside rear view mirrors and height of seat belt shoulder anchor to suit your preferences.

Driving position memory


Your preferred driving position (the position of the driver's seat, steering wheel, outside rear view mirrors and height of seat belt shoulder anchor) can be recorded and recalled by pressing a switch.

Three different driving positions can be recorded into memory.

■ Recording procedure

- 1** Check that the shift lever is in P.
- 2** Turn the power switch to ON mode.
- 3** Adjust the driver's seat, steering wheel, outside rear view mirrors and seat belt shoulder anchor height to the desired positions.
- 4** Press the "SET" switch, then within 3 seconds press switch "1", "2" or "3" until the buzzer sounds.


If the selected switch has already been preset, the previously recorded position will be overwritten.

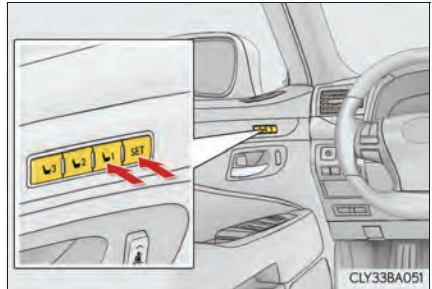

To record the position of the front passenger's seat, adjust the front passenger's seat to the desired position and perform step **4** using the switches on the front passenger's side.

■ Recall procedure

- 1 Check that the shift lever is in P.
- 2 Turn the power switch to ON mode.
- 3 Press one of the switches for the driving position you want to recall until the buzzer sounds.

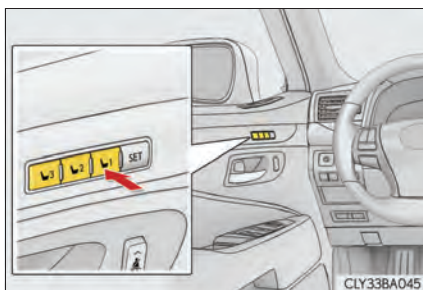

■ When you want to stop the position recall operation part-way through

Perform any of the following operations:

- Press the "SET" switch.
- Press switch "1", "2" or "3".
- Operate any of the seat adjustment switches (only cancels seat position recall).
- Operate the tilt and telescopic steering control switch (only cancels steering wheel position recall).
- Operate the seat belt shoulder anchor height adjusting switch (only cancels height of seat belt shoulder anchor recall).

■ Front passenger's seat position recall limitations (vehicles with relaxation seat)

When retractable table (4-seat models) or ottoman is used, rearward memories cannot be recalled.

■ Operating the driving position memory after turning the power switch off

Driver's seat:

Recorded driving positions (except the steering wheel position) can be recalled up to 180 seconds after the driver's door is opened and up to 60 seconds after it is closed again.

Front passenger's seat:

Recorded seat positions can be recalled up to 180 seconds after the front passenger's door is opened.

■ In order to correctly use the driving position memory function

If a seat position is already in the furthest possible position and the seat is operated in the same direction, the recorded position may be slightly different when it is recalled.

Memory recall function (driver's side only)


Each electronic key (including a card key) can be registered to recall your preferred driving position.

■ Registering procedure

Record your driving position to switch "1", "2" or "3" before performing the following:

► Using the wireless remote control

- 1 Turn the power switch off and close the driver's door.
- 2 While pressing the desired switch ("1", "2" or "3"), press  on the wireless remote control until the buzzer sounds.

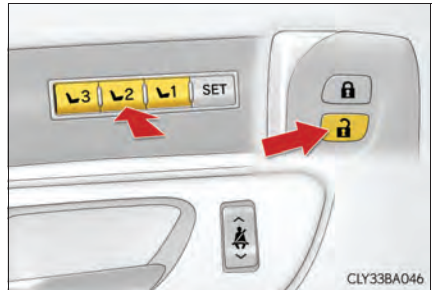


To prevent unintended triggering of the alarm, open and close a door once after a driving position has been recorded. (If a door is not opened within 30 seconds after  is pressed, the doors will be locked again and the alarm will automatically be set.)

In case that the alarm is triggered, immediately stop the alarm.
(→P. 92)

► Using the door lock switch

Carry only one of the keys (including the card key) to which you want to link the driving position. If 2 or more keys are in the vehicle, the driving position cannot be linked properly.

- 1** Turn the power switch off and close the driver's door.
- 2** While pressing the recalled switch, press and hold the door lock switch (either lock or unlock) until the buzzer sounds.

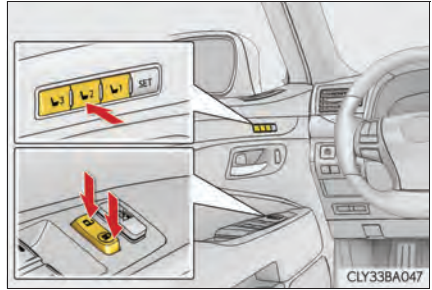

■ Recall procedure

- 1** Carry the electronic key that has been registered to the driving position, and then unlock and open the driver's door using the smart access system with push-button start or wireless remote control.

The driving position will move to the recorded position (not including the steering wheel). However, the seat will move to a position slightly behind the recorded position in order to make entering the vehicle easier.

If the driving position is in a position that has already been recorded, the seat and outside rear view mirrors will not move.

- 2** Turn the power switch to ACCESSORY mode or fasten your seat-belt.

The seat and steering wheel will move to the recorded position.

■ Cancellation procedure

- ▶ Using the wireless remote control

- 1 Turn the power switch off and close the driver's door.
- 2 While pressing the "SET" switch, press  on the wireless remote control until the buzzer sounds.

- ▶ Using the door lock switch

Carry only the key you want to cancel and then close the driver's door. If 2 or more keys are in the vehicle, the driving position cannot be canceled properly.

- 1 Turn the power switch off and close the driver's door.
- 2 While pressing the "SET" switch, press the lock or unlock side on the door lock switch until the buzzer sounds.

■ Recalling the driving position using the memory recall function

- Different driving positions can be registered for each electronic key. Therefore, the driving position that is recalled may be different depending on the key being carried.
- If a door other than the driver's door is unlocked with the smart access system with push-button start, the driving position cannot be recalled. In this case, press the driving position switch which has been set.

■ Seat operation automatic stop function (vehicles with relaxation seat)

If a front seat is likely to come into contact with the retractable table (4-seat models) or the ottoman during seat operation or activation of the power easy access system, a buzzer will sound and seat slide operation will be stopped partway. (A warning message will be shown on the multi-information display.)

CAUTION

■ Seat adjustment caution

Take care during seat adjustment so that the seat does not strike the rear passenger or squeeze your body against the steering wheel.


Rear seat position memory

The rear seat position can be memorized and recalled with the touch of a button.

Entering a position to memory

- 1 Turn the power switch to ON mode.
- 2 Adjust the rear seat to the desired position.
- 3 Press the “SET” button until the signal beeps.

If the preset is being used, the previously recorded seat position will be overwritten.

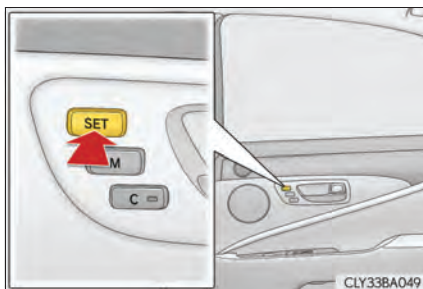


Recalling the memorized position

Press the “M” button until the signal beeps.

Relaxation seat:

The memorized position will only be recalled if the ottoman is in a position higher than the memorized position. It will not move in an upward direction.

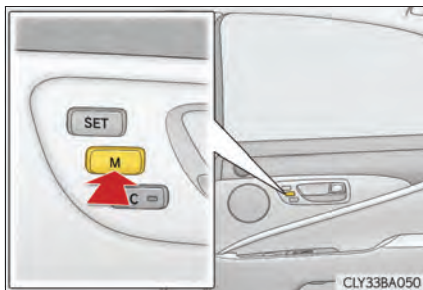


Disabling the seat return function

Pressing the “C” button will disable the seat position recall or seat return function.

The indicator light comes on when the function is disabled.

Pressing the button again will enable the seat position recall or seat return function.

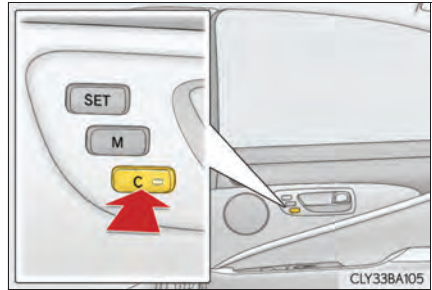

■ Seat return function linked to the door opening operation

● Operating conditions

The power switch is in ON mode.

● Canceling operation partway through

During the seat return operation, performing either of the following actions cancels the operation:

- Pressing the “SET”, “M” or “C” button
- Pressing any of the seat adjustment switches

● Seat return operation after turning the power switch off

The seat will automatically return to the neutral position if the door is opened within approximately 45 seconds of the power switch being turned off.

⚠ CAUTION

■ Seat adjustment caution


Take care during seat adjustment so that the rear passengers do not strike the front seats.

Head restraints

Head restraints are provided for all seats.


Front seats

- ① Vertical adjustment
- ② Horizontal adjustment

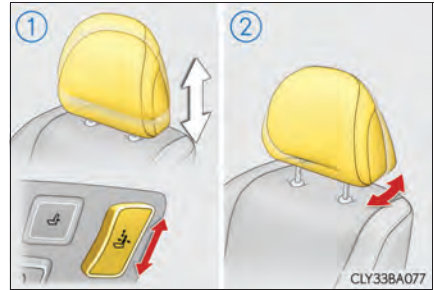


Outer rear seats

- ① Vertical adjustment
- ② Side support adjustment

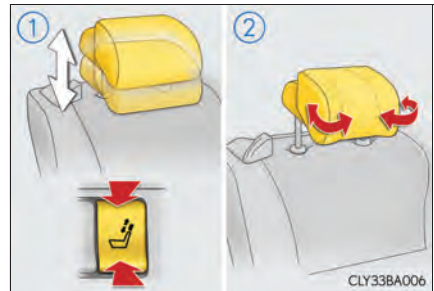

Rear center seat (5-seat models)


- ① To use
- ② To fold

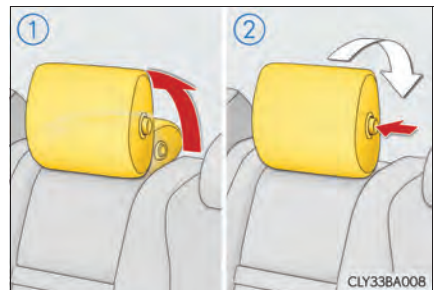

Active head restraints (front seats)

If the vehicle detects an impact during a rear-end collision, the front part of the head restraint moves forward and upward to help reduce the risk of whiplash to the seat occupant.

When reversing, even a small amount of force applied from the rear, such as a minor rear impact, may cause the head restraints to move.

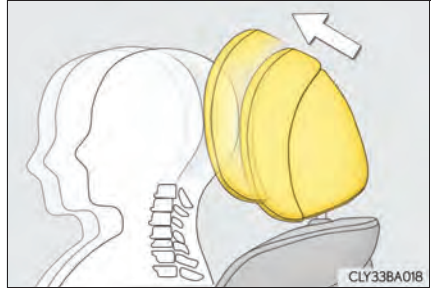


■ Removing the head restraints

For removal and installation of the head restraint, contact your Lexus dealer.

■ Adjusting the height of the head restraints (except rear center seat)

Make sure that the head restraints are adjusted so that the center of the head restraint is closest to the top of your ears.



■ Rear center seat

Make sure to pull the head restraint forward when using the rear center seat.

■ Active head restraints

- The active head restraint on the front passenger seat will not activate if the seat is unoccupied. However, it may activate during a rear-end collision if luggage is in the seat or the seat belt is fastened.
- Once the active head restraint has activated, the head restraint remains protruded forward and upward. After it has operated, have it repaired at your Lexus dealer.

 CAUTION**■ Head restraint precautions**

Observe the following precautions regarding the head restraints. Failure to do so may result in death or serious injury.

- Use the head restraints designed for each respective seat.
- Adjust the head restraints to the correct position at all times.
- Do not drive with the head restraints removed.

■ The active head restraint on the front passenger seat

Do not place anything, such as a cushion, on the front passenger's seat.

Doing so will disperse the passenger's weight, which may prevent the sensor from detecting the passenger's weight properly. As a result, the active head restraint may not activate in the event of an accident.

■ Active head restraint precautions


- Do not put head restraint covers.
- For removal, installation, modification, disassembly or disposal of the active head restraints, contact your Lexus dealer.
Inappropriate handling of the active head restraints may prevent them from operating properly during an accident.

Steering wheel

Adjustment procedure

Operating the switch moves the steering wheel in the following directions:

- ① Up
- ② Down
- ③ Toward the driver
- ④ Away from the driver

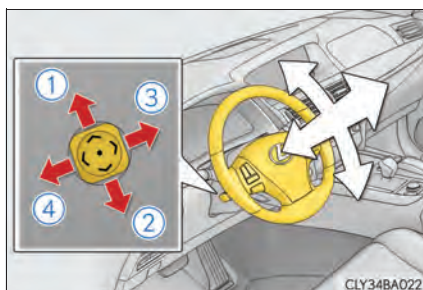

■ The steering wheel can be adjusted when

The power switch is in ACCESSORY or ON mode*.

*: If the driver's seat belt is fastened, the steering wheel can be adjusted regardless of power switch mode.

■ Automatic adjustment of the steering position

A desired steering position can be entered to memory and recalled automatically by the driving position memory system. (→P. 177)

■ Power easy access system

The steering wheel and driver's seat move in accordance with power switch mode and the driver's seat belt condition. (→P. 160)

⚠ CAUTION

Do not adjust the steering wheel while driving.

Doing so may cause the driver to mishandle the vehicle and cause an accident, resulting in death or serious injury.


Inside rear view mirror

The rear view mirror's position can be adjusted to enable sufficient confirmation of the rear view.

Adjusting the height of rear view mirror

The height of the rear view mirror can be adjusted to suit your driving posture.

Adjust the height of the rear view mirror by moving it up and down.

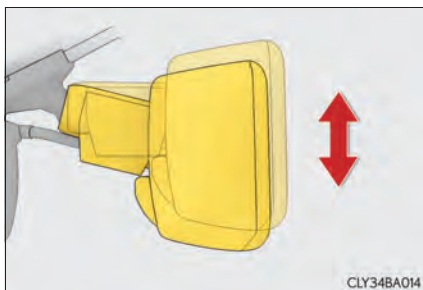

Anti-glare function

Responding to the level of brightness of the headlights of vehicles behind, the reflected light is automatically reduced.


Changing automatic anti-glare function mode

- ① ON
- ② OFF

When the automatic anti-glare function is in ON mode, the indicator illuminates.


The function will set to ON mode each time the power switch is turned to ON mode.

Pressing the button turns the function to OFF mode. (The indicator also turns off.)

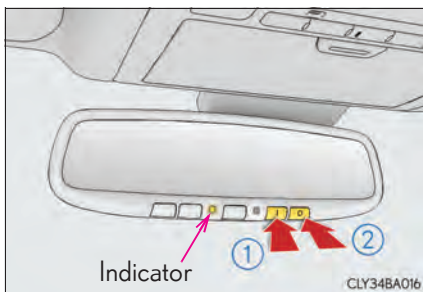

■ To prevent sensor error

To ensure that the sensors operate properly, do not touch or cover them.

**⚠ CAUTION**


Do not adjust the position of the mirror while driving.
Doing so may lead to mishandling of the vehicle and cause an accident, resulting in death or serious injury.

Outside rear view mirrors

Adjustment procedure


1 Select the mirror to be adjusted.

- ① Left
- ② Neutral position
- ③ Right

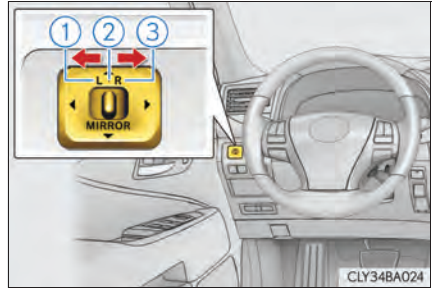

2 To adjust the mirror, press the switch.

- ① Up
- ② Right
- ③ Down
- ④ Left

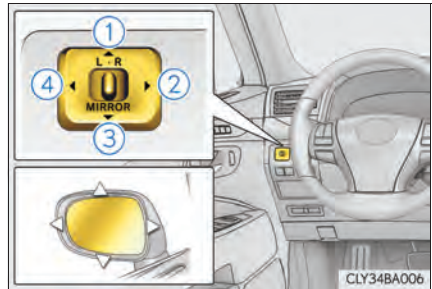

Folding and extending the mirrors

■ Using the switch

- ① Folds the mirrors
- ② Extends the mirrors




■ Setting automatic mode

Automatic mode allows the folding or extending of the mirrors to be linked to locking/unlocking of the doors.

To set to automatic mode, put the switch in the neutral position.

The indicator will come on.

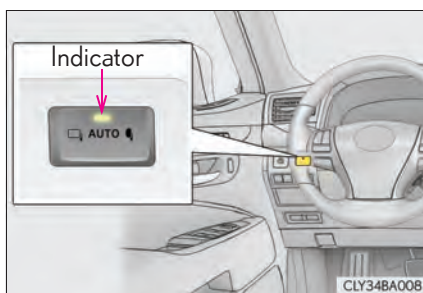

Linked mirror function when reversing

- When the mirror select switch is in the “L” or “R” position, the outside rear view mirrors will automatically angle downwards when the vehicle is reversing in order to give a better view of the ground. To disable this function, move the mirror select switch to the neutral position (between “L” and “R”).
- If the mirror angle adjustment switch is operated while the linked mirror function is in operation, the angle and position of the mirrors can be remembered, and the mirrors will operate at the angle adjusted to the last time the linked mirror function was operated.
However, because the mirrors move based on the angle they are in when the linked mirror function is not operating, the mirror angle when the linked mirror function is operating will also be changed if the mirrors are adjusted while the function is not operating.

■ Mirror angle can be adjusted when

The power switch is in ACCESSORY or ON mode.

■ When the mirrors are fogged up

The outside rear view mirrors can be cleared using the mirror defoggers. Turn on the rear window defogger to turn on the outside rear view mirror defoggers. (→P. 425)

■ Automatic adjustment of the mirror angle

A desired mirror face angle can be entered to memory and recalled automatically by the driving position memory. (→P. 177)

■ Auto anti-glare function

When the anti-glare inside rear view mirror is set to automatic mode, the outside rear view mirrors will activate in conjunction with the anti-glare inside rear view mirror to reduce reflected light. (→P. 188)

■ Using automatic mode in cold weather

When automatic mode is used in cold weather, the door mirror could freeze up and automatic stowing and return may not be possible. In this event, remove any ice and snow from the door mirror, then either operate the mirror using manual mode or move the mirror by hand.

**CAUTION****■ Important points while driving**

Observe the following precautions while driving.

Failure to do so may result in loss of control of the vehicle and cause an accident, resulting in death or serious injury.

- Do not adjust the mirrors while driving.
- Do not drive with the mirrors folded.
- Both the driver and passenger side mirrors must be extended and properly adjusted before driving.

■ When a mirror is moving

To avoid personal injury and mirror malfunction, be careful not to get your hand caught by the moving mirror.

■ When the mirror defoggers are operating

Do not touch the rear view mirror surfaces, as they can become very hot and burn you.

Power windows


Opening and closing procedures

The power windows can be opened and closed using the switches.

Operating the switch moves the windows as follows:

- ① Closing
- ② One-touch closing*
- ③ Opening
- ④ One-touch opening*


*: To stop the window partway, operate the switch in the opposite direction.

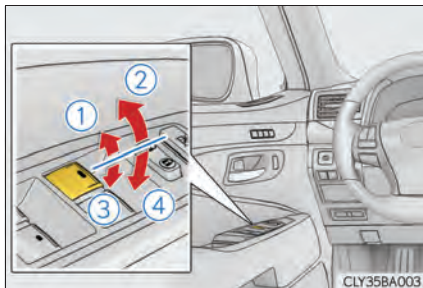

Window lock switch

Press the switch down to lock the passenger window switches.

Use this switch to prevent children from accidentally opening or closing a passenger window.

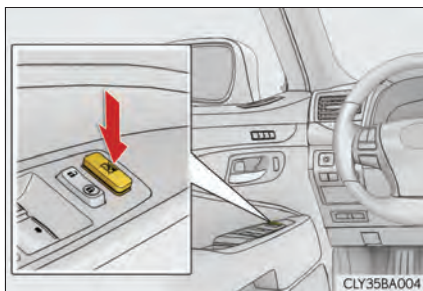

■ The power windows can be operated when

The power switch is in ON mode.

■ Operating the power windows after turning the hybrid system off

The power windows can be operated for approximately 45 seconds even after the power switch is turned to ACCESSORY mode or turned off. They cannot, however, be operated once either front door is opened.

■ Jam protection function

If an object becomes caught between the window and the window frame, window travel is stopped and the window is opened slightly.

■ When the power window does not close normally

If the jam protection function is operating abnormally and a window cannot be closed, perform the following operations using the power window switch on the relevant door.

- After stopping the vehicle, the window can be closed by holding the power window switch in the one-touch closing position while the power switch is turned to ON mode.
- If the window still cannot be closed even by carrying out the operation as explained above, initialize the function by performing the following procedure.
 - 1 Hold the power window switch in the one-touch closing position. Continue holding the switch for a further 6 seconds after the window has closed.
 - 2 Hold the power window switch in the one-touch opening position. Continue holding the switch for a further 2 seconds after the window has opened completely.
 - 3 Hold the power window switch in the one-touch closing position once again. Continue holding the switch for a further 2 seconds after the window has closed.

If you release the switch while the window is moving, start again from the beginning. If the window continues to close but then re-open slightly even after performing the above procedure correctly, have the vehicle inspected by your Lexus dealer.

■ Door lock linked window operation

- The power windows can be closed using the entry function. (→P. 129)
- The power windows can be opened and closed using the mechanical key. (→P. 826)

■ Customization

Settings (e.g. linked door lock operation) can be changed.
(Customizable features →P. 865)

**CAUTION**

Observe the following precautions.

Failure to do so may result in death or serious injury.

■ Closing the windows

- Check to make sure that all passengers do not have any part of their body in a position where it could be caught when a window is being operated.
- Do not allow children to operate the power windows.
Closing a power window on someone can cause death or serious injury. The driver is responsible for instructing children not to operate the power windows.

■ Jam protection function

- Never use any part of your body to intentionally activate the jam protection function.
- The jam protection function may not work if something gets caught just before the window fully closes.

Moon roof

Use the overhead switches to open and close the moon roof and tilt it up and down.

Opening and closing


① Opens the moon roof*

The moon roof stops slightly before the fully open position to reduce wind noise.

Press the switch again to fully open the moon roof.

② Closes the moon roof*

*: Lightly press either way of the moon roof switch to stop the moon roof partway.

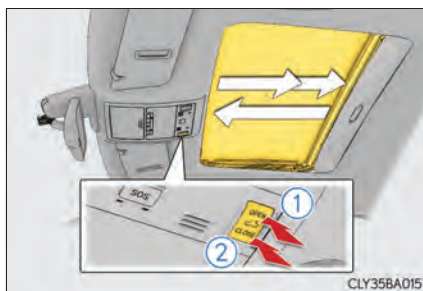


Tilting up and down

① Tilts the moon roof up*

② Tilts the moon roof down*

*: Lightly press either way of the moon roof switch to stop the moon roof partway.

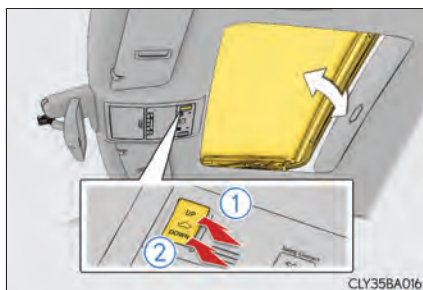

■ The moon roof can be operated when

The power switch is in ON mode.

■ Operating the moon roof after turning the hybrid system off

The moon roof can be operated for approximately 45 seconds after the power switch is turned to ACCESSORY mode or turned off. It cannot, however, be operated once either front door is opened.

■ Jam protection function

If an object is detected between the moon roof and the frame while the moon roof is closing or tilting down, travel is stopped and the moon roof opens slightly.

■ Sunshade

The sunshade can be opened and closed manually. However, the sunshade will open automatically when the moon roof is opened.

■ Door lock linked moon roof operation

- The moon roof can be closed using the entry function. (→P. 129)
- The moon roof can be opened and closed using the mechanical key. (→P. 826)

■ When the moon roof does not close normally

Perform the following procedure:

- If the moon roof closes but then re-opens slightly

1 Stop the vehicle.

2 Press and hold the “CLOSE” switch. ^{*1}

The moon roof will close, reopen and pause for approximately 10 seconds. ^{*2}
Then it will close again, tilt up and pause for approximately 1 second. Finally, it will tilt down, open and close.

3 Check to make sure that the moon roof is completely closed and then release the switch.

- If the moon roof tilts down but then tilts back up

1 Stop the vehicle.

2 Press and hold the “UP” switch ^{*1} until the moon roof moves into the tilt up position and stops.

3 Release the “UP” switch once and then press and hold the “UP” switch again. ^{*1}
The moon roof will pause for approximately 10 seconds in the tilt up position. ^{*2}
Then it will adjust slightly and pause for approximately 1 second. Finally, it will tilt down, open and close.

4 Check to make sure that the moon roof is completely closed and then release the switch.

^{*1}: If the switch is released at the incorrect time, the procedure will have to be performed again from the beginning.

^{*2}: If the switch is released after the above mentioned 10 second pause, automatic operation will be disabled. In that case, press and hold the “CLOSE” or “UP” switch, and the moon roof will tilt up and pause for approximately 1 second. Then it will tilt down, open and close. Check to make sure that the moon roof is completely closed and then release the switch.

If the moon roof does not fully close even after performing the above procedure correctly, have the vehicle inspected by your Lexus dealer.

■ Moon roof open warning buzzer

The buzzer sounds and a message is shown on the multi-information display in the instrument cluster when the power switch is turned off and the driver's door is opened with the moon roof open.

■ Customization

Settings (e.g. linked door lock operation) can be changed.
(Customizable features →P. 865)

CAUTION

Observe the following precautions.
Failure to do so may cause death or serious injury.

■ Opening the moon roof

- Do not allow any passengers to put their hands or heads outside the vehicle while it is moving.
- Do not sit on top of the moon roof.

■ Closing the moon roof

- Check to make sure that all passengers do not have any part of their body in a position where it could be caught when the moon roof is being operated.
- Do not allow children to operate the moon roof.
Closing the moon roof on someone can cause death or serious injury. The driver is responsible for instructing children not to operate the moon roof.

■ Jam protection function

- Never use any part of your body to intentionally activate the jam protection function.
- The jam protection function may not work if something gets caught just before the moon roof fully closes.

Driving

4

4-1. Before driving

Driving the vehicle	202
Cargo and luggage	213
Vehicle load limits	217
Trailer towing	218
Dinghy towing	219

4-2. Driving procedures

Power (ignition) switch	220
EV drive mode	225
Hybrid transmission	227
Turn signal lever	231
Parking brake	232
Brake Hold	235
Horn	237

4-3. Operating the lights and wipers

Headlight switch	238
Automatic High Beam	242
Fog light switch	247
Windshield wipers and washer	248
Headlight cleaner switch	252

4-4. Refueling

Opening the fuel tank cap	253
---------------------------------	-----

4-5. Using the driving support systems

Cruise control	257
Dynamic radar cruise control with full-speed range	261
LKA (Lane-Keeping Assist)	277
Intuitive parking assist	287
Rear view monitor system	298
Driving mode select switch	309
Electronically modulated air suspension	313
Driving assist systems	315
PCS (Pre-Collision System)	322
BSM (Blind Spot Monitor)	334
• The Blind Spot Monitor function	338
• The Rear Cross Traffic Alert function	341
Lexus night view	344

4-6. Driving tips

Hybrid vehicle driving tips	349
Winter driving tips	351

Driving the vehicle

The following procedures should be observed to ensure safe driving:

Starting the hybrid system

→P. 220

Driving

- 1** With the brake pedal depressed, shift the shift lever to D. (→P. 227)
- 2** If the parking brake is in manual mode, release the parking brake.
(→P. 232)
- 3** Gradually release the brake pedal and gently depress the accelerator pedal to accelerate the vehicle.

Stopping

- 1** With the shift lever in D, depress the brake pedal.
- 2** If necessary, set the parking brake.
If the vehicle is to be stopped for an extended period of time, shift the shift lever to P. (→P. 227)

Parking the vehicle

- 1** With the shift lever in D, depress the brake pedal.
- 2** If the parking brake is in manual mode, set the parking brake.
(→P. 232)
- 3** Shift the shift lever to P. (→P. 227)
- 4** Press the power switch to stop the hybrid system.
- 5** Lock the door, making sure that you have the electronic key on your person.
If parking on a hill, block the wheels as needed.

Starting off on a steep uphill

- 1** Make sure that the parking brake is set and shift the shift lever to D.
- 2** Gently depress the accelerator pedal.
- 3** Release the parking brake.

■ When starting off on a uphill

Hill-start assist control will operate. (→P. 315)

■ Driving in the rain

- Drive carefully when it is raining, because visibility will be reduced, the windows may become fogged-up, and the road will be slippery.
- Drive carefully when it starts to rain, because the road surface will be especially slippery.
- Refrain from high speeds when driving on an expressway in the rain, because there may be a layer of water between the tires and the road surface, preventing the steering and brakes from operating properly.

■ Breaking in your new Lexus

To extend the life of the vehicle, observing the following precautions is recommended:

- For the first 186 miles (300 km):
Avoid sudden stops.
- For the first 621 miles (1000 km):
 - Do not drive at extremely high speeds.
 - Avoid sudden acceleration.
 - Do not drive continuously in low gears.
 - Do not drive at a constant speed for extended periods.

■ Drum-in-disc type parking brake system

Your vehicle has a drum-in-disc type parking brake system. This type of brake system needs bedding-down of the brake shoes periodically or whenever the parking brake shoes and/or drum are replaced. Have your Lexus dealer perform the bedding down operation.

■ Operating your vehicle in a foreign country

Comply with the relevant vehicle registration laws and confirm the availability of the correct fuel. (→P. 851)

■ For efficient use

- Shift the shift lever to D when driving.

In the N position, the gasoline engine operates but electricity cannot be generated. The hybrid battery (traction battery) will discharge, requiring unnecessary engine power to recharge.

- Drive your vehicle smoothly.

Avoid abrupt acceleration and deceleration. Gradual acceleration and deceleration will make more effective use of the electric motor (traction motor) without having to use gasoline engine power.

- Avoid repeated acceleration.

Repeated acceleration consumes hybrid battery (traction battery) power, resulting in poor acceleration. Battery power can be restored by driving with the accelerator pedal slightly released.

- Shift the shift lever to P when parking.

In the N position, the hybrid battery (traction battery) does not recharge.

Leaving the shift lever in the N position for an extended period of time may discharge the hybrid battery (traction battery). The vehicle cannot run if the hybrid battery (traction battery) is discharged.

 CAUTION

Observe the following precautions.

Failure to do so may result in death or serious injury.

■ **When starting the vehicle**

Always keep your foot on the brake pedal while stopped with the hybrid system operating. This prevents the vehicle from creeping.

■ **When driving the vehicle**

- Do not drive if you are unfamiliar with the location of the brake and accelerator pedals to avoid depressing the wrong pedal.
 - Accidentally depressing the accelerator pedal instead of the brake pedal will result in sudden acceleration that may lead to an accident.
 - When backing up, you may twist your body around, leading to a difficulty in operating the pedals. Make sure to operate the pedals properly.
 - Make sure to keep a correct driving posture even when moving the vehicle only slightly. This allows you to depress the brake and accelerator pedals properly.
 - Depress the brake pedal using your right foot. Depressing the brake pedal using your left foot may delay response in an emergency, resulting in an accident.
- When the hybrid vehicle is driven using the electric motor only, no engine noise is made. As such, pedestrians, people riding bicycles or other people and vehicles in the surrounding area may not realize that the vehicle is approaching. Even with the Vehicle Proximity Notification System active, people may not realize the vehicle is approaching when the surrounding area is noisy and so forth. Therefore, take extra care while driving.
- Do not drive the vehicle over or stop the vehicle near flammable materials. The exhaust system and exhaust gases can be extremely hot. These hot parts may cause a fire if there is any flammable material nearby.

 CAUTION

Observe the following precautions.

Failure to do so may result in death or serious injury.

■ **When driving the vehicle**

- During normal driving, do not turn off the hybrid system. Turning the hybrid system off while driving will not cause loss of steering or braking control, however, power assist to the steering will be lost. This will make it more difficult to steer smoothly, so you should pull over and stop the vehicle as soon as it is safe to do so. In the event of an emergency, such as if it becomes impossible to stop the vehicle in the normal way: →P. 791
- Use engine braking (downshift) to maintain a safe speed when driving down a steep hill.
Using the brakes continuously may cause the brakes to overheat and lose effectiveness. (→P. 227)
- Do not adjust the positions of the steering wheel, the seat, or the inside or outside rear view mirrors while driving.
Doing so may result in a loss of vehicle control.
- Always check that all passengers' arms, heads or other parts of their body are not outside the vehicle.
- Do not drive in excess of the speed limit. Even if the legal speed limit permits it, do not drive over 85 mph (140 km/h) unless your vehicle has high-speed capability tires. Driving over 85 mph (140 km/h) may result in tire failure, loss of control and possible injury. Be sure to consult a tire dealer to determine whether the tires on your vehicle are high-speed capability tires or not before driving at such speeds.

 CAUTION

Observe the following precautions.
Failure to do so may result in death or serious injury.

■ When driving on slippery road surfaces

- Sudden braking, acceleration and steering may cause tire slippage and reduce your ability to control the vehicle.
- Sudden acceleration, engine braking due to shift changing, or changes in engine speed could cause the vehicle to skid.
- After driving through a puddle, depress the brake pedal to make sure that the brakes are functioning properly. Wet brake pads may prevent the brakes from functioning properly. If the brakes on only one side are wet and not functioning properly, steering control may be affected.

■ When shifting the shift lever

- Do not let the vehicle roll backward while the shift lever is in a driving position, or roll forward while the shift lever is in R.
Doing so may result in an accident or damage to the vehicle.
- Do not shift the shift lever to P while the vehicle is moving.
Doing so can damage the transmission and may result in a loss of vehicle control.
- Do not shift the shift lever to R while the vehicle is moving forward.
Doing so can damage the transmission and may result in a loss of vehicle control.
- Do not shift the shift lever to D while the vehicle is moving backward.
Doing so can damage the transmission and may result in a loss of vehicle control.
- Do not shift the shift lever to N while the vehicle is moving. Doing so will disengage the hybrid system. Engine braking is not available when N is selected.
- Be careful not to shift the shift lever with the accelerator pedal depressed. Shifting the shift lever to a gear other than P or N may lead to unexpected rapid acceleration of the vehicle that may cause an accident and result in death or serious injury.

 CAUTION

Observe the following precautions.

Failure to do so may result in death or serious injury.

■ **If a brake pad wear warning message is displayed**

Have your Lexus dealer check and replace the brake pads as soon as possible.

The rotor damage can result if the pads are not replaced when needed.

Moderate levels of the brake pad and disc wear allow enhanced braking power. As a result, the discs may wear more quickly than conventional brake discs. Therefore, when replacing the brake pads, Lexus recommends that you also have the thickness of the discs measured.

It is dangerous to drive the vehicle when the wear limits of the brake pads and/or those of the brake discs are exceeded.

■ **When the vehicle is stopped**

- Do not depress the accelerator pedal unnecessarily.

If the vehicle is in any gear other than P or N, the vehicle may accelerate suddenly and unexpectedly, causing an accident.

- In order to prevent accidents due to the vehicle rolling away, always keep depressing the brake pedal while the “READY” indicator is on, and apply the parking brake as necessary.
- If the vehicle is stopped on an incline, in order to prevent accidents caused by the vehicle rolling forward or backward, always depress the brake pedal and securely apply the parking brake as needed.
- Avoid revving or racing the engine.

Running the engine at high speed while the vehicle is stopped may cause the exhaust system to overheat, which could result in a fire if combustible material is nearby.

 CAUTION

Observe the following precautions.

Failure to do so may result in death or serious injury.

■ **When the vehicle is parked**

- Do not leave glasses, cigarette lighters, spray cans, or soft drink cans in the vehicle when it is in the sun.

Doing so may result in the following:

- Gas may leak from a cigarette lighter or spray can, and may lead to a fire.
 - The temperature inside the vehicle may cause the plastic lenses and plastic material of glasses to deform or crack.
 - Soft drink cans may fracture, causing the contents to spray over the interior of the vehicle, and may also cause a short circuit in the vehicle's electrical components.
- Do not leave cigarette lighters in the vehicle. If a cigarette lighter is in a place such as the glove box or on the floor, it may be lit accidentally when luggage is loaded or the seat is adjusted, causing a fire.
 - Do not attach adhesive discs to the windshield or windows. Do not place containers such as air fresheners on the instrument panel or dashboard. Adhesive discs or containers may act as lenses, causing a fire in the vehicle.
 - Do not leave a door or window open if the curved glass is coated with a metalized film such as a silver-colored one. Reflected sunlight may cause the glass to act as a lens, causing a fire.
 - Always apply the parking brake, shift the shift lever to P, stop the hybrid system and lock the vehicle.
Do not leave the vehicle unattended while the hybrid system is operating.
 - Do not touch the exhaust pipes while the hybrid system is operating or immediately after turning the hybrid system off.
Doing so may cause burns.

 CAUTION

Observe the following precautions.

Failure to do so may result in death or serious injury.

■ **When taking a nap in the vehicle**

Always turn the hybrid system off. Otherwise, if you accidentally move the shift lever or depress the accelerator pedal, this could cause an accident or fire due to hybrid system overheating. Additionally, if the vehicle is parked in a poorly ventilated area, exhaust gases may collect and enter the vehicle, leading to death or a serious health hazard.

■ **When braking**

- When the brakes are wet, drive more cautiously.
Braking distance increases when the brakes are wet, and this may cause one side of the vehicle to brake differently than the other side. Also, the parking brake may not securely hold the vehicle.
- If the electronically controlled brake system does not operate, do not follow other vehicles closely and avoid hills or sharp turns that require braking.
In this case, braking is still possible, but the brake pedal should be depressed more firmly than usual. Also, the braking distance will increase. Have your brakes fixed immediately.
- The brake system consists of 2 or more individual hydraulic systems; if one of the systems fails, the other(s) will still operate. In this case, the brake pedal should be depressed more firmly than usual and the braking distance will increase. Have your brakes fixed immediately.

■ **If the vehicle becomes stuck**

Do not spin the wheels excessively when any of the tires is up in the air, or the vehicle is stuck in sand, mud, etc. This may damage the driveline components or propel the vehicle forward or backward, causing an accident.

 NOTICE**■ When driving the vehicle**

- Do not depress the accelerator and brake pedals at the same time during driving, as this may restrain driving torque.
- Do not use the accelerator pedal or depress the accelerator and brake pedals at the same time to hold the vehicle on a hill.

■ When parking the vehicle

Always shift the shift lever to P. Failure to do so may cause the vehicle to move or the vehicle may accelerate suddenly if the accelerator pedal is accidentally depressed.

■ Avoiding damage to vehicle parts

- Do not turn the steering wheel fully in either direction and hold it there for an extended period of time.
Doing so may damage the power steering motor.
- When driving over bumps in the road, drive as slowly as possible to avoid damaging the wheels, underside of the vehicle, etc.

■ If you get a flat tire while driving

A flat or damaged tire may cause the following situations. Hold the steering wheel firmly and gradually depress the brake pedal to slow down the vehicle.

- It may be difficult to control your vehicle.
- The vehicle will make abnormal sounds or vibrations.
- The vehicle will lean abnormally.

Information on what to do in case of a flat tire (→P. 812)

**NOTICE****■ When encountering flooded roads**

Do not drive on a road that has flooded after heavy rain etc. Doing so may cause the following serious damage to the vehicle:

- Engine stalling
- Short in electrical components
- Engine damage caused by water immersion

In the event that you drive on a flooded road and the vehicle is flooded, be sure to have your Lexus dealer check the following:

- Brake function
- Changes in quantity and quality of oil and fluid used for the engine, transmission, transfer, differential, etc.
- Lubricant condition for the propeller shaft, bearings and suspension joints (where possible), and the function of all joints, bearings, etc.

Cargo and luggage

Take notice of the following information about storage precautions, cargo capacity and load:

Capacity and distribution

Cargo capacity depends on the total weight of the occupants.

$(\text{Cargo capacity}) = (\text{Total load capacity}) - (\text{Total weight of occupants})$

Steps for Determining Correct Load Limit –

- (1) Locate the statement “The combined weight of occupants and cargo should never exceed XXX kg or XXX lbs.” on your vehicle’s placard.
- (2) Determine the combined weight of the driver and passengers that will be riding in your vehicle.
- (3) Subtract the combined weight of the driver and passengers from XXX kg or XXX lbs.
- (4) The resulting figure equals the available amount of cargo and luggage load capacity.


For example, if the “XXX” amount equals 1400 lbs. and there will be five 150 lb passengers in your vehicle, the amount of available cargo and luggage load capacity is 650 lbs. $(1400 - 750 (5 \times 150) = 650 \text{ lbs.})$

- (5) Determine the combined weight of luggage and cargo being loaded on the vehicle. That weight may not safely exceed the available cargo and luggage load capacity calculated in Step 4.
- (6) If your vehicle will be towing a trailer, load from your trailer will be transferred to your vehicle. Consult this manual to determine how this reduces the available cargo and luggage load capacity of your vehicle. (→P. 217)

Lexus does not recommend towing a trailer with your vehicle. Your vehicle is not designed for trailer towing.

Calculation formula for your vehicle

- ① Cargo capacity
- ② Total load capacity (vehicle capacity weight) (→P. 840)

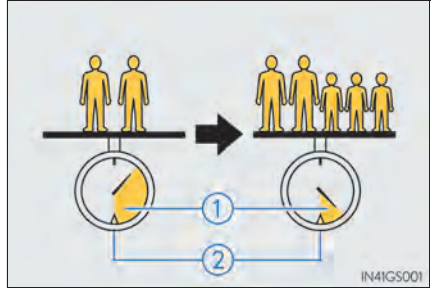

► 5-seat models

When 2 people with the combined weight of A lb. (kg) are riding in your vehicle, which has a total load capacity (vehicle capacity weight) of B lb. (kg), the available amount of cargo and luggage load capacity will be C lb. (kg) as follows:

$$B^{*2} \text{ lb. (kg)} - A^{*1} \text{ lb. (kg)} = C^{*3} \text{ lb. (kg)}$$

*1: A = Weight of people

*2: B = Total load capacity

*3: C = Available cargo and luggage load

In this condition, if 3 more passengers with the combined weight of D lb. (kg) get on, the available cargo and luggage load will be reduced E lb. (kg) as follows:

$$C \text{ lb. (kg)} - D^{*4} \text{ lb. (kg)} = E^{*5} \text{ lb. (kg)}$$

*4: D = Additional weight of people

*5: E = Available cargo and luggage load

► 4-seat models

When 2 people with the combined weight of A lb. (kg) are riding in your vehicle, which has a total load capacity (vehicle capacity weight) of B lb. (kg), the available amount of cargo and luggage load capacity will be C lb. (kg) as follows:

$$B^{*2} \text{ lb. (kg)} - A^{*1} \text{ lb. (kg)} = C^{*3} \text{ lb. (kg)}$$

*1: A = Weight of people

*2: B = Total load capacity

*3: C = Available cargo and luggage load

In this condition, if 2 more passengers with the combined weight of D lb. (kg) get on, the available cargo and luggage load will be reduced E lb. (kg) as follows:

$$C \text{ lb. (kg)} - D^{*4} \text{ lb. (kg)} = E^{*5} \text{ lb. (kg)}$$

*4: D = Additional weight of people

*5: E = Available cargo and luggage load

As shown in the example above, if the number of occupants increases, the cargo and luggage load will be reduced by an amount that equals the increased weight due to the additional occupants. In other words, if an increase in the number of occupants causes an excess of the total load capacity (combined weight of occupants plus cargo and luggage load), you must reduce the cargo and luggage on your vehicle.

 CAUTION**■ Things that must not be carried in the trunk**

The following things may cause a fire if loaded in the trunk:

- Receptacles containing gasoline
- Aerosol cans

■ Storage precautions

Observe the following precautions.

Failure to do so may prevent the pedals from being depressed properly, may block the driver's vision, or may result in items hitting the driver or passengers, possibly causing an accident.

- Stow cargo and luggage in the trunk whenever possible.
- Do not place cargo or luggage in or on the following locations.
 - At the feet of the driver
 - On the front passenger or rear seats (when stacking items)
 - On the package tray
 - On the instrument panel
 - On the dashboard
 - In front of the Remote Touch screen
- Secure all items in the occupant compartment.

■ Capacity and distribution

- Do not exceed the maximum axle weight rating or the total vehicle weight rating.
- Even if the total load of occupant's weight and the cargo load is less than the total load capacity, do not apply the load unevenly. Improper loading may cause deterioration of steering or braking control which may cause death or serious injury.

Vehicle load limits

Vehicle load limits include total load capacity, seating capacity, towing capacity and cargo capacity.

◆ Total load capacity (vehicle capacity weight): (→P. 840)

Total load capacity means the combined weight of occupants, cargo and luggage.

◆ Seating capacity: 5-seat models

5 occupants (Front 2, Rear 3)

4-seat models

4 occupants (Front 2, Rear 2)

Seating capacity means the maximum number of occupants whose estimated average weight is 150 lb. (68 kg) per person.

◆ Towing capacity

Lexus does not recommend towing a trailer with your vehicle.

◆ Cargo capacity

Cargo capacity may increase or decrease depending on the weight and the number of occupants.

■ Total load capacity and seating capacity

These details are also described on the tire and loading information label. (→P. 770)

⚠ CAUTION

■ Overloading the vehicle

Do not overload the vehicle.

It may not only cause damage to the tires, but also degrade steering and braking ability, resulting in an accident.


Trailer towing

Lexus does not recommend towing a trailer with your vehicle. Lexus also does not recommend the installation of a tow hitch or the use of a tow hitch carrier for a wheelchair, scooter, bicycle, etc. Your vehicle is not designed for trailer towing or for the use of tow hitch mounted carriers.



Dinghy towing

Your vehicle is not designed to be dinghy towed (with 4 wheels on the ground) behind a motor home.

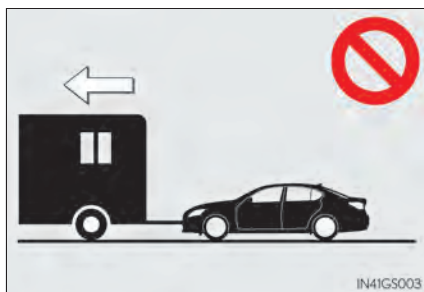

NOTICE

■ **To avoid serious damage to your vehicle**

Do not tow your vehicle with the four wheels on the ground.

Power (ignition) switch

Performing the following operations when carrying the electronic key on your person starts the hybrid system or changes power switch modes.

Starting the hybrid system

- 1 Turn the power switch to ON mode (→P. 221) and check that the parking brake is set.
- 2 Check that the shift lever is set in P.
- 3 Firmly depress the brake pedal.

The power switch indicator will turn green. If the indicator does not turn green, the hybrid system cannot be started.

- 4 Press the power switch.

After a while, the “READY” indicator comes on with a beep sound.

The vehicle can move when the “READY” indicator is on even if the engine is stopped.

Continue depressing the brake pedal until the hybrid system is completely started.

The hybrid system can be started from any power switch mode.



- 5 Check that the “READY” indicator is on.

The vehicle will not move when the “READY” indicator is off.

Stopping the hybrid system

- 1 Stop the vehicle.
- 2 Shift the shift lever to P.
- 3 Set the parking brake. (→P. 232)
- 4 Press the power switch.
- 5 Release the brake pedal and check that the indicator on the power switch is off.

Changing power switch modes

Modes can be changed by pressing the power switch with brake pedal released. (The mode changes each time the switch is pressed.)

① Off*

The emergency flashers can be used.

② ACCESSORY mode

Some electrical components such as the audio system can be used.


The power switch indicator turns amber.

③ ON mode

All electrical components can be used.

The power switch indicator turns amber.

*: If the shift lever is in a position other than P when turning off the hybrid system, the power switch will be turned to ACCESSORY mode, not to off.

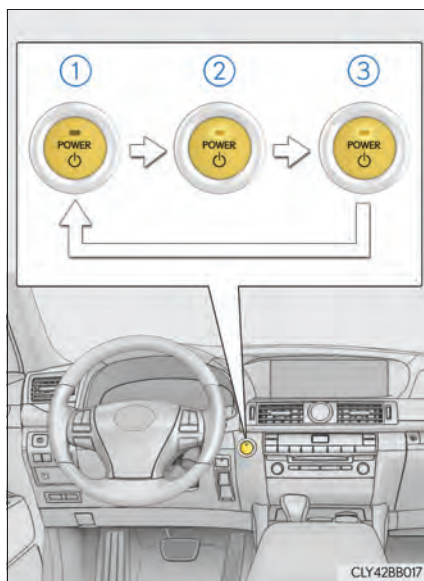

■ Auto power off function

If the vehicle is left in ACCESSORY mode for more than 20 minutes with the shift lever in P, the power switch will automatically turn off.

■ Sounds and vibrations specific to a hybrid vehicle

→P. 81

■ Electronic key battery depletion

→P. 139

■ When the ambient temperature is low, such as during winter driving conditions

It may take time until the “READY” indicator comes on.

■ Conditions affecting operation

→P. 136

■ Notes for the entry function

→P. 137

■ If the hybrid system does not start

The immobilizer system may not have been deactivated. (→P. 90)


Contact your Lexus dealer.

■ Steering lock

After turning the power switch off and opening and closing the doors, the steering wheel will be locked due to the steering lock function. Operating the power switch again automatically cancels the steering lock.

■ When the steering lock cannot be released

The green indicator light on the power switch will flash and a message will be shown on the multi-information display. Press the power switch again while turning the steering wheel left and right.



■ Steering lock motor overheating prevention

To prevent the steering lock motor from overheating, the motor may be suspended if the hybrid system is turned on and off repeatedly in a short period of time. In this case, refrain from operating the hybrid system. After about 10 seconds, the steering lock motor will resume functioning.

■ **When the power switch indicator flashes in amber**

The system may be malfunctioning. Have the vehicle inspected by your Lexus dealer immediately.

■ **If the “READY” indicator does not come on**

If the “READY” indicator does not come on when you press the power switch with the shift lever in P and the brake pedal depressed, contact your Lexus dealer immediately.

■ **If the hybrid system is malfunctioning**

→P. 809

■ **If the electronic key battery is depleted**

→P. 778

■ **If the smart access system with push-button start has been deactivated in a customized setting**

→P. 826

 CAUTION

■ **When starting the hybrid system**

Always start the hybrid system while sitting in the driver's seat. Do not depress the accelerator pedal while starting the hybrid system under any circumstances. Doing so may cause an accident resulting in death or serious injury.

■ **Caution while driving**

If hybrid system failure occurs while the vehicle is moving, do not lock or open the doors until the vehicle reaches a safe and complete stop. Activation of the steering lock in this circumstance may lead to an accident, resulting in death or serious injury.

■ **Stopping the hybrid system in an emergency**

If you want to stop the hybrid system in an emergency while driving the vehicle, press and hold the power switch for more than 2 seconds, or press it briefly 3 times or more in succession. (→P. 791)

However, do not touch the power switch while driving except in an emergency. Turning the hybrid system off while driving will not cause loss of steering or braking control, however, power assist to the steering will be lost. This will make it more difficult to steer smoothly, so you should pull over and stop the vehicle as soon as it is safe to do so.

**NOTICE****■ To prevent 12-volt battery discharge**

Do not leave the power switch in ACCESSORY or ON mode for long periods of time without the hybrid system on.

■ When starting the hybrid system

- Do not depress the accelerator pedal unnecessarily.
- If the hybrid system becomes difficult to start, have your vehicle checked by your Lexus dealer immediately.

■ Symptoms indicating a malfunction with the power switch

If the power switch seems to be operating somewhat differently than usual, such as the switch sticking slightly, there may be a malfunction. Contact your Lexus dealer immediately.

EV drive mode


In EV drive mode the electric motor (traction motor), powered by the hybrid battery (traction battery), is used to drive the vehicle.

This mode allows you to drive in residential areas early in the morning and late at night, or in indoor parking lots etc. without concern for noises and gas emissions.

However, when the vehicle proximity notification system is active, the vehicle may produce sound.

Turns EV drive mode on/off

When EV drive mode is turned on, the EV drive mode indicator will come on. Pressing the switch when in EV drive mode will return the vehicle to normal driving (using the gasoline engine and electric motor [traction motor]).

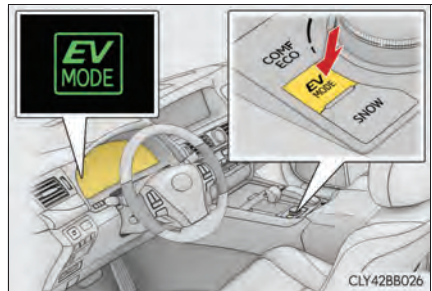

■ Situations in which EV drive mode cannot be turned on

It may not be possible to turn EV drive mode on in the following situations. If it cannot be turned on, a buzzer will sound and a message will be shown on the multi-information display.

- The temperature of the hybrid system is high.
The vehicle has been left in the sun, driven on a hill, driven at high speeds, etc.
- The temperature of the hybrid system is low.
The vehicle has been left in temperatures lower than about 32°F (0°C) for a long period of time etc.
- The gasoline engine is warming up.
- The hybrid battery (traction battery) is low.
The remaining battery level indicated in the "Energy Monitor" display is low.
(→P. 115)
- Vehicle speed is about 25 mph (40 km/h) or more.
- The accelerator pedal is depressed firmly or the vehicle is on a hill etc.
- The windshield defogger is in use.

■ Automatic cancelation of EV drive mode

When driving in EV drive mode, the gasoline engine may automatically restart in the following situations. When EV drive mode is canceled, a buzzer will sound and the EV drive mode indicator will flash and go off.

- The hybrid battery (traction battery) becomes low.
The remaining battery level indicated in the “Energy Monitor” display is low.
(→P. 115)
- Vehicle speed becomes more than about 25 mph (40 km/h).
- The accelerator pedal is depressed firmly or the vehicle is on a hill etc.

When it is possible to inform the driver of automatic cancelation in advance, a prior notice screen will appear on the multi-information display.

■ Possible driving distance when driving in EV drive mode

EV drive mode's possible driving distance ranges from a few hundred meters to approximately 0.6 mile (1 km). Driving is possible at speeds of less than approximately 25 mph (40 km/h). However, depending on vehicle conditions, there are situations when EV drive mode cannot be used. (The distance that is possible depends on the hybrid battery [traction battery] level and driving conditions.)

■ Fuel economy

Your Lexus is designed to achieve the best possible fuel economy during normal driving (using the gasoline engine and electric motor [traction motor]). Driving in EV drive mode more than necessary may lower fuel economy.


⚠ CAUTION

■ Caution while driving

When driving in EV drive mode no engine noise is made. As such, pedestrians, people riding bicycles or other people and vehicles in the surrounding area may not be aware of the vehicle starting off or approaching them. Therefore, take extra care while driving even if the vehicle proximity notification system is active.

Hybrid transmission

Shifting the shift lever

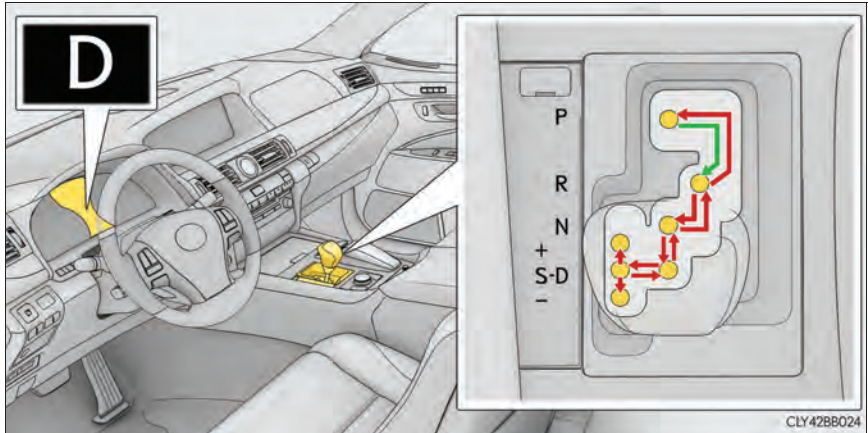

While the power switch is in ON mode, move the shift lever with the brake pedal depressed.

When shifting the shift lever between P and D, make sure that the vehicle is completely stopped.

Shift position purpose

Shift position	Purpose and condition
P	Parking the vehicle/starting the hybrid system
R	Reversing
N	Condition in which the power is not transmitted
D	Normal driving ^{*1}
S	S mode driving ^{*2} (→P. 228)

^{*1}: To improve fuel efficiency and reduce noises, set the shift lever in D for normal driving.

^{*2}: By selecting shift ranges using S mode, you can control accelerating forces and engine braking forces.

Selecting shift ranges in S mode

To enter S mode, shift the shift lever to the S position.

Changing the shift range allows restriction of the highest shift range, preventing unnecessary upshifting and enabling the level of engine braking force to be selected.

Also, by controlling the transmission so that engine speed is higher when compared with normal driving, acceleration response is improved.


The shift range can be selected by the shift lever.

① Upshifting

② Downshifting

The selected shift range, from S1 to S8, will be displayed in the meter.

The initial shift range in S mode is automatically set to S4, S5, S6 or S7 according to vehicle speed.

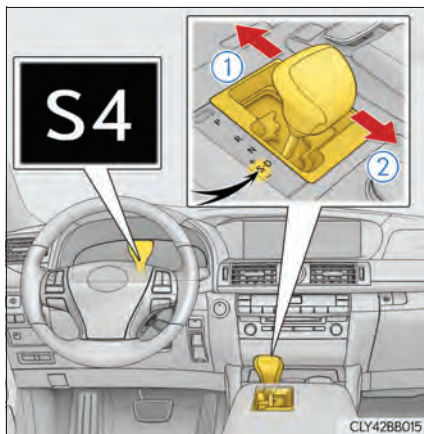

■ Shift ranges and their functions

- You can choose from 8 levels of accelerating force and engine braking force.
- A lower shift range will provide greater accelerating force and engine braking force than a higher shift range, and the engine speed will also increase.
- If you accelerate while in ranges 1 to 5, the shift range may automatically range up in accordance with the vehicle's speed.

Selecting the driving mode

■ Sport mode/Comfort mode/Eco drive mode

→P. 309


■ Snow mode

Snow mode can be selected to suit the conditions when driving on slippery road surfaces, such as on snow.

Press the switch.

The snow mode indicator light will come on.

Press the switch again to return to normal mode.

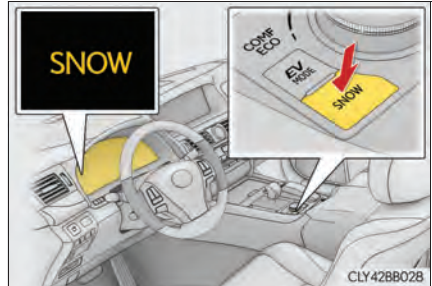

■ S mode

- When the shift range is 6 or lower, holding the shift lever toward “+” sets the shift range to 8.
- When the shift lever is moved toward “-”, the shift range is downshifted to a range that enables engine braking force that is suitable to driving conditions.

■ Downshifting restrictions warning buzzer (in the S mode)

To help ensure safety and driving performance, downshifting operation may sometimes be restricted. In some circumstances, downshifting may not be possible even when the shift lever is operated. (A buzzer will sound twice.)

■ When driving with cruise control or dynamic radar cruise control with full speed range activated

Even when performing the following actions with the intent of enabling engine braking, engine braking will not activate because cruise control or dynamic radar cruise control with full speed range will not be canceled.

- While driving in S mode, downshifting to 7, 6, 5 or 4. (→ P. 257, 261)
- When switching the driving mode to sport mode while driving in D position. (→ P. 309)

■ Snow mode automatic deactivation

Snow mode is automatically deactivated if the power switch is turned off after driving in snow mode.

■ If the shift lever cannot be shifted from P

→P. 823

CAUTION

■ When driving on slippery road surfaces

Be careful of downshifting and sudden acceleration, as this could result in the vehicle skidding to the side or spinning.

NOTICE


■ Hybrid battery (traction battery) charge

If the shift lever is in N, the hybrid battery (traction battery) will not be charged even when the engine is running. Therefore, if the vehicle is left with the shift lever in N for a long period of time, the hybrid battery (traction battery) will discharge, and this may result in the vehicle not being able to start.

Turn signal lever

Operating instructions

- ① Right turn
- ② Lane change to the right (move the lever partway and release it)
The right hand signals will flash 3 times.
- ③ Lane change to the left (move the lever partway and release it)
The left hand signals will flash 3 times.
- ④ Left turn

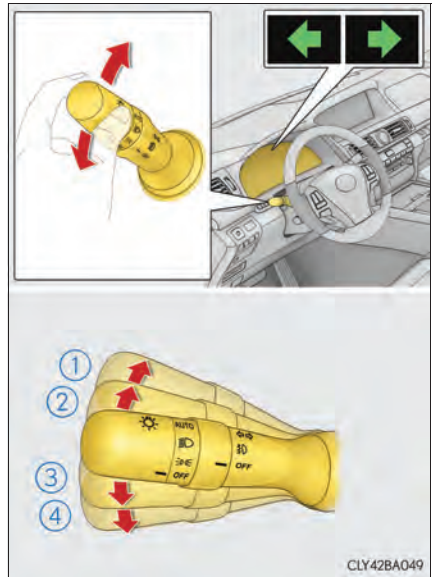

■ Turn signals can be operated when

The power switch is in ON mode.

■ If the indicator flashes faster than usual

Check that a light bulb in the front or rear turn signal lights has not burned out.

■ If the turn signals stop flashing before a lane change has been performed

Operate the lever again.

■ To discontinue flashing of the turn signals during a lane change

Operate the lever in the opposite direction.

■ Customization

The number of times the turn signals flash during a lane change can be changed.
(Customizable features → P. 865)

Parking brake

A selections can be made as desired from the following modes.

Manual mode


① Sets the parking brake

The parking brake indicator light will come on. (→P. 234)

Press and hold the parking brake switch if an emergency occurs and it is necessary to operate the parking brake while driving. The parking brake is applied only while the switch is being pressed.

② Releases the parking brake

Operate the parking brake switch while depressing the brake pedal. Make sure that the parking brake indicator light goes off.

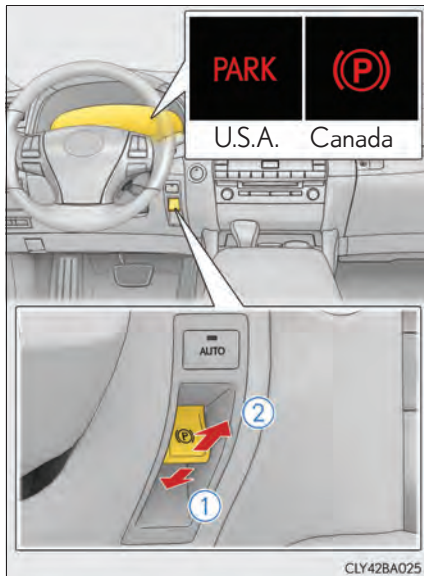

Automatic mode

The parking brake is set or released automatically according to shift lever operation.

Turns automatic mode on/off

When automatic mode is turned on, the indicator on the switch comes on and it operates in the following manner:

- When the shift lever is moved into P, the parking brake will be set.
- When the shift lever is moved out of P, the parking brake will be released.

Operate the shift lever with the brake pedal depressed.



■ Parking brake operation

- When the power switch is not in ON mode, the parking brake cannot be released using the parking brake switch.
- When the power switch is not in ON mode, automatic mode (automatic brake setting and releasing) is not available.
- If the parking brake is operated repeatedly over a short period of time, the system may restrict operation to prevent overheating. If this happens, refrain from operating the parking brake. Normal operation will return after about 1 minute.

■ Parking brake operation sound

When the parking brake operates, a motor sound (whirring sound) may be heard. This does not indicate a malfunction.

■ Parking brake indicator light

- Depending on the power switch mode, the parking brake indicator light will come on and stay on as described below:
ON mode: Comes on until the parking brake is released.
Not in ON mode: Stays on for approximately 15 seconds.
- When the power switch is turned off with the parking brake set, the parking brake indicator light will stay on for about 15 seconds. This does not indicate a malfunction.

■ Parking brake engaged warning buzzer

A buzzer will sound if the vehicle is driven at a speed of approximately 3 mph (5 km/h) or more with the parking brake engaged.

■ When there is a malfunction in the system

Warning lights and/or warning message will turn on or flash. (→P. 801, 809)
Depending on the condition, the parking brake indicator light may flash.

■ Usage in winter time

→P. 352



NOTICE

■ When parking the vehicle

Before you leave the vehicle, set the parking brake, shift the shift lever to P and make sure that the vehicle does not move.

■ When the system malfunctions

Stop the vehicle in a safe place and check the warning messages.

■ When the parking brake cannot be released due to a malfunction

Use the parking brake release tool to manually release the parking brake.
(→P. 824)

Driving the vehicle with the parking brake set will lead to brake components overheating, which may affect braking performance and increase brake wear.

Brake Hold

The brake hold system keeps the brake applied when the shift lever is in D, S or N with the system on and the brake pedal has been depressed to stop the vehicle. The system releases the brake when the accelerator pedal is depressed with the shift lever in D or S to allow smooth start off.

Turns the brake hold system on

The brake hold standby indicator (green) comes on. While the system is holding the brake, the brake hold operated indicator (yellow) comes on.



■ Brake hold system operating conditions

The brake hold system cannot be turned on in the following conditions:

- The trunk or hood is not closed.
- The driver's door is not closed.
- The driver is not wearing the seat belt.

If any of the conditions above are detected when the brake hold system is enabled, the system will turn off and the brake hold standby indicator light will go off. In addition, if any of the conditions are detected while the system is holding the brake, a warning buzzer will sound and a message will be shown on the multi-information display. The parking brake will then be set automatically.

■ Brake hold function

- If the brake pedal is left released for a period of about 3 minutes after the system has started holding the brake, the parking brake will be set automatically. In this case, a warning buzzer sounds and a message is shown on the multi-information display.
- To turn the system off while the system is holding the brake, firmly depress the brake pedal and press the switch again.
- The brake hold function may not hold the vehicle when the vehicle is on a steep incline. In this situation, it may be necessary for the driver to apply the brakes. The multi-information display will inform the driver of this situation.

■ When the parking brake is set automatically while the system is holding the brakes

The parking brake will not be released automatically. Release the parking brake by operating the parking brake switch, making sure that the parking brake indicator light goes off. (→P. 232)

■ When there is a malfunction in the system

Warning lights and/or warning messages will turn on or flash. (→P. 801, 809)

⚠ CAUTION**■ When the vehicle is on a steep incline**

When using the brake hold system on a steep incline exercise caution. The brake hold function may not hold the vehicle in such a situation.

■ When stopped on a slippery road


The system cannot stop the vehicle when the gripping ability of the tires has been exceeded. Do not use the system when stopped on a slippery road.

⚠ NOTICE**■ When parking the vehicle**

The brake hold system is not designed for use when parking the vehicle for a long period of time. Turning the power switch off while the system is holding the brake may release the brake, which would cause the vehicle to move. When operating the power switch, depress the brake pedal, set the parking brake and shift the shift lever to P.

Horn

To sound the horn, press on or close to the  mark.

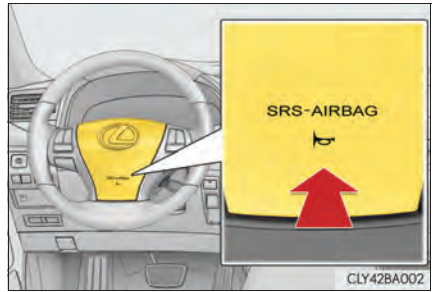


Headlight switch

The headlights can be operated manually or automatically.

Operating instructions

Turning the end of the lever turns on the lights as follows:

- ① OFF (U.S.A.) or ○ (Canada)
The daytime running lights turn on.
- ②  The side marker, tail, license plate, instrument panel and daytime running lights turn on.
- ③  The headlights, parking lights and all lights listed (except daytime running lights) above turn on.
- ④ AUTO The headlights, parking lights, daytime running lights and all the lights listed above turn on and off automatically.
(When the power switch is in ON mode.)

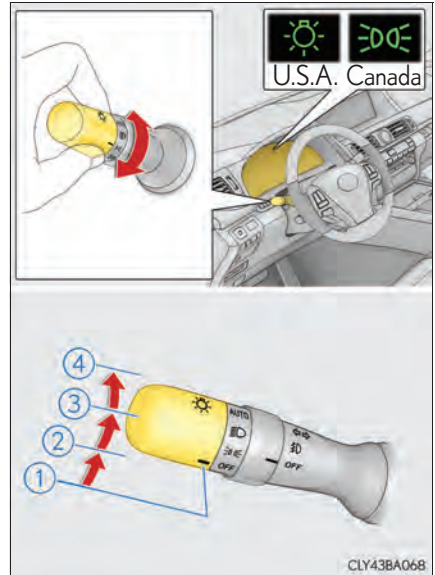


Turning on the high beam headlights

- ① With the headlights on, push the lever away from you to turn on the high beams.

Pull the lever toward you to the center position to turn the high beams off.

- ② Pull the lever toward you and release it to flash the high beams once.

You can flash the high beams with the headlights on or off.

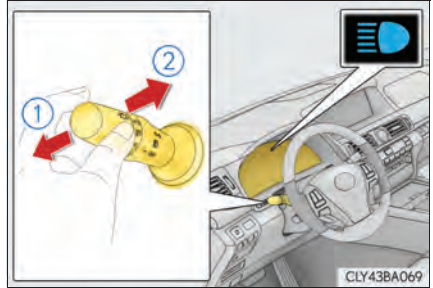

AFS (Adaptive Front-lighting System)

AFS (Adaptive Front-lighting System) secures excellent visibility at intersections and on curves by automatically adjusting the direction of the light axis of the headlights according to vehicle speed and the degree of the tire's angle as controlled by steering input.

AFS operates at speeds of 6 mph (10 km/h) or higher.


■ Daytime running light system

- To make your vehicle more visible to other drivers, the parking lights turn on automatically (at an increased intensity) whenever the hybrid system is started and the parking brake is released. Daytime running lights are not designed for use at night.
- Compared to turning on the headlights, the daytime running light system offers greater durability and consumes less electricity, so it can help improve fuel economy.

■ Headlight control sensor

The sensor may not function properly if an object is placed on the sensor, or anything that blocks the sensor is affixed to the windshield.

Doing so interferes with the sensor detecting the level of ambient light and may cause the automatic headlight system to malfunction.



■ Automatic light off system

- When the headlights are on: The headlights and tail lights turn off 30 seconds after a door is opened and closed if the power switch is turned to ACCESSORY mode or turned off. (The lights turn off immediately if  on the key is pressed after all the doors are closed.)
- When only the tail lights are on: The tail lights turn off automatically if the power switch is turned to ACCESSORY mode or turned off and the driver's door is opened.

To turn the lights on again, turn the power switch to ON mode, or turn the light switch off once and then back to  or .

If any of the doors or trunk lid is kept open, the lights automatically turn off after 20 minutes.

■ Light reminder buzzer

A buzzer sounds when the power switch is turned off or turned to ACCESSORY mode and the driver's door is opened while the lights are turned on.

■ Automatic headlight leveling system

The level of the headlights is automatically adjusted according to the number of passengers and the loading condition of the vehicle to ensure that the headlights do not interfere with other road users.

■ Battery-saving function

In the following conditions, the remaining lights will go off automatically after 20 minutes in order to prevent the vehicle battery from being discharged:

- The headlights and/or tail lights are on.
- The power switch is turned to ACCESSORY mode or turned off.

This function will be canceled in any of the following situations:

- When the power switch is turned to ON mode.
- When the light switch is operated.
- When the door or trunk is opened or closed.

■ Customization

Settings (e.g. light sensor sensitivity) can be changed.
(Customizable features → P. 870)



NOTICE

■ To prevent 12-volt battery discharge


Do not leave the lights on longer than necessary when the hybrid system is off.

Automatic High Beam

The Automatic High Beam uses an in-vehicle camera sensor to assess the brightness of streetlights, the lights of oncoming and preceding vehicles, etc., and automatically turns high beam on or off as necessary.


Activating the Automatic High Beam system

- 1 Push the lever away from you with the headlight switch in **AUTO** or  position.

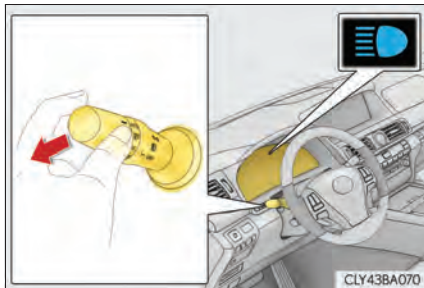

- 2 Press the Automatic High Beam switch.

The Automatic High Beam indicator will come on when the headlights are turned on automatically to indicate that the system is active.

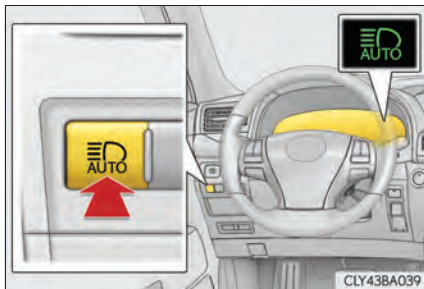


Turning the high beam on/off manually

■ Switching to low beam

Pull the lever to original position.

The Automatic High Beam indicator will turn off.

Push the lever away from you to activate the Automatic High Beam system again.

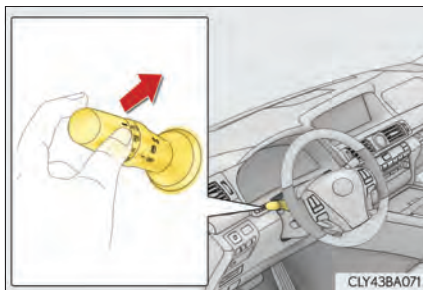


■ Switching to high beam

Press the Automatic High Beam switch.

The Automatic High Beam indicator will turn off and the high beam indicator will turn on.

Press the switch to activate the Automatic High Beam system again.

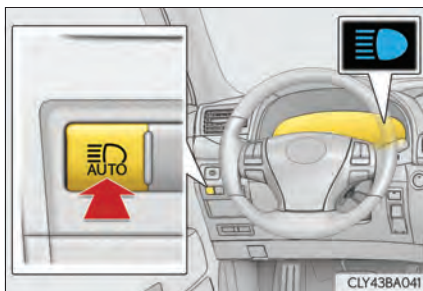

High beam automatic turning on or off conditions

- When all of the following conditions are fulfilled, high beam will be automatically turned on (after approximately 1 second):
 - Vehicle speed is above approximately 21 mph (34 km/h).
 - The area ahead of the vehicle is dark.
 - There are no oncoming or preceding vehicles with headlights or tail lights turned on.
- If any of the following conditions are fulfilled, high beam will be automatically turned off:
 - Vehicle speed drops below approximately 17 mph (27 km/h).
 - The area ahead of the vehicle is not dark.
 - Oncoming or preceding vehicles have headlights or tail lights turned on.

■ The Automatic High Beam can be operated when

The power switch is in ON mode.

■ Camera sensor detection information

- High beam may not be automatically turned off in the following situations:
 - When oncoming vehicles suddenly appear from a curve
 - When the vehicle is cut in front of by another
 - When oncoming or preceding vehicles are hidden from sight due to repeated curves, road dividers or roadside trees
- High beam may be turned off if an oncoming vehicle that is using fog lights without using the headlights is detected.
- House lights, street lights, red traffic signals, and illuminated billboards or signs may cause the high beam to turn off.
- The following factors may affect the amount of time taken to turn high beam on or off:
 - The brightness of headlights, fog lights, and tail lights of oncoming and preceding vehicles
 - The movement and direction of oncoming and preceding vehicles
 - When a oncoming or preceding vehicle only has operational lights on one side
 - When a oncoming or preceding vehicle is a two-wheeled vehicle
 - The condition of the road (gradient, curve, condition of the road surface etc.)
 - The number of passengers and amount of luggage
- High beam may be turned on or off when unexpected by the driver.
- Small vehicles, such as bicycles, may not be detected.

- In the situations below, the system may not be able to correctly detect the surrounding brightness levels, and may flash or expose oncoming or preceding vehicles to the high beam or may continue using the low beam. Therefore, in these situations you should consider turning the high beams on or off manually rather than relying on the Automatic High Beam system.
 - In bad weather (rain, snow, fog, sandstorms etc.)
 - The windshield is obscured by fog, mist, ice, dirt etc.
 - The windshield is cracked or damaged.
 - The inside rear view mirror or camera sensor is deformed or dirty.
 - The camera sensor temperature is extremely high.
 - Surrounding brightness levels are equal to those of headlights, tail lights or fog lights.
 - Vehicles ahead have headlights that are either switched off, dirty, are changing color, or have are not aimed properly.
 - When driving through an area of intermittently changing brightness and darkness.
 - When frequently and repeatedly driving ascending/descending roads, or roads with rough, bumpy or uneven surfaces (such as stone-paved roads, gravel tracks etc.).
 - When frequently and repeatedly taking curves or driving on a winding road.
 - There is a highly reflective object ahead of the vehicle, such as a sign or a mirror.
 - The back of a vehicle ahead is highly reflective, such as a container on a truck.
 - The vehicle's headlights are damaged or dirty.
 - The vehicle is listing or tilting, due to a flat tire, a trailer being towed etc.

■ Temporary lowering sensor sensitivity

The sensitivity of the sensor can be temporarily lowered.

To lower the sensitivity, push and hold the "AUTO" button on the inside rear view mirror for 15 to 20 seconds, and release. The indicator light on the inside rear view mirror will flash to indicate that the sensitivity has been lowered.

When the power switch is turned off, the sensitivity will be returned to its normal level.


CAUTION

■ Limitations of the Automatic High Beam

Do not rely on the Automatic High Beam. Always drive safely, taking care to observe your surroundings and turn the high beam on or off manually if necessary.

 NOTICE**■ Notes when using the Automatic High Beam system**

Observe the following to ensure that the Automatic High Beam functions correctly.




- Do not touch the camera sensor.
- Do not subject the inside rear view mirror or the camera sensor to a strong impact.
- Do not disassemble the camera sensor.
- Do not spill liquid onto the inside rear view mirror or the camera sensor.
- Do not apply window tinting or stickers to the camera sensor or the area of windshield near the camera sensor.
- Do not place items on the dashboard. There is a possibility that the camera sensor will mistake items reflected in the windshield for streetlights, the headlights of other vehicles, etc.
- Do not install a parking tag or any other accessories near or around the inside rear view mirror and the camera sensor.
- Do not overload the vehicle.
- Do not modify the vehicle.
- Do not replace the windshield with a non-genuine windshield.
Contact your Lexus dealer.

Fog light switch

The fog lights secure excellent visibility in difficult driving conditions, such as in rain and fog.

- ① OFF (U.S.A.) or ○ (Canada)
Turns the front fog lights off
- ②  Turns the front fog lights on

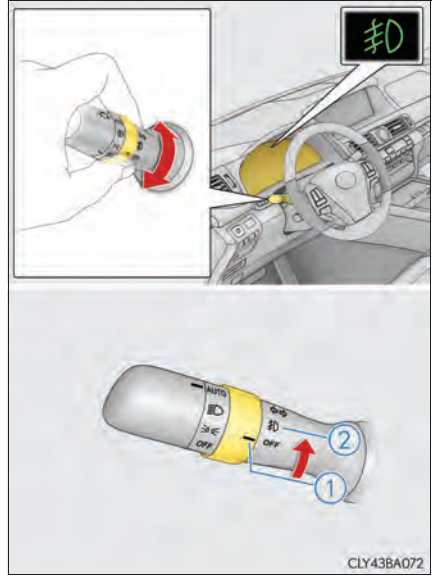

- Fog lights can be used when
The headlights are on in low beam.

Windshield wipers and washer

Operating the wiper lever

Operate the lever as follows to operate the wipers.


- ① **MIST** (U.S.A.) or $\triangle$ (Canada)
Temporary operation

- ② **AUTO** Rain-sensing wiper operation

The wipers will operate automatically when the sensor detects falling rain. The system automatically adjusts wiper timing in accordance with rain volume and vehicle speed.


- ③ **LO** (U.S.A.) or $\blacktriangledown$ (Canada)
Low speed wiper operation

- ④ **HI** (U.S.A.) or $\blacktriangledown$ (Canada)
High speed wiper operation

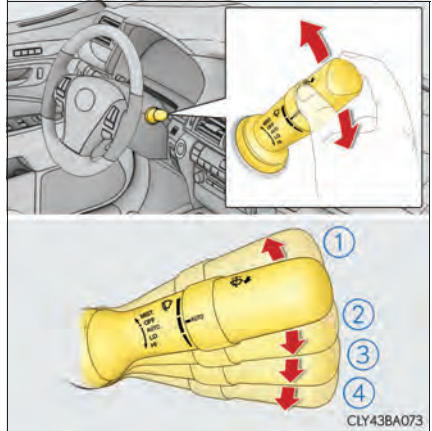

When “AUTO” mode is selected, the sensor sensitivity can be adjusted by turning the switch ring.

- ⑤ Increases the sensitivity
- ⑥ Decreases the sensitivity

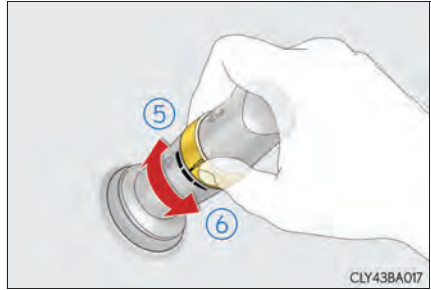

⑦ Washer/wiper dual operation

Wipers will automatically operate a couple of times after the washer squirts.



■ The windshield wiper and washer can be operated when

The power switch is in ON mode.

■ Dripping prevention wiper sweep

After washing and the wiper has operated several times, the wipers operate one more time after a short delay to prevent dripping.

However, the last sweep will not happen if the vehicle is traveling above 106 mph (170 km/h).

■ Effects of vehicle speed on wiper operation

Even when the wipers are not in “AUTO” mode, vehicle speed affects the time until the drip prevention wiper sweep occurs.


With low speed windshield wiper operation selected, wiper operation will be switched from low speed to intermittent wiper operation only when the vehicle is stationary.

(However, when the sensor sensitivity is adjusted to the highest level, the mode cannot be switched.)

■ Raindrop sensor

- The raindrop sensor judges the amount of raindrops.

An optical sensor is adopted. It may not operate properly when sunlight from the rising or setting of the sun intermittently strikes the windshield, or if bugs etc. are present on the windshield.



- If the wiper is turned to "AUTO" mode while the power switch is in ON mode, the wipers will operate once to show that "AUTO" mode is activated.
- If the temperature of the raindrop sensor is 194°F (90°C) or higher, or 5°F (-15°C) or lower, automatic operation may not occur. In this case, operate the wipers in any mode other than "AUTO" mode.

■ If no windshield washer fluid sprays

Check that the washer nozzles are not blocked if there is washer fluid in the windshield washer fluid reservoir.

■ Outside rear view mirror defogger activation linked to windshield wiper operation

The outside rear view mirror defoggers automatically turn on when you operate the windshield wipers.

The outside rear view mirror defoggers automatically turn off approximately 15 minutes after the wipers stop.

For details about the outside rear view mirror defoggers: →P. 425

⚠ CAUTION

■ Caution regarding the use of windshield wipers in "AUTO" mode

The windshield wipers may operate unexpectedly if the sensor is touched or the windshield is subject to vibration in "AUTO" mode. Take care that your fingers or anything else do not become caught in the windshield wipers.

■ Caution regarding the use of washer fluid

When it is cold, do not use the washer fluid until the windshield becomes warm. The fluid may freeze on the windshield and cause low visibility. This may lead to an accident, resulting in death or serious injury.

**NOTICE****■ When the windshield is dry**

Do not use the wipers, as they may damage the windshield.

■ When there is no washer fluid spray from the nozzle

Damage to the washer fluid pump may be caused if the lever is pulled toward you and held continually.

■ When a nozzle becomes blocked


In this case, contact your Lexus dealer.

Do not try to clear it with a pin or other object. The nozzle will be damaged.

Headlight cleaner switch

Washer fluid can be sprayed on the headlights.

Press the switch to clean the headlights.

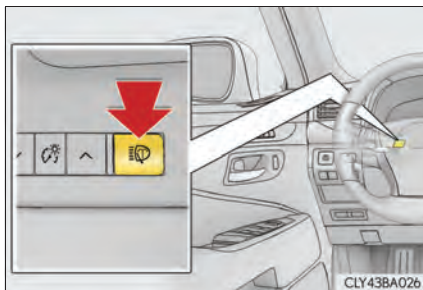

■ The headlight cleaners can be operated when

The power switch is in ON mode and the headlight switch is turned on.

■ Windshield washer linked operation

When the windshield washer is operated with the power switch in ON mode and the headlights on, the headlight cleaners will operate once. (→P. 248)



NOTICE

■ When the washer fluid tank is empty

Do not press the switch continually as the washer fluid pump may overheat.

Opening the fuel tank cap

The fuel tank of your vehicle has a special structure, which requires a reduction in fuel tank pressure before refueling. After the opener switch has been pressed, it will take several seconds until the vehicle is ready for refueling.

Before refueling the vehicle

- Close all the doors and windows, and turn the power switch off.
- Confirm the type of fuel.

■ Fuel types

Premium unleaded gasoline (Octane rating 91 [Research Octane Number 96] or higher)

 CAUTION**■ When refueling the vehicle**

Observe the following precautions while refueling the vehicle. Failure to do so may result in death or serious injury.

- After exiting the vehicle and before opening the fuel door, touch an unpainted metal surface to discharge any static electricity. It is important to discharge static electricity before refueling because sparks resulting from static electricity can cause fuel vapors to ignite while refueling.
- Always hold the grips on the fuel tank cap and turn it slowly to remove it.
A whooshing sound may be heard when the fuel tank cap is loosened. Wait until the sound cannot be heard before fully removing the cap. In hot weather, pressurized fuel may spray out the filler neck and cause injury.
- Do not allow anyone that has not discharged static electricity from their body to come close to an open fuel tank.
- Do not inhale vaporized fuel.
Fuel contains substances that are harmful if inhaled.
- Do not smoke while refueling the vehicle.
Doing so may cause the fuel to ignite and cause a fire.
- Do not return to the vehicle or touch any person or object that is statically charged.
This may cause static electricity to build up, resulting in a possible ignition hazard.

■ When refueling

Observe the following precautions to prevent fuel overflowing from the fuel tank:

- Securely insert the fuel nozzle into the fuel filler neck.
- Stop filling the tank after the fuel nozzle automatically clicks off.
- Do not top off the fuel tank.

 NOTICE**■ Refueling**


Do not spill fuel during refueling.

Doing so may damage the vehicle, such as causing the emission control system to operate abnormally or damaging fuel system components or the vehicle's painted surface.


Opening the fuel tank cap

- 1 Press the opener switch.


The fuel filler door will open within about 10 seconds of the switch being pressed. Before refueling is possible, a message will be shown on the multi-information display in the instrument cluster to indicate the progress of the fuel filler door opener.

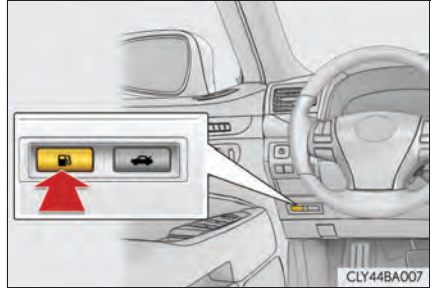

- 2 Turn the fuel tank cap slowly to open.

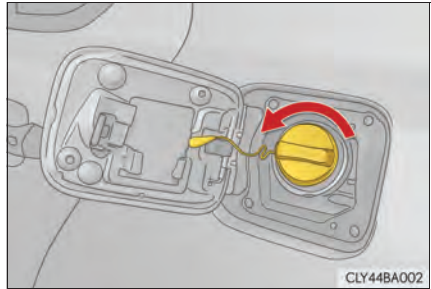


- 3 Hang the fuel tank cap on the back of the fuel filler door.

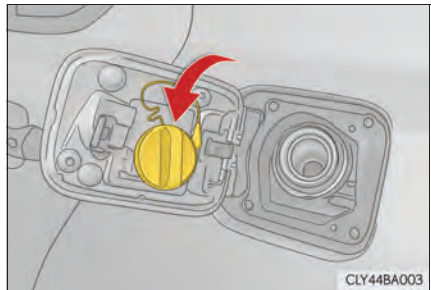

■ When the fuel filler door cannot be opened by pressing the inside switch


- If the fuel filler door opener switch cannot be operated, contact your Lexus dealer to service the vehicle. In case where refueling is urgently necessary, the fuel filler door can be opened using the lever in the trunk.



- Using the lever to open the fuel filler door may not allow for an adequate reduction in fuel tank pressure before refueling. To prevent fuel from spilling out, turn the cap slowly when removing it. During refueling, fuel may spill out from the filler opening due to air being discharged from inside the fuel tank. Therefore, fill the fuel tank carefully and slowly.

Closing the fuel tank cap

After refueling, turn the fuel tank cap until you hear a click. Once the cap is released, it will turn slightly in the opposite direction.

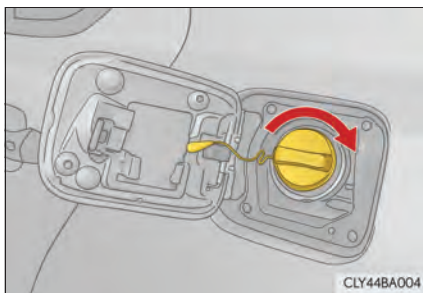**⚠ CAUTION****■ When replacing the fuel tank cap**

Do not use anything but a genuine Lexus fuel tank cap designed for your vehicle. Doing so may cause a fire or other incident which may result in death or serious injury.

Cruise control*

Summary of functions

Use the cruise control to maintain a set speed without depressing the accelerator pedal.

- ① Indicators
- ② Cruise control switch




Setting the vehicle speed

- 1 Press the “ON•OFF” button to activate the cruise control.

Cruise control indicator will come on.


Press the button again to deactivate the cruise control.

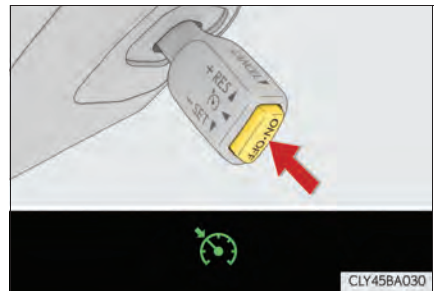

- 2 Accelerate or decelerate the vehicle to the desired speed, and push the lever down to set the speed.

“SET” indicator will come on.

The vehicle speed at the moment the lever is released becomes the set speed.

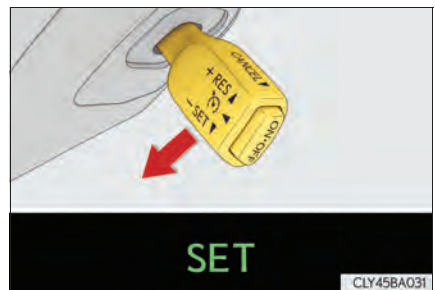


Adjusting the set speed

To change the set speed, operate the lever until the desired set speed is obtained.

- ① Increases the speed
- ② Decreases the speed

Fine adjustment: Momentarily move the lever in the desired direction.

Large adjustment: Hold the lever in the desired direction.

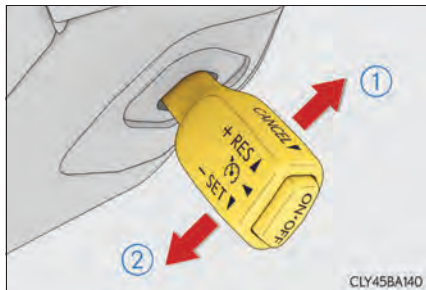

The set speed will be increased or decreased as follows:

Fine adjustment: By approximately 1 mph (1.6 km/h) each time the lever is operated.

Large adjustment: The set speed can be increased or decreased continually until the lever is released.


Canceling and resuming the constant speed control

- ① Pulling the lever toward you cancels the constant speed control.

The speed setting is also canceled when the brakes are applied.

- ② Pushing the lever up resumes the constant speed control.

Resuming is available when the vehicle speed is more than approximately 25 mph (40 km/h).

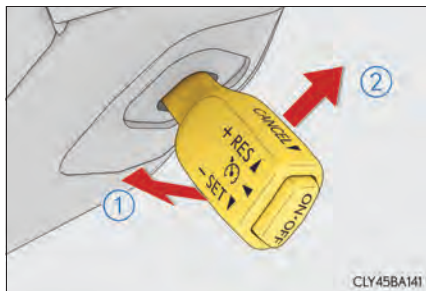

■ Cruise control can be set when

- The shift lever is in D or range 4 or higher of S has been selected.
- Vehicle speed is above approximately 25 mph (40 km/h).

■ Accelerating after setting the vehicle speed

- The vehicle can be accelerated normally. After acceleration, the set speed resumes.
- Even without canceling the cruise control, the set speed can be increased by first accelerating the vehicle to the desired speed and then pushing the lever down to set the new speed.

■ Automatic cruise control cancelation

Cruise control will stop maintaining the vehicle speed in any of the following situations.

- Actual vehicle speed falls more than approximately 10 mph (16 km/h) below the preset vehicle speed.
At this time, the memorized set speed is not retained.
- Actual vehicle speed is below approximately 25 mph (40 km/h).
- VSC is activated.
- TRAC is activated for a period of time.
- When the VSC or TRAC system is turned off by pressing the VSC OFF switch.

■ If the warning message for the cruise control is shown on the multi-information display

Press the "ON•OFF" button once to deactivate the system, and then press the button again to reactivate the system.

If the cruise control speed cannot be set or if the cruise control cancels immediately after being activated, there may be a malfunction in the cruise control system. Have the vehicle inspected by your Lexus dealer.

**CAUTION****■ To avoid operating the cruise control by mistake**

Switch the cruise control off using the “ON•OFF” button when not in use.

■ Situations unsuitable for cruise control

Do not use cruise control in any of the following situations.

Doing so may result in loss of control and could cause an accident resulting in death or serious injury.

- In heavy traffic
- On roads with sharp bends
- On winding roads
- On slippery roads, such as those covered with rain, ice or snow
- On steep hills


Vehicle speed may exceed the set speed when driving down a steep hill.

Dynamic radar cruise control with full-speed range*

Summary of functions

Dynamic radar cruise control with full-speed range supplements conventional cruise control with a vehicle-to-vehicle distance control. In vehicle-to-vehicle distance control mode, the vehicle automatically accelerates, decelerates or stops in order to maintain a set following distance from vehicles ahead. See cautions on P. 273

- ① Vehicle-to-vehicle distance button
- ② Display
- ③ Set speed
- ④ Indicators
- ⑤ Cruise control switch

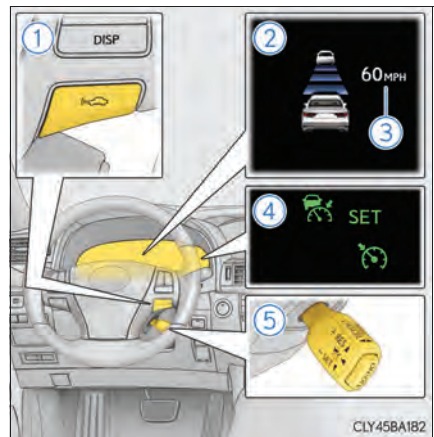

Setting the vehicle speed (vehicle-to-vehicle distance control mode)

- 1 Press the “ON•OFF” button to activate the cruise control.

Radar cruise control indicator will come on and a message will be shown on the multi-information display.

Press the button again to deactivate the cruise control.



- 2 Accelerate or decelerate the vehicle to the desired speed, and push the lever down to set the speed.

“SET” indicator will be displayed.

The vehicle speed at the moment the lever is released becomes the set speed.



While the vehicle is in vehicle-to-vehicle distance control mode, if the lever is released when vehicle speed is less than 30 mph (50 km/h) and a vehicle ahead can be detected, the vehicle will start following the vehicle ahead at a set speed of 30 mph (50 km/h).

Adjusting the set speed

To change the set speed, operate the lever until the desired set speed is displayed.


① Increases the speed

(Except when the vehicle has been stopped by system control in vehicle-to-vehicle distance control mode)

② Decreases the speed

Fine adjustment: Momentarily move the lever in the desired direction.

Large adjustment: Hold the lever in the desired direction.

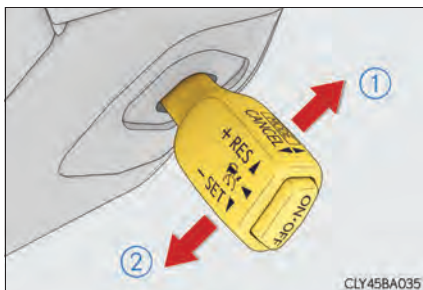

In the vehicle-to-vehicle distance control mode, the set speed will be increased or decreased as follows:

- When the set speed is shown in "MPH"

Fine adjustment: By approximately 1 mph (1.6 km/h) each time the lever is operated

Large adjustment: By approximately 5 mph (8 km/h) for each 0.75 seconds the lever is held

- When the set speed is shown in "km/h"

Fine adjustment: By approximately 0.6 mph (1 km/h) each time the lever is operated

Large adjustment: By approximately 3.1 mph (5 km/h) for each 0.75 seconds the lever is held

In the constant speed control mode (→P. 269), the set speed will be increased or decreased as follows:

Fine adjustment: By approximately 1 mph (1.6 km/h) each time the lever is operated

Large adjustment: The set speed can be increased or decreased continually until the lever is released.


Changing the vehicle-to-vehicle distance

Pressing the button changes the vehicle-to-vehicle distance as follows:

- ① Long
- ② Medium
- ③ Short

The vehicle-to-vehicle distance is set automatically to long mode when the power switch is turned to ON mode.

If a vehicle is running ahead of you, the preceding vehicle mark will also be displayed.

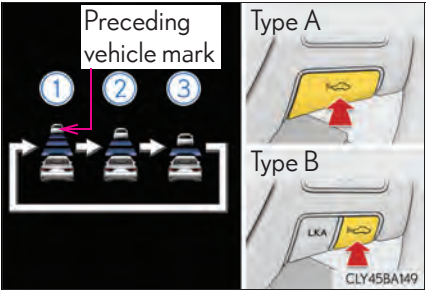

Vehicle-to-vehicle distance settings

Select a distance from the table below. Note that the distances shown correspond to a vehicle speed of 50 mph (80 km/h). Vehicle-to-vehicle distance increases/decreases in accordance with vehicle speed. When the vehicle is stopped by system control, the vehicle-to-vehicle distance will be about 10 ft. (3 m) to 16 ft. (5 m) regardless of the vehicle-to-vehicle distance setting.

Distance options	Vehicle-to-vehicle distance
Long	Approximately 160 ft. (50 m)
Medium	Approximately 130 ft. (40 m)
Short	Approximately 100 ft. (30 m)

Resuming follow-up cruising when the vehicle has been stopped by system control

After the vehicle ahead of you starts off, push the lever up.

Your vehicle will also resume follow-up cruising if the accelerator pedal is depressed after the vehicle ahead of you starts off.



Canceling and resuming the speed control


- ① Pulling the lever toward you cancels the cruise control.

The setting is also canceled when the brake pedal is depressed while driving.

(When the vehicle has been stopped by system control, applying the brakes does not cancel the setting.)

- ② Pushing the lever up resumes the cruise control and returns vehicle speed to the set speed.

However, when a vehicle ahead is not detected in vehicle-to-vehicle distance control mode, cruise control does not resume when the actual vehicle speed is approximately 25 mph (40 km/h) or less. Also, when the vehicle is in constant speed control mode and the actual vehicle speed is approximately 25 mph (40 km/h) or less, cruise control does not resume as the set speed is cleared.

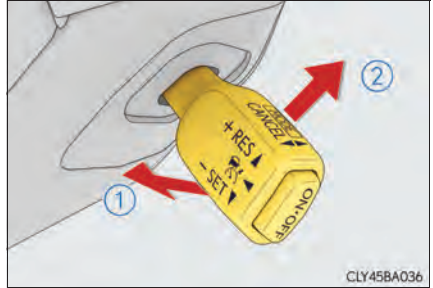


CLY45BA036

Driving in vehicle-to-vehicle distance control mode

This mode employs a radar sensor to detect the presence of vehicles up to approximately 400 ft. (120 m) ahead, determines the current vehicle-to-vehicle following distance, and operates to maintain a suitable following distance from the vehicle ahead.

Note that vehicle-to-vehicle distance will close in when traveling on long downhill slopes.

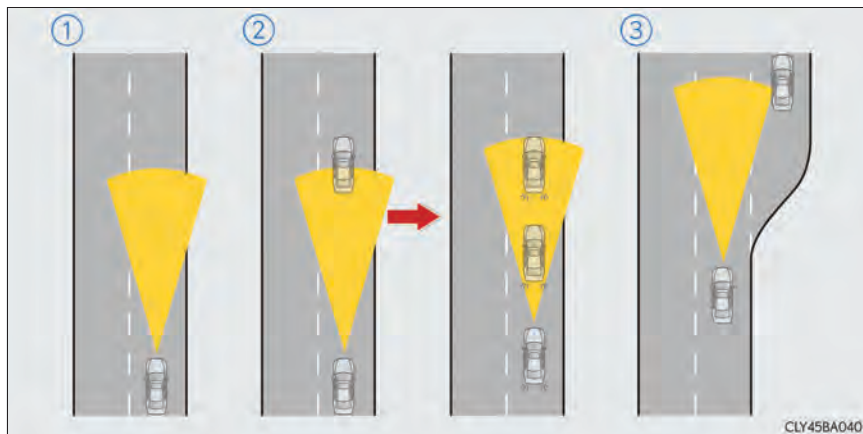

① Example of constant speed cruising

When there are no vehicles ahead

The vehicle travels at the speed set by the driver. The desired vehicle-to-vehicle distance can also be set by operating the vehicle-to-vehicle distance control.

② Example of deceleration cruising and follow-up cruising

When the vehicle ahead is driving slower than the set speed

When a vehicle is detected running ahead of you, the system automatically decelerates your vehicle. When a greater reduction in vehicle speed is necessary, the system applies the brakes. The system will respond to changes in the speed of the vehicle ahead in order to maintain the vehicle-to-vehicle distance set by the driver. A warning tone warns you when the system cannot decelerate sufficiently to prevent your vehicle from closing in on the vehicle ahead. When the vehicle ahead of you stops, your vehicle will also stop. After the vehicle ahead starts off, pushing the cruise control lever up or depressing the accelerator pedal will resume follow-up cruising.

③ Example of acceleration

When there are no longer any vehicles ahead driving slower than the set speed

The system accelerates until the set speed is reached. The system then returns to constant speed cruising.

Approach warning

When your vehicle is too close to a vehicle ahead, and sufficient automatic deceleration via the cruise control is not possible, the display will flash and the buzzer will sound to alert the driver. An example of this would be if another driver cuts in front of you while you are following a vehicle. Apply the brakes to ensure an appropriate vehicle-to-vehicle distance.

■ Warnings may not occur when

In the following instances, there is a possibility that the warnings will not occur:

- When the speed of the vehicle ahead matches or exceeds your vehicle speed
- When the vehicle ahead is traveling at an extremely slow speed or is stationary
- Immediately after the cruise control speed was set
- At the instant the accelerator is applied


Selecting conventional constant speed control mode

When constant speed control mode is selected, your vehicle will maintain a set speed without controlling the vehicle-to-vehicle distance. Select this mode only when vehicle-to-vehicle distance control mode does not function correctly due to dirt etc.

- ① Press the “ON•OFF” button to activate the cruise control.

Radar cruise control indicator will come on and a message will be shown on the multi-information display.

Press the button again to deactivate the cruise control.

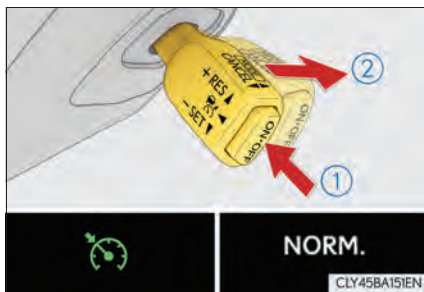

- ② Switch to constant speed control mode.

(Push the lever forward and hold for approximately 1 second.)

Cruise control indicator will come on and a message will be shown on the multi-information display.

When in constant speed control mode, to return to vehicle-to-vehicle distance control mode, push the lever forward again and hold for approximately 1 second.

After the desired speed has been set, it is not possible to return to vehicle-to-vehicle distance control mode.

If the power switch is turned off and then turned to ON mode again, the vehicle will automatically return to vehicle-to-vehicle distance control mode.

Adjusting the speed setting: →P. 263

Canceling and resuming the speed setting: →P. 266

■ **Dynamic radar cruise control with full-speed range can be set when**

- The shift lever is in D or range 4 or higher of S has been selected.
- Vehicle speed is above approximately 30 mph (50 km/h).

■ **Accelerating after setting the vehicle speed**

The vehicle can accelerate normally. After acceleration, the set speed resumes. However, during vehicle-to-vehicle distance control mode, the vehicle speed may decrease below the set speed in order to maintain the distance to the vehicle ahead.

■ **Automatic cancelation of vehicle-to-vehicle distance control**

Vehicle-to-vehicle distance control driving is automatically canceled in the following situations:

- Actual vehicle speed falls below approximately 25 mph (40 km/h) when there are no vehicle ahead.
- The preceding vehicle leaves the lane when your vehicle is following at a speed below 25 mph (40 km/h).
- VSC is activated.
- TRAC is activated for a period of time.
- When the VSC or TRAC system is turned off by pressing the VSC OFF switch.
- The sensor cannot operate correctly because it is covered in some way.
- The windshield wipers are operating at high speed (when the wiper switch is set to the "AUTO" mode or the high speed wiper operation position).
- When snow mode is set.
- The parking brake is operated.
- The vehicle is stopped by system control on a steep incline.
- Pre-collision brake assist is activated.
- The following are detected when the vehicle has been stopped by system control:
 - The driver is not wearing a seat belt.
 - The driver's door is opened.
 - The trunk or hood is opened.
 - The vehicle has been stopped for about 3 minutes.

If vehicle-to-vehicle distance control driving is automatically canceled for any other reason, there may be a malfunction in the system. Contact your Lexus dealer.

■ Automatic cancelation of constant speed control

The cruise control will stop maintaining the vehicle speed in the following situations:

- Actual vehicle speed is more than approximately 10 mph (16 km/h) below the set vehicle speed.
At this time, the memorized set speed is not retained.
- Actual vehicle speed falls below approximately 25 mph (40 km/h).
- VSC is activated.
- TRAC is activated for a period of time.
- When the VSC or TRAC system is turned off by pressing the VSC OFF switch.

■ When the LKA (Lane-Keeping Assist) will be activated


Using the radar cruise control in vehicle-to-vehicle distance control mode, lane keeping assistance control is activated.

■ Radar sensor and grille cover

Always keep the sensor and grille cover clean to ensure that the vehicle-to-vehicle distance control operates properly. (Some obstructions, such as snow, ice and plastic objects, cannot be detected by the obstruction sensor.)

Dynamic radar cruise control with full-speed range is canceled if an obstruction is detected.

- ① Grille cover
- ② Radar sensor



■ Warning messages and buzzers for dynamic radar cruise control with full-speed range

Warning messages and buzzers are used to indicate a system malfunction or to inform the driver of the need for caution while driving. (→P. 809)

■ Certification for the dynamic radar cruise control with full-speed range

► For vehicles sold in the U.S.A.

FCC ID: HYQDNMWR004

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radiofrequency radiation exposure Information:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance of 20 cm between the radiator (antenna) and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

► For vehicles sold in Canada

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

 CAUTION

Dynamic radar cruise control with full-speed range is designed to detect motor vehicles intended for use on public highways, with the exception of motorcycles. It will not detect: stationary objects, pedestrians, motorcycles, bicycles, animals, and similarly sized, or smaller, moving objects. The driver must always be aware of surroundings and in control of the vehicle.

■ Before using dynamic radar cruise control with full-speed range

Do not overly rely on vehicle-to-vehicle distance control.

Be aware of the set speed. If automatic deceleration/acceleration is not appropriate, adjust the vehicle speed, as well as the distance between your vehicle and vehicles ahead, by applying the brakes etc.

■ Cautions regarding the driving assist systems

Observe the following precautions.

Failure to do so may cause an accident resulting in death or serious injury.

The system, even in vehicle-to-vehicle distance control mode, only assists the driver:

● To measure following distance

The dynamic radar cruise control with full-speed range is only intended to help the driver in determining the following distance between the driver's own vehicle and a designated vehicle traveling ahead. It is not a mechanism that allows care-less or inattentive driving, and it is not a system that can assist the driver in low-visibility conditions. It is still necessary for driver to pay close attention to the vehicle's surroundings.

● To judge proper following distance

The dynamic radar cruise control with full-speed range determines whether the following distance between the driver's own vehicle and a designated vehicle traveling ahead is appropriate or not. It is not capable of making any other type of judgement. Therefore, it is absolutely necessary for the driver to remain vigilant and to determine whether or not there is a possibility of danger in any given situation.

● To operate the vehicle

The dynamic radar cruise control with full-speed range cannot prevent or avoid all collisions. Therefore, if there is ever any danger, the driver must take immediate and direct control of the vehicle and act appropriately in order to ensure the safety of all involved.

 CAUTION**■ To avoid inadvertent dynamic radar cruise control with full-speed range activation**

Switch the cruise control off using the “ON•OFF” button when not in use.

■ Situations unsuitable for dynamic radar cruise control with full-speed range

Do not use dynamic radar cruise control with full-speed range in any of the following situations.

Doing so may result in inappropriate speed control and could cause an accident resulting in death or serious injury.

- In heavy traffic
- On city streets
- On roads with sharp turns
- On winding roads
- On slippery roads, such as those covered with rain, ice or snow
- On steep downhills, or where there are sudden changes between sharp up and down gradients
Vehicle speed may exceed the set speed when driving down a steep hill.
- At entrances to expressways
- When weather conditions are bad enough that they may prevent the sensors from functioning correctly (fog, snow, sandstorm, heavy rain, etc.)
- When an approach warning buzzer is heard often
- In areas where the driver is likely to encounter pedestrians, motorcyclists, bicyclists, animals, stationary objects or other people/objects not detectable by the system. (→P. 273)

 CAUTION**■ When the sensor may not be correctly detecting a vehicle ahead**

Apply the brakes as necessary when any of the following types of vehicles are in front of you.

As the sensor may not be able to correctly detect these types of vehicles, the approach warning (→P. 268) will not be activated, and a fatal or serious accident may result.

- Vehicles traveling at low speeds
- Vehicles that are stationary
- Motorcycles traveling in the same lane
- Vehicles with small rear ends (trailers with no load on board etc.)
- Vehicles that cut in suddenly

Details about other people/objects the system will not detect:

→P. 273

■ Conditions under which the vehicle-to-vehicle distance control may not function correctly

Apply the brakes as necessary in the following conditions as the radar sensor may not be able to correctly detect vehicles ahead, and a fatal or serious accident may result:

- When water or snow splashed by the surrounding vehicles hinders the functioning of the sensor
- When your vehicle is tilted upwards (due to a heavy load in the trunk etc.)
- When the road curves or when the lanes are narrow
- When steering wheel operation or your position in the lane is unstable
- When the vehicle ahead decelerates suddenly as the system is not able to respond to sudden braking.

Details about limitations:

→P. 273

Details about unsuitable conditions:

→P. 274

 CAUTION**■ Handling the radar sensor**

Observe the following to ensure the cruise control system can function effectively. Otherwise, the system may not function correctly and could result in an accident.

- Keep the sensor and grille cover clean at all times.
Clean the sensor and grille cover with a soft cloth so you do not mark or damage them.
- Do not subject the sensor or surrounding area to a strong impact.
If the sensor moves even slightly off position, the system may malfunction. If the sensor or surrounding area is subject to a strong impact, always have the area inspected and adjusted by your Lexus dealer.
- Do not disassemble the sensor.
- Do not attach accessories or stickers to the sensor, grille cover or surrounding area.
- Do not modify or paint the sensor and grille cover.
- Do not replace the sensor or grill cover with non-genuine parts.

LKA (Lane-Keeping Assist)*


Summary of functions

While driving on a freeway or motor highway that has lane markers and no sharp curves, the system recognizes the lanes using a camera located above the inside rear view mirror as a sensor to assist the driver with staying in the lane. The LKA system has two functions.

Camera sensor



Functions included in the LKA

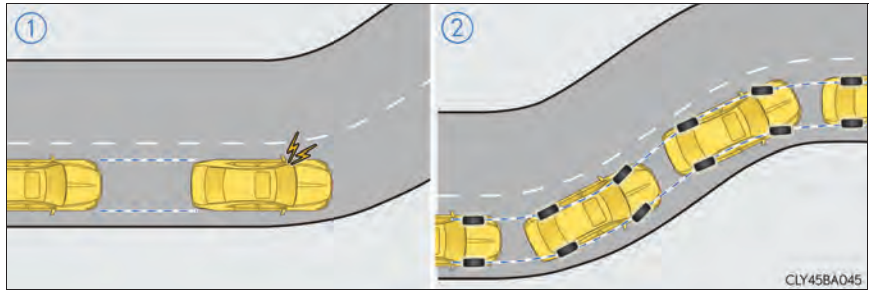

① Lane departure warning function

If the system judges that the vehicle may deviate from its lane, it alerts the driver using rapid beeping, indications on the multi-information display, and a sensory warning* given via the steering wheel.

*: A slight steering torque is applied for a short period of time in the direction of the center of the lane.

② Lane keeping assist function

- This function will be active when the vehicle-to-vehicle distance control mode of the dynamic radar cruise control with full-speed range (→P. 261) is set with vehicle speed above approximately 45 mph (72 km/h) and while the lane departure warning function is active.
- When the lane keeping assist function is active, a slight steering torque will be applied, to help the driver maintain the vehicle inside the lane.

The lane keeping assist function will be temporarily canceled if the steering wheel is not operated, or if you continue driving with your hands lightly touching the steering wheel. (→P. 282)


Turning the LKA system on

Press the LKA switch to activate the system.

LKA indicator will come on.

Press the switch again to turn the LKA system off.

The LKA system will revert to off each time the power switch is turned to ON mode.

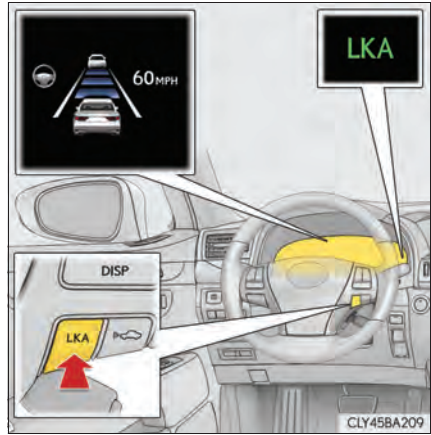

Operating conditions for each function

■ Lane departure warning function

- When the vehicle speed is approximately 30 mph (48 km/h) or more
- When the lane width is more than approximately 9.8 ft. (3.0 m)
- When driving on a straight road or through a curve with a radius of more than approximately 394 ft. (120 m)

■ Lane keeping assist function

- When the vehicle speed is between approximately 45 and 112 mph (72 and 180 km/h)
- When the vehicle-to-vehicle distance mode of the dynamic radar cruise control with full-speed range is on, and the set vehicle speed is approximately 45 mph (72 km/h) or more (the function will not operate when the dynamic radar cruise control with full-speed range is in set speed mode)
- When the lane width is between approximately 9.8 and 13.1 ft. (3.0 and 4.0 m)
- When driving on a straight road or through a curve with a radius of more than approximately 656 ft. (200 m)

Indication on the multi-information display

When the LKA system is on, the lane line display and steering wheel display are shown.

① Lane keeping assist function operation indication

Steering wheel displayed:

Indicates that the function is currently operating. (If the lane departure warning operates at this time, the steering wheel flashes orange.)

Steering wheel not displayed:

Indicates that the function is not currently operating. (When the lane keeping assist function is canceled, the buzzer will beep twice.)


② Dynamic radar cruise control with full-speed range display

③ Lane departure warning function indication (when the inside of the white line is white):

The function has recognized lane markers. (If the lane departure warning operates at this time, the lines flash orange.)

④ Lane departure warning function indication (when the inside of the white line is black):

A lane marker is not recognized by the system, or the LKA system functions are temporarily canceled.

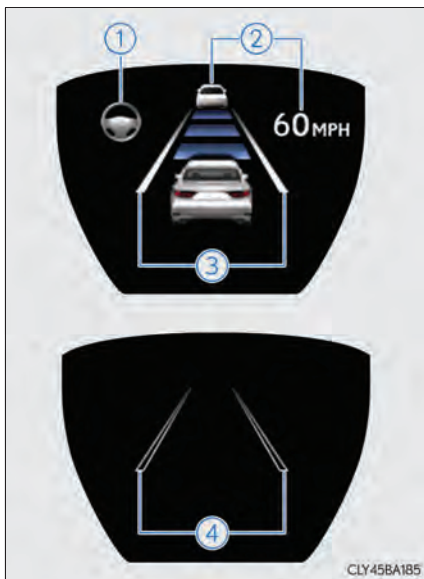

■ Temporary cancelation of the LKA system functions

If any of the following occurs, the LKA system functions will be temporarily canceled. The functions will resume after the necessary operating conditions have returned.

- The steering wheel is turned as far as necessary to cause the vehicle to change lanes.
- When the system detects no-handed driving. (The lane keeping assist function will be temporarily canceled, but the lane departure warning function will continue.)
- The turn signal lever is operated.
- The vehicle speed deviates from the operating range of the LKA system functions. (The buzzer will beep twice when the lane keeping assist function is being canceled.)
- When the lane lines cannot be recognized while driving.
- When the wiper switch is in the high speed position or is set to "AUTO" mode with the wipers operating at high speed. (The lane keeping assist function will be temporarily canceled, but the lane departure warning function will continue.)
- If the vehicle crosses a line for approximately half a minute or more. (The lane keeping assist function will be temporarily canceled, but the lane departure warning function will continue.)
- When the lane departure warning function is activated.
The lane departure warning function will not operate again for several seconds after it has been activated, even if the vehicle leaves the lane again.

■ The lane departure warning

It may be difficult to feel the sensory warning depending on the road conditions.

■ No-handed driving warning

If the steering wheel is not operated for approximately 15 seconds on a straight road or approximately 5 seconds on a curve, the buzzer will beep twice, indicators on the multi-information display will flash, and the lane keeping assist function will be temporarily canceled. If you drive the vehicle with your hands lightly touching the steering wheel, this may also be detected as no-handed driving.

■ After the vehicle has been parked in the sun

The LKA system functions may not be available and a warning message (→P. 809) will be displayed for a while after driving has started. In such cases, turn the LKA system off and turn it on again after normal temperature returns. When the temperature in the cabin decreases and the temperature around the camera sensor (→P. 277) becomes suitable for its operation, the functions will begin to operate.

■ If there are lane markers on only one side of the vehicle

The lane keeping assist function will not operate. Also, the lane departure warning will not operate for the side on which lane markers could not be recognized.

■ Conditions in which the function may not operate correctly

In the following conditions, the LKA system functions may not operate, or it may not be possible to ensure adequate performance. Also, the camera sensor may be unable to recognize lane lines causing the lane departure warning function to operate incorrectly, or the lane keeping assist function may not operate properly. However, this does not indicate a malfunction.

- When driving through an area with no lane markers, such as a tollbooth, a crossing or before a ticket checkpoint
- When driving on a sharp curve
- When lanes are extremely narrow or extremely wide
- When the vehicle leans to one side an unusual amount due to a heavy load or improper tire inflation pressure
- When the following distance between your vehicle and the vehicle ahead is extremely short
- When the lane markers are yellow (These may be more difficult for the system to recognize compared to white markers.)
- When the lane markers are broken, “Botts’ dots”, “Raised pavement marker” or stones
- When lane markers are obscured or partially obscured by sand, dirt, etc.
- When there are shadows on the road running parallel with lane markers, or if a shadow covers the lane markers
- When driving on a particularly bright road surface, such as concrete
- When driving on a road surface that is bright due to reflected light
- When driving in a location where the light level changes rapidly, such as the entrance to or exit from a tunnel
- When sunlight or the headlights of oncoming vehicles are shining directly into the camera lens
- When driving on roads that are branching or merging

- When driving on a road surface that is wet due to rain, previous rainfall, standing water, etc.
- When the vehicle experiences strong up-and-down motion such as when driving on an extremely rough road or on a seam in the pavement
- When headlight brightness at nighttime is reduced due to dirt on the lenses, or when the headlights are misaligned
- When driving with a strong crosswind
- When driving on winding roads or roads that are uneven
- When driving on rough or unpaved roads

■ When changing the tires

Depending on the tires used, sufficient performance may not be maintainable.

■ Warning messages for LKA

Warning messages are used to indicate a system malfunction or to inform the driver of the need for caution while driving. (→P. 809)

CAUTION

■ Before using the LKA system

Do not rely solely on the LKA system. The LKA system does not drive the vehicle automatically, nor does it reduce the amount of care you need to take. As such, the driver must always assume full responsibility for understanding his/her surroundings, for operating the steering wheel to correct the driving line, and for driving safely.

Inappropriate or negligent driving could lead to an accident.

■ To avoid operating the LKA by mistake

Switch the LKA off using the LKA switch when not in use.

 CAUTION**■ Situations unsuitable for LKA**

Do not use LKA in any of the following situations.

Otherwise, the system may not function correctly and could result in an accident.


- When driving with snow tires, tire chains, a spare tire, or similar equipment
- When the tires have been excessively worn, or when the tire inflation pressure is low
- When there are objects or structures along the roadside that might be misinterpreted as lane markers (such as guardrails, curb, reflector posts, etc.)
- When driving on snowy roads
- When pavement lane markers are difficult to see due to rain, snow, fog, sand, dirt, etc.
- When there are visible lines on the pavement from road repairs, or if the remains of old lane markers are still visible on the road
- When driving on slippery roads, such as those covered with rain, ice or snow
- When driving in a lane other than the driving or passing lanes on a freeway or highway
- When driving on a road with lane closures due to maintenance, or when driving in a temporary lane

 NOTICE**■ To prevent damage to or incorrect operation of the LKA system**

- Do not modify the headlights or attach stickers to the surface of the lights.
- Do not modify the suspension, or replace them with non-genuine parts.
- Do not install or place anything on the hood or the grille. Also, do not install a grille guard (bull bars, kangaroo bar etc.).
- Do not modify the sun visor or replace it with anything other than a genuine Lexus product.
- If your windshield needs repairs, contact your Lexus dealer.

 NOTICE■ **Camera sensor (→P. 277)**


Observe the following to ensure that the LKA system functions correctly.

- Keep the windshield clean at all times.
Performance could be affected if the windshield is dirty, or if raindrops, condensation or ice are adhering to the windshield.
 - Do not attach a sticker or other items to the windshield near the camera sensor.
 - Do not install or place anything near the camera.
- 
- Do not attach window tinting to the windshield.
 - Do not install an antenna in front of the camera lens.
 - If the windshield is fogged up, use the windshield defogger to remove fog from the windshield.
When it is cold, using the heater with air blowing to the feet may allow the upper part of the windshield to fog up. This will have a negative effect on the images.
 - Do not place anything on the dashboard.
The camera sensor may recognize the image reflected on the windshield as lane markers by mistake.
 - Do not scratch the camera lens, or let it get dirty.
When cleaning the inside of the windshield, be careful not to get any glass cleaner etc. on the lens. Also, do not touch the lens.
For lens repair, contact your Lexus dealer.
 - Do not change the installation position or direction of the camera sensor or remove it. The direction of the camera sensor is precisely adjusted.
 - Do not subject the camera sensor to strong impact or force, and do not disassemble the camera sensor.

Intuitive parking assist

The distance from your vehicle to nearby obstacles when parallel parking or maneuvering into a garage is measured by the sensors and communicated via the multi-information display, Remote Touch screen and a buzzer. Always check the surrounding area when using this system.

■ Types of sensors

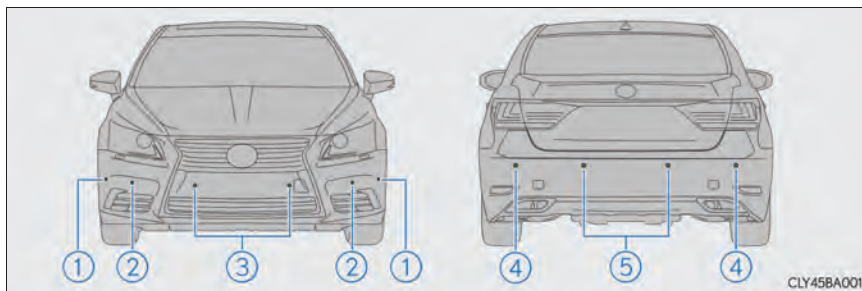


- ① Front side sensors
- ② Front corner sensors
- ③ Front center sensors
- ④ Rear corner sensors
- ⑤ Rear center sensors

■ Intuitive parking assist switch

Turns the intuitive parking assist on/off

When on, the indicator light comes on and the buzzer sounds to inform the driver that the system is operational.

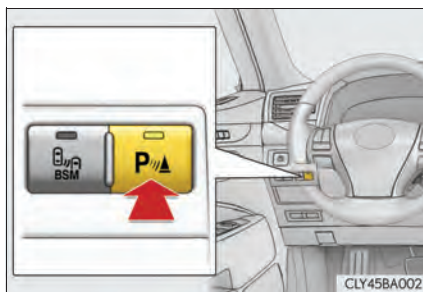


Display

When the sensors detect an obstacle, a graphic is shown on the multi-information display and Remote Touch screen depending on the position and distance to the obstacle.

■ Multi-information display

- ① Front side and front corner sensor detection
- ② Front center sensor detection
- ③ Rear corner sensor detection
- ④ Rear center sensor detection

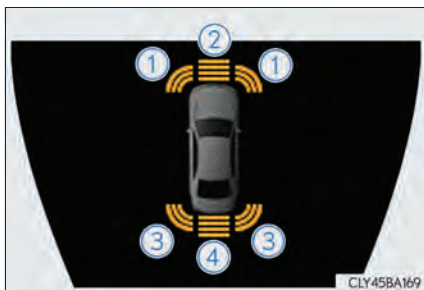

■ Remote Touch screen

A graphic will be shown on the side display

A graphic is automatically displayed when an obstacle is detected. The screen can be set so that the graphic is not displayed. (→P. 293)



Sensor detection display, obstacle distance

■ Front center sensor

Approximate distance to obstacle	Multi-information display	Remote Touch screen
3.3 ft. (100 cm) to 1.6 ft. (50 cm)	 (continuous)	 (continuous)
1.6 ft. (50 cm) to 1.2 ft. (37.5 cm)	 (continuous)	 (continuous)
1.2 ft. (37.5 cm) to 1.0 ft. (30 cm)	 (continuous)	 (continuous)
Less than 1.0 ft. (30 cm)	 (blinking)	 (continuous)

■ Corner sensors and side sensors

Approximate distance to obstacle	Multi-information display	Remote Touch screen
Front side sensor: 1.6 ft. (50 cm) to 1.2 ft. (37.5 cm) Front corner sensor and rear corner sensor: 2.0 ft. (60 cm) to 1.2 ft. (37.5 cm)	 (continuous)	 (continuous)
Front side sensor and front corner sensor: 1.2 ft. (37.5 cm) to 1.0 ft. (30 cm) Rear corner sensor: 1.2 ft. (37.5 cm) to 0.8 ft. (25 cm)	 (continuous)	 (continuous)
Front side sensor and front corner sensor: Less than 1.0 ft. (30 cm) Rear corner sensor: Less than 0.8 ft. (25 cm)	 (blinking)	 (continuous)

■ Rear center sensor

Approximate distance to obstacle	Multi-information display	Remote Touch screen
4.9 ft. (150 cm) to 2.0 ft. (60 cm)	 (continuous)	 (continuous)
2.0 ft. (60 cm) to 1.5 ft. (45 cm)	 (continuous)	 (continuous)
1.5 ft. (45 cm) to 1.1 ft. (35 cm)	 (continuous)	 (continuous)
Less than 1.1 ft. (35 cm)	 (blinking)	 (continuous)

■ Buzzer operation and distance to an obstacle

A buzzer sounds when the sensors are operating.


- The buzzer beeps faster as the vehicle approaches an obstacle. When the vehicle comes within the following distance of the obstacle, the buzzer sounds continuously:
 - Front center sensors: Approximately 1.0 ft. (30 cm)
 - Front side and front corner sensors: Approximately 1.0 ft. (30 cm)
 - Rear center sensors: Approximately 1.1 ft. (35 cm)
 - Rear corner sensors: Approximately 0.8 ft. (25 cm)
- When 2 or more obstacles are detected simultaneously, the buzzer system responds to the nearest obstacle. If one or both come within the above distances, the beep will repeat a long tone, followed by fast beeps.

Detection range of the sensors

- ① Approximately 3.3 ft. (100 cm)
- ② Approximately 4.9 ft. (150 cm)
- ③ Approximately 1.6 ft. (50 cm)
- ④ Approximately 2.0 ft. (60 cm)

The diagram shows the detection range of the sensors. Note that the sensors cannot detect obstacles that are extremely close to the vehicle.

The range of the sensors may change depending on the shape of the object etc.

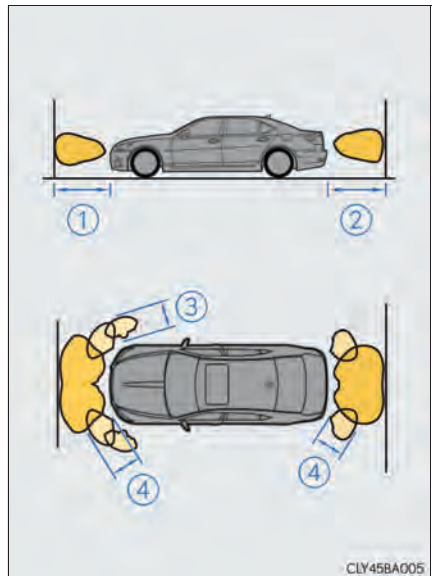


Setting up intuitive parking assist

You can change the warning beep volume and Remote Touch screen operating conditions.

- 1** Press the "MENU" button on the Remote Touch. (→P. 358)
- 2** Select "SETUP" on the "Menu" screen.
- 3** Select "Vehicle" on the "Setup" screen.
- 4** Select "Lexus Park Assist" on the "Vehicle Settings" screen.
 - ① Alert volume setting
 - ② Display on/off
 - ③ Alert distance setting

Make sure to save after changing settings.

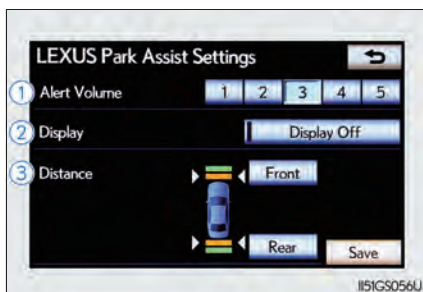

■ Alert volume setting

The alert volume can be adjusted.

- 1 Select "1" to "5" on the "LEXUS Park Assist Settings".
- 2 Select "Save".

■ Display on/off setting

On or off can be selected for intuitive parking assist display.

- 1 Select "Display Off".

When the "Display Off" indicator is turned on, the display of intuitive parking assist will be off. Select "Display Off" again to turn the display of intuitive parking assist on.

- 2 Select "Save".

■ Alert distance setting

Front or rear center sensors display and tone indication can be set.

- 1 Select "Front" or "Rear".

Long distance or short distance can be selected.

- 2 Select "Save".

■ The intuitive parking assist can be operated when

- Front side sensors:
 - The power switch is in ON mode.
 - The shift lever is in a position other than P.
 - The vehicle speed is less than approximately 6 mph (10 km/h).
- Front corner and front center sensors:
 - The power switch is in ON mode.
 - The shift lever is in a position other than P or R.
 - The vehicle speed is less than approximately 6 mph (10 km/h).
- Rear corner and rear center sensors:
 - The power switch is in ON mode.
 - The shift lever is in R.

■ Sensor detection information

- The sensor's detection areas are limited to the areas around the vehicle's front corner and rear bumpers.
- Certain vehicle conditions and the surrounding environment may affect the ability of the sensor to correctly detect obstacles. Particular instances where this may occur are listed below.
 - There is dirt, snow or ice on the sensor. (Wiping the sensors will resolve this problem.)
 - The sensor is frozen. (Thawing the area will resolve this problem.)
In especially cold weather, if a sensor is frozen the screen may show an abnormal display, or obstacles may not be detected.
 - The sensor is covered in any way.
 - The vehicle is leaning considerably to one side.
 - On an extremely bumpy road, on an incline, on gravel, or on grass.
 - The vicinity of the vehicle is noisy due to vehicle horns, motorcycle engines, air brakes of large vehicles, or other loud noises producing ultrasonic waves.
 - There is another vehicle equipped with parking assist sensors in the vicinity.
 - The sensor is coated with a sheet of spray or heavy rain.
 - The vehicle is equipped with a fender pole or wireless antenna.
 - Towing eyelet is installed.
 - The bumper or sensor receives a strong impact.
 - The vehicle is approaching a tall or curved curb.
 - In harsh sunlight or intense cold weather.
 - The area directly under the bumpers is not detected.
 - If obstacles draw too close to the sensor.
 - A non-genuine Lexus suspension (lowered suspension etc.) is installed.
 - People may not be detected if they are wearing certain types of clothing.

In addition to the examples above, there are instances in which, because of their shape, signs and other objects may be judged by the sensor to be closer than they are.

- The shape of the obstacle may prevent the sensor from detecting it. Pay particular attention to the following obstacles:
 - Wires, fences, ropes, etc.
 - Cotton, snow and other materials that absorb sound waves
 - Sharply-angled objects
 - Low obstacles
 - Tall obstacles with upper sections projecting outwards in the direction of your vehicle
- The following situations may occur during use.
 - Depending on the shape of the obstacle and other factors, the detection distance may shorten, or detection may be impossible.
 - Obstacles may not be detected if they are too close to the sensor.
 - There will be a short delay between obstacle detection and display. Even at slow speeds, there is a possibility that the obstacle will come within the sensor's detection areas before the display is shown and the warning beep sounds.
 - Thin posts or objects lower than the sensor may not be detected for collision when approached, even if they have been detected once.
 - It might be difficult to hear beeps due to the volume of audio system or air flow noise of air conditioning system.

■ **If a message is displayed on the multi-information display**

→P. 809

■ **Certification for the intuitive parking assist**

- For vehicles sold in the U.S.A.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions; (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- For vehicles sold in Canada

This ISM device complies with Canadian ICES-001.

Cet appareil ISM est conforme à la norme NMB-001 du Canada.

 CAUTION
■ When using the intuitive parking assist

Observe the following precautions.

Failing to do so may result in the vehicle being unable to be driven safely and possibly cause an accident.

- Do not use the sensor at speeds in excess of 6 mph (10 km/h).
- The sensors' detection areas and reaction times are limited. When moving forward or reversing, check the areas surrounding the vehicle (especially the sides of the vehicle) for safety, and drive slowly, using the brake to control the vehicle's speed.
- Do not install accessories within the sensors' detection areas.

 NOTICE
■ When using intuitive parking assist-sensor

In the following situations, the system may not function correctly due to a sensor malfunction etc. Have the vehicle checked by your Lexus dealer.

- The intuitive parking assist operation display flashes, and a beep sounds when no obstacles are detected.
- If the area around a sensor collides with something, or is subjected to strong impact.
- If the bumper collides with something.
- If the display shows continuously without a beep.
- If a display error occurs, first check the sensor.
If the error occurs even if there is no ice, snow or mud on the sensor, it is likely that the sensor is malfunctioning.

■ Notes when washing the vehicle

Do not apply intensive bursts of water or steam to the sensor area.

Doing so may result in the sensor malfunctioning.

Rear view monitor system


The rear view monitor system assists the driver by displaying guide lines and an image of the view behind the vehicle while backing up, for example while parking.

The screen illustrations used in this text are intended as examples, and may differ from the image that is actually displayed on the screen.

The rear view image is displayed when the shift position is in R and the power switch is in ON mode.

The rear view monitor system will be deactivated when the shift lever is in any position other than R.


When the shift lever is shifted to the R position and any mode button (such as "MENU") is pressed, the rear view monitor system is canceled, and the screen is switched to the mode of the button that was pressed.

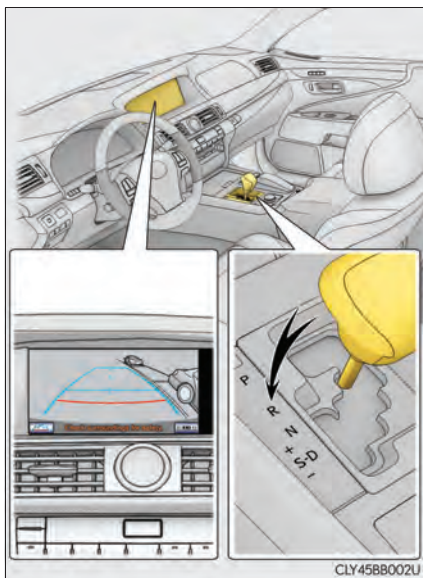

Screen description

Guide lines are displayed on the screen.

Guide lines shown differ from those shown on the actual screen.

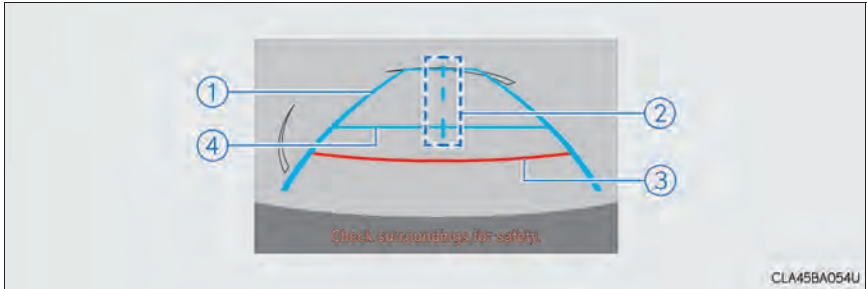

① Vehicle width extension guide line (blue)

The line indicates a guide path when the vehicle is being backed straight up. The displayed width is wider than the actual vehicle width.

② Vehicle center guide lines

These lines indicate the estimated vehicle center on the ground.

③ Distance guide line (red)

This line indicates a position on the ground about 1.5 ft. (0.5 m) behind on the ground of the rear bumper of your vehicle.

④ Distance guide line (blue)

This line indicates a position on the ground about 3 ft. (1 m) behind on the ground of the rear bumper of your vehicle.


Rear view monitor system precautions

■ Area displayed on screen

The rear view monitor system displays an image of the view from the bumper of the rear area of the vehicle.


To adjust the image on the rear view monitor system screen.
(→P.362)

- The area displayed on the screen may vary according to vehicle orientation conditions.
- Objects which are close to either corner of the bumper or under the bumper cannot be displayed.
- The camera uses a special lens. The distance of the image that appears on the screen differs from the actual distance.
- Items which are located higher than the camera may not be displayed on the monitor.

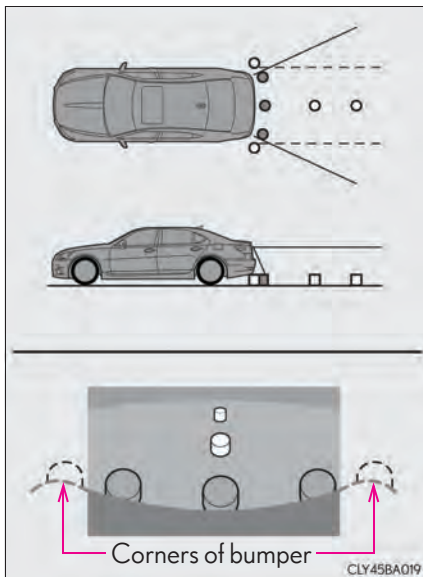

■ Rear view monitor system camera

The camera for the rear view monitor system is located above the license plate.

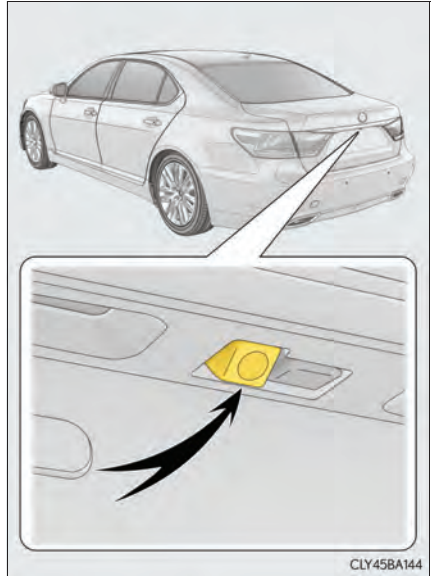

● Using the camera

If the camera lens becomes dirty, it cannot transmit a clear image. If water droplets, snow or mud adhere to the lens, rinse with water and wipe with a soft cloth. If the lens is extremely dirty, wash it with a mild cleanser and rinse.

■ Differences between the screen and the actual road


The distance guide lines and the vehicle width extension guide lines may not actually be parallel with the dividing lines of the parking space, even when they appear to be so. Be sure to check visually.

The distances between the vehicle width extension guide lines and the left and right dividing lines of the parking space may not be equal, even when they appear to be so. Be sure to check visually.

The distance guide lines give a distance guide for flat road surfaces. In any of the following situations, there is a margin of error between the guide lines on the screen and the actual distance/course on the road.


- When the ground behind the vehicle slopes up sharply

The distance guide lines will appear to be closer to the vehicle than the actual distance. Because of this, objects will appear to be farther away than they actually are. In the same way, there will be a margin of error between the guide lines and the actual distance/course on the road.

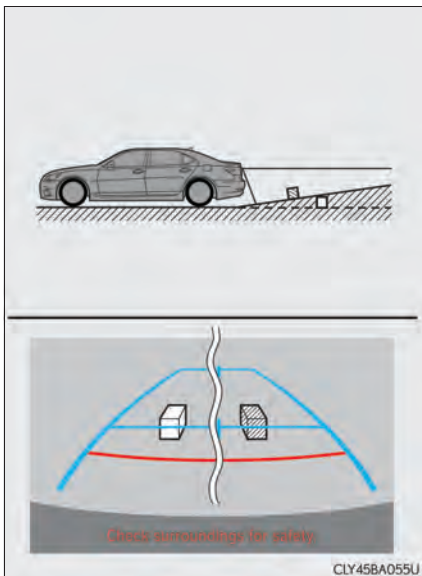


- When the ground behind the vehicle slopes down sharply

The distance guide lines will appear to be farther from the vehicle than the actual distance. Because of this, objects will appear to be closer than they actually are. In the same way, there will be a margin of error between the guide lines and the actual distance/course on the road.

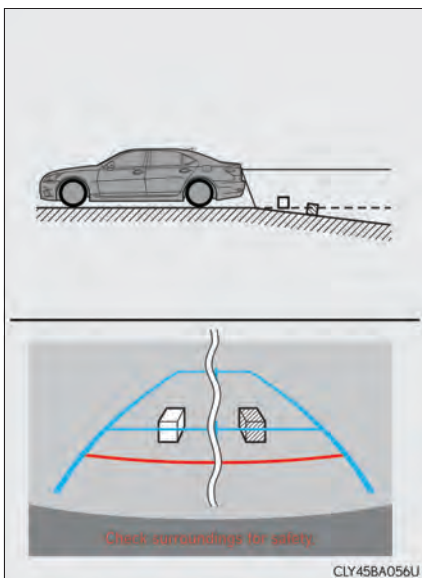

- When any part of the vehicle sags

When any part of the vehicle sags due to the number of passengers or the distribution of the load, there is a margin of error between the guide lines on the screen and the actual distance/course on the road.

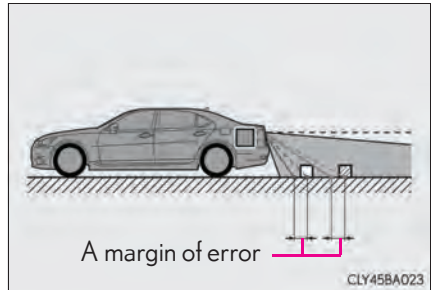


- When approaching three-dimensional objects

It is not possible to determine the position of three-dimensional objects (such as vehicles) using the vehicle width extension guide lines and distance guide lines. When approaching a three-dimensional object that extends outward (such as the flatbed of a truck), be careful of the following.


- Vehicle width extension guide lines

Visually check the surroundings and the area behind the vehicle. In the case shown in the illustration, the truck appears to be outside of the vehicle width extension guide lines and the vehicle does not look as if it hits the truck. However, the rear body of the truck may actually cross over the vehicle width extension guide lines. In reality if you back up as guided by the vehicle width extension guide lines, the vehicle may hit the truck.

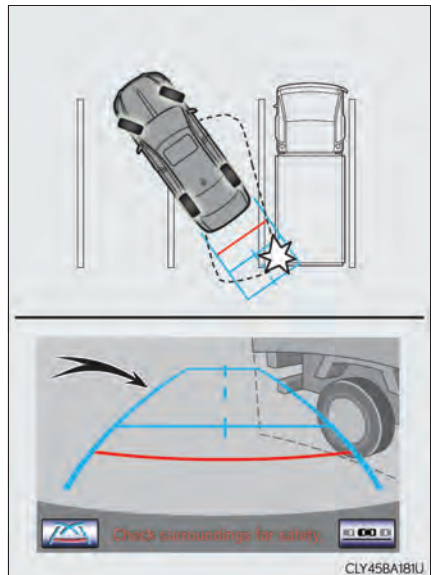

- Distance guide lines

Visually check the surroundings and the area behind the vehicle. On the screen, it appears that a truck is parking at point ②. However, in reality if you back up to point ①, you will hit the truck. On the screen, it appears that ① is closest and ③ is furthest away. However, in reality, the distance to ① and ③ is the same, and ② is farther than ① and ③.

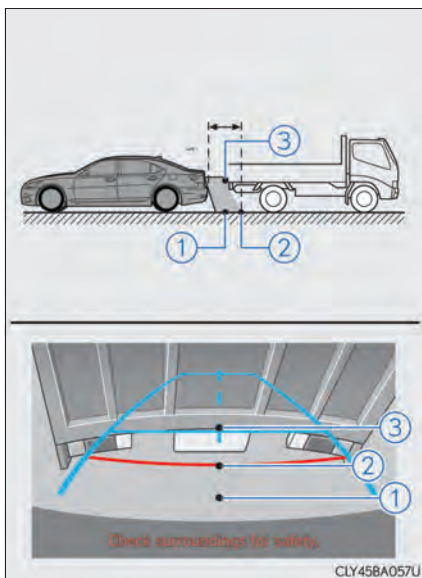

Things you should know

■ If you notice any symptoms

If you notice any of the following symptoms, refer to the likely cause and the solution, and re-check.

If the symptom is not resolved by the solution, have the vehicle inspected by your Lexus dealer.

Symptom	Likely cause	Solution
The image is difficult to see	• The vehicle is in a dark area • The temperature around the lens is either high or low • The outside temperature is low • There are water droplets on the camera • It is raining or humid • Foreign matter (mud etc.) is adhering to the camera • There are scratches on the camera • Sunlight or headlights are shining directly into the camera • The vehicle is under fluorescent lights, sodium lights, mercury lights etc.	If this happens due to these causes, it does not indicate a malfunction. Back up while visually checking the vehicle's surroundings. (Use the monitor again once conditions have been improved.) To adjust the image on the rear view monitor system screen. (→P. 362)
The image is blurry	Dirt or foreign matter (such as water droplets, snow, mud etc.) is adhering to the camera.	Rinse the camera lens with water and wipe it clean with a soft cloth. Wash with a mild soap if the dirt is stubborn.

Symptom	Likely cause	Solution
The image is out of alignment	The camera or surrounding area has received a strong impact.	Have the vehicle inspected by your Lexus dealer.
The guide lines are very far out of alignment	The camera position is out of alignment.	Have the vehicle inspected by your Lexus dealer.
	• The vehicle is tilted (there is a heavy load on the vehicle, tire pressure is low due to a tire puncture, etc.) • The vehicle is used on an incline.	If this happens due to these causes, it does not indicate a malfunction. Back up while visually checking the vehicle's surroundings.

 CAUTION**■ When using the rear view monitor system**

The rear view monitor system is a supplemental device intended to assist the driver when backing up. When backing up, be sure to check visually behind and all around the vehicle before proceeding.

Observe the following precautions to avoid an accident that could result in death or serious injuries.


- Never depend on the rear view monitor system entirely when backing up. The image and the position of the guide lines displayed on the screen may differ from the actual state.
Use caution, just as you would when backing up any vehicle.
- Be sure to back up slowly, depressing the brake pedal to control vehicle speed.
- When and how much to turn the steering wheel will vary according to traffic conditions, road surface conditions, vehicle condition, etc. when parking. It is necessary to be fully aware of this before using the rear view monitor system.
- When parking, be sure to check that the parking space will accommodate your vehicle before maneuvering into it.
- Do not use the rear view monitor system in the following cases:
 - On icy or slick road surfaces, or in snow
 - When using tire chains
 - When the trunk lid is not closed completely
 - On roads that are not flat or straight, such as curves or slopes.
- In low temperatures, the screen may darken or the image may become faint. The image could distort when the vehicle is moving, or you may become unable to see the image on the screen. Be sure to check direct visually and with the mirrors all around the vehicle before proceeding.
- If the tire sizes are changed, the position of the guide lines displayed on the screen may change.
- The camera uses a special lens. The distances between objects and pedestrians that appear in the image displayed on the screen will differ from the actual distances. (→P. 301)

 NOTICE**■ How to use the camera**

- The rear view monitor system may not operate properly in the following cases.
 - If the back of the vehicle is hit, the position and mounting angle of the camera may change.
 - As the camera has a water proof construction, do not detach, disassemble or modify it. This may cause incorrect operation.
 - Do not strongly rub the camera lens. If the camera lens is scratched, it cannot transmit a clear image.
 - Do not allow organic solvent, car wax, window cleaner or glass coat to adhere to the camera. If this happens, wipe it off as soon as possible.
 - If the temperature changes rapidly, such as when hot water is poured on the vehicle in cold weather, the system may not operate normally.
 - When washing the vehicle, do not apply intensive bursts of water to the camera or camera area. Doing so may result in the camera malfunctioning.
 - When the camera is used under fluorescent lights, sodium light or mercury light etc., the lights and the illuminated areas may appear to flicker.
- Do not expose the camera to strong impact as this could cause a malfunction. If this happens, have the vehicle inspected by your Lexus dealer as soon as possible.

Driving mode select switch

The driving modes can be selected to suit driving condition.

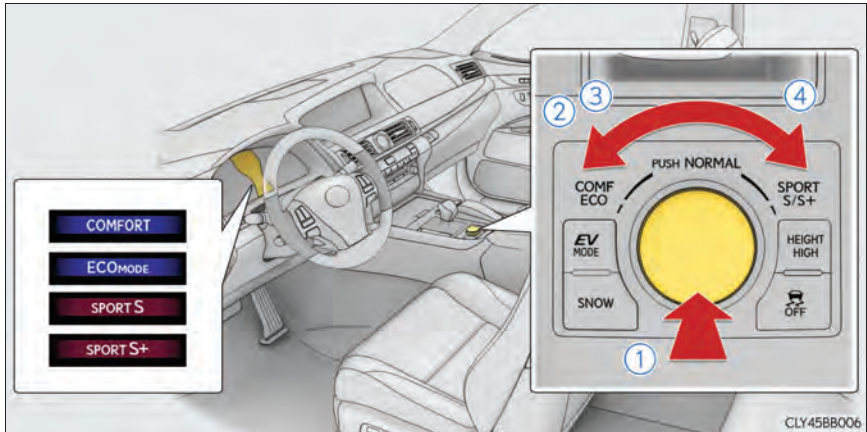

① Normal mode

For normal driving.


Press the switch to change the driving mode to normal mode when not in normal mode.

② Comfort mode

By controlling the suspension, riding comfort is further enhanced. Suitable for city driving.

When not in comfort mode and the driving mode select switch is turned to the left, the "COMFORT" indicator comes on in the multi-information display.

Also, the driving mode is automatically displayed on the "Side Display".
(→P. 360)

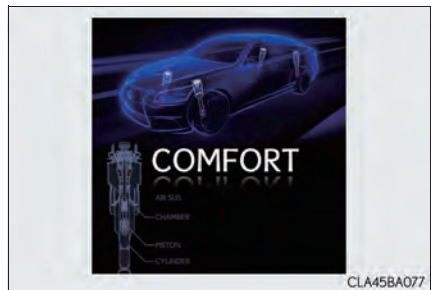


③ Eco drive mode

Use Eco drive mode to help achieve low fuel consumption during trips that involve frequent accelerating.

When in comfort mode and the driving mode select switch is turned to the left, the "ECO MODE" indicator comes on in the multi-information display.

Also, the driving mode is automatically displayed on the "Side Display".
(→P. 360)

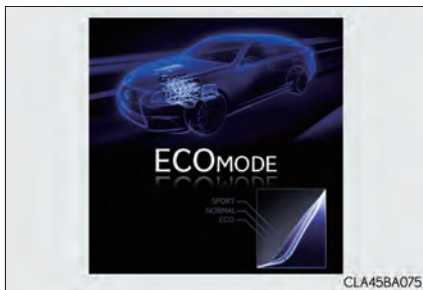

④ Sport mode

• SPORT S mode

Assists acceleration response by controlling the hybrid system. Suitable for when powerful acceleration is desirable.

When not in SPORT S mode and the driving mode select switch is turned to the right, the "SPORT S" indicator comes on in the multi-information display, and the Hybrid System Indicator changes to the tachometer. (→P. 101)

Also, the driving mode is automatically displayed on the "Side Display". (→P. 360)



• SPORT S+ mode

Helps to ensure steering performance and driving stability by simultaneously controlling the steering and suspension in addition to the hybrid system. Suitable for sporty driving.

When in SPORT S mode and the driving mode select switch is turned to the right, the "SPORT S+" indicator comes on in the multi-information display.

Also, the driving mode is automatically displayed on the "Side Display". (→P. 360)



■ Operation of the air conditioning system in Eco drive mode

Eco drive mode controls the heating/cooling operations and fan speed of the air conditioning system to enhance fuel efficiency (→P. 404). To improve air conditioning performance, adjust the fan speed or turn off Eco drive mode.

■ Sport mode automatic deactivation

Sport mode is automatically deactivated if the power switch is turned off after driving in sport mode.


Electronically modulated air suspension

By independently controlling the damping force of the shock absorbers for each of the 4 wheels according to the road and driving conditions and the selected driving mode, this system achieves ride comfort with superior steering stability, and ensures good vehicle posture. In addition, vehicle height can be selected according to road and driving conditions.

The vehicle height is maintained at the selected level regardless of the number of occupants and luggage weight.

Turns high mode on/off.

When on, the “HEIGHT HIGH” indicator will come on.

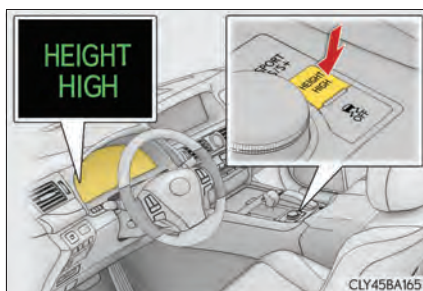

■ Operating sound of the air suspension compressor

When the vehicle height is lowered, such as when entering or loading the vehicle, or high mode is selected, the compressor may operate and a whirring sound may be heard. This does not indicate a malfunction.

 CAUTION

■ **Be sure to stop the hybrid system in the following situations in order to stop operation of the electronically modulated air suspension:**

- The vehicle is parked on a curb.
- Any of the wheels is stuck in a ditch.
- It is necessary to jack up the vehicle.
- It is necessary to tow the vehicle with part of it lifted.

If the power switch remains in ON mode, the vehicle height may change, and you may catch part of your body in the vehicle, resulting in accidental damage.

Driving assist systems

To help enhance driving safety and performance, the following systems operate automatically in response to various driving situations. Be aware, however, that these systems are supplementary and should not be relied upon too heavily when operating the vehicle.

◆ ABS (Anti-lock Brake System)

Helps to prevent wheel lock when the brakes are applied suddenly, or if the brakes are applied while driving on a slippery road surface

◆ Brake assist

Generates an increased level of braking force after the brake pedal is depressed when the system detects a panic stop situation

◆ VSC (Vehicle Stability Control)

Helps the driver to control skidding when swerving suddenly or turning on slippery road surfaces

◆ TRAC (Traction Control)

Helps to maintain drive power and prevent the drive wheels from spinning when starting the vehicle or accelerating on slippery roads

◆ Hill-start assist control

Helps to prevent the vehicle from rolling backward when starting on an incline or slippery slope

◆ VGRS (Variable Gear Ratio Steering)

Adjusts the wheel turning angle in accordance with the vehicle speed and steering wheel movement

◆ EPS (Electric Power Steering)

Employs an electric motor to reduce the amount of effort needed to turn the steering wheel

◆ VDIM (Vehicle Dynamics Integrated Management)

Provides integrated control of the ABS, brake assist, TRAC, VSC, hill-start assist control, EPS and VGRS systems

Helps to maintain vehicle stability when swerving on slippery road surfaces by controlling the brakes, hybrid system output, steering assist, and steering ratio

◆ PCS (Pre-Collision System) (if equipped)

→P. 322

◆ BSM (Blind Spot Monitor) (if equipped)

→P. 334

When the TRAC/VSC/ABS/hill-start assist control systems are operating

The slip indicator light will flash while the TRAC/VSC/ABS/hill-start assist control systems are operating.

The stop lights and high mounted stoplight turn on when the hill-start assist control system is operating.




Disabling the TRAC/VSC systems

If the vehicle gets stuck in fresh snow or mud, the TRAC and VSC systems may reduce power from the hybrid system to the wheels. Pressing VSC OFF switch to turn the system off may make it easier for you to rock the vehicle in order to free it.

■ Turning off the TRAC system only

To turn the TRAC system off, quickly press and release the switch.

The “TRAC OFF” will be shown on the multi-information display. Press the switch again to turn the system back on.

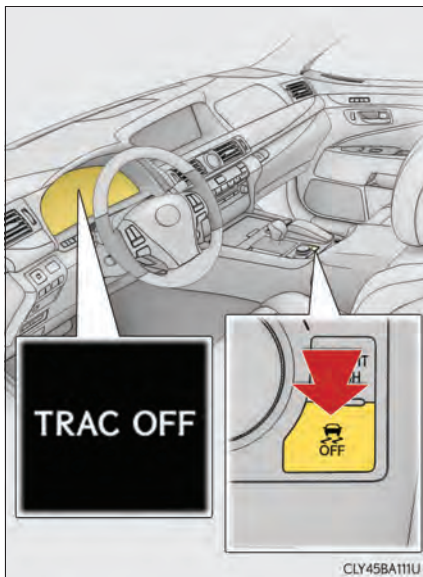


■ Turning off both TRAC and VSC systems

To turn the TRAC and VSC systems off, press and hold the switch for more than 3 seconds while the vehicle is stopped.

The VSC OFF indicator light will come on and the "TRAC OFF" will be shown on the multi-information display.*

Press the switch again to turn the systems back on.

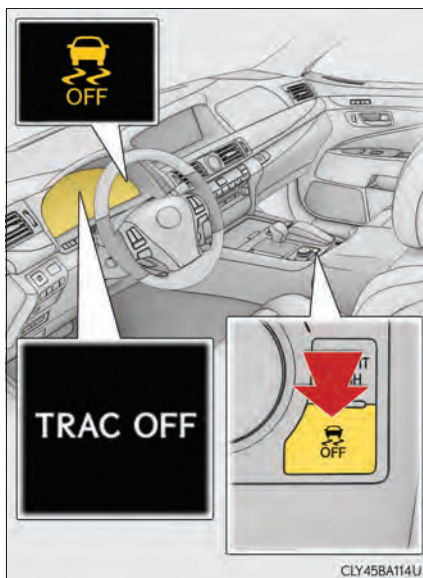

- *: On vehicles with pre-collision system, pre-collision alert braking, pre-collision brake assist and pre-collision braking will also be disabled. The pre-collision system warning light will come on and the "Pre-collision brakes are disabled because VSC is OFF" will be shown on the multi-information display. (→P. 322)

■ Hill-start assist control is operational when

- The system has detected that the vehicle is moving backward.
- The shift lever is in the D or S position.
- The brake pedal is not depressed.

■ VGRS is disabled when

VGRS may stop operating in the following situations.

In this event, the steering wheel may move from its straight forward position, but it will return when the system restarts.

- When the steering wheel is operated for an extended period of time while the vehicle is stopped or is moving very slowly
- When the steering wheel has been held fully to the left or right
- When the 12-volt battery is low or the voltage temporarily drops
- After the hybrid system is started at lower than -22°F (-30°C)

The center position of the steering wheel may change when VGRS is disabled. However, the position will return to normal after VGRS is reactivated.

■ Sounds and vibrations caused by the ABS, brake assist, TRAC, VSC, hill-start assist control and VGRS systems

- A sound may be heard from the engine compartment when the brake pedal is depressed repeatedly, when the hybrid system is started or just after the vehicle begins to move. This sound does not indicate that a malfunction has occurred in any of these systems.
- Any of the following conditions may occur when the above systems are operating. None of these indicates that a malfunction has occurred.
 - Vibrations may be felt through the vehicle body and steering.
 - A motor sound may be heard after the vehicle comes to a stop.
- The steering wheel may be moved slightly or a sound may be heard when the hybrid system is started or stopped. None of these indicate that a malfunction has occurred.

■ EPS operation sound

When the steering wheel is operated, a motor sound (whirring sound) may be heard. This does not indicate a malfunction.

■ Reactivation of the TRAC/VSC systems

Even after the TRAC/VSC systems have been turned off, turning the hybrid system off and then on again will automatically reactivate the TRAC/VSC systems.

■ Reactivation of the TRAC system linked to vehicle speed

When only the TRAC system is turned off, the TRAC system will turn on when vehicle speed increases. However, when both TRAC/VSC systems are turned off, the systems will not turn on even when vehicle speed increases.

■ Reduced effectiveness of the EPS system

The effectiveness of the EPS system is reduced to prevent the system from overheating when there is frequent steering input over an extended period of time. The steering wheel may feel heavy as a result.* Should this occur, refrain from excessive steering input or stop the vehicle and turn the hybrid system off. The EPS system should return to normal within 10 minutes.

*: If the LKA (Lane-Keeping Assist) system cannot operate in this case, a warning message will be shown on the multi-information display.



CAUTION

■ The ABS does not operate effectively when

- The limits of tire gripping performance have been exceeded (such as excessively worn tires on a snow covered road).
- The vehicle hydroplanes while driving at high speed on wet or slick roads.

■ Stopping distance when the ABS is operating may exceed that of normal conditions

The ABS is not designed to shorten the vehicle's stopping distance. Always maintain a safe distance from the vehicle in front of you, especially in the following situations:

- When driving on dirt, gravel or snow-covered roads
- When driving with tire chains
- When driving over bumps in the road
- When driving over roads with potholes or uneven surfaces

 CAUTION**■ TRAC may not operate effectively when**

Directional control and power may not be achievable while driving on slippery road surfaces, even if the TRAC system is operating.

Do not drive the vehicle in conditions where stability and power may be lost.

■ Hill- start assist control does not operate effectively when

Do not overly rely on the hill-start assist control. The hill-start assist control may not operate effectively on steep inclines and roads covered with ice.

■ When the VSC is activated

The slip indicator light flashes. Always drive carefully. Reckless driving may cause an accident. Exercise particular care when the indicator light flashes.

■ When the TRAC/VSC systems are turned off

Be especially careful and drive at a speed appropriate to the road conditions. As these are the systems to ensure vehicle stability and driving force, do not turn the TRAC/VSC systems off unless necessary.

■ Replacing tires

Make sure that all tires are of the specified size, brand, tread pattern and total load capacity. In addition, make sure that the tires are inflated to the recommended tire inflation pressure level.

The ABS, TRAC and VSC systems will not function correctly if different tires are installed on the vehicle.

Contact your Lexus dealer for further information when replacing tires or wheels.

■ Handling of tires and the suspension

Using tires with any kind of problem or modifying the suspension will affect the driving assist systems, and may cause a system to malfunction.


PCS (Pre-Collision System)*

When the sensor detects that a frontal collision is highly likely or even unavoidable, safety systems such as the brakes and seat belts are automatically engaged to help avoid a collision or to lessen impact as well as vehicle damage.

◆ Pre-collision warning

When a high possibility of a frontal collision is detected, the pre-collision system warning light flashes, a buzzer sounds and a message is shown on the multi-information display to urge the driver to take evasive action.

Pre-collision warning can be disabled using the pre-collision braking off switch.

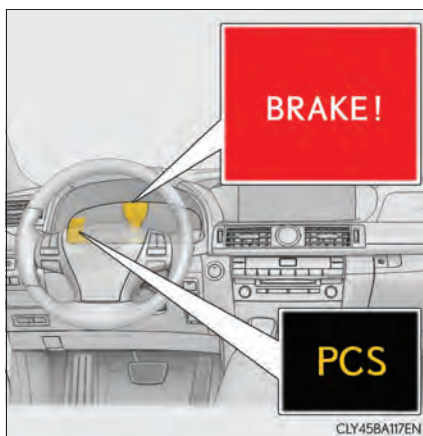

◆ Pre-collision seat belts (front seat only)

If the pre-collision sensor detects that a collision is unavoidable, the pre-collision system will retract the seat belt before the collision occurs. The same will happen if the driver makes an emergency braking or loses control of the vehicle. (→P. 40)

◆ Pre-collision brake assist

When there is a high possibility of a frontal collision, the system applies greater braking force in relation to how strongly the brake pedal is depressed.

◆ Pre-collision braking

When there is a high possibility of a frontal collision, the system warns the driver using a warning light, warning display and buzzer. If the system determines that a collision is unavoidable, the brakes are automatically applied to help avoid a collision or to reduce the collision speed.

When the vehicle is being stopped by pre-collision braking, the brake will be engaged for a maximum of 2 seconds and then released automatically. This pre-collision braking can be canceled by depressing the accelerator pedal or brake pedal.

Pre-collision braking can be disabled using the pre-collision braking off switch.

◆ Suspension control

When there is a high possibility of a frontal collision, the operation of suspension control helps prevent the front of the vehicle from dropping when the brakes are applied suddenly.

◆ Steering gear control (VGRS) (vehicles with camera sensors)

When the system determines that a collision is unavoidable, the steering gear ratio is changed to help improve the response to steering input.

◆ Driver monitor system (if equipped)

When the system determines that there is a possibility of a collision, and either the driver is not facing forward or the driver's eyes are closed, pre-collision warnings are given in advance to warn the driver. If the system determines that the conditions to operate pre-collision alert braking have been met even when the possibility of a collision increases further, pre-collision alert braking will operate.


Pre-collision alert braking can be disabled using the pre-collision braking off switch.

Disabling pre-collision braking

Pre-collision warning, pre-collision braking and pre-collision alert braking (vehicles with driver monitor system) can be switched between enabled and disabled by pressing the pre-collision braking off switch.


- ① Enabled
- ② Disabled

The pre-collision system warning light comes on when the system is disabled.

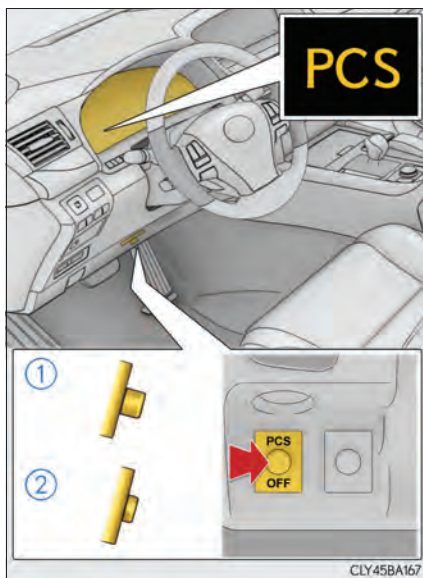

Radar sensor

The radar sensor detects vehicles or other obstacles on or near the road ahead and determines whether a collision is imminent based on the position, speed, and heading of the obstacles.

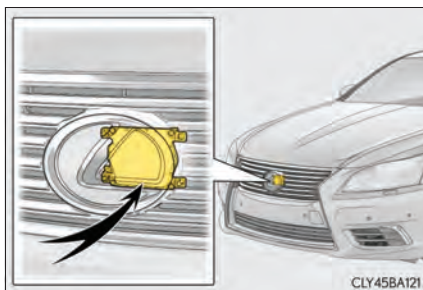


Camera sensors (if equipped)

The camera sensors detect pedestrians and other three-dimensional objects on or near the road ahead together with the radar sensor while the vehicle is moving.

When the headlights are on, near-infrared rays are projected to ensure proper detection performance in the night time.


- ① Camera sensors
- ② Near-infrared ray transmitters

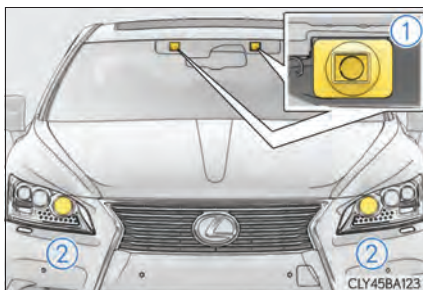

Driver monitor sensor (vehicles with driver monitor system)

The driver monitor sensor detects the direction the driver is facing and whether the driver's eyes are open or closed.

The system determines whether the driver is facing forward and whether or not the driver's eyes are closed.

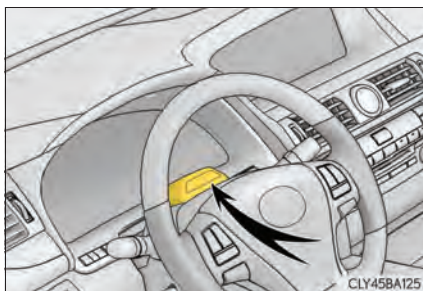

■ The pre-collision system is operational when

- Pre-collision warning:
 - ▶ Vehicles without camera sensors
 - The pre-collision braking off switch is not pressed.
 - Vehicle speed is greater than about 10 mph (15 km/h).
 - The speed at which your vehicle is approaching the obstacle or the vehicle running ahead of you is greater than about 10 mph (15 km/h).
 - ▶ Vehicles with camera sensors
 - The pre-collision braking off switch is not pressed.
 - Vehicle speed is greater than about 4 mph (5 km/h).
 - The speed at which your vehicle is approaching the obstacle or the vehicle running ahead of you is greater than about 4 mph (5 km/h).
- Pre-collision seat belts (operating conditions A):
 - Vehicle speed is greater than about 19 mph (30 km/h).
 - The system detects sudden braking or skidding.
 - The front occupants are wearing a seat belt.
- Pre-collision seat belts (operating conditions B):
 - Vehicle speed is greater than about 4 mph (5 km/h).
 - The speed at which your vehicle is approaching the obstacle or the vehicle running ahead of you is greater than about 19 mph (30 km/h).
 - The front occupants are wearing a seat belt.
- Pre-collision brake assist:
 - The VSC OFF switch is not pressed.
 - Vehicle speed is greater than about 19 mph (30 km/h).
 - The speed at which your vehicle is approaching the obstacle or the vehicle running ahead of you is greater than about 19 mph (30 km/h).
 - The brake pedal is depressed.
- Pre-collision braking:
 - ▶ Vehicles without camera sensors
 - The pre-collision braking off switch is not pressed.
 - The VSC OFF switch is not pressed.
 - Vehicle speed is greater than about 10 mph (15 km/h).
 - The speed at which your vehicle is approaching the obstacle or the vehicle running ahead of you is greater than about 10 mph (15 km/h).
 - ▶ Vehicles with camera sensors
 - The pre-collision braking off switch is not pressed.
 - The VSC OFF switch is not pressed.
 - Vehicle speed is greater than about 4 mph (5 km/h).
 - The speed at which your vehicle is approaching the obstacle or the vehicle running ahead of you is greater than about 4 mph (5 km/h).

- Suspension control:
 - Vehicle speed is greater than about 4 mph (5 km/h).
 - The speed at which your vehicle is approaching the obstacle or the vehicle running ahead of you is greater than about 19 mph (30 km/h).
- Steering gear control (VGRS) (vehicles with camera sensors):
 - Vehicle speed is greater than about 19 mph (30 km/h).
 - The speed at which your vehicle is approaching the obstacle or the vehicle running ahead of you is greater than about 19 mph (30 km/h).
- Pre-collision alert braking (vehicles with driver monitor system):
 - The pre-collision braking off switch is not pressed.
 - The VSC OFF switch is not pressed.
 - The system determines that the driver is not facing forward, or that the driver's eyes are closed.
 - Vehicle speed is greater than about 25 mph (40 km/h).
 - The speed at which your vehicle is approaching the vehicle running ahead of you is greater than about 25 mph (40 km/h).
 - The steering is not being turned.

■ Conditions that may trigger the system even if there is no danger of a collision

- When there is an object by the roadside at the entrance to a curve
- When passing an oncoming vehicle on a curve
- When driving over a narrow iron bridge
- When there is a metal object on the road surface
- When driving on an uneven road surface
- When passing an oncoming vehicle on a left-turn
- When your vehicle rapidly closes on the vehicle in front
- When a grade separation/interchange, sign, billboard, or other structure appears to be directly in the vehicle's line of travel
- When there is a metal plate in the road in front of the vehicle on a downhill slope
- When climbing a steep hill causes an overhead billboard or other metallic structure to appear directly in the vehicle's line of travel
- When driving under an overpass
- When an extreme change in vehicle height occurs
- When passing through certain toll gates
- When driving through a lump of steam or smoke
- When the radar sensor moves off position due to its surrounding area being subjected to a strong impact

When the system is activated in the situations described above, there is also a possibility that the seat belts will retract quickly and the brakes will be applied with a force greater than normal. When the seat belt is locked in the retracted position, stop the vehicle in a safe place, release the seat belt and refasten it.

■ Obstacles not detected

The radar sensor cannot detect plastic obstacles such as traffic cones. There may also be occasions when the sensor cannot detect pedestrians, animals, bicycles, motorcycles, trees, or snowdrifts.

■ A camera sensor cannot detect obstacles in the following situations:

- A camera sensor is directly receiving intense light, such as sunlight.
- Visibility is poor because of bad weather or other reasons.
- The sensor temperature is extremely high.
- The headlights are not turned on in darkness such as at night or in a tunnel.

■ Situations in which the pre-collision system does not function properly

The system may not function effectively in situations such as the following:

- On roads with sharp bends or uneven surfaces
- If a vehicle suddenly moves in front of your vehicle, such as at an intersection
- If a vehicle suddenly cuts in front of your vehicle, such as when overtaking
- In inclement weather such as heavy rain, fog, snow or sand storms
- If the vehicle is skidding when VSC is not operating
- When an extreme change in vehicle height occurs
- When only part of your vehicle's front end collides with, or contacts, a vehicle or object in a frontal collision
- When the radar sensor moves off position due to its surrounding area being subjected to a strong impact
- If an obstacle in front of the vehicle is small
- When the system judges that the driver performed a collision avoidance operation via the accelerator pedal, brake pedal, or steering wheel

■ Automatic cancelation of the pre-collision system

When a malfunction occurs due to sensor contamination, etc. that results in the sensors being unable to detect obstacles, the pre-collision system will be automatically disabled. In this case, the system will not activate even if there is a collision possibility.

■ When there is a malfunction in the system

The pre-collision system warning light will flash and warning messages will be displayed. (→P. 801, 809)

■ Certification for the pre-collision system

► For vehicles sold in the U.S.A.

FCC ID: HYQDNMWR004

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radiofrequency radiation exposure Information:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance of 20 cm between the radiator (antenna) and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

► For vehicles sold in Canada

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

CAUTION

■ Limitations of the pre-collision system

Do not overly rely on the pre-collision system. Always drive safely, taking care to observe your surroundings and checking for any obstacles or other road hazards. Failure to do so may cause an accident resulting in death or serious injury.

■ Handling the radar sensor

Observe the following to ensure the pre-collision system can function effectively. Otherwise, the system may not function correctly and could result in an accident.

- Keep the sensor and grille cover clean at all times.
Clean the sensor and grille cover with a soft cloth so you do not mark or damage them.
- Do not subject the sensor or surrounding area to a strong impact.
If the sensor moves even slightly off position, the system may malfunction. If the sensor or surrounding area is subject to a strong impact, always have the area inspected and adjusted by your Lexus dealer.
- Do not disassemble the sensor.
- Do not attach accessories or stickers to the sensor, grille cover or surrounding area.
- Do not modify or paint the sensor and grille cover.
- Do not replace them with non-genuine parts.

■ Handling the camera sensors (if equipped)

Observe the following to ensure that the PCS functions effectively:

- Keep the windshield clean at all times.
PCS effectiveness may be reduced due to the presence of raindrops, condensation, ice or snow on the windshield.
- Do not subject the camera sensor to a strong impact or force, and do not disassemble the camera sensor.
- Do not change the installation position of the camera sensor, or remove and reinstall it. The direction of the camera sensor is precisely adjusted.
- When the windshield fogs up, use the windshield defogger to dry the windshield.
During cold weather, using the heater with air blowing to the feet may allow the upper part of the windshield to fog up, having a negative effect on the images.
- Do not place anything on the dashboard.
Images reflected on the windshield may reduce the effectiveness of the camera sensor.
- Do not scratch the camera lens, or let it get dirty.
- Do not attach a sticker or other items to the windshield near the camera sensor.

 CAUTION**■ Headlights (vehicles with camera sensors)**

- Observe the following to ensure proper near-infrared ray projection:
 - Keep the headlights clean at all times.
 - The detection performance may deteriorate if the high beams are misaligned or inoperative.
- The near-infrared ray transmitters project strong energy that is not visible. Although the transmitters normally turn off when the vehicle is stopped, never look into the headlights for your safety.

■ Determining the direction the driver is facing and whether the driver's eyes are open or closed (vehicles with driver monitor system)

The direction the driver is facing and whether the driver's eyes are open or closed may not be determined correctly if the following conditions exist:

- There is an object between the driver monitor sensor and the driver's face, such as when the sensor is blocked.
- A part of the driver's face is covered.
- The sensor or the driver's face is exposed to intense light such as sunlight.
- The driving posture is improper.
- The vehicle is parked.

■ Handling the driver monitor sensor (vehicles with driver monitor system)

Observe the following to ensure the driver monitor sensor can function effectively.

Failure to do so may result in a malfunction or may prevent the system from correctly determining the direction the driver is facing and whether the driver's eyes are open or closed, resulting in an unexpected accident.

- Do not disassemble, damage, lift or pull on the sensor.
- Do not select the sensor while driving.
- Do not wet or spill water on the sensor.
- Do not drop anything on or allow anything to hit against the sensor. Do not subject the sensor to an impact.
- Make sure that there are no scratches, dirt or stickers on the side of the sensor that faces the driver.
- Do not place any objects in front of the side of the sensor that faces the driver or cover the sensor.

 CAUTION**■ Cautions regarding the assist contents of the system**

By means of alarms and brake control, the pre-collision system is intended to assist the driver in avoiding collisions through the process of LOOK-JUDGE-ACT. There are limits to the degree of assistance the system can provide, so please keep in mind the following important points.

- **Assisting the driver in watching the road**

The pre-collision system is only able to detect obstacles directly in front of the vehicle, and only within a limited range. It is not a mechanism that allows careless or inattentive driving, and it is not a system that can assist the driver in low-visibility conditions. It is still necessary for the driver to pay close attention to the vehicle's surroundings.

- **Assisting the driver in making correct judgment**

When attempting to estimate the likelihood of a collision, the only data available to the pre-collision system is that from obstacles it has detected directly in front of the vehicle. Therefore, it is absolutely necessary for the driver to remain vigilant and to determine whether or not there is a possibility of collision in any given situation.

- **Assisting the driver in taking action**

The pre-collision system's braking assist feature is designed to help reduce the severity of a collision, and so only acts when the system has judged that a collision is unavoidable. This system by itself is not capable of automatically avoiding a collision or bringing the vehicle to a stop safely. For this reason, when encountering a dangerous situation the driver must take direct and immediate action in order to ensure the safety of all involved.

 NOTICE**■ Precautions for cleaning the driver monitor sensor (vehicles with driver monitor system)**

- Gently wipe the sensor with a soft cloth to prevent damage.
- Wipe any excess dirt with a cloth dampened with neutral detergent, all liquids having been wringed out of the cloth. After that, wipe again with a dry cloth.
- Do not use benzene, thinner, glass cleaners, wax, etc.


BSM (Blind Spot Monitor)*

Summary of the Blind Spot Monitor

The Blind Spot Monitor is a system that has 2 functions;

- The Blind Spot Monitor function
Assists the driver in making the decision when changing lanes
- The Rear Cross Traffic Alert function
Assists the driver when backing up

These functions use same sensors.

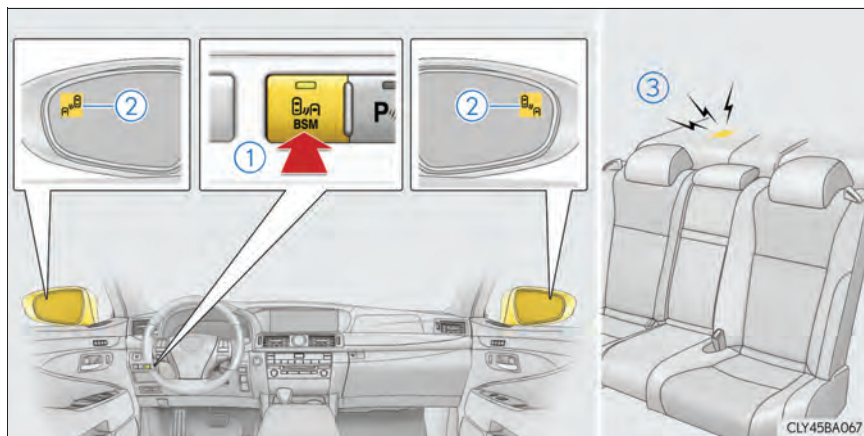

① BSM main switch

Pressing the switch turns the system on or off. When the switch is set to on, the switch's indicator illuminates and the buzzer sounds. Common switch for Blind Spot Monitor function and Rear Cross Traffic Alert function.

② Outside rear view mirror indicators

Blind Spot Monitor function:

When a vehicle is detected in the blind spot, the outside rear view mirror indicator comes on while the turn signal lever is not operated and the outside rear view mirror indicator flashes while the turn signal lever is operated.

Rear Cross Traffic Alert function:

When a vehicle approaching from the right or left rear of the vehicle is detected, the outside rear view mirror indicators flash.

③ Rear Cross Traffic Alert buzzer (Rear Cross Traffic Alert function only)

When a vehicle approaching from the right or left rear of the vehicle is detected, a buzzer sounds from behind the rear seat.

■ The outside rear view mirror indicators visibility

When under strong sunlight, the outside rear view mirror indicator may be difficult to see.

■ Rear Cross Traffic Alert buzzer hearing

Rear Cross Traffic Alert function may be difficult to hear over loud noises such as high audio volume.

■ When there is a malfunction in the Blind Spot Monitor

If a system malfunction is detected due to any of the following reasons, warning messages will be displayed: (→P. 809)

- There is a malfunction with the sensors
- The sensors have become dirty
- The outside temperature is extremely high or low
- The sensor voltage has become abnormal

■ Certification for the Blind Spot Monitor

- For vehicles sold in the U.S.A.

FCC ID : OAYSRR2A

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Warning

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- For vehicles sold in Canada

Applicable law : Canada 310

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.


Frequency bands : 24.05 - 24.25GHz

Output power : less than 20 milliwatts

⚠ CAUTION**■ Handling the radar sensor**

One Blind Spot Monitor sensor is installed inside the left and right side of the vehicle rear bumper respectively. Observe the following to ensure the Blind Spot Monitor can function correctly.

- Keep the sensor and its surrounding area on the bumper clean at all times.



- Do not subject the sensor or surrounding area on the bumper to a strong impact. If the sensor moves even slightly off position, the system may malfunction and vehicles that enter the detection area may not be detected. If the sensor or surrounding area is subject to a strong impact, always have the area inspected by your Lexus dealer.
- Do not disassemble the sensor.
- Do not attach accessories or stickers to the sensor or surrounding area on the bumper.
- Do not modify the sensor or surrounding area on the bumper.
- Do not paint the sensor or surrounding area on the bumper.

The Blind Spot Monitor function

The Blind Spot Monitor function uses radar sensors to detect vehicles that are traveling in an adjacent lane in the area that is not reflected in the outside rear view mirror (the blind spot), and advises the driver of the vehicles existence via the outside rear view mirror indicator.

The Blind Spot Monitor function detection areas


The areas that vehicles can be detected in are outlined below.

The range of the detection area extends to:

- ① Approximately 11.5 ft. (3.5 m) from the side of the vehicle

The first 1.6 ft. (0.5 m) from the side of the vehicle is not in the detection area

- ② Approximately 9.8 ft. (3 m) from the rear bumper
- ③ Approximately 3.3 ft. (1 m) forward of the rear bumper

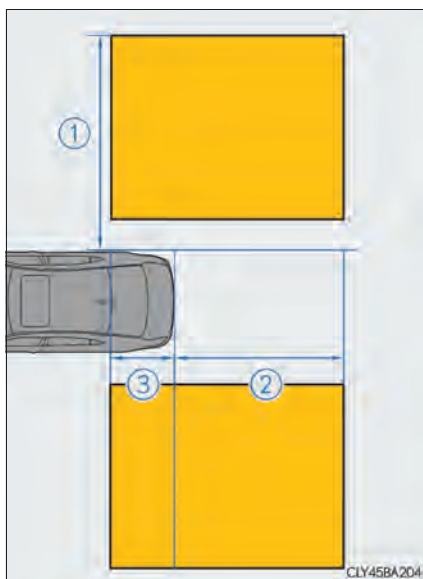

⚠ CAUTION

■ Cautions regarding the use of the system

The driver is solely responsible for safe driving. Always drive safely, taking care to observe your surroundings.

The Blind Spot Monitor function is a supplementary function which alerts the driver that a vehicle is present in the blind spot. Do not overly rely on the Blind Spot Monitor function. The function cannot judge if it is safe to change lanes, therefore over reliance could cause an accident resulting in death or serious injury.

According to conditions, the system may not function correctly. Therefore the driver's own visual confirmation of safety is necessary.

■ The Blind Spot Monitor function is operational when

- The BSM main switch is set to on
- Vehicle speed is greater than approximately 10 mph (16 km/h).

■ The Blind Spot Monitor function will detect a vehicle when

- A vehicle in an adjacent lane overtakes your vehicle.
- Another vehicle enters the detection area when it changes lanes.

■ Conditions under which the Blind Spot Monitor function will not detect a vehicle

The Blind Spot Monitor function is not designed to detect the following types of vehicles and/or objects:

- Small motorcycles, bicycles, pedestrians etc.*
- Vehicles traveling in the opposite direction
- Guardrails, walls, signs, parked vehicles and similar stationary objects*
- Following vehicles that are in the same lane*
- Vehicles driving 2 lanes across from your vehicle*


*: Depending on conditions, detection of a vehicle and/or object may occur.

■ **Conditions under which the Blind Spot Monitor function may not function correctly**

- The Blind Spot Monitor function may not detect vehicles correctly in the following conditions:
 - During bad weather such as heavy rain, fog, snow etc.
 - When ice or mud etc. is attached to the rear bumper
 - When driving on a road surface that is wet due to rain, standing water etc.
 - When there is a significant difference in speed between your vehicle and the vehicle that enters the detection area
 - When a vehicle is in the detection area from a stop and remains in the detection area as your vehicle accelerates
 - When driving up or down consecutive steep inclines, such as hills, a dip in the road etc.
 - When multiple vehicles approach with only a small gap between each vehicle
 - When vehicle lanes are wide, and the vehicle in the next lane is too far away from your vehicle
 - When the vehicle that enters the detection area is traveling at about the same speed as your vehicle
 - When there is a significant difference in height between your vehicle and the vehicle that enters the detection area
 - Directly after the BSM main switch is set to on
- Instances of the Blind Spot Monitor function unnecessarily detecting a vehicle and/or object may increase under the following conditions:
 - When there is only a short distance between your vehicle and a guardrail, wall etc.
 - When there is only a short distance between your vehicle and a following vehicle
 - When vehicle lanes are narrow and a vehicle driving 2 lanes across from your vehicle enters the detection area
 - When items such as a bicycle carrier are installed on the rear of the vehicle

The Rear Cross Traffic Alert function

The Rear Cross Traffic Alert functions when your vehicle is in reverse. It can detect other vehicles approaching from the right or left rear of the vehicle. It uses radar sensors to alert the driver of the other vehicle's existence through flashing the outside rear view mirror indicators and sounding a buzzer.

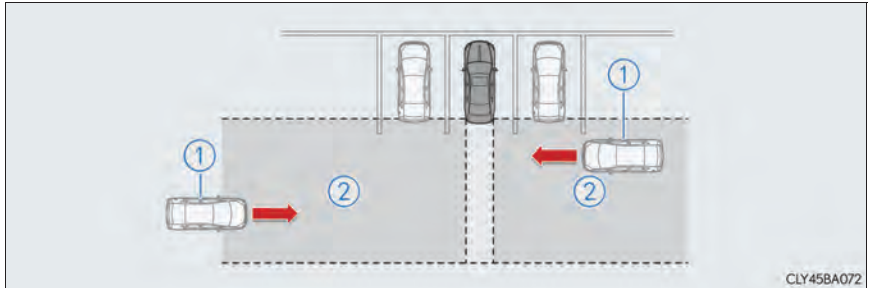

① Approaching vehicles

② Detection areas

⚠ CAUTION

■ Cautions regarding the use of the system


The driver is solely responsible for safe driving. Always drive safely, taking care to observe your surroundings.

The Rear Traffic Alert function is only an assist and is not a replacement for careful driving. Driver must be careful when backing up, even when using Rear Traffic Alert function. The driver's own visual confirmation of behind you and your vehicle is necessary and be sure there are no pedestrians, other vehicles etc. before backing up. Failure to do so could cause death or serious injury.

According to conditions, the system may not function correctly. Therefore the driver's own visual confirmation of safety is necessary.

The Rear Cross Traffic Alert function detection areas

The areas that vehicles can be detected in are outlined below.

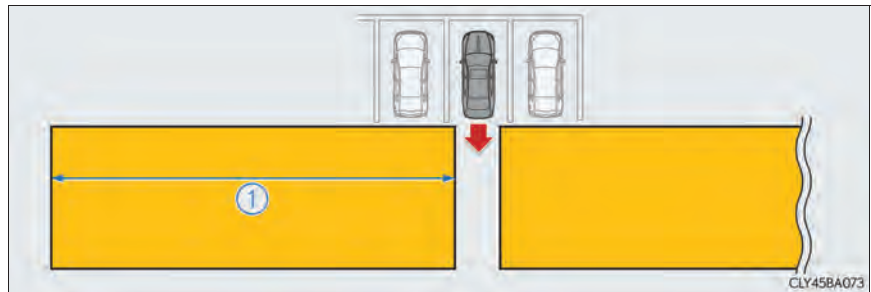

To give the driver a more consistent time to react, the buzzer can alert for faster vehicles from farther away.

Example:

Approaching vehicle	Speed	① Approximate alert distance
Fast	18 mph (28 km/h)	65 ft. (20 m)
Slow	5 mph (8 km/h)	18 ft. (5.5 m)

■ The Rear Cross Traffic Alert function is operational when

- The BSM main switch is set to on.
- The shift lever is in R.
- Vehicle speed is less than approximately 5 mph (8 km/h).
- Approaching vehicle speed is between approximately 5 mph (8 km/h) and 18 mph (28 km/h).

■ Conditions under which the Rear Cross Traffic Alert function will not detect a vehicle

The Rear Cross Traffic Alert function is not designed to detect the following types of vehicles and/or objects.


- Small motorcycles, bicycles, pedestrians etc. *
- Vehicles approaching from directly behind
- Guardrails, walls, signs, parked vehicles and similar stationary objects *
- Vehicles moving away from your vehicle
- Vehicles approaching from the parking spaces next to your vehicle *
- Vehicles backing up in the parking space next to your vehicle

*: Depending on conditions, detection of a vehicle and/or object may occur.

■ Conditions under which the Rear Cross Traffic Alert function may not function correctly

The Rear Cross Traffic Alert function may not detect vehicles correctly in the following conditions:

- During bad weather such as heavy rain, fog, snow etc.
- When ice or mud etc. is attached to the rear bumper
- When multiple vehicles approach continuously
- Shallow angle parking
- When a vehicle is approaching at high speed
- When parking on a steep incline, such as hills, a dip in the road etc.
- Directly after the BSM main switch is set to on
- Directly after the hybrid system is started with the BSM main switch on
- Vehicles that the sensors cannot detect because of obstacles



Lexus night view*

Lexus night view is a system which assists with nighttime driving.

Near-infrared rays are irradiated forward and an image converted from the irradiated light is shown on the Remote Touch screen. The image shows pedestrians, obstacles, and road conditions ahead of the vehicle, which are difficult to see at nighttime with the naked eye.

Displaying the Lexus night view

- 1 Turn the power switch to ON mode.
- 2 Turn the headlights on.
- 3 Press the Lexus night view switch.

The Lexus night view is displayed on the Remote Touch screen.


To return the screen to its previous state, press the switch again.

When the light sensor (→P. 240) determines that it is currently night time from the brightness of the surrounding area, the Lexus night view can be operated by pressing the Lexus night view switch while the headlights are on.



The Lexus night view display

■ When displaying on the “Main Display” (→P. 360)

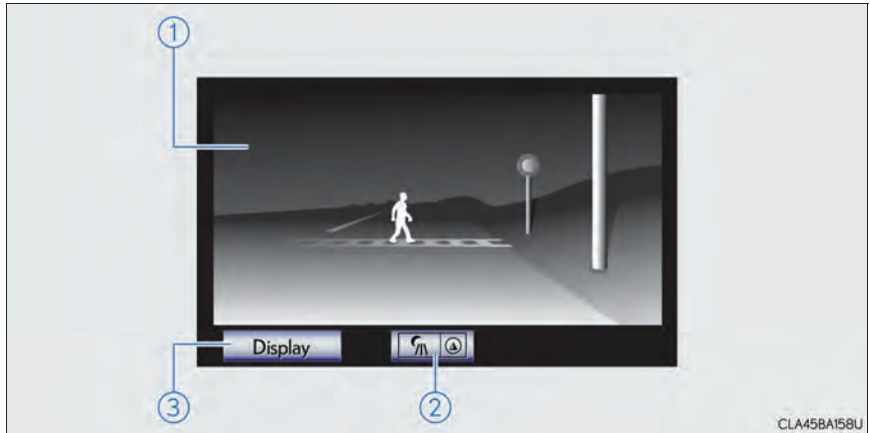

- ① Lexus night view screen
- ② “Side Display” switching button

If this button is selected using the Remote Touch when the Lexus night view is being shown on the “Main Display”, the “Side Display” will change to a map display (vehicle with navigation system) or compass display (vehicle without navigation system). (→P. 358)

If the button is selected again, the screen will return to its previous display.

- ③ Brightness adjustment button

The brightness of the display can be adjusted by selecting this button using Remote Touch.

Make sure to select the “OK” after adjusting the brightness.

“-”: Darker

“+”: Brighter



■ When displaying on the “Side Display”

When another screen is displayed on the “Main Display” while the Lexus night view is being shown on the “Main Display”, the Lexus night view screen will be displayed on the “Side Display”.

- ① Lexus night view screen
- ② “Main Display” switching button

Switches the Lexus night view from the “Side Display” to the “Main Display”.



■ Imaging range

The image is shown ranging from the tip of the low beam to the high beam.

■ If the vehicle speed is less than approximately 9 mph (15 km/h) when the Lexus night view is operating

An image will be displayed on the Lexus night view screen, but both the range and the distance of the projection will be limited as near-infrared rays are not being radiated outward.

■ When the Lexus night view switch is pressed while the Lexus night view cannot be operated

Advice information will be displayed on the Lexus night view screen. Follow the displayed advice.

■ If the Lexus night view switch is pressed at a time when the Lexus night view operation is not possible

Follow the advice displayed on the Remote Touch screen.

■ When the shift lever is shifted to R while the Lexus night view is operating

The Lexus night view screen switches as follows.

“Main Display”: Switches to the rear view monitor system screen.

“Side Display”: The display blacks out and no image is displayed.

 CAUTION**■ Before using the Lexus night view**

Never depend on this system only.

Lexus night view is intended as a supplemental aid to help you see pedestrians and road conditions ahead of the vehicle. As there are limits to the system, do not rely solely on the system while in use, and drive safely while observing the following precautions.

■ When using the Lexus night view

Observe the following precautions.

Failure to do so may cause an accident resulting in death or serious injury.

- Never drive while looking at the Lexus night view screen only.
- Do not look continuously at the Lexus night view screen while driving. Pedestrians, objects etc. ahead of the vehicle may be overlooked by the system. The system should always be used as a supplemental aid only.
- Lexus night view is designed to help you see objects better when driving in darkness on a road with few curves. Do not use the Lexus night view in well-lit areas or on roads with many curves or slopes. There may be areas that cannot be displayed by the system due to the road conditions (curve size, gradient, etc.)
- Lexus night view may be unable to project some features at an appropriate level of brightness. Some or all parts of certain features may be dark or difficult to see. Do not rely solely on the Lexus night view, and drive carefully while checking the surroundings for safety, as you would with a normal vehicle. Also, the following features and conditions may not be displayed clearly.

Features that are difficult to display:

- Clothing of a pedestrian made of a certain kind of material (ex. leather jackets)
- The characters on signs and billboards
- The information on road signs


Conditions in which display is difficult:

- Unfavorable weather conditions such as rain, fog, snowfall, snow storms etc.
- There are large puddles of water on the road surface following rainfall
- The area of the windshield in front of the camera is fogged up, dirty or icy
- The areas around the headlights are covered with ice, snow, mud etc.
- The 12-volt battery voltage is remarkably low
- There are bright lights ahead of the vehicle


⚠ CAUTION**■ The near-infrared light**

Follow these precautions to avoid damage to or incorrect operation of the Lexus night view system.

- System performance may deteriorate if the areas around the headlights are dirty. Clean the vehicle if it is dirty.
- The near-infrared ray transmitters irradiate strong energy not visible to the eyes. Do not stare at the light at close range for a long time.

**⚠ NOTICE****■ The near-infrared camera**

Follow these precautions to avoid damage to or incorrect operation of the Lexus night view.



- Make sure the windshield is kept clean.
- System performance may deteriorate if rain water, condensation or ice adheres to the camera. If you notice the inner lens of the camera is dirty, the garnish will have to be replaced. Consult your Lexus dealer.
- Do not subject the camera to strong impacts, or disassemble the camera.
- As the alignment of the camera has been very finely adjusted, do not change or remove the mounting.
- If the windshield fogs up, defog the windshield using the front defroster.
- Do not dirty or scratch the camera lens.
- Night view may not function properly if an object is placed on the sensor, or anything that blocks the sensor is affixed to the windshield.

Hybrid vehicle driving tips

For economical and ecological driving, pay attention to the following points:

■ Using Eco drive mode

When using Eco drive mode, the torque corresponding to the accelerator pedal depression amount can be generated more smoothly than it is in normal conditions. In addition, the operation of the air conditioning system (heating/cooling) will be minimized, improving the fuel economy. (→P. 309)

■ Use of Hybrid System Indicator

The Eco-friendly driving is possible by keeping the indicate of Hybrid System Indicator within Eco area. (→P. 105)

■ When braking the vehicle

Make sure to operate the brakes gently and in good time. A greater amount of electrical energy can be retained when slowing down.

■ Delays

Repeated acceleration and deceleration, as well as long waits at traffic lights, will lead to bad fuel consumption. Check traffic reports before leaving and avoid delays as much as possible. When encountering a delay, gently release the brake pedal to allow the vehicle to move forward slightly while avoiding overuse of the accelerator pedal. Doing so can help control excessive gasoline consumption.

■ Highway driving

Control your speed and keep at a constant speed. Also, before stopping at a toll booth or similar, allow plenty of time to release the accelerator and gently apply the brakes. A greater amount of electrical energy can be retained when slowing down.

■ Air conditioning

Use the air conditioning only when necessary. Doing so can help control excessive gasoline consumption.

In summer: In high temperatures, use the recirculated air mode. Doing so will help to reduce the burden on the air conditioner and reduce fuel consumption as well.

In winter: Because the gasoline engine will not automatically cut out until the gasoline engine and the interior of the vehicle are warm, it will consume fuel. Also, fuel consumption can be improved by avoiding overuse of the heater.

■ Checking tire inflation pressure

Make sure to check the tire inflation pressure frequently. Improper tire inflation pressure can cause poor fuel consumption.

Also, as snow tires can cause large amounts of friction, their use on dry roads can lead to poor fuel consumption. Use a tire that is appropriate for the season.

■ Luggage

Carrying heavy luggage can lead to poor fuel consumption. Avoid carrying unnecessary luggage. Installing a large roof rack can also cause poor fuel consumption.

■ Warming up before driving

Since the gasoline engine starts up and cuts out automatically when cold, warming up the engine is unnecessary. Moreover, frequently driving short distances will cause the engine to repeatedly warm up, which can lead to poor fuel consumption.

Winter driving tips

Carry out the necessary preparations and inspections before driving the vehicle in winter. Always drive the vehicle in a manner appropriate to the prevailing weather conditions.

Preparation for winter

- Use fluids that are appropriate to the prevailing outside temperatures.
 - Engine oil
 - Engine/power control unit coolant
 - Washer fluid
- Have a service technician inspect the condition of the 12-volt battery.
- Have the vehicle fitted with four snow tires or purchase a set of tire chains for the rear tires.

Ensure that all tires are the specified size and brand, and that chains match the size of the tires.

Before driving the vehicle

Perform the following according to the driving conditions:

- Do not try to forcibly open a window or move a wiper that is frozen. Pour warm water over the frozen area to melt the ice. Wipe away the water immediately to prevent it from freezing.
- To ensure proper operation of the climate control system fan, remove any snow that has accumulated on the air inlet vents in front of the windshield.
- Check for and remove any excess ice or snow that may have accumulated on the exterior lights, vehicle's roof, chassis, around the tires or on the brakes.
- Remove any snow or mud from the bottom of your shoes before getting in the vehicle.

When driving the vehicle

Accelerate the vehicle slowly, keep a safe distance between you and the vehicle ahead, and drive at a reduced speed suitable to road conditions.


When parking the vehicle

Park the vehicle and move the shift lever to P without setting the parking brake. The parking brake may freeze up, preventing it from being released. If necessary, block the wheels to prevent inadvertent sliding or creeping.

Selecting tire chains

Use the correct tire chain size when mounting the tire chains.
Chain size is regulated for each tire size.

- ① Side chain
(0.12 in. [3 mm] in diameter)
- ② Cross chain
(0.16 in. [4 mm] in diameter)

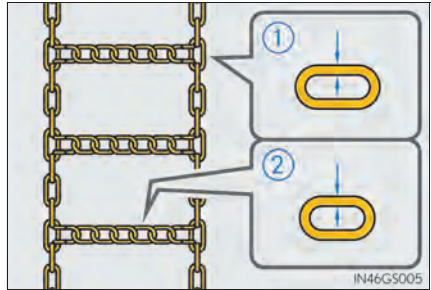

Regulations on the use of tire chains

Regulations regarding the use of tire chains vary depending on location and type of road. Always check local regulations before installing chains.

■ Tire chain installation

Observe the following precautions when installing and removing chains:

- Install and remove tire chains in a safe location.
- Install tire chains on the rear tires. Do not install tire chains on the front tires.
- Install tire chains on rear tires as tightly as possible. Retighten chains after driving 1/4 — 1/2 mile (0.5 — 1.0 km).
- Install tire chains following the instructions provided with the tire chains.

 CAUTION**■ Driving with snow tires**

Observe the following precautions to reduce the risk of accidents. Failure to do so may result in a loss of vehicle control and cause death or serious injury.

- Use tires of the specified size.
- Maintain the recommended level of air pressure.
- Do not drive in excess of 75 mph (120 km/h), regardless of the type of snow tires being used.
- Use snow tires on all, not just some wheels.
- Do not use LKA (Lane-Keeping Assist) system.

■ Driving with tire chains

Observe the following precautions to reduce the risk of accidents. Failure to do so may result in the vehicle being unable to be driven safely, and may cause death or serious injury.

- Do not drive in excess of the speed limit specified for the tire chains being used, or 30 mph (50 km/h), whichever is lower.
- Avoid driving on bumpy road surfaces or over potholes.
- Avoid sudden acceleration, abrupt steering, sudden braking and shifting operations that cause sudden engine braking.
- Slow down sufficiently before entering a curve to ensure that vehicle control is maintained.
- Do not use LKA (Lane-Keeping Assist) system.

 NOTICE**■ Repairing or replacing snow tires**

Request repairs or replacement of snow tires from Lexus dealers or legitimate tire retailers.

This is because the removal and attachment of snow tires affects the operation of the tire pressure warning valves and transmitters.

■ Fitting tire chains

The tire pressure warning valves and transmitters may not function correctly when tire chains are fitted.

5-1. Remote Touch screen

Remote Touch.....	358
Remote Touch screen.....	360
Set up screen	366
12.3-inch display operation	382
Voice command system	391
Mobile Assistant	401

5-2. Lexus Climate Concierge

Lexus Climate Concierge.....	403
------------------------------	-----

5-3. Using the air conditioning system and defogger

Front automatic air conditioning system	404
Rear air conditioning system	418
Rear window and outside rear view mirror defoggers	425
Windshield wiper de-icer	426

5-4. Using the audio system

Audio system type	427
Using the radio.....	449
Using the CD/DVD player....	467
Playing an audio CD and MP3/WMA discs	469
Playing DVD video.....	475
CD/DVD player and DVD video disc information.....	486
Listening to Bluetooth® audio.....	498
Listening to a USB memory.....	508
Listening to an iPod.....	518
Using the AUX port	528
Optimal use of the audio/ video system.....	530
Using the rear seat audio controls	531
Using the steering wheel audio switches.....	534

Interior features

5

5-5. Using the rear seat entertainment system

Rear seat entertainment system features..... 537

Playing a Blu-ray Disc™ (BD) and DVD disc..... 554

Playing an audio CD and MP3/WMA discs..... 582

Playing an SD card 587

Using the front audio system 593

Using the video mode 595

Changing other setting..... 597

5-6. Using the hands-free phone system (for cellular phone)

Hands-free system (for cellular phone)..... 601

Using a Bluetooth® phone 608

Setting the hands-free system (for cellular phone)..... 628

Setting the Bluetooth® 652

5-7. Using the interior lights

Interior lights list..... 665

• Interior lights 666

• Personal lights..... 667

5-8. Using the storage features

List of storage features 669

• Glove box 671

• Coin holder 672

• Door pockets..... 672

• Cup holders 673

• Console box..... 675

• Auxiliary boxes 677

Trunk features 680

5-9. Other interior features

Sun visors and vanity mirrors 682

Clock..... 684

Ashtrays 685

Cigarette lighters..... 686

Power outlets 688

Heated steering wheel 692

Climate control seats 694

Armrest..... 699

Retractable table..... 700

Rear sunshade..... 702

Rear door sunshades..... 705

Coat hooks..... 708

Assist grips..... 709


Garage door opener..... 710

Safety Connect..... 716

Remote Touch

The Remote Touch can be used to operate the Remote Touch screens. Owners of models equipped with a navigation system should refer to the “Navigation System Owner’s Manual”.

The illustration below is for vehicles without navigation system.

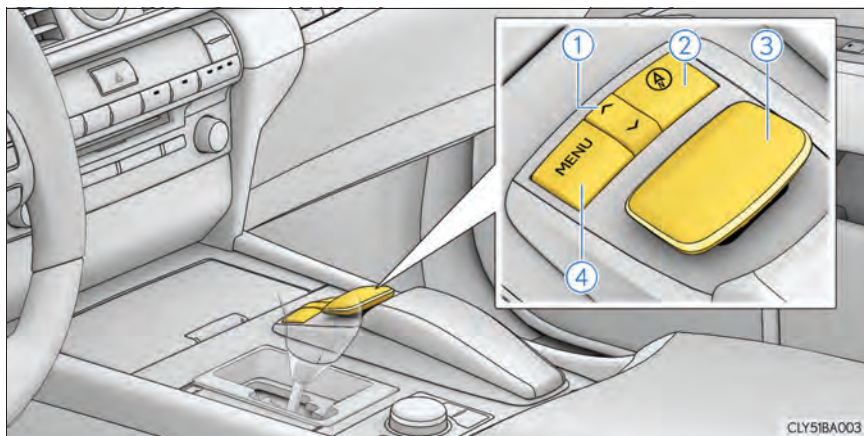

① “^•v” button

Press this button to scroll through lists.

② “COMPASS” button

Press this button to display the compass mode screen.

③ Remote Touch knob

Move in the desired direction to select a function, number and screen button.

Push the knob to enter the selected function, number and screen button.

Feedback force, pointer sound volume, on or off of selection sounds, etc. can be changed. (→P. 367)

④ “MENU” button

Press this button to display the “Menu” screen.

**CAUTION****■ When using the Remote Touch**

- Do not allow fingers, fingernails or hair to become caught in the Remote Touch as this may cause an injury.
- Be careful when touching the Remote Touch in extreme temperatures as it may become very hot or cold due to the temperature inside the vehicle.

**NOTICE****■ To prevent damage to the Remote Touch**

- Do not allow the Remote Touch to come into contact with food, liquid, stickers or lit cigarettes as doing so may cause it to change color, emit a strange odor or stop functioning.
- Do not subject the Remote Touch to excessive pressure or strong impact as the knob may bend or break off.
- Do not allow coins, contact lenses or other such items to become caught in the Remote Touch as this may cause it to stop functioning.
- Items of clothing may rip if they become caught on the Remote Touch knob.
- If your hand or any object is on the Remote Touch knob when the power switch is turned to ACCESSORY mode, the Remote Touch knob may not operate properly.

Remote Touch screen

By using the Remote Touch, you can control the audio system and air conditioning system, and adjust the screen display, etc.


Owners of models equipped with a navigation system should refer to the “Navigation System Owner’s Manual”.

Different information can be displayed on the left and right of the screen. The 8-inch display area on the left of the screen is called the “Main Display”, and the area to the right is called the “Side Display”. (→P.382)

Initial screen

When the power switch is turned to ACCESSORY or ON mode, the initial screen will be displayed for a few seconds as the system starts up.

Images shown on the initial screen can be changed to suit individual preferences. (→P.372)

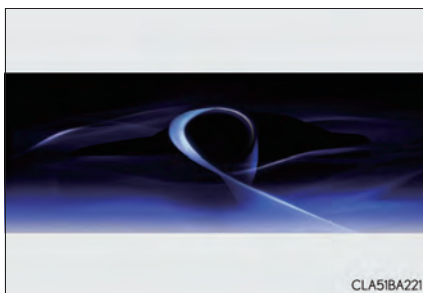

“Menu” screen


By using the Remote Touch, you can control the audio system and air conditioning system, and adjust the screen display, etc.

To display the “Menu” screen, press the “MENU” button on the Remote Touch.

- Vehicles without navigation system



- Vehicles with a navigation system

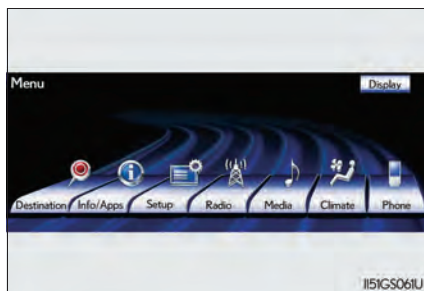

Switch	Page
“Destination”	Navigation System Owner’s Manual
“Info” or “Info/Apps”	P. 114/ Navigation System Owner’s Manual
“Setup”	P. 366
“Radio”	P. 427, 449
“Media”	P. 427, 469, 475, 498, 508, 518, 528
“Climate”	P. 404
“Phone”	P. 601
“Display”	P. 362

Adjusting the display

The contrast and brightness of the screen display and the image the camera displays can be adjusted. (For information regarding audio/video screen adjustment: →P. 480)



- 1 Press the “MENU” button on the Remote Touch and select “Display” on the “Menu” screen.
- 2 Select “Map•Menu” / “Menu” or “Camera” to display the desired screen.

► Display screen
 (“Map•Menu”/“Menu”)

If the map menu adjust screen does not appear, select “Map•Menu”/ “Menu”.

► Display screen
 (“Camera”)

If the camera adjust screen does not appear, select “Camera”.

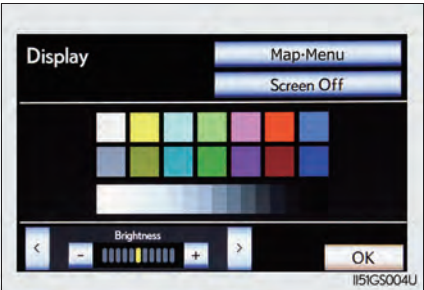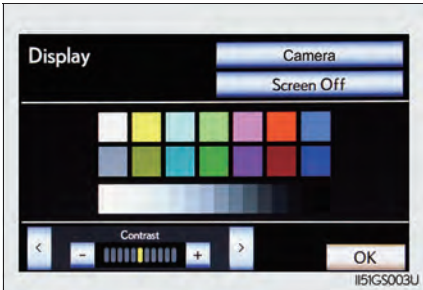

- 3 Select “<” or “>” to select the desired function (“Contrast” or “Brightness”) and then select the desired screen button to adjust contrast and brightness.

	“ - ”	“ + ”
“Contrast”	Weaker	Stronger
“Brightness”	Darker	Brighter

- 4 After adjusting the screen, select “OK”.

■ When using the Remote Touch screen

- If the screen is cold, the display may be dark, or the system may seem to be operating slightly slower than normal.
- When the screen is viewed through polarized sunglasses, a rainbow pattern may appear on the screen due to optical characteristics of the screen. If this is disturbing, please operate the screen without polarized sunglasses.
- Dimmed screen buttons cannot be operated.

■ Changing between day mode and night mode

To display the screen in day mode, even with the headlight switch on, select "Day Mode" for brightness and contrast control.

If the screen is set to day mode with the headlight switch turned on, this condition is memorized even with the hybrid system turned off.



The display condition is not changed to night mode even if the headlight switch is turned on when the vehicle is in a bright area such as daytime.

■ To turn off the display

The display goes off when "Screen Off" is selected. To turn the screen back on, press any button. The selected screen appears.

Inputting letters and numbers/list screen operation



Letters and numbers can be input via the screen.

■ To input letters and numbers/symbols

Select the keys directly to enter letters, numbers or symbols.

▶ Letters and numbers

▶ Symbols

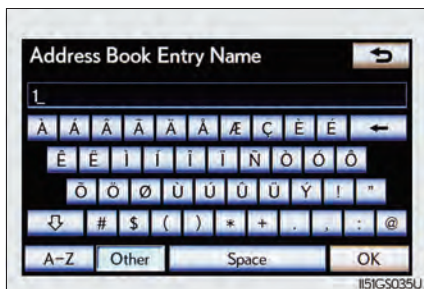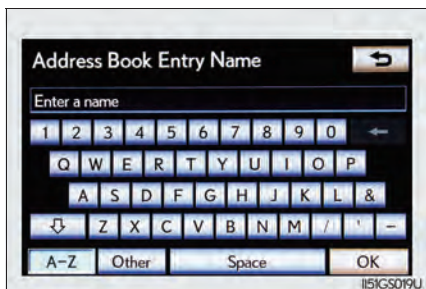

: Select to erase one character. Select and hold to continue erasing characters.

“A-Z”: To change letters and numbers

“Other”: To display symbols

: To enter in lower case



: To enter in upper case

■ Layout type

Keyboard layout can be changed. (→P. 371)

▶ “ABC” type

▶ “QWERTY” type

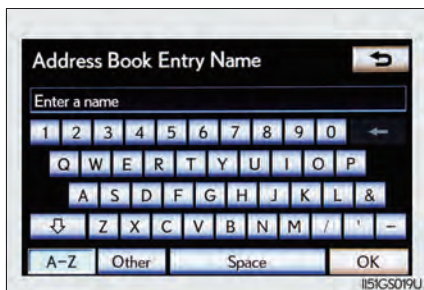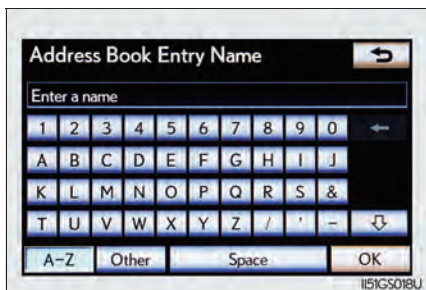

■ List screen operation


When a list is displayed, use the appropriate screen button to scroll through the list.

  : Select to skip to the next or previous page. Select and hold  or  to scroll through the displayed list.

 : This indicates the displayed screen's position.

  : If  appears to the right of an item name, the complete name is too long for the display. Select  to scroll to the end of the name. Select  to move to the beginning of the name.

Turn the "TUNE•SCROLL" knob to move the cursor box to select a desired item from the list, and press the "TUNE•SCROLL" knob to play it. The track that is being played is highlighted.

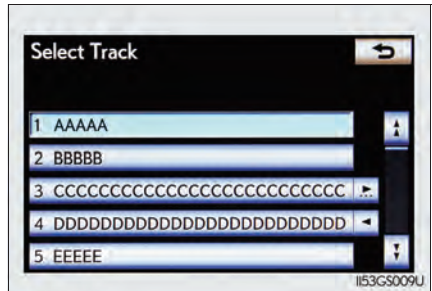

■ If you select

The display returns to the previous screen.

■ "∧" and "∨" buttons on the Remote Touch

The "∧" and "∨" buttons on the Remote Touch can be used to scroll up and down on list screens.

Set up screen

You can change the Remote Touch screen to your desired settings. Press the “MENU” button on the Remote Touch, and then select “Setup” on the “Menu” screen.

Owners of models equipped with a navigation system should refer to the “Navigation System Owner’s Manual”.

▶ Vehicles without navigation system



▶ Vehicles with a navigation system



Switch	Page
“General”	P. 367/ Navigation System Owner’s Manual
“Voice”	P. 379/ Navigation System Owner’s Manual
“Navigation”	Navigation System Owner’s Manual
“Vehicle”	P. 380/ Navigation System Owner’s Manual
“Phone”	P. 380
“Bluetooth”*	P. 381
“Audio”	P. 381
“Other”	Navigation System Owner’s Manual

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

General settings (vehicles without navigation system)




This screen is used for language selection, on/off settings of operation sounds, etc.

Select "General" on the "Setup" screen.

- ① Clock and system time settings
- ② Selecting a language
- ③ Selecting a button color
- ④ Selecting keyboard layout
- ⑤ Changing the startup image
- ⑥ Changing the screen off image
- ⑦ Selection sound on/off
- ⑧ Pointer sound on/off
- ⑨ Error sound on/off
- ⑩ Pointer sound volume settings
- ⑪ Setting a feedback force
- ⑫ Delete personal data
- ⑬ Software update*
- ⑭ Gracenote database update*

Select "Save" after changing settings.

*: For details, contact your Lexus dealer.

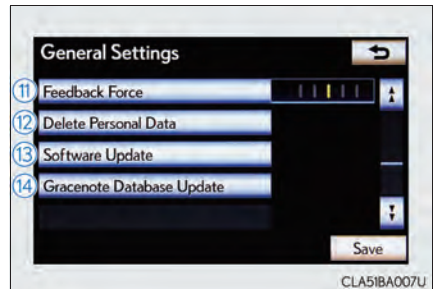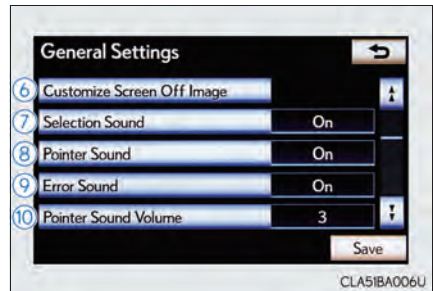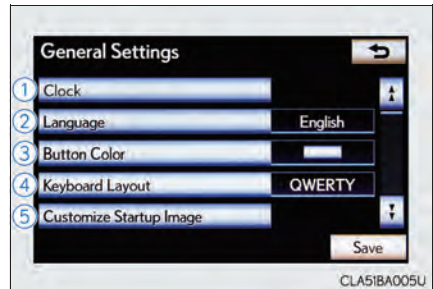


■ System time settings

Used for changing time zones, and on/off settings of daylight saving time and automatic adjustment of the clock.

1 Select “Clock” on the “General Settings” screen.

2 Select the items to be set.

- ① Time zone
- ② Daylight saving time setting on/off
- ③ Auto adjust clock setting on/off

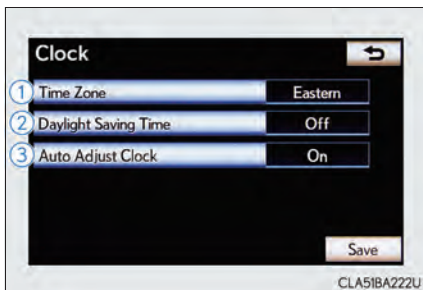


3 Select “Save”.

● Time zone

A time zone can be selected and GMT can be set.

1 Select “Time Zone”.

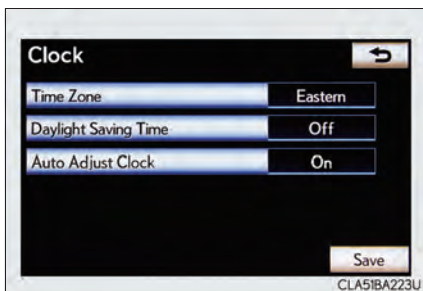

2 Select the desired time zone.



If "Other" is selected, the zone can be adjusted manually. Select "+" or "-" to adjust the time zone and then select "OK".



- Daylight saving time


To select "On" or "Off" for daylight saving time.

- Manual clock setting

When "Auto Adjust Clock" is turned "Off", the clock can be manually adjusted.

- ① Select "+" to set the time forward one hour and "-" to set the time back one hour.
- ② Select "+" to set the time forward one minute and "-" to set the time back one minute.
- ③ Select to round to the nearest hour*.


* e.g. 1:00 to 1:29 → 1:00
1:30 to 1:59 → 2:00

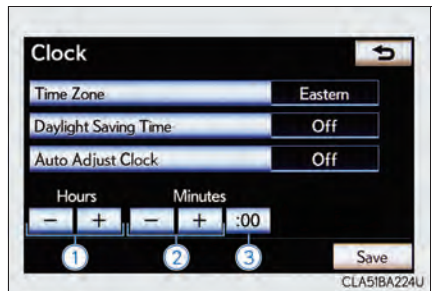

■ Selecting a language

The language can be changed.

- 1 Select “Language” on the “General Settings” screen.
- 2 Select the desired screen button.

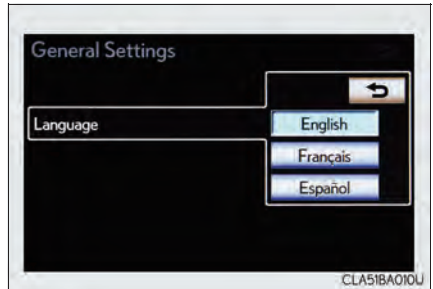

- 3 Select “Yes”.

The previous screen will be displayed.


- 4 Select “Save”.

■ Selecting a button color

The color of the screen buttons can be changed.

- 1 Select “Button Color” on the “General Settings” screen.
- 2 Select the desired screen button color.

The previous screen will be displayed.

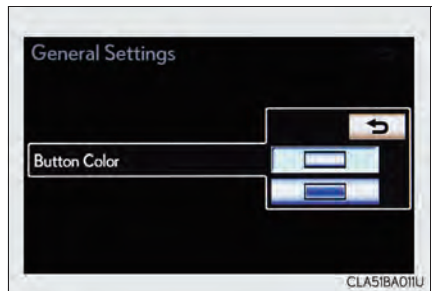

- 3 Select “Save”.


■ Selecting a keyboard layout

Keyboard layout can be changed.

1 Select “Keyboard Layout” on the “General Settings” screen.

2 Select “ABC” or “QWERTY”.

The previous screen will be displayed.

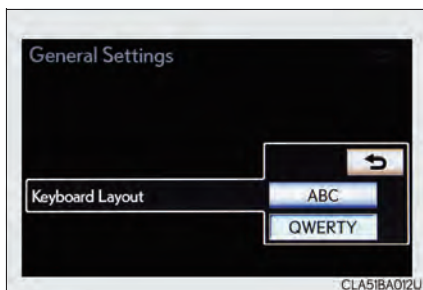


3 Select “Save”.


■ Changing the startup image

The startup image can be selected from 3 preregistered movies.


▶ Type A

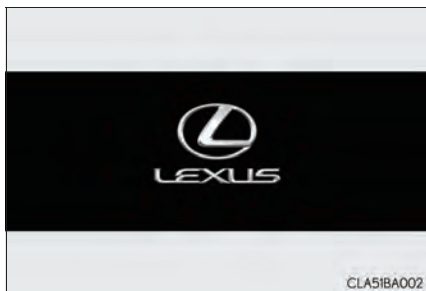

▶ Type B

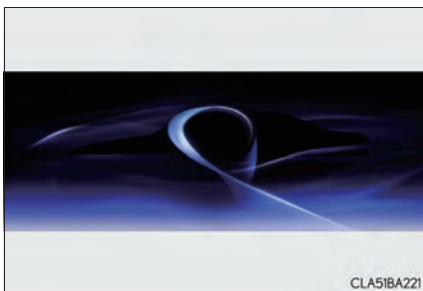

▶ Type C

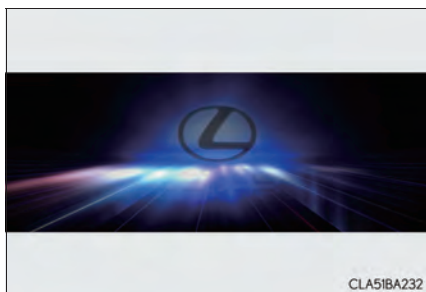


Also, an image can be copied from a USB memory and used as the startup image.

When saving the images to a USB memory, name the folder that the startup image is saved to "StartupImage". If these folder names are not used, the system cannot download the images. (The folder names are case sensitive.)


● Transferring data

- 1 Open the console box, open the cover and connect a USB memory.

Turn on the power of the USB memory if it is not turned on.

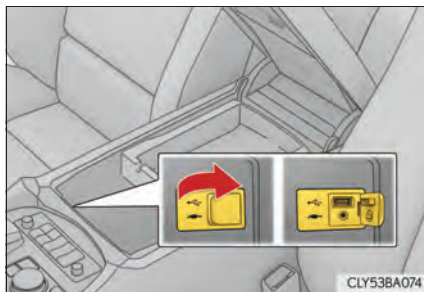


- 2 Close the console box.
- 3 Select "Customize Startup Image" on the "General Settings" screen.
- 4 Select "Transfer".

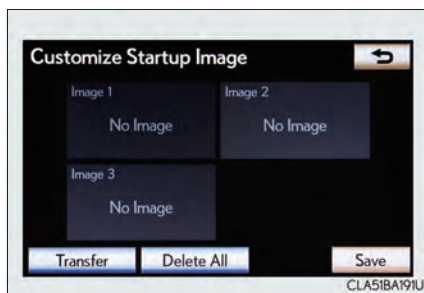

- 5 Select "Yes".

- Setting the startup image

- 1 Select “Customize Startup Image” on the “General Settings” screen.
- 2 Select the desired image.

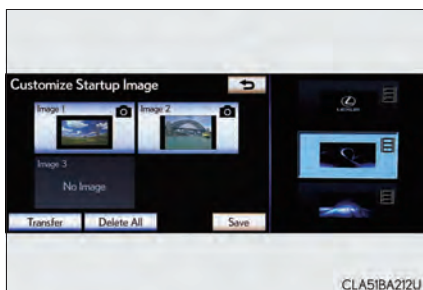

- 3 Select “Save”.

- Deleting transferred image

- 1 Select “Customize Startup Image” on the “General Settings” screen.
- 2 Select “Delete All”.



- 3 Select “Yes”.

■ Changing the screen off image


Select “Screen Off” on the “Display” screen to turn off the screen. An image can be copied from a USB memory and can be set to display when “Screen Off” is selected.

When saving the images to a USB memory, name the folder that the screen off image is saved to “Displayoffimage”. If these folder names are not used, the system cannot download the images. (The folder names are case sensitive.)


● Transferring data

- 1 Open the console box, open the cover and connect a USB memory.

Turn on the power of the USB memory if it is not turned on.

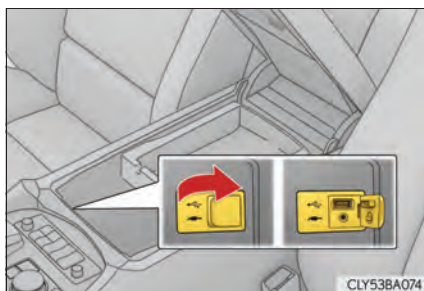


- 2 Close the console box.
- 3 Select “Customize Screen Off Image” on the “General Settings” screen.
- 4 Select “Transfer”.

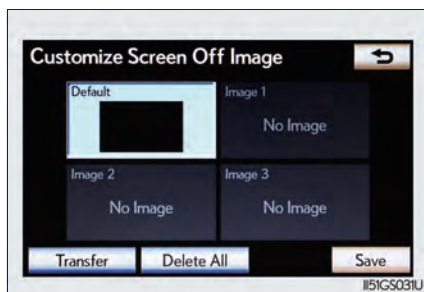

- 5 Select “Yes”.

- Setting the screen off image

- 1 Select “Customize Screen Off Image” on the “General Settings” screen.
- 2 Select the desired image.

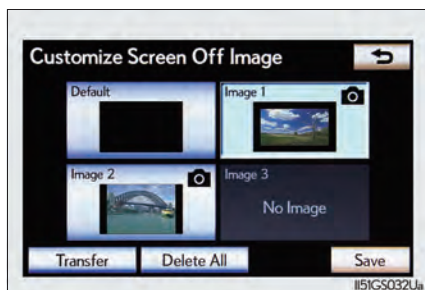

- 3 Select “Save”.

- Deleting transferred images

- 1 Select “Customize Screen Off Image” on the “General Settings” screen.
- 2 Select “Delete All”.




- 3 Select “Yes”.

■ Pointer sound volume settings

The pointer sound volume can be adjusted.

- 1 Select "Pointer Sound Volume" on the "General Settings" screen.
- 2 Select the desired button.

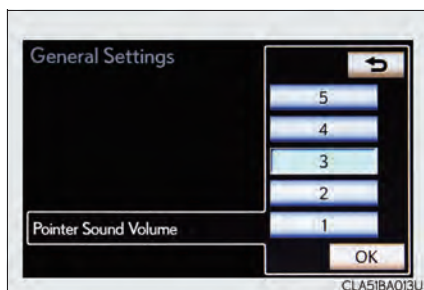


- 3 Select "OK", and then "Save".

■ Setting a feedback force

When the pointer moves close to a button, it will be automatically pulled onto that button. The strength of this pull can be adjusted.

- 1 Select "Feedback Force" on the "General Settings" screen.
- 2 Select "+" or "-".

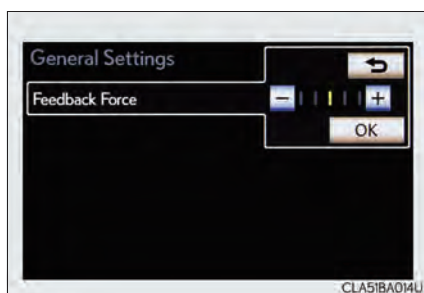


- 3 Select "OK", and then "Save".

■ Delete personal data

This function is not available while driving.

- 1 Select “Delete Personal Data” on the “General Settings” screen.
- 2 Select “Delete”.

Check carefully beforehand, as data cannot be retrieved once deleted.

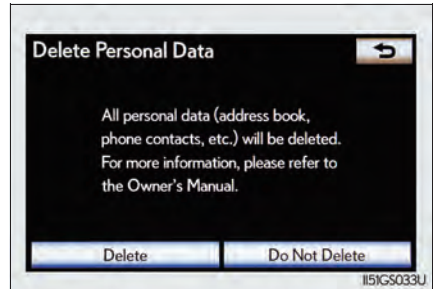

- 3 Select “Yes”.

The following personal data can be deleted or returned to their default settings:

- Phonebook data
- Call history data
- Speed dial data
- Bluetooth® phone data
- Phone sound settings
- Phone display settings
- Message settings
- Audio setting
- Bluetooth® audio setting
- Startup image data
- Screen off image data

■ About startup or screen off images

- The images file extension is JPG or JPEG.
- The images file name, including the file extension, can be up to 32 characters.
- Image files of 10 MB or less can be saved.
- Up to 3 images can be downloaded.

Voice settings (vehicles without navigation system)

Voice guidance can be set.

Select "Voice" on the "Setup" screen.

- ① Select voice guidance volume
- ② Voice guidance on/off during audio system is in use

- ③ Voice recognition prompt on/off

This setting can also be changed on the "Shortcut Menu" screen.

(→P. 399)

- ④ Voice commands on/off when using the audio/video and air conditioning system


- ⑤ Restore default settings

Select "Save" after changing settings.

■ Voice volume

The voice guidance volume can be adjusted or switched off.

- 1 Select "Voice" on the "Setup" screen.
- 2 Select the desired level.

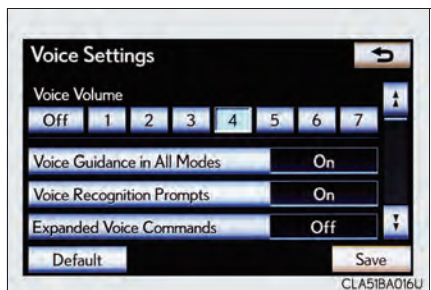

- 3 Select "Save".

Vehicle settings (vehicles without navigation system)


Select "Vehicle" on the "Setup" screen.

① Vehicle customization

Detailed information: →P. 865

② Setting up intuitive parking assist

Detailed information: →P. 293

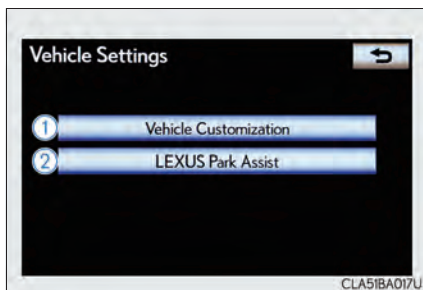

Phone settings

Select "Phone" on the "Setup" screen.

① Phone sound settings

Detailed information: →P. 629

② Phonebook settings


Detailed information: →P. 630

③ Message settings

Detailed information: →P. 646

④ Phone display settings

Detailed information: →P. 650

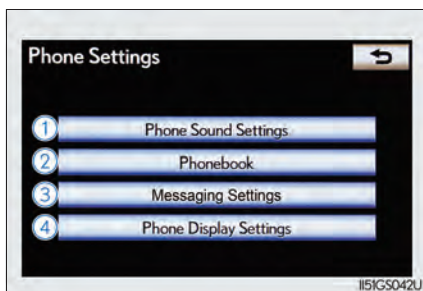

Bluetooth® Settings

Select “Bluetooth*” on the “Setup” screen.

① Registered devices

Detailed information: →P. 653

② Selecting a Bluetooth® phone

Detailed information: →P. 659


③ Selecting a portable player

Detailed information: →P. 660

④ Detailed Bluetooth® settings

Detailed information: →P. 661

*: Bluetooth is a registered trademark of
Bluetooth SIG, Inc.

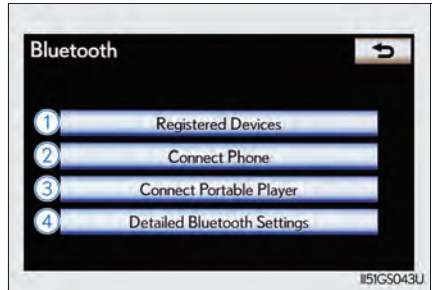

Audio settings


Select “Audio” on the “Setup” screen.

① HD Radio™ system settings

Detailed information: →P. 454

② iPod settings

Detailed information: →P. 523

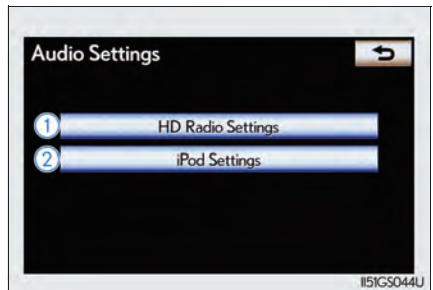

12.3-inch display operation

The 12.3-inch display has a display area which is 1.5 times wider than that of the 8-inch display.

12.3-inch display-overview

■ Full screen display

The initial screen and “Menu” screen fill the entirety of the display area.



■ Split-screen display

Different information can be displayed on the left and right of the screen. For example, air conditioning system or fuel consumption information screens can be displayed and operated while the audio screen is being displayed. The large screen on the left of the display is called the “Main Display”, and the small screen to the right is called the “Side Display”.



12.3-inch display function

This section describes only the characteristics of the 12.3-inch display, paying particular attention to the “Side Display”. For details of the functions and operation of the “Main Display”, refer to the respective section.

The following functions can be displayed and operated on the “Side Display”.

- ▶ Basic screens (→P. 386)
 - Audio
 - Air conditioning system
 - Vehicle information
- ▶ Interruption screens (→P. 390)
 - Intuitive parking assist
 - Phone
 - Driving mode
 - Lexus night view
 - Destination Assist

Using the “Side Display”

The audio control screen, air conditioning control screen or vehicle information screen can be displayed and operated on the “Side Display”.



■ Selecting the operation screen

When selecting the “Side Display”, move the Remote Touch knob to the right until  is displayed at the boundary between the “Main Display” and the “Side Display”, and then move it further to the right. When selecting the “Main Display”, move the Remote Touch knob to the left until  is displayed at the boundary between the “Main Display” and the “Side Display”, and then move it further to the left.

Selecting the “Main Display” will dim the “Side Display”.

■ Switching the basic screen

Select the desired tab.

- ① To display the audio control screen
- ② To display the air conditioning control screen
- ③ To display the vehicle information screen
- ④ Bluetooth® connection status



■ To display on the “Main Display”

Detailed information that is not shown on the “Side Display” can be set to display on the “Main Display”. For “Main Display” operation, refer to the respective section.

Select ,  or .


Basic screens

■ Audio/video system

Operations such as selecting a preset station or track are carried out on the screen.


- ① Changing the audio mode
- ② Selecting a radio station that has been registered to the preset buttons, track/file or chapter

 and  is not displayed in some audio modes.

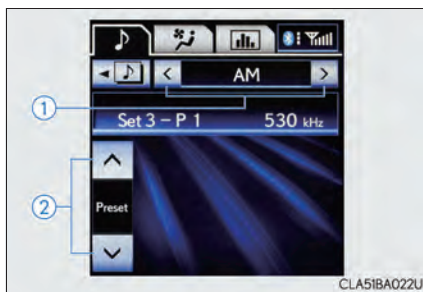

■ Air conditioning system

- ① Left-hand front seat side air outlet selector
- ② Fan speed control buttons
- ③ Fan speed display
- ④ Right-hand front seat side air outlet selector
- ⑤ Left-hand front seat side temperature control
- ⑥ Left-hand front seat side temperature display
- ⑦ Right-hand front seat side temperature display
- ⑧ Right-hand front seat side temperature control
- ⑨ Air conditioning on/off switch
- ⑩ Automatic mode
- ⑪ 4-zone operation switch

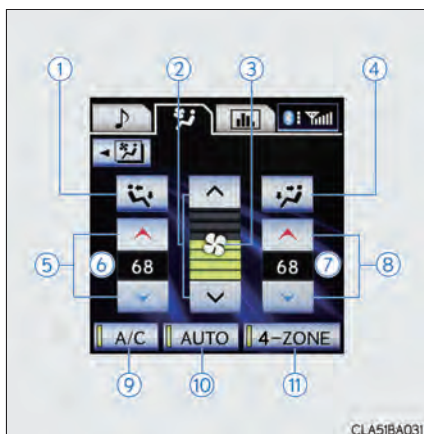

■ Vehicle information

Vehicle information (the fuel consumption, compass, etc.) can be displayed. (For details of the information: →P. 114)

Select  or  to select the desired screen.

► Fuel consumption

Displays the average fuel consumption and regenerated energy for the past 10 minutes in 1 minute intervals, as well as the cruising range.




► Past record

Displays the average fuel consumption and highest fuel consumption.



► Trip information

Displays the cruising range, average fuel consumption and the amount of time elapsed since the hybrid system was started.

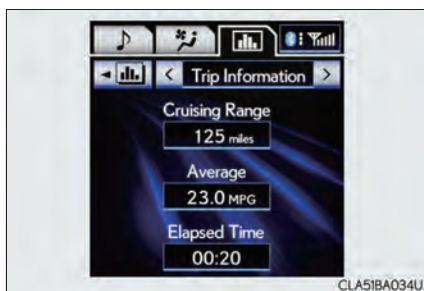

► Energy monitor

Displays the hybrid system operation and energy recovery states.



► Compass

Displays a compass and information about the current position. The orientation of the compass can be changed from north-up to heading-up by selecting the orientation symbol.



Interruption screens

Each of the following screens is displayed automatically in accordance with conditions.


- Intuitive parking assist (→P. 287)
- Phone (→P. 601)
- Destination Assist (Refer to the “Navigation System Owner’s Manual”.)
- Driving mode (→P. 309)
- Lexus night view (→P. 344)

■ Switching the interruption screen

When multiple interruption screens have been opened, the individual screens can be hidden or displayed. (The driving mode screen cannot be displayed again.)

Select the desired screen to be displayed. (For example, when the Intuitive parking assist is being displayed.)

- ① To display the Lexus night view screen
- ② To display the intuitive parking assist screen
- ③ To display the phone screen
- ④ To display the Destination Assist screen

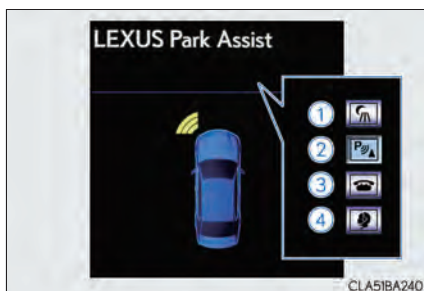

Voice command system

The voice command system enables the navigation, audio/video, hands-free and air conditioning systems to be operated using voice commands.

For details of the navigation system, refer to the “Navigation System Owner’s Manual”.

◆ Talk switch

Press .

To cancel, press and hold the talk switch.




◆ Back switch

Press .

To return to the previous screen.



◆ Microphone

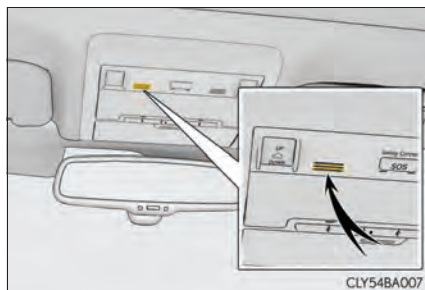

Voice command system operation

■ Voice command system operation

1 Press .

After the “Shortcut Menu” screen has been displayed, voice guidance will commence.

Voice guidance for the voice command system can be skipped by pressing



2 After a beep sounds, say the command of your choice.

Voice commands are marked with



Some commonly used commands are displayed on the screen.

If you wish to display the commands displayed on the page in the background, perform one of the following:


- Say “Next page” or “Previous page”.
- Select “Next Pg.” or “Prev. Pg.”

If you wish to display the “Main Menu” screen when the “Shortcut Menu” screen is displayed, perform one of the following:

- Say “Main menu”.
- Select “Main Menu”.

To cancel, select “Cancel”, or press and hold .

Saying “Help” prompts voice guidance to offer examples of commands and operation methods.

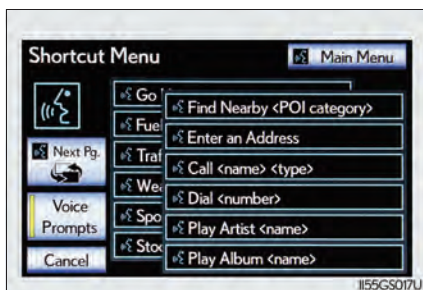


- 3 Say the command displayed on the screen.

If a desired outcome is not shown, or if no selections are available, perform one of the following to return to the previous screen:

- Say "Go back".
- Select "Go Back".
- Press .

To cancel, select "Cancel", or press and hold .

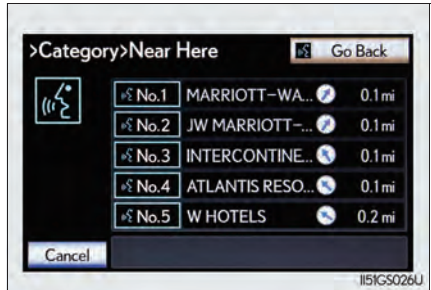

■ Voice command example (search for a track using artist name or album name)

- 1 Press .

"Play Artist <name>" and "Play Album <name>" are displayed in the "Shortcut Menu" screen.

- 2 Say "Play artist <name>" or "Play album <name>".

Say the desired artist name or album name in the place of the "<>".

A confirmation screen will be displayed showing the recognition results. If multiple matching items are found, a selection screen will be displayed.

When "Play Artist <name>" is used to play music, the first track is selected randomly.

- 3 Say "Yes" or select "Yes".



Natural speech information (English only)

Due to natural language speech recognition technology, this system enables recognition of a command when spoken naturally. However, the system cannot recognize every variation of each command. In some situations, it is possible to omit the command for the procedure and directly state the desired operation. Not all voice commands are displayed in the short cut menu.

■ Expression examples for each function

Command	Expression examples
"Call <name> <type>"	Get me <Robert Brown>. I need to call <Robert Brown> at <Work> right away.
"Dial <number>"	Please dial the number <3334445555>. Ring <3334445555>.
"Play Artist <name>"	Play the artist <XXXXX>. I'd like to hear the band <XXXXX>.*
"Play Album <name>"	Play album <XXXXX>. Music from album <XXXXX>.*

*: Say the desired artist name or album name in the place of the "<>".

Commands that are not displayed in the "Shortcut Menu" screen can be accessed from the main menu.

For example, to make an "International Call", say "Main menu" while the "Shortcut Menu" screen is being displayed. Then say "Use the phone" followed by saying the desired number, e.g. "123456789".


Expanded voice commands

Selecting “On” next to “Expanded Voice Commands” on the “Voice Settings” screen enables voice command operation of the audio/video and air conditioning system. (→P. 379)

For more information on operations that can be controlled using expanded voice commands, refer to “Command list”. (→P. 396)

■ Voice command example (turn the audio system)

- 1 Press .
- 2 Say “Audio on”.

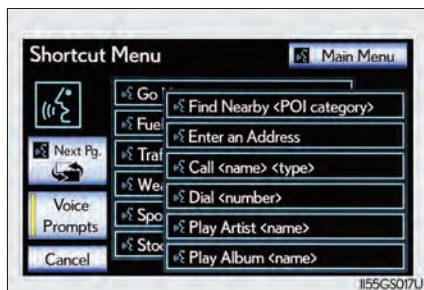

Command list

Recognizable voice commands and their actions are shown below.

- For devices that are not installed in the vehicle, the related commands will not be displayed in the “Shortcut Menu” screen. Also, according to conditions, other commands may not be displayed in the “Shortcut Menu” screen.
- Voice recognition language can be changed. (→P. 370)
- Commands that have a “O” in the “Shortcut Menu” column in the following table can be recognized from the “Shortcut Menu” screen. Commands that have a “–” in the Shortcut Menu column can only be recognized from the screen that they are displayed in.

■ Calling a phone (→P. 613)

Command	Action	Shortcut Menu
“Call <name> <type>”	Calls made by saying a name from the phonebook. For example: Say “Call John Smith”, “Call John Smith, mobile” etc.	O
“Dial <number>”	Calls made by saying the phone number. For example: Say “Dial 911”, “Dial 5556667777” etc.	O
“International Call”*	Calls international numbers by saying the phone number.	–

*: To use this function, say “Main menu” and then “Use the phone” while the “Shortcut Menu” screen is being displayed.

■ Playing a music

Command	Action	Shortcut Menu
"Play Artist <name>"	Plays tracks by the selected artist. For example: Say "Play artist <XXXXXX>"*1	○
"Play Album <name>"	Plays tracks from the selected album. For example: Say "Play album <XXXXXX>"*1	○
"Play Song <name>"*2	Plays the selected track. For example: Say "Play song Summer-time", "Play song Concerto in A Major" etc.	—
"Play Playlist <name>"*2	Plays tracks from the selected playlist. For example: Say "Play playlist My Favorite Songs", "Play Playlist Classic Hits" etc.	—

*1: Say the desired artist name or album name in the place of the "<>".

*2: To use this function, say "Main menu" and then "Play music" while the "Short-cut Menu" screen is being displayed.

■ Select audio mode

When expanded voice commands are turned “On”. (→P. 379)

Command	Action	Shortcut Menu
“Radio”	Sets the audio mode to radio.	○
“AM”	Selects the AM band.	○
“FM”	Selects the FM band.	○
“Satellite radio”	Selects the satellite radio mode.	○
“Disc”	Selects the disc audio mode.	○
“Auxiliary”	Selects the auxiliary audio mode.	○
“Bluetooth* audio”	Selects the Bluetooth® audio mode.	○
“iPod”	Selects the iPod audio mode.	○
“USB audio”	Selects the USB audio mode.	○
“Audio on”	Turns the audio system on.	○
“Audio off”	Turns the audio system off.	○

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

■ Air conditioning system command

When expanded voice commands are turned “On”. (→P. 379)

Command	Action	Shortcut Menu
“Automatic climate control”	Turns air conditioning system on and off.	○
“Warmer”	Turns temperature up.	○
“Cooler”	Turns temperature down.	○

■ Voice command system

- Commands that are not displayed in the “Shortcut Menu” screen can be operated from the “Main Menu” screen.
- If the system does not respond or the confirmation screen does not disappear, press  and try again.
- Voice guidance can be canceled by setting voice prompts to off. Use this setting when it is desirable to say a command immediately after pressing  and hearing a beep.

■ If a voice command cannot be recognized

- If a voice command cannot be recognized within 6 seconds, voice guidance will say “Pardon?” (“Command not recognized.” will be displayed on the screen) and voice command reception will restart.
- If a voice command cannot be recognized 2 consecutive times, the voice command guidance system will say “Paused. To restart voice recognition, push the talk switch. To cancel voice recognition, push and hold the talk switch.”. Voice recognition will then be suspended.

■ When selecting “Voice Prompts”

- The voice recognition prompt can be set to on or off. This setting can also be changed on the “Voice Settings” screen. (→P. 379)
- Voice recognition will be temporarily suspended. Press  again.

■ When using the microphone

- It is unnecessary to speak directly into the microphone when giving a command.
- Wait for the confirmation beep before speaking a command.
- Voice commands may not be recognized if:
 - Spoken too quickly.
 - Spoken at a low or high volume.
 - The roof or windows are open.
 - Passengers are talking while voice commands are spoken.
 - The air conditioning speed is set high.
 - The air conditioning vents are turned towards the microphone.
- In the following conditions, the system may not recognize the command properly and using voice commands may not be possible:
 - The command is incorrect or unclear. Note that certain words, accents or speech patterns may be difficult for the system to recognize.
 - There is excessive background noise, such as wind noise.

■ When searching for a track

- A USB memory or iPod must be connected to enable track searching and playback. (→P. 510, 520)
- When a USB memory or iPod is connected, recognition data is created so tracks can be searched using voice commands.
- Recognition data is updated under the following conditions:
 - When the USB memory or iPod data has changed.
 - When the voice recognition language is changed. (→P. 370)
- While the recognition data is being created or being updated, a track search cannot be performed using a voice command.
- While “Play Music” is displayed in the “Shortcut Menu” screen, say “Play Music” to display the music screen from which searching for a track using a voice command can be performed.
- When “Play Music” is dimmed in the “Shortcut Menu” screen, it is not possible to search for a track using a voice command. In this situation, reduce the amount of music data in the USB memory or iPod and update the recognition data to enable searching by voice command.

■ Natural speech information

- The “Use the Phone” and “Play Music” commands displayed on the “Shortcut Menu” screen can be operated using natural language speech recognition technology.
- If the command cannot be recognized completely, the command input screen will be displayed. (Search results will be shown based on the part of the command that was recognized.)

■ When turning the audio system or air conditioning system on

- Commands relating to operation of the audio/video and air conditioning systems can only be performed when the audio/video and air conditioning systems are turned on.
- Expanded voice commands can be recognized when the “Shortcut Menu” screen is displayed.

■ The Gracenote® media database

Music recognition technology and related data are provided by Gracenote®. Gracenote is the industry standard in music recognition technology and related content delivery. For more information visit www.gracenote.com.

Mobile Assistant

The Mobile Assistant feature on this system allows the activation of Apple's Siri® Eyes Free mode via the steering wheel switches. To operate the Mobile Assistant, a compatible cellular phone must be registered and connected to this system via Bluetooth®. (→P. 608)


- 1 Press and hold the off hook switch until you hear the beeps that indicate the system is listening.



- 2 The Mobile Assistant can be used only when the neighboring screen is displayed.

To cancel the Mobile Assistant, select "Cancel", or press and hold the off hook switch.

To restart the Mobile Assistant for additional commands, press the off hook switch. Mobile Assistant can only be restarted after the system responds to a voice command. After some phone and music commands, the Mobile Assistant feature will automatically end to complete the requested action.

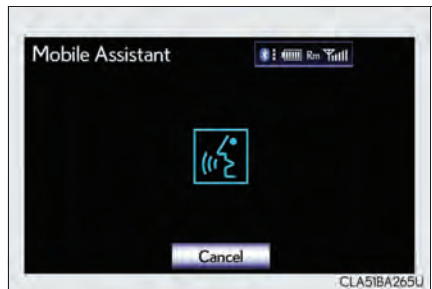


■ Adjusting the volume

The volume of the Mobile Assistant can be adjusted using the “PWR·VOL” knob or steering wheel volume switches. The Mobile Assistant and phone call volumes are synchronized.

■ Microphone

It is not necessary to speak directly into the microphone when using the Mobile Assistant.




- Wait for the listening beeps before using the Mobile Assistant.
- The Mobile Assistant may not recognize commands in the following situations:
 - When spoken too quickly.
 - When spoken at a low or high volume.
 - When the roof or windows are open.
 - When passengers are talking while the Mobile Assistant is being used.
 - When the air conditioning system's fan speed is set high.
 - When the air conditioning vents are turned toward the microphone.

■ Mobile Assistant precautions

- The available features and functions may vary based on the iOS version installed on the connected device.
- Some Siri features are limited in Eyes Free mode. If you attempt to use an unavailable function, Siri will inform you that the function is not available.
- If Siri is not enabled on the cellular phone connected via Bluetooth[®], an error message will be displayed on the screen.
- While a phone call is active, the Mobile Assistant cannot be used.
- If using the navigation feature of the cellular phone, ensure the active audio source is Bluetooth[®] audio or iPod in order to hear turn by turn direction prompts.

Lexus Climate Concierge

The climate control seats on each seat and heated steering wheel are automatically controlled according to the set temperature of the air conditioning system, outside temperature, cabin temperature, etc. Lexus Climate Concierge allows a comfortable condition to be maintained without adjusting each system.

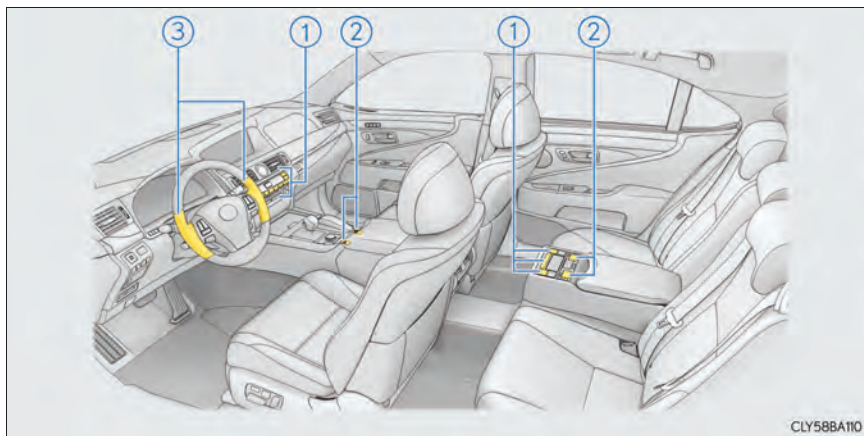

① Automatic air conditioning system (→P. 407, 419)

Set the air conditioning system to automatic mode.

The temperature for the driver's seat, front passenger's seat and both rear seats can be adjusted individually.

② Climate control seats (→P. 694, 695)

Select "AUTO" mode on each seat.

Seat heater, off, ventilation or seat cooler is automatically selected according to the set temperature of the air conditioning system, outside temperature, etc.

③ Heated steering wheel (→P. 692)

Turned on automatically according to the outside temperature and cabin temperature.

Operates for a maximum of 30 minutes.

Front automatic air conditioning system


Air outlets and fan speed are automatically adjusted according to the temperature setting.

The air conditioning system can be displayed and operated on the “Side Display”. (→P. 382)

Press the “MENU” button on the Remote Touch, and then select “Climate” to display the air conditioning operation screen.


The display and button positions will differ depending on the type of the system.

■ Control panel

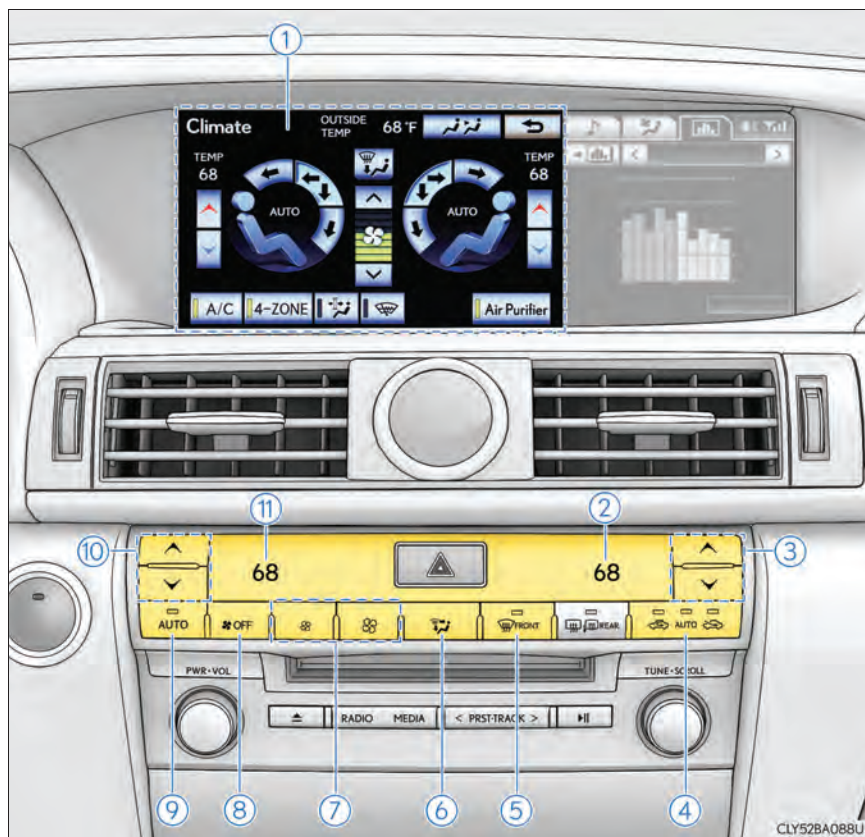

- ① Control screen
- ② Right-hand front seat side temperature display
- ③ Right-hand front seat side temperature control
- ④ Outside air or recirculated mode
- ⑤ Windshield defogger
- ⑥ Air outlet selector
- ⑦ Fan speed control
- ⑧ Off
- ⑨ Automatic mode
- ⑩ Left-hand front seat side temperature control
- ⑪ Left-hand front seat side temperature display

■ Control screen

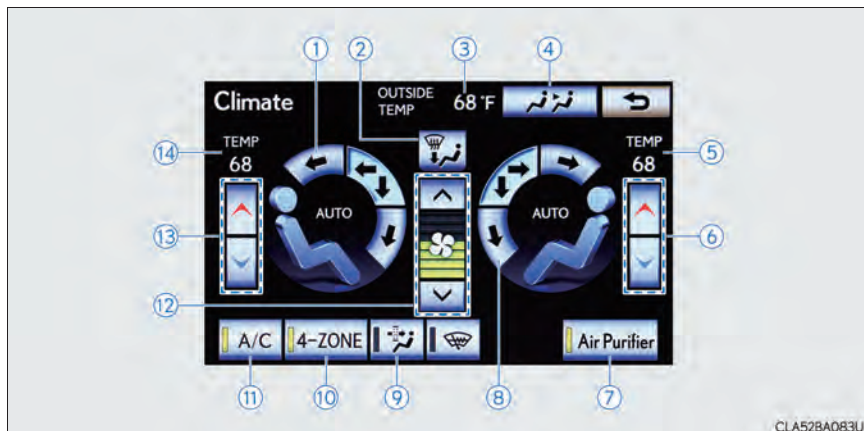

- | | |
|--|--|
| ① Left-hand front seat side air outlet selector | ⑧ Right-hand front seat side air outlet selector |
| ② Air flows to the feet and the windshield defogger operates | ⑨ Micro dust and pollen filter |
| ③ Outside temperature | ⑩ 4-ZONE mode |
| ④ Rear air conditioning operation screen | ⑪ Cooling and dehumidification function on/off |
| ⑤ Right-hand front seat side temperature display | ⑫ Fan speed control |
| ⑥ Right-hand front seat side temperature control | ⑬ Left-hand front seat side temperature control |
| ⑦ Air purifier and rear air conditioning function on/off | ⑭ Left-hand front seat side temperature display |

Using the voice command system

Press  to operate the voice command system. (→P. 391)



Using the automatic air conditioning system

- 1 Press the “AUTO” button.

The dehumidification function begins to operate. Air outlets and fan speed are automatically adjusted according to the temperature setting and humidity.

- 2 Press  to switch to automatic air intake mode.

The air conditioning system automatically switches between outside air and recirculated air modes.

- 3 Press  or select  on the operation screen to increase the temperature and  or  to decrease the temperature.

When “4-ZONE” is selected (the indicator on “4-ZONE” is on) or the passenger’s side temperature control button is pressed, the temperature for the driver’s, front passenger’s and rear seats (→P. 418) can be adjusted separately.

Air outlets for the driver and passenger seats may be adjusted separately depending on the temperature setting.

When the climate control seats are set to “AUTO” mode, the system is operated automatically according to the set temperature, outside temperature, etc.

Adjusting the settings manually

- 1** To adjust the fan speed, press  to increase the fan speed and  to decrease the fan speed or select “^” on  on the operation screen to increase the fan speed and “v” to decrease the fan speed. Press  to turn the fan off.

- 2** To adjust the temperature setting, press  or select  on the operation screen to increase the temperature and  or  to decrease the temperature.

The air conditioning system switches between individual and simultaneous modes each time “4-ZONE” is selected.

When “4-ZONE” is selected (the indicator on “4-ZONE” is on) or the passenger’s side temperature control button is pressed, the temperature for the driver’s, front passenger’s and rear seats (→P. 418) can be adjusted separately.

When the climate control seats are set to “AUTO” mode, the system is operated automatically according to the set temperature, outside temperature, etc.

- 3** To change the air outlets, press  or select an air outlet switch.

- ① Left-hand front seat
- ② Right-hand front seat

Different air outlets for the driver and front passenger seats can be chosen.



Defogging the windshield


Press  .

The dehumidification function operates and fan speed increases.

Set the outside/recirculated air mode button to outside air mode if the recirculated air mode is used. (It may switch automatically.)


To defog the windshield and the side windows early, turn the air flow and temperature up.

To return to the previous mode, press  again when the windshield is defogged.

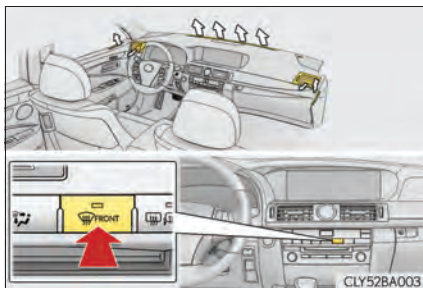


Air outlets and air flow


Upper body

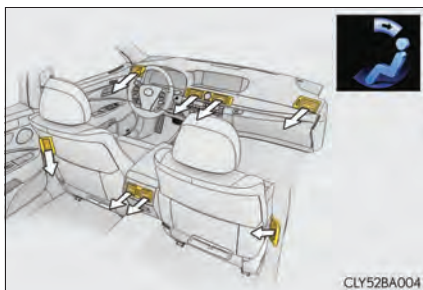


Upper body and feet

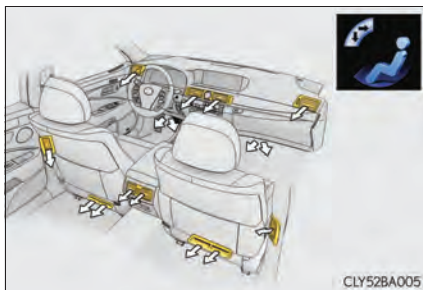


Feet

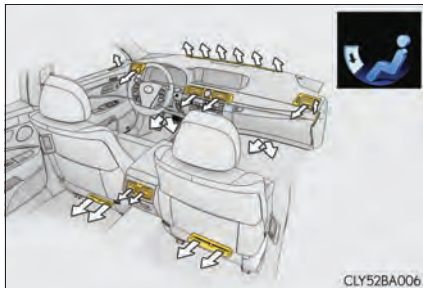

Feet and windshield

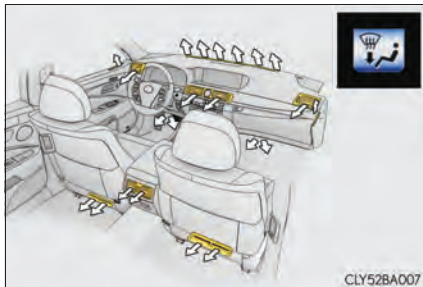

Switching between outside air and recirculated air modes

Press .

The mode switches among  (recirculated air mode), automatic and  (outside air mode) modes each time the button is pressed.

When the system is switched to automatic mode, the air conditioning system operates automatically.

Turning the air purifier off

Select "Air Purifier" on the operation screen.

The air purifier will turn off when the indicator on the switch goes off. Air will not flow from the roof vents.

To turn the air purifier on, select "Air Purifier" again.

Changing the rear seat settings


■ Using the automatic mode

1 Select  on the operation screen.

2 Select "REAR AUTO".

The air conditioning system and air purifier will operate, and air outlets and speed will be set automatically.

The rear climate control seats are operated automatically according to the set temperature and the outside temperature. (→P. 694)

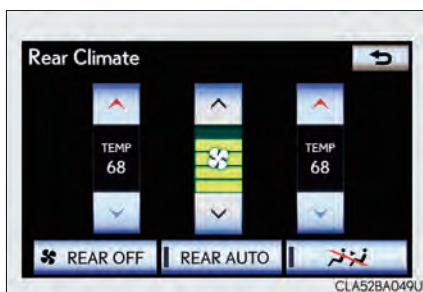

3 Select  to increase the temperature and  to decrease the temperature on the operation screen.

Air outlets for the right-hand and left-hand seats may be set separately depending on the temperature setting.

When the rear climate control seats are set to "AUTO" mode, the system is operated automatically according to the set temperature, outside temperature, etc.


■ Adjusting the temperature setting

1 Select  on the operation screen.

2 Select  (increase) or  (decrease). Operating the switch will enter individual mode.

① L: Left-hand rear seat

② R: Right-hand rear seat

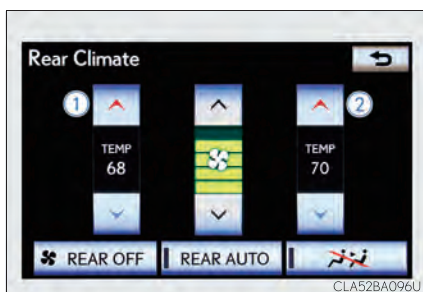

The air conditioning system switches between individual and simultaneous modes each time "4-ZONE" is selected.

When the rear climate control seats are set to "AUTO" mode, the system is operated automatically according to the set temperature, outside temperature, etc.

■ Adjusting the fan speed (air purifier and cooler from the roof vents)

- 1 Select  on the operation screen.
- 2 To adjust the fan speed, select “^” on  on the operation screen to increase the fan speed and “v” to decrease the fan speed.

According to the air outlets currently selected, the fan speed of either the cool air from the roof vents or air purifier will be adjusted.

(→P. 422)

■ Turning the rear air conditioning system off


Select  REAR OFF on the operation screen.

The air purifier and the rear climate control seats also turn off.

■ Disabling the switches on the rear controller

Select .

Rear climate control seats buttons are also locked.

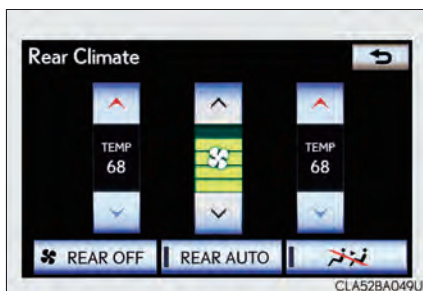

Micro dust and pollen filter button

Operates micro dust and pollen filter on/off.

Outside air mode switches to  (recirculated air) mode. Pollen is removed from the air and the air flows to the upper part of the body.


Usually the system will turn off automatically after approximately 1 to 3 minutes.



Adjusting the position of and opening and closing the air outlets

■ Front center outlets and front side outlets



- ① Direct air flow to the left or right, up or down.
- ② Turn the knob to open or close the vent.

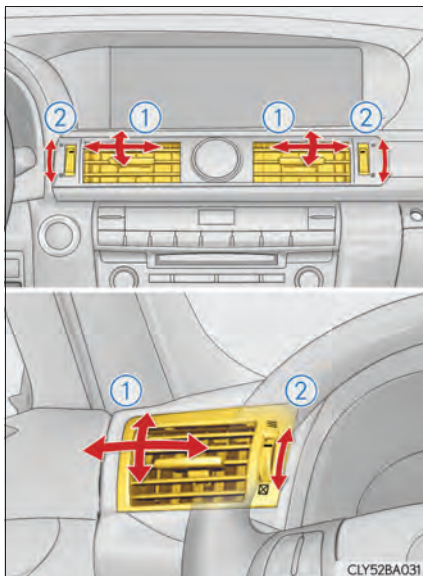

■ Rear center outlets

► Without rear console display

► With rear console display

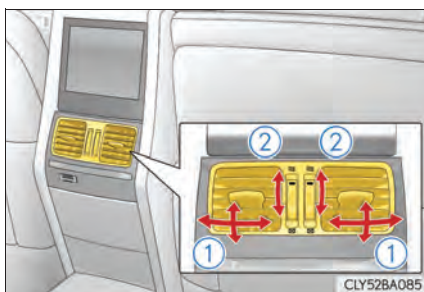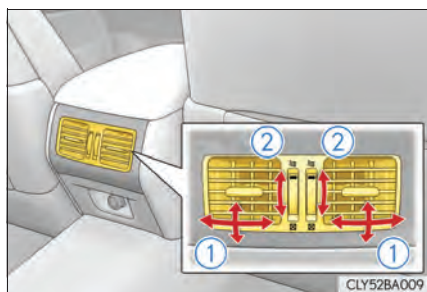

- ① Direct air flow to the left or right, up or down.
- ② Turn the knob to open or close the vent.


■ Rear side outlets

- ① Direct air flow to the left or right, up or down.
- ② Turn the knob to open or close the vent.



■ Roof side outlets

Direct air flow to the left or right, up or down.

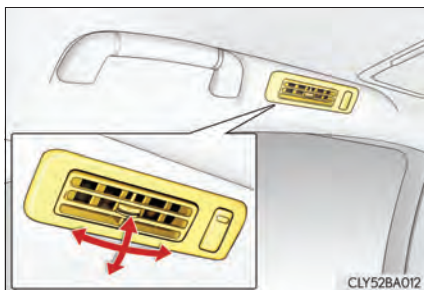

■ Operation of the air conditioning system in Eco drive mode

In Eco drive mode, the air conditioning system is controlled as follows to prioritize fuel efficiency:

- Engine speed and compressor operation controlled to restrict heating/cooling capacity
- Fan speed restricted when automatic mode is selected

To improve air conditioning performance, perform the following operations:

- Adjust the fan speed
- Turn off Eco drive mode

The air conditioning control of Eco drive mode can be changed to the same setting as that used in normal drive mode. (Customizable features→P. 865)

■ Using the automatic mode

Fan speed is adjusted automatically in accordance with the temperature setting and ambient conditions. As a result, the following may occur:

- Immediately after the "AUTO" button is pressed, the fan may stop for a while until warm or cool air is ready to flow.
- Cool air may flow to the area around the upper body when the heater is on.

■ Fogging up of the windows

- The windows will easily fog up when the humidity in the vehicle is high. Selecting "A/C" on the operation screen on will dehumidify the air from the outlets and defog the windshield effectively.
- If you turn "A/C" off, the windows may fog up more easily.
- The windows may fog up if the recirculated air mode is used.

■ Outside/recirculated air mode

- When driving on dusty roads such as tunnels or in heavy traffic, set the outside/recirculated air mode button to the recirculated air mode. This is effective in preventing outside air from entering the vehicle interior. During cooling operation, setting the recirculated air mode will also cool the vehicle interior effectively.
- Outside/recirculated air mode may automatically switch depending on the temperature setting or the inside temperature.

■ When the outside temperature exceeds 75°F (24°C) and the air conditioning system is on

- In order to reduce the air conditioning power consumption, the air conditioning system may switch to recirculated air mode automatically. This may also reduce fuel consumption.
- Recirculated air mode is selected as a default mode when the power switch is turned on.
- It is possible to switch to outside air mode at any time by pressing .

■ When the hybrid battery cooling system operates

- If the hybrid battery cooling system operates when the air conditioning is off, a message will be shown on the multi-information display and the air conditioning will automatically turn on. (→P. 107)
- The sound of the air flow may change when cool air flows from the rear roof vents or the air purifier is in operation. This occurs when the hybrid battery is being cooled and does not indicate a malfunction.

■ Automatic mode for air intake control

In automatic mode, the system detects exhaust gas and other pollutants and automatically switches between outside air and recirculated air modes.

When the dehumidification function is off, and the fan is operating, turning automatic mode on will activate the dehumidification function.

■ Micro dust and pollen filter

- In order to prevent the windshield from fogging up when the outside air is cold, the following may occur:
 - Outside air mode does not switch to  (recirculated air) mode.
 - The dehumidification function operates.
 - The operation cancels after approximately 1 minute.
- In rainy weather, the windows may fog up. Press .
- In extremely humid weather, the windows may fog up.
- The pollens are filtered out even if the micro dust and pollen filter is turned off.

■ Air purifier

The air purifier will turn on when turning the rear air conditioning system on.

■ When the outside temperature falls to nearly 32°F (0°C)

The dehumidification function may not operate even when “A/C” on the operation screen is selected.

■ Air conditioning odors

- During use, various odors from inside and outside the vehicle may enter into and accumulate in the air conditioning system. This may then cause odor to be emitted from the vents.
- To reduce potential odors from occurring:
 - It is recommended that the air conditioning system be set to outside air mode prior to turning the vehicle off.
 - The start timing of the blower may be delayed for a short period of time immediately after the air conditioning system is started in automatic mode.

■ Air conditioning filter

→P. 775

■ Customization

Settings (e.g. the climate control seats coordinated control, exhaust gas sensor sensitivity, etc.) can be changed. (Customizable features →P. 865)

 CAUTION **To prevent the windshield from fogging up**


Do not use  during cool air operation in extremely humid weather. The difference between the temperature of the outside air and that of the windshield can cause the outer surface of the windshield to fog up, blocking your vision.

 NOTICE **To prevent 12-volt battery discharge**

Do not leave the air conditioning system on longer than necessary when the hybrid system is off.

Rear air conditioning system

Air outlets and fan speed are automatically adjusted according to the temperature setting.

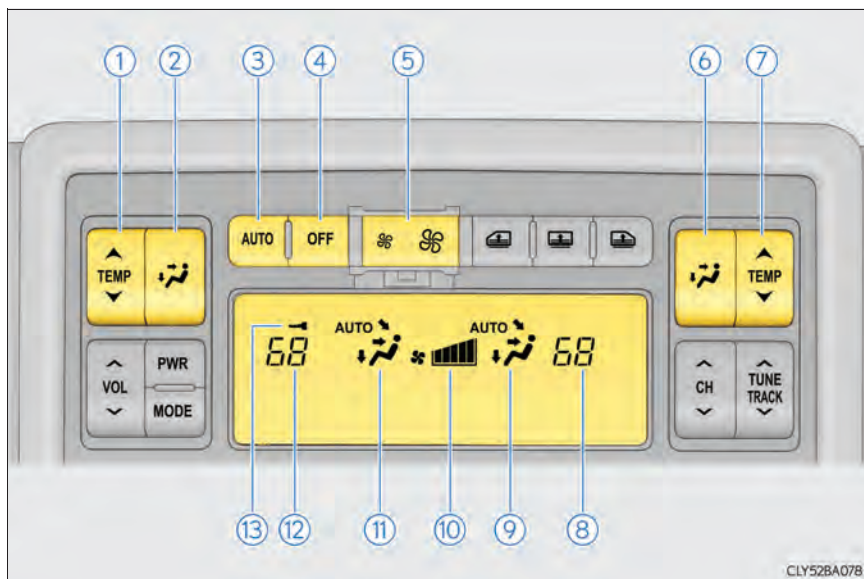

- ① Left-hand rear seat side temperature control
- ② Left-hand rear seat side air outlet selector
- ③ Automatic mode
- ④ Off
- ⑤ Fan speed control
- ⑥ Right-hand rear seat side air outlet selector
- ⑦ Right-hand rear seat side temperature control
- ⑧ Right-hand rear seat side temperature display
- ⑨ Right-hand rear seat side air flow display
- ⑩ Fan speed display
- ⑪ Left-hand rear seat side air flow display
- ⑫ Left-hand rear seat side temperature display
- ⑬ Button lock display

Using automatic air conditioning system

1 Press the "AUTO" button.

The air conditioning system will operate, and air outlets and fan speed will be adjusted automatically.

"AUTO" will be displayed on the control panel.

2 Press "^" on "TEMP" to increase the temperature and "v" to decrease the temperature.

Air outlets for the right-hand and left-hand seats may be set separately depending on the temperature setting.

When the rear climate control seats are set to "AUTO" mode, the system is operated automatically according to the set temperature, outside temperature, etc.

Adjusting the settings manually

■ Adjusting the temperature setting

Press “^” on “TEMP” to increase the temperature and “v” to decrease the temperature.

When the rear climate control seats are set to “AUTO” mode, the system is operated automatically according to the set temperature, outside temperature, etc.

■ Changing the air outlets

Press .


The air outlets change as follows each time  is pressed.

Different air outlets for the right-hand and left-hand rear seats can be chosen.

Air flows as shown below according to the mode selected.


Upper body

When the indicator on “A/C” (on the front operation screen) is on

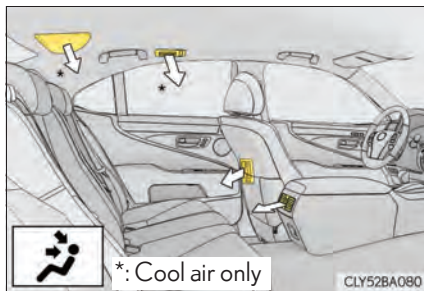


Upper body


When the indicator on “A/C” (on the front operation screen) is off

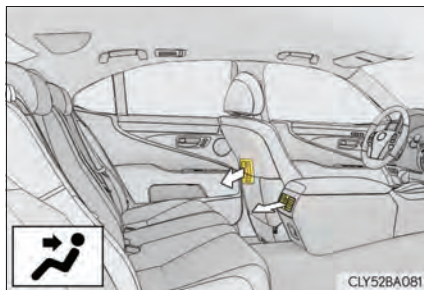

Upper body and feet

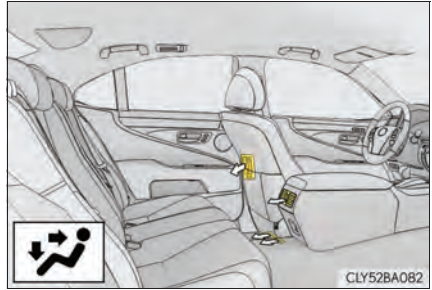

Feet

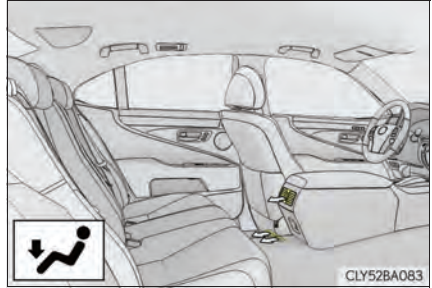


■ Adjusting the air volume


The volume of cool air or air from the air purifier can be adjusted according to the mode selected.

Press  (increase) or  (decrease) on .

Cool air flows from roof vents.

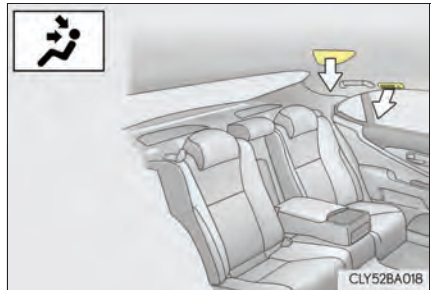

Air purifier operation (air flows from the rear package tray.)

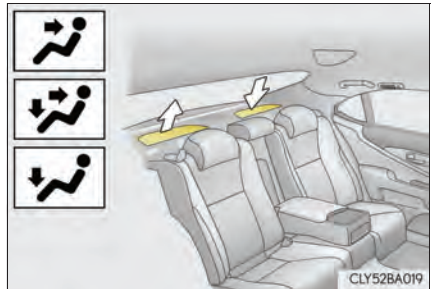

Press the "OFF" button to turn the fan off.



The air purifier also turn off.

Adjusting the position of and opening and closing the air outlets

■ Rear center outlets

► Without rear console display

► With rear console display

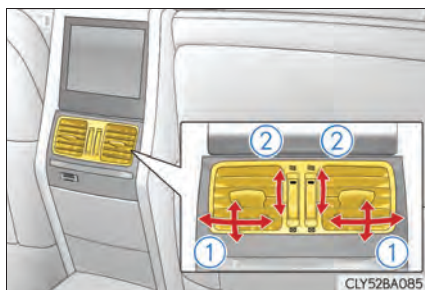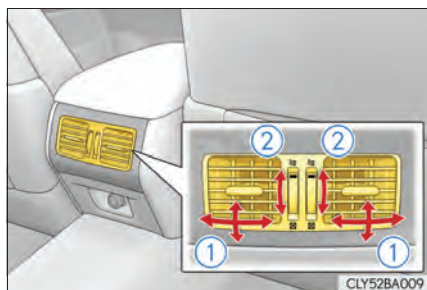

- ① Direct air flow to the left or right, up or down.
- ② Turn the knob to open or close the vent.


■ Rear side outlets

- ① Direct air flow to the left or right, up or down.
- ② Turn the knob to open or close the vent.



■ Roof side outlets

Direct air flow to the left or right, up or down.

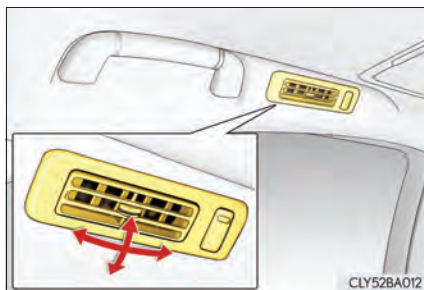


■ Button lock function

To prevent inadvertent operation, the buttons on the rear controller can be locked. Press and hold the “MODE” button until you hear a beep to lock the buttons. Pressing the “MODE” button again until you hear a beep will release the lock.


The indicator appears on the display when the buttons are locked.

The rear controller can be locked from the air conditioning operation screen.
(→P. 412)



■ Rear control panel illumination off function

Control panel illumination on the rear controller can be turned off. Press and hold the “PWR” button until you hear a beep to turn the illumination off. Pressing the “PWR” button again until you hear a beep will turn the illumination on.



■ Replacing the rear air conditioning filter

Replacing the air conditioning filter when using rear air conditioning or air purifier reduces air flow or deodorizing performance. (→P. 775).

NOTICE

■ To prevent 12-volt battery discharge


Do not leave the air conditioning system on longer than necessary when the hybrid system is off.

Rear window and outside rear view mirror defoggers

These features are used to defog the rear window, and to remove rain-drops, dew and frost from the outside rear view mirrors.

On/off

The defoggers will automatically turn off after approximately 15 minutes.

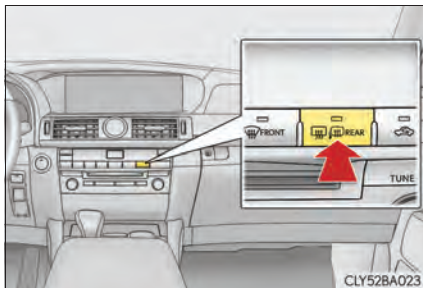

■ Operating conditions

The power switch must be in the ON mode.

⚠ CAUTION

■ When the outside rear view mirror defoggers are on

Do not touch the rear view mirror surfaces, as they can become very hot and burn you.

⚠ NOTICE

■ To prevent 12-volt battery discharge

Turn the defoggers off when the hybrid system is off.

Windshield wiper de-icer*

This feature is used to prevent ice from building up on the windshield and wiper blades.

- 1 Press the “MENU” button on the Remote Touch. (→P. 358)
- 2 Select “Climate” on the “Menu” screen.



- 3 On/off

Select  to turn on the windshield wiper de-icer. The windshield wiper de-icer will automatically turn off after approximately 15 minutes. Selecting  again also turns the de-icer off.



Operating conditions

The power switch must be in the ON mode.

CAUTION

When the windshield wiper de-icer is on

Do not touch the glass at the lower part of the windshield or to the side of the front pillars as the surfaces can become very hot and burn you.

Audio system type

CD and DVD player with AM/FM/SAT radio

The audio functions can be displayed and operated on the “Side Display”. (→P.382)

- ▶ Using the instrument panel

Press the “RADIO” or “MEDIA” button to display the audio control screen.

- ▶ Using the Remote Touch


Press the “MENU” button on the Remote Touch, select “Radio” or “Media” and select each tab to display the audio control screen.



Title	Page
Using the radio	P. 449
Using the CD/DVD player	P. 467
Playing an audio CD and MP3/WMA discs	P. 469
Playing DVD video	P. 475
CD/DVD player and DVD video disc information	P. 486
Listening to Bluetooth® audio	P. 498
Listening to a USB memory	P. 508
Listening to an iPod	P. 518
Using the AUX port	P. 528
Optimal use of the audio/video system	P. 530
Using the rear seat audio controls	P. 531
Using the steering wheel audio switches	P. 534

Using the voice command system

Press  to operate the voice command system. (→P. 391)

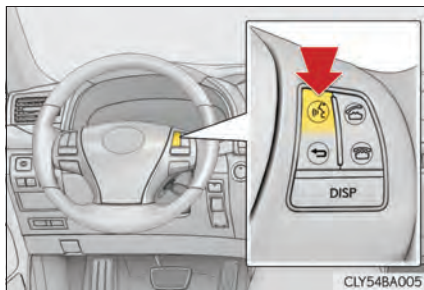

■ Using cellular phones

Interference may be heard through the audio system's speakers if a cellular phone is being used inside or close to the vehicle while the audio system is operating.

■ When using the Remote Touch screen

Dimmed screen buttons cannot be operated.

■ Tab

Select  or , located either side of the screen tabs, to display tabs from the previous or next page.

■ About Dolby

Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.

CAUTION

■ For vehicles sold in the U.S.A. and Canada

● Part 15 of the FCC Rules

FCC Warning:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

● Laser products

- USE OF CONTROL OR ADJUSTMENT OR PERFORMANCE OF PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.
- THE USE OF OPTICAL INSTRUMENTS WITH THIS PRODUCT WILL INCREASE EYE HAZARD.

NOTICE

■ To prevent 12-volt battery discharge

Do not leave the audio system on longer than necessary when the hybrid system is off.

■ To avoid damaging the audio system

Take care not to spill drinks or other fluids on the audio system.

■ Open source license

This product uses the following open source software.

● T-Kernel

This Product uses the Source Code of T-Kernel under T-License granted by the T-Engine Forum (www.t-engine.org).

● C Library

This product includes software developed by the University of California, Berkeley and its contributors. This product includes software developed by the University of California, Lawrence Berkeley Laboratory.

Copyright © 1982, 1985, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1982, 1986, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1982, 1986, 1989, 1993 The Regents of the University of California. All rights reserved.

© UNIX System Laboratories, Inc. All or some portions of this file are derived from material licensed to the University of California by American Telephone and Telegraph Co. or Unix System Laboratories, Inc. and are reproduced herein with the permission of UNIX System Laboratories, Inc.

Copyright © 1982, 1986, 1991, 1993, 1994 The Regents of the University of California. All rights reserved.

© UNIX System Laboratories, Inc. All or some portions of this file are derived from material licensed to the University of California by American Telephone and Telegraph Co. or Unix System Laboratories, Inc. and are reproduced herein with the permission of UNIX System Laboratories, Inc.

Copyright © 1983, 1990, 1993 The Regents of the University of California. All rights reserved.

© UNIX System Laboratories, Inc. All or some portions of this file are derived from material licensed to the University of California by American Telephone and Telegraph Co. or Unix System Laboratories, Inc. and are reproduced herein with the permission of UNIX System Laboratories, Inc.

Copyright © 1983, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1987, 1991, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1987, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1988 Regents of the University of California. All rights reserved.

Copyright © 1988 University of Utah.

Copyright © 1992, 1993 The Regents of the University of California. All rights reserved. This code is derived from software contributed to Berkeley by the Systems Programming Group of the University of Utah Computer Science Department and Ralph Campbell.

Copyright © 1988, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1988, 1993 The Regents of the University of California. All rights reserved. This code is derived from software contributed to Berkeley by Arthur David Olson of the National Cancer Institute.

Copyright © 1989 The Regents of the University of California. All rights reserved.

Copyright © 1989 The Regents of the University of California. All rights reserved.

© UNIX System Laboratories, Inc. All or some portions of this file are derived from material licensed to the University of California by American Telephone and Telegraph Co. or Unix System Laboratories, Inc. and are reproduced herein with the permission of UNIX System Laboratories, Inc.

Copyright © 1989, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1989, 1993 The Regents of the University of California. All rights reserved.

© UNIX System Laboratories, Inc. All or some portions of this file are derived from material licensed to the University of California by American Telephone and Telegraph Co. or Unix System Laboratories, Inc. and are reproduced herein with the permission of UNIX System Laboratories, Inc.

Copyright © 1990, 1993 The Regents of the University of California. All rights reserved.

This code is derived from software contributed to Berkeley by Chris Torek.

Copyright © 1991, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1991, 1993 The Regents of the University of California. All rights reserved.

This code is derived from software contributed to Berkeley by Berkeley Software Design, Inc.

Copyright © 1992, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1992, 1993 The Regents of the University of California. All rights reserved.

This code is derived from software contributed to Berkeley by Ralph Campbell.

Copyright © 1992, 1993 The Regents of the University of California. All rights reserved.

© UNIX System Laboratories, Inc. All or some portions of this file are derived from material licensed to the University of California by American Telephone and Telegraph Co. or Unix System Laboratories, Inc. and are reproduced herein with the permission of UNIX System Laboratories, Inc.

Copyright © 1992, 1993 The Regents of the University of California. All rights reserved.

This software was developed by the Computer Systems Engineering group at Lawrence Berkeley Laboratory under DARPA contract BG 91-66 and contributed to Berkeley. All advertising materials mentioning features or use of this software must display the following acknowledgement: This product includes software developed by the University of California, Lawrence Berkeley Laboratory.

Copyright © 1992, 1993 The Regents of the University of California. All rights reserved.

This code is derived from software contributed to Berkeley by Ralph Campbell. This file is derived from the MIPS RISC Architecture book by Gerry Kane.

Copyright © 1993 The Regents of the University of California. All rights reserved.

Copyright © 1994 The Regents of the University of California. All rights reserved.

This code is derived from software contributed to Berkeley by Andrew Hume of AT&T Bell Laboratories.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement: This product includes software developed by the University of California, Berkeley and its contributors.
4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright © 1982, 1986 Regents of the University of California. All rights reserved.

Copyright © 1983, 1990, 1993 The Regents of the University of California. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement: This product includes software developed by the University of California, Berkeley and its contributors.
4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Portions Copyright © 1993 by Digital Equipment Corporation.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies, and that the name of Digital Equipment Corporation not be used in advertising or publicity pertaining to distribution of the document or software without specific, written prior permission.

THE SOFTWARE IS PROVIDED "AS IS" AND DIGITAL EQUIPMENT CORP. DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL DIGITAL EQUIPMENT CORPORATION BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Copyright © 1982, 1986, 1990, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1983, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1990, 1993 The Regents of the University of California. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This product includes software developed by the NetBSD Foundation, Inc. and its contributors.

Copyright © 1996 The NetBSD Foundation, Inc. All rights reserved.

This code is derived from software contributed to The NetBSD Foundation by J.T. Conklin.

Copyright © 1997 The NetBSD Foundation, Inc. All rights reserved.

This code is derived from software contributed to The NetBSD Foundation by Klaus Klein.

Copyright © 1997, 1998 The NetBSD Foundation, Inc. All rights reserved.

Copyright © 1997, 98 The NetBSD Foundation, Inc. All rights reserved.

This code is derived from software contributed to The NetBSD Foundation by J.T. Conklin.

Copyright © 1997, 1998 The NetBSD Foundation, Inc. All rights reserved.

This code was contributed to The NetBSD Foundation by Klaus Klein.

Copyright © 1998 The NetBSD Foundation, Inc. All rights reserved.

This code is derived from software contributed to The NetBSD Foundation by Klaus Klein.

Copyright © 1998, 2000 The NetBSD Foundation, Inc. All rights reserved.

This code is derived from software contributed to The NetBSD Foundation by Klaus J. Klein.

Copyright © 1999, 2000 The NetBSD Foundation, Inc. All rights reserved.

This code is derived from software contributed to The NetBSD Foundation by Julian Coleman.

Copyright © 2000 The NetBSD Foundation, Inc. All rights reserved.

This code is derived from software contributed to The NetBSD Foundation by Dieter Baron and Thomas Klausner.

Copyright © 2000, 2001 The NetBSD Foundation, Inc. All rights reserved.

This code is derived from software contributed to The NetBSD Foundation by Jun-ichiro itojun Hagino and by Klaus Klein.

Copyright © 2001 The NetBSD Foundation, Inc. All rights reserved.

This code is derived from software contributed to The NetBSD Foundation by Klaus Klein.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement: This product includes software developed by the NetBSD Foundation, Inc. and its contributors.
4. Neither the name of The NetBSD Foundation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE NETBSD FOUNDATION, INC. AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This product includes software developed by Christos Zoulas.

Copyright © 1997 Christos Zoulas. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement: This product includes software developed by Christos Zoulas.
4. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This product includes software developed by Winning Strategies, Inc.

Copyright © 1994 Winning Strategies, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement: This product includes software developed by Winning Strategies, Inc.
4. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright © 1995, 1996, 1997, and 1998 WIDE Project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the project nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE PROJECT AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE PROJECT OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright ©1999 Citrus Project, All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright © 1995 Carnegie-Mellon University. All rights reserved. Author: Chris G. Demetriou

Copyright © 1995, 1996 Carnegie-Mellon University. All rights reserved. Author: Chris G. Demetriou

Permission to use, copy, modify and distribute this software and its documentation is hereby granted, provided that both the copyright notice and this permission notice appear in all copies of the software, derivative works or modified versions, and any portions thereof, and that both notices appear in supporting documentation.

CARNEGIE MELLON ALLOWS FREE USE OF THIS SOFTWARE IN ITS “AS IS” CONDITION. CARNEGIE MELLON DISCLAIMS ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

Carnegie Mellon requests users of this software to return to Software Distribution Coordinator or Software.Distribution@CS.CMU.EDU School of Computer Science Carnegie Mellon University Pittsburgh PA 15213-3890 any improvements or extensions that they make and grant Carnegie the rights to redistribute these changes.

● TCP/IP, Socket Library

This product includes software developed by the University of California, Berkeley and its contributors.

Copyright © 1980, 1983, 1988, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1983, 1987, 1989 The Regents of the University of California. All rights reserved.

Copyright © 1983, 1989, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1985, 1988, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1985, 1993 The Regents of the University of California. All rights reserved.

Copyright © 1989, 1993, 1995 The Regents of the University of California. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement: This product includes software developed by the University of California, Berkeley and its contributors.
4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright © 2004 by Internet Systems Consortium, Inc. ("ISC") Portions Copyright © 1996-1999 by Internet Software Consortium. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND ISC DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL ISC BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Portions Copyright © 1993 by Digital Equipment Corporation.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies, and that the name of Digital Equipment Corporation not be used in advertising or publicity pertaining to distribution of the document or software without specific, written prior permission.

THE SOFTWARE IS PROVIDED “AS IS” AND DIGITAL EQUIPMENT CORP. DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL DIGITAL EQUIPMENT CORPORATION BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

This product includes software developed by WIDE Project and its contributors.

Portions Copyright © 1995, 1996, 1997, and 1998 WIDE Project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement: This product includes software developed by WIDE Project and its contributors.
4. Neither the name of the project nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE PROJECT AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE PROJECT OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright © 1988 Stephen Deering.

Copyright © 1982, 1986 Regents of the University of California. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. [rescinded 22 July 1999]
4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright © 1982, 1986, 1988 Regents of the University of California. All rights reserved.

Redistribution and use in source and binary forms are permitted provided that the above copyright notice and this paragraph are duplicated in all such forms and that any documentation and other materials related to such distribution and use acknowledge that the software was developed by the University of California, Berkeley. The name of the University may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Rights, responsibilities and use of this software are controlled by the agreement found in the “LICENSE.H” file distributed with this source code. “LICENSE.H” may not be removed from this distribution, modified, enhanced nor references to it omitted.

Copyright 1983 by the Massachusetts Institute of Technology

Copyright 1984 by the Massachusetts Institute of Technology

Copyright 1984, 1985 by the Massachusetts Institute of Technology

Copyright 1990 by NetPort Software

Copyright 1990-1993 by NetPort Software.

Copyright 1990-1994 by NetPort Software.

Copyright 1990-1996 by NetPort Software.

Copyright 1990-1997 by NetPort Software.

Copyright 1993 by NetPort Software

Copyright 1986 by Carnegie Mellon

All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of CMU not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

● OpenSSL

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>) This product includes cryptographic software written by Eric Young (eyay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).

OpenSSL License

Copyright © 1998-2008 The OpenSSL Project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgment: "This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)"
4. The names "OpenSSL Toolkit" and "OpenSSL Project" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact openssl-core@openssl.org.
5. Products derived from this software may not be called "OpenSSL" nor may "OpenSSL" appear in their names without prior written permission of the OpenSSL Project.
6. Redistributions of any form whatsoever must retain the following acknowledgment: "This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>)"

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This product includes cryptographic software written by Eric Young (eay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).

Original SSLeay License

Copyright © 1995-1998 Eric Young (eay@cryptsoft.com) All rights reserved.

This package is an SSL implementation written by Eric Young (eay@cryptsoft.com). The implementation was written so as to conform with Netscape's SSL. This library is free for commercial and non-commercial use as long as the following conditions are aheared to. The following conditions apply to all code found in this distribution, be it the RC4, RSA, lhash, DES, etc., code; not just the SSL code. The SSL documentation included with this distribution is covered by the same copyright terms except that the holder is Tim Hudson (tjh@cryptsoft.com). Copyright remains Eric Young's, and as such any Copyright notices in the code are not to be removed. If this package is used in a product, Eric Young should be given attribution as the author of the parts of the library used. This can be in the form of a textual message at program startup or in documentation (online or textual) provided with the package.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement: "This product includes cryptographic software written by Eric Young (eyay@cryptsoft.com)" The word 'cryptographic' can be left out if the routines from the library being used are not cryptographic related :-).
4. If you include any Windows specific code (or a derivative thereof) from the apps directory (application code) you must include an acknowledgement: "This product includes software written by Tim Hudson (tjh@cryptsoft.com)"

THIS SOFTWARE IS PROVIDED BY ERIC YOUNG "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.


The licence and distribution terms for any publically available version or derivative of this code cannot be changed. i.e. this code cannot simply be copied and put under another distribution licence [including the GNU Public Licence.

Using the radio

Press the “RADIO” button to display the radio control screen.

Select the “AM”, “FM”, “SAT” or “Apps”^{*} tab or press the “RADIO” button repeatedly to select the desired tab.

^{*}: Vehicles with the navigation system

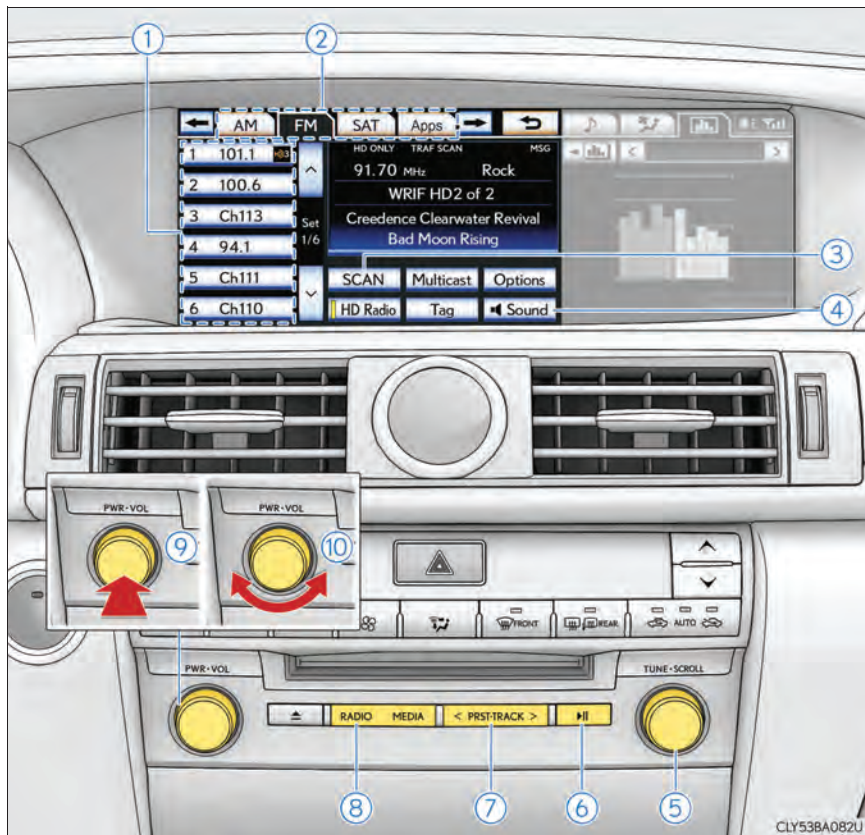

CLY53BA082U

- | | |
|---|--|
| ① Preset stations/channels | ⑥ Mute/unmute |
| ② AM/FM/SAT/Apps* mode tabs | ⑦ Preset turning/seeking the frequency |
| ③ Scanning for receivable stations/channels | ⑧ Radio selection |
| ④ Setting the sound (→P. 530) | ⑨ Power |
| ⑤ Adjusting the frequency | ⑩ Volume |

*: Vehicles with the navigation system

Selecting a station (excluding XM Satellite Radio)

■ Seek tuning

Press and hold “<” or “>” on the “PRST•TRACK” button.

■ Manual tuning

Turn the “TUNE•SCROLL” knob.

■ Preset stations

Select the desired preset stations.

Change the page by using “^” or “v” on the screen or on the Remote Touch.

Press “<” or “>” on the “PRST•TRACK” button.

Setting station presets (excluding XM Satellite Radio)

- 1 Search for desired stations.
- 2 Select one of the left side screen buttons and hold it until a beep is heard. There are 6 sets of 6 presets. There is a total of 36 presets.



Scanning radio stations (excluding XM Satellite Radio)

Scanning all radio stations within range

- 1 Select “SCAN” on the screen.

“SCAN” appears on the screen.

The radio will find the next station and stay there for 10 seconds if “All” or “HD Only” is selected, or 5 seconds if “Analog” is selected, and then scan again.

(→P. 454)

- 2 Select “SCAN” once again when the desired station is reached.

RBDS (Radio Broadcast Data Systems)


This feature allows your radio to receive station identification information and program information (classical, jazz, etc.) from radio stations which broadcast this information.

■ Receiving RBDS broadcasts

- 1 Select "Options" on the screen.



- 2 Select "< TYPE" or "TYPE >" on the screen.

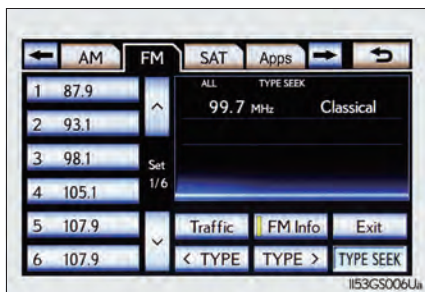

The program list changes as follows each time the switch is selected.

- Classical
- Country
- EasyLis (Easy Listening)
- Inform (Information)
- Jazz
- News
- Oldies
- Other
- Pop Music
- Religion
- Rock
- R&B (Rhythm and Blues)
- Sports
- Talk
- Traffic (Not available when "HD Radio Settings" are set to analog.)
- Alert (Emergency Alert)

When a program is set, "TYPE SEEK" appears.

3 Select "TYPE SEEK" on the screen.

The radio seeks for stations by the relevant program type.

If no relevant program can be found, "no type" appears on the screen.

■ Traffic announcement

Select "Traffic" on the screen.

"TRAF SEEK" appears on the display, and the radio seeks a traffic program station.

If no traffic program station is found, "No Traffic" appears on the display.



HD Radio™ Technology

HD Radio™ Technology is the digital evolution of analog AM/FM radio. Your radio product has a special receiver which allows it to receive digital broadcasts (where available) in addition to the analog broadcasts it already receives.

Digital broadcasts have better sound quality than analog broadcasts as digital broadcasts provide free, crystal clear audio with no static or distortion. For more information, and a guide to available radio stations and programming, refer to www.hdradio.com.




HD Radio Technology manufactured under license from iBiquity Digital Corporation. U.S. and Foreign Patents. HD Radio™ and the HD, HD Radio, and "Arc" logos are proprietary trademarks of iBiquity Digital Corp.


■ HD Radio™ system settings

HD Radio™ system can be set using the procedure outlined below.

- 1** Press the “MENU” button on the Remote Touch and select “Setup” on the “Menu” screen.
- 2** Select “Audio” on the “Setup” screen.
- 3** Select “HD Radio Settings”.

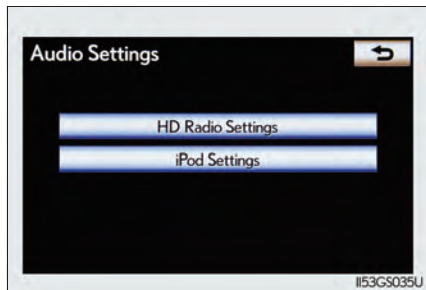

- 4** Select “HD Radio/Analog Setting”.

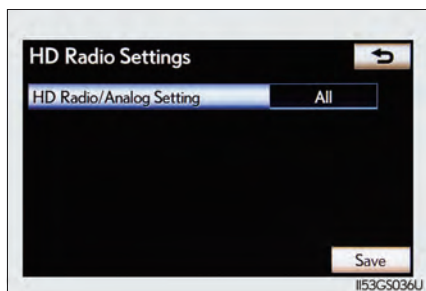


- 5** Select the item to be set.

“All”: Select to receive both analog and digital broadcasts.

“HD Only”: Select to receive only digital broadcasts.

“Analog”: Select to receive only analog broadcasts.

- 6** Select “Save”.

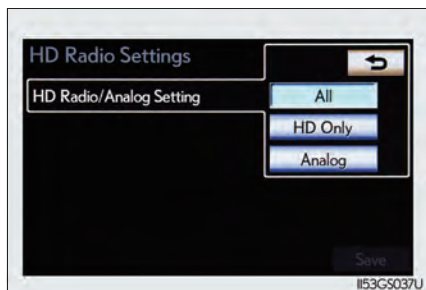

■ Using HD Radio™ Technology

- 1 Press the “RADIO” button.
- 2 Select the “AM” or “FM” tab or press the “RADIO” button repeatedly to select the desired tab.

An orange “HD”) logo indicator will be displayed on the screen when in digital.

The song title, artist name and music genre will appear on the screen when available by the radio station.

- 3 Select “Options” to display this screen.

When “Text” is selected, information such as the artist name, song title, album title and music genre of the track being listened to are displayed on the text screen. To display messages from the station, select “Additional Information”.

When “< TYPE” or “TYPE >” is selected, a program type will be searched. Once a program type has been set, “TYPE SEEK” will appear on the screen. (→P. 452)



■ Changing the multiple or supplemental programs

On the FM radio frequency most digital stations have “multiple” or supplemental programs on one FM station.

Select “Multicast”.

Each time “Multicast” is selected, the supplemental program changes.

If “Multicast” is selected when tuned to the last of the supplemental programs, the main program will be returned to.



■ Preserving tag information

Tag information in the music broadcasting is preserved in the system and transmits to an iPod.

- 1 Select “Tag” to bookmark the music information.



- 2 Open the console box, open the cover and connect an iPod using an iPod cable. (→P. 520)

Turn on the power of the iPod if it is not turned on.

Once an iPod is connected, the music tag moves from the radio into the iPod.

When the iPod is connected to iTunes, the “tagged” information of the songs which were tagged while listening to the radio can be viewed. Then a user may decide to purchase the song or CD/Album which had been listened to on their radio.

If tagging the music information fails, “Saving the HD Radio tag failed.” will be displayed on the screen. If this occurs, tag the information again.


■ HD Radio™ Technology troubleshooting guide

Experience	Cause	Action
Mismatch of time alignment- a user may hear a short period of programming replayed or an echo, stutter or skip.	The radio stations analog and digital volume are not properly aligned or the station is in ballgame mode.	None, radio broadcast issue. A user can contact the radio station.
Sound fades, blending in and out.	Radio is shifting between analog and digital audio.	Reception issue, may clear-up as the vehicle continues to be driven. Selecting "Analog" can force radio in an analog audio.
Audio mute condition when an HD2/HD3 multicast channel had been playing.	The radio does not have access to digital signals at the moment.	This is normal behavior, wait until the digital signal returns. If out of the coverage area, seek a new station.
Audio mute delay when selecting an HD2/HD3 multicast channel preset.	The digital multicast content is not available until HD Radio™ broadcast can be decoded and make the audio available. This takes up to 7 seconds.	This is normal behavior, wait for the audio to become available.
Text information does not match the present song audio.	Data service issue at the radio broadcaster.	Broadcaster should be notified. Complete the form: www.ibequity.com/automotive/report_radio_station_experiences .
No text information shown for the present selected frequency.	Data service issue by the radio broadcaster.	Broadcaster should be notified. Complete the form: www.ibequity.com/automotive/report_radio_station_experiences .

XM Satellite Radio

■ Receiving XM Satellite Radio

- 1 Press the "RADIO" button.
- 2 Select the "SAT" tab or press the "RADIO" button repeatedly until the "SAT" tab is selected.

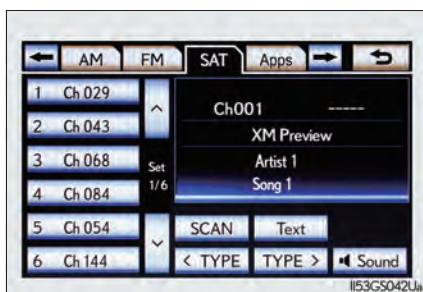


- 3 Turn the "TUNE•SCROLL" knob to select the next or previous channel.

Turning the knob quickly allows rapid scrolling through the channel list.

■ Presetting XM Satellite Radio channels


- 1 Select the desired channel.
- 2 Select one of the left side screen buttons (1 - 6) and hold it until a beep is heard.

To change the preset channel to a different one, follow the same procedure.

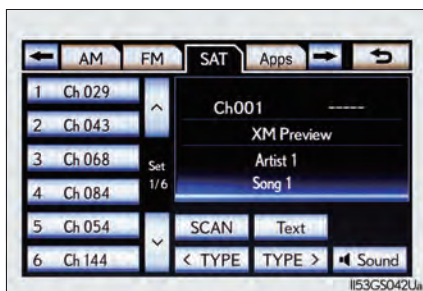

■ Changing the channel category

Select either "< TYPE" or "TYPE >" to go to the next or previous category.

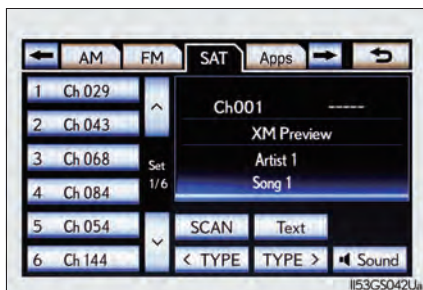

■ Seeking the channel within the current category

Press and hold “<” or “>” on the “PRST•TRACK” button.

■ Scanning XM Satellite Radio channels

Scanning channels in the current category

- 1 Select “SCAN” on the screen.


“SCAN” appears on the screen.

- 2 Select “SCAN” once again when the desired channel is reached.

■ Displaying the title and artist name

Select “Text” to display the song title and artist name currently being listening to.

Up to 64 alphanumeric characters can be displayed. (Some information will not be fully displayed.)

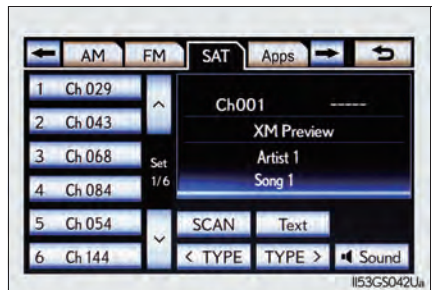

Internet radio broadcast (vehicles with the navigation system)

One of Apps' features is the ability to listen to internet radio. In order to use this service, an Apps compatible phone and the navigation system need to be set. For details, refer to the "Navigation System Owner's Manual".

- 1** Press the "RADIO" button.
- 2** Select the "Apps" tab or press the "RADIO" button repeatedly until the "Apps" tab is selected.

If a compatible phone is already registered, it will be connected automatically.

If a compatible phone has not been registered or the Bluetooth[®] connection cannot be completed correctly, select "Connect" to register and/or connect your phone. (→P. 608)


When connection is complete, the application screen can be displayed.

- 3** Select "View Application Screen" on the screen.

The internet radio application screen is displayed.

Perform operations according to the displayed application screen.

By pressing the "RADIO" button, the "Audio" screen can be returned to.

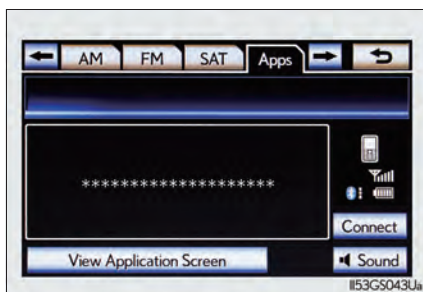

■ If you select

The display returns to the previous screen.

■ Reception sensitivity

- Maintaining perfect radio reception at all times is difficult due to the continually changing position of the antenna, differences in signal strength and surrounding objects, such as trains, transmitters, etc.
- The radio antenna is mounted inside the rear window. To maintain clear radio reception, do not attach metallic window tinting or other metallic objects to the antenna wire mounted inside the rear window.

■ XM Radio Services – Descriptions (vehicles without a navigation system for U.S.A.)

● Radio and Entertainment

XM offers more than 170 satellite radio channels of commercial-free music and premier sports, news, talk, and entertainment. XM is broadcast via satellites to millions of listeners across the continental United States. XM subscribers listen to XM on satellite radio receivers for the car, home, and portable use. More information about XM is available online at www.siriusxm.com.

● Satellite tuner

The tuner supports only Audio Services (Music and Talk) and the accompanying Text Information of XM Satellite Radio.

■ XM Radio Services – Subscription Instructions (vehicles without a navigation system for U.S.A.)

For XM Services requiring a subscription (such as XM Radio), the following paragraph shall be included.

Required XM Radio monthly subscriptions sold separately after trial period. Subscription fee is consumer only. All fees and programming subject to change. Subscriptions are subject to the Customer Agreement available at www.siriusxm.com. XM service only available in the 48 contiguous United States. © 2011 Sirius XM Radio Inc. Sirius, XM and all related marks and logos are trademarks of Sirius XM Radio Inc. All other marks, channel names and logos are the property of their respective owners.

For more information, program schedules, and to subscribe or extend subscription after complimentary trial period; more information is available at:

U.S.A. Customers:

Visit www.siriusxm.com or call 1-877-515-3987

● Radio ID

You will need the radio ID when activating XM service or reporting a problem. If “Ch000” is selected using the “TUNE•SCROLL” knob, the ID code, which is 8 alphanumeric characters, will be displayed. If another channel is selected, the ID code will no longer be displayed. The channel (000) alternates between displaying the radio ID and the specific radio code.

■ XM Radio Services – Legal Disclaimers and Warnings (vehicles without a navigation system for U.S.A.)

● Fees and Taxes – Subscription fee, taxes, one time activation fee, and other fees may apply. Subscription fee is consumer only. All fees and programming subject to change. Subscriptions subject to Customer Agreement available at www.siriusxm.com. XM service only available in the 48 contiguous United States and Canada.

Explicit Language Notice – Channels with frequent explicit language are indicated with an “XL” preceding the channel name. Channel blocking is available for XM Satellite Radio receivers by notifying XM at;

U.S.A. Customers:

Visit www.siriusxm.com or calling 1-877-515-3987

It is prohibited to copy, decompile, disassemble, reverse engineer, hack, manipulate, or otherwise make available any technology or software incorporated in receivers compatible with the XM Satellite Radio System or that support the XM website, the Online Service or any of its content. Furthermore, the AMBE® voice compression software included in this product is protected by intellectual property rights including patent rights, copyrights, and trade secrets of Digital Voice Systems, Inc.

Note: this applies to XM receivers only and not XM Ready devices.

■ XM Radio Services – Descriptions (vehicles with a navigation system)

● Radio and Entertainment

XM offers more than 170 satellite radio channels of commercial-free music and premier sports, news, talk, and entertainment. XM is broadcast via satellites to millions of listeners across the continental United States. XM subscribers listen to XM on satellite radio receivers for the car, home, and portable use. More information about XM is available online at www.siriusxm.com. (U.S.A.) or www.xmradio.ca (Canada)

● Infotainment and Data services

XM offers a variety of advanced Infotainment and data services.

■ XM Radio Services – Subscription Instructions (vehicles with a navigation system)

For XM Services requiring a subscription (such as XM Radio, and some Infotainment & data services), the following paragraph shall be included.

Required XM Radio and some Infotainment & data services monthly subscriptions sold separately after trial period. Subscription fee is consumer only. All fees and programming subject to change. Subscriptions are subject to the Customer Agreement available at www.siriusxm.com. (U.S.A.) or www.xmradio.ca (Canada) XM service only available in the 48 contiguous United States and 10 Canadian provinces. © 2011 Sirius XM Radio Inc. Sirius, XM and all related marks and logos are trademarks of Sirius XM Radio Inc. All other marks, channel names and logos are the property of their respective owners.

For more information, program schedules, and to subscribe or extend subscription after complimentary trial period; more information is available at:

► U.S.A. Customers:

Visit www.siriusxm.com or call 1-877-515-3987

► Canadian Customers:

Visit www.xmradio.ca or call 1-877-438-9677

● Radio ID

You will need the radio ID when activating XM service or reporting a problem. If “Ch000” is selected using the “TUNE•SCROLL” knob, the ID code, which is 8 alphanumeric characters, will be displayed. If another channel is selected, the ID code will no longer be displayed. The channel (000) alternates between displaying the radio ID and the specific radio code.

■ XM Radio Services – Legal Disclaimers and Warnings (vehicles with a navigation system)

Fees and Taxes – Subscription fee, taxes, one time activation fee, and other fees may apply. Subscription fee is consumer only. All fees and programming subject to change. Subscriptions subject to Customer Agreement available at www.siriusxm.com. (U.S.A.) or www.xmradio.ca (Canada) XM service only available in the 48 contiguous United States and Canada*.

*Canada – some deterioration of service may occur in extreme northern latitudes. This is beyond the control of XM Satellite Radio.

Explicit Language Notice – Channels with frequent explicit language are indicated with an “XL” preceding the channel name. Channel blocking is available for XM Satellite Radio receivers by notifying XM at;

► U.S.A. Customers:

Visit www.siriusxm.com or calling 1-877-515-3987

► Canadian Customers:

Visit www.xmradio.ca or calling 1-877-438-9677

It is prohibited to copy, decompile, disassemble, reverse engineer, hack, manipulate, or otherwise make available any technology or software incorporated in receivers compatible with the XM Satellite Radio System or that support the XM website, the Online Service or any of its content. Furthermore, the AMBE[®] voice compression software included in this product is protected by intellectual property rights including patent rights, copyrights, and trade secrets of Digital Voice Systems, Inc.

Note: this applies to XM receivers only and not XM Ready devices.

■ If the satellite radio does not operate normally

If a problem occurs with the XM tuner, a message will appear on the screen. Refer to the table below to identify the problem, and take the suggested corrective action.

SAT Ck Antenna	The XM antenna is not connected. Check whether the XM antenna cable is attached securely.
	There is a short-circuit in the antenna or the surrounding antenna cable. See a Lexus certified dealer.
SAT Ch Unauth	You have not subscribed to XM Satellite Radio. The radio is being updated with the latest encryption code. Contact XM Satellite Radio for subscription information. When a contract is canceled, you can choose "Ch000" and all free-to-air channels.
	The premium channel you selected is not authorized. Wait for about 2 seconds until the radio returns to the previous channel or "Ch001". If it does not change automatically, select another channel. To listen to the premium channel, contact XM Satellite Radio.
SAT No Signal	The XM signal is too weak at the current location. Wait until your vehicle reaches a location with a stronger signal.
SAT Ch Loading	The unit is acquiring audio or program information. Wait until the unit has received the information.
SAT Ch Off Air	The channel you selected is not broadcasting any programming. Select another channel.
-----	There is no song/program title or artist name/feature associated with the channel at that time. No action is required.
SAT Ch Unavail	The channel you selected is no longer available. Wait for about 2 seconds until the radio returns to the previous channel or "Ch001". If it does not change automatically, select another channel.

Contact the XM Listener Care Center at 1-877-515-3987 (U.S.A.) or 1-877-438-9677 (Canada).

■ About internet radio (vehicles with the navigation system)

- Other applications can be activated while listening to internet radio.
- An iPhone cannot be connected via Bluetooth® and USB connection at the same time. However, it is possible to recharge an iPhone while using Apps by connecting via USB. The system uses the connection method that was used last. Therefore, if connected via USB after Bluetooth® connection, it is necessary to reconnect the iPhone via Bluetooth®.
- Services requiring a separate contract can also be used. For details, refer to <http://www.lexus.com/enform/> or call 1-800-255-3987.
- If internet radio has never been listened to by activating “Apps” from the “Information” screen, the “Apps” tab will be dimmed.

■ Certifications for XM Satellite Radio

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Using the CD/DVD player



- | | |
|---|-------------------|
| ① Setting the sound (→P. 530) | ⑥ Media selection |
| ② Disc slot | ⑦ Disc eject |
| ③ Track, file and chapter selection | ⑧ Power |
| ④ Play/pause | ⑨ Volume |
| ⑤ Track, file and chapter selection/fast forward/rewind | |

Inserting a disc

Insert a disc into the disc slot.

Ejecting a disc

Press  and remove the disc.

Playing and pausing a track/file/chapter

To play or pause a track/file/chapter, press .

■ Using the display

If a disc is inserted with the label facing down, it cannot be played.

Playing an audio CD and MP3/WMA discs

Press the “MEDIA” button if a disc has already been loaded in the disc slot.

Select the “DISC” tab or press the “MEDIA” button repeatedly until the “DISC” tab is selected.

Control icon screen

▶ AudioCD mode



▶ MP3/WMA discs mode



- ① Random playback
- ② Repeat play
- ③ Pause
Select  to play
- ④ Setting the sound (→P. 530)
- ⑤ Selecting a track/file
- ⑥ Selecting a folder

Selecting, fast forwarding or rewinding a track (Audio CD)

■ Selecting a track

Select “<” or “>” on the screen to select the next/previous track.

Press “<” or “>” on the “PRST•TRACK” button or turn the “TUNE•SCROLL” knob to select the desired track number.

■ Selecting a track from the track list

- 1 Select the track name on the screen to display the following track list screen.


- 2 Select the desired track number.

 ,  : Select to move the list up or down by 5 track groups.

“PRST•TRACK” button: Press “<” or “>” on the “PRST•TRACK” button to scroll through the track list one by one.

“TUNE•SCROLL” knob: Turn the knob clockwise or counterclockwise to quickly scroll up or down the track list.

 ,  : If  appears to the right of an item name, the complete name is too long for the screen. Select  to scroll to the end of the name. Select  to move to the beginning of the name.

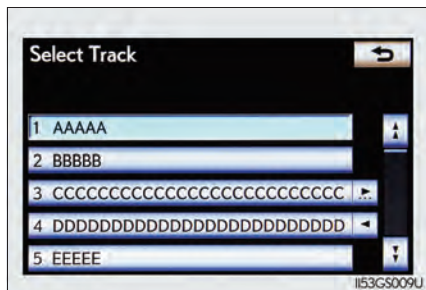

■ Fast forwarding or rewinding a track

Press and hold “<” or “>” on the “PRST•TRACK” button to fast forward or rewind.

Selecting a folder (MP3/WMA discs)

■ Selecting a folder

Select "<" or ">" on the screen to select the next/previous folder.

■ Selecting a folder from the folder list


1 Select the folder name on the screen to display the following folder list screen.

2 Select the desired folder number to display the folder's file list. From the file list, select the desired file number.

 ,  : Select to move the list up or down by 5 folder groups.

"TUNE•SCROLL" knob: Turn the knob clockwise or counterclockwise to quickly scroll up or down the folder list.

 ,  : If  appears to the right of an item name, the complete name is too long for the screen. Select  to scroll to the end of the name. Select  to move to the beginning of the name.

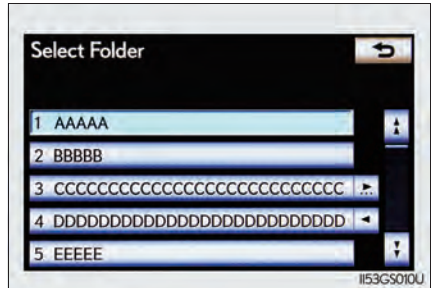

Selecting, fast forwarding or rewinding a file (MP3/WMA discs)

■ Selecting a file

Select “<” or “>” on the screen to select the next/previous file.

Press “<” or “>” on the “PRST•TRACK” button or turn the “TUNE•SCROLL” knob to select the desired file number.

■ Selecting a file from the file list

- 1 Select the file name on the screen to display the following file list screen.


- 2 Select the desired file number.

 ,  : Select to move the list up or down by 5 file groups.

“PRST•TRACK” button: Press “<” or “>” on the “PRST•TRACK” button to scroll through the file list one by one.

“TUNE•SCROLL” knob: Turn the knob clockwise or counterclockwise to quickly scroll up or down the file list.

 ,  : If  appears to the right of an item name, the complete name is too long for the screen. Select  to scroll to the end of the name. Select  to move to the beginning of the name.

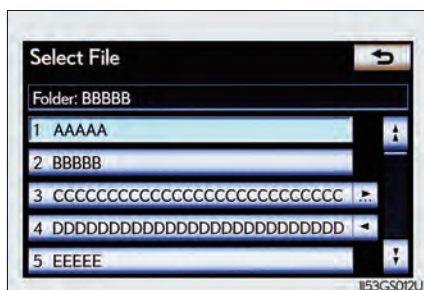

■ Fast forwarding or rewinding a file

Press and hold “<” or “>” on the “PRST•TRACK” button to fast forward or rewind.

Random playback

■ Audio CD

Select “RAND” on the screen.

“RAND” appears on the screen.

To cancel, select “RAND” again.

■ MP3/WMA disc

- Playing files from a particular folder in random order

Each time “RAND” is selected, the mode changes as follows:

random (1 folder random) → folder random (1 disc random) → off

- Playing all the files on a disc in random order

Select “RAND” repeatedly until “FLD.RAND” appears on the screen.

To cancel, select “RAND” again.

When a file is skipped or the system is inoperative, select “RAND” to reset.

Repeat play

■ Audio CD

Select “RPT” on the screen.

“RPT” appears on the screen.

To cancel, select “RPT” again.

■ MP3/WMA disc

● Repeating a file

Select “RPT” on the screen.

Each time “RPT” is selected, the mode changes as follows:

- When “RAND” is off
file repeat → folder repeat → off
- When “RAND” is on
file repeat → repeat off

● Repeating all of the files in a folder

Select “RPT” repeatedly until “FLD.RPT” appears on the screen.

To cancel, select “RPT” again.

■ If you select

The display returns to the previous screen.

■ Displaying the title and artist name (Audio CD)

If a CD-TEXT disc is inserted, the title of the disc and track will be displayed. Up to 32 characters can be displayed.

■ Error messages

→P. 486

Playing DVD video

For safety reasons, you can enjoy the visual contents of discs only when the vehicle is completely stopped with the power switch in ACCESSORY or ON mode and the parking brake applied. While driving in DVD video mode, only the DVD's audio can be heard.

When a DVD video disc is inserted while driving, the audio contents of the main feature will automatically be played. However, some discs may not be played from the main story.

Press the "MEDIA" button if a disc has already been loaded in the disc slot.

Select the "DISC" tab or press the "MEDIA" button repeatedly until the "DISC" tab is selected.

Control icon screen

- ① ② Menu screen appears
- ③ Option screen appears
(→P. 477)
- ④ Display menu control key
(→P. 478)
- ⑤ Returns to the full screen (only when the vehicle is completely stopped and the parking brake is applied)
- ⑥ Rewind
- ⑦ Stop
- ⑧ Pause
Select  to play
- ⑨ Fast forward
- ⑩ Setting the sound (→P. 530)

If  is selected, while watching a DVD, the DVD controls will appear.


If  appears on the screen when a control is selected the operation relevant to the control is not permitted.



DVD options screen

Select "Options" on "DVD" screen, the following screen appears.

- ① Returns to the full screen (only when the vehicle is completely stopped and the parking brake is applied)
- ② Search by title/group number
- ③ Change audio language
- ④ Change angle
- ⑤ Display the predetermined scene and start playing from there
- ⑥ Change subtitle language
- ⑦ Change screen size
- ⑧ Display the image quality adjustment screen
- ⑨ Change initial setting

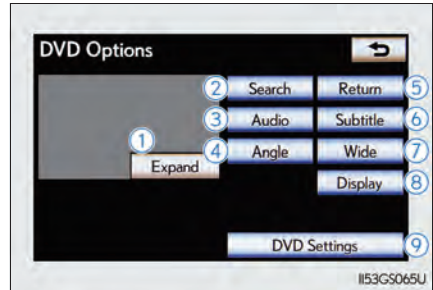

If  appears on the screen when a control is selected the operation relevant to the control is not permitted.

Fast forwarding/rewinding a disc

Press and hold "<" or ">" on the "PRST•TRACK" button to fast forward or rewind.

Using the DVD menu

- 1 Select "Menu" or "Top Menu" on the control icon screen.
Select  if the menu control key does not appear on the menu screen.
- 2 Select the menu item using , ,  or  and select "Enter".
: Returns to the previous screen



Note that specific items or the operating method differs from one DVD to another. Refer to the manual that comes with the DVD disc. (The above image is an example.)


Searching for a desired screen

■ Searching by title

- 1 Select "Search" on the "DVD Options" screen.
- 2 Input the desired title number and then select "OK".

: Deletes the last input number

: Returns to the previous screen

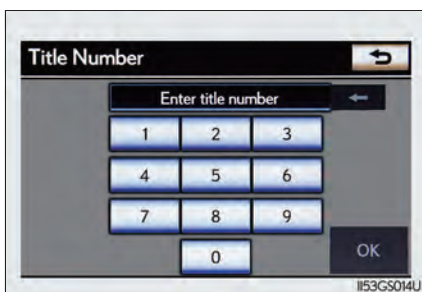

■ Searching by chapter

Press "<" or ">" on the "PRST•TRACK" button or turn the "TUNE•SCROLL" knob.


Changing the subtitle language

- 1 Select "Subtitle" on the "DVD Options" screen.
- 2 Each time you select "Change", the next available language is selected.

The languages available are restricted to those available on the DVD disc.

"Hide": Hides the subtitles

: Returns to the previous screen

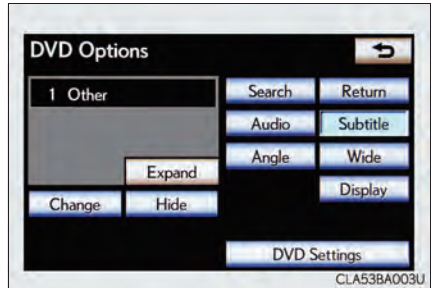


Changing the audio language

- 1 Select "Audio" on the "DVD Options" screen.
- 2 Each time you select "Change", the next available language is selected.

The languages available are restricted to those available on the DVD disc.

: Returns to the previous screen

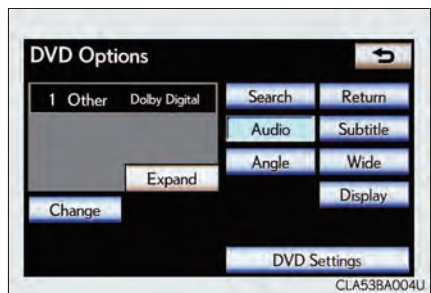


Changing the angle (if the angle option is available)

- 1 Select "Angle" on the "DVD Options" screen.
- 2 Each time you select "Change", the next available angle is selected.

The angles available are restricted to those available on the DVD disc.

: Returns to the previous screen

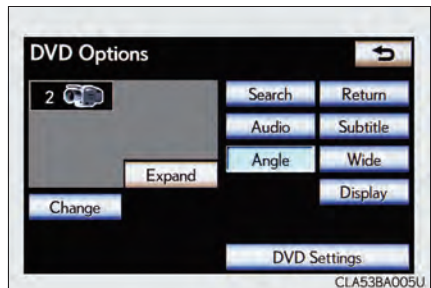


Changing screen size

1 Select “Wide” on the “DVD Options” screen.

2 Select the desired display. After setting, select “Save”.

- ① Displays a 4 : 3 screen, with either side in black
- ② Widens the 4 : 3 screen horizontally to fill the screen
- ③ Widens the 4 : 3 screen vertically and horizontally, in the same ratio, to fill the screen

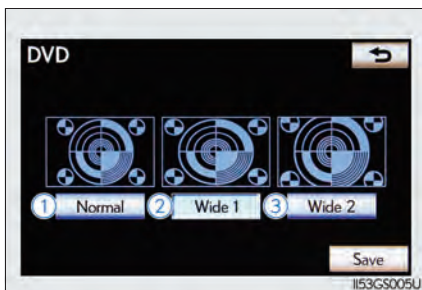

: Returns to the previous screen

Adjusting the screen

1 Select “Display” on the “DVD Options” screen.

2 Select “<” or “>” to display the desired item to be adjusted, and then select “OK”.

The screen goes off when “Screen Off” is selected. To turn the display screen back on, press any button on the audio panel or on the Remote Touch. The selected screen appears.



	R	G
Color	Red	Green
	+	-
Tone	Lighter	Darker
Contrast	Weaker	Stronger
Brightness	Darker	Brighter

Initial DVD settings



■ Displaying “DVD Settings” screen

- 1 Select “DVD Settings” on the “DVD Options” screen.
- 2 Select the setting to be changed.

After you change the settings, select “Save”.

“Default”: Restores default settings

: Returns to the previous screen

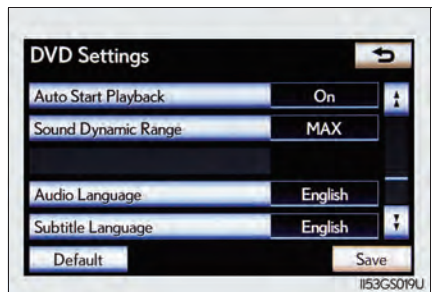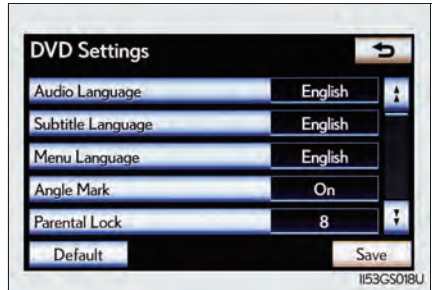

■ Setting audio language

- 1 Select “Audio Language” on the “DVD Settings” screen.
- 2 Select the desired language to be heard on the “Audio Language” screen.

If you cannot find the desired language, select “Other” and input the desired language code. (→P. 483)

■ Setting subtitle language

- 1 Select “Subtitle Language” on the “DVD Settings” screen.
- 2 Select the desired language to be read on the “Subtitle Language” screen.

If you cannot find the desired language, select “Other” and input the desired language code. (→P. 483)

■ Setting menu language

- 1 Select "Menu Language" on the "DVD Settings" screen.
- 2 Select the desired language to be read on the "Menu Language" screen.

If you cannot find the desired language, select "Other" and input the desired language code. (→P. 483)

■ Setting angle mark

If the DVD has angle options, you can turn the angle mark on or off.

- 1 Select "Angle Mark" on the "DVD Settings" screen.
- 2 Select "On" or "Off".

■ Setting parental lock

- 1 Select "Parental Lock" on the "DVD Settings" screen.
- 2 Input the 4-digit personal code on the "Key Code" screen.

If you enter wrong numbers, select  to delete the numbers.
- 3 Select a parental level (1-8) on the "Select Restriction Level" screen. (→P. 489)

■ Setting the auto start

Discs that are inserted while the vehicle is in motion will automatically start playing.

- 1 Select "Auto Start Playback" on the "DVD Settings" screen.
- 2 Select "On" or "Off".

■ Setting sound dynamic range

The difference between the lowest volume and the highest volume can be adjusted.

- 1 Select "Sound Dynamic Range" on the "DVD Settings" screen.
- 2 Select "MAX", "STD" or "MIN".


■ Entering a language code

If you select “Other” on the “Audio Language” screen, “Subtitle Language” screen or “Menu Language” screen you can select a language by entering the 4-digit language code if that language is available.

Input the 4-digit language code and then select “OK”.

 : Deletes the last input digit

 : Returns to the previous screen

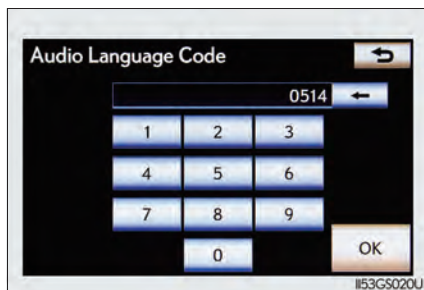

● Language codes

Code	Language	Code	Language	Code	Language
0514	English	0207	Bulgarian	0712	Galician
0618	French	0208	Bihari	0714	Guarani
0405	German	0209	Bislama	0721	Gujarati
0920	Italian	0214	Bengali, Bangla	0801	Hausa
0519	Spanish	0215	Tibetan	0809	Hindi
2608	Chinese	0218	Breton	0818	Croatian
1412	Dutch	0301	Catalan	0821	Hungarian
1620	Portuguese	0315	Corsican	0825	Armenian
1922	Swedish	0319	Czech	0901	Interlingua
1821	Russian	0325	Welsh	0905	Interlingue
1115	Korean	0401	Danish	0911	Inupiak
0512	Greek	0426	Bhutani	0914	Indonesian
0101	Afar	0515	Esperanto	0919	Icelandic
0102	Abkhazian	0520	Estonian	0923	Hebrew
0106	Afrikaans	0521	Basque	1001	Japanese

Code	Language	Code	Language	Code	Language
0113	Amharic	0601	Persian	1009	Yiddish
0118	Arabic	0609	Finnish	1023	Javanese
0119	Assamese	0610	Fiji	1101	Georgian
0125	Aymara	0615	Faroese	1111	Kazakh
0126	Azerbaijani	0625	Frisian	1112	Greenlandic
0201	Bashkir	0701	Irish	1113	Cambodian
0205	Byelorussian	0704	Scottish-Gaelic	1114	Kannada
1119	Kashmiri	1415	Norwegian	1914	Shona
1121	Kurdish	1503	Occitan	1915	Somali
1125	Kirghiz	1513	(Afan) Oromo	1917	Albanian
1201	Latin	1518	Oriya	1918	Serbian
1214	Lingala	1601	Panjabi	1919	Siswati
1215	Laothian	1612	Polish	1920	Sesotho
1220	Lithuanian	1619	Pashto, Pushto	1921	Sundanese
1222	Latvian, Lettish	1721	Quechua	1923	Swahili
1307	Malagasy	1813	Rhaeto-Romance	2001	Tamil
1309	Maori	1814	Kirundi	2005	Telugu
1311	Macedonian	1815	Romanian	2007	Tajik
1312	Malayalam	1823	Kinyarwanda	2008	Thai
1314	Mongolian	1901	Sanskrit	2009	Tigrinya
1315	Moldavian	1904	Sindhi	2011	Turkmen
1318	Marathi	1907	Sango	2012	Tagalog
1319	Malay	1908	Serbo-Croatian	2014	Setswana

Code	Language	Code	Language	Code	Language
1320	Maltese	1909	Sinhalese	2015	Tongan
1325	Burmese	1911	Slovak	2018	Turkish
1401	Nauru	1912	Slovenian	2019	Tsonga
1405	Nepali	1913	Samoa	2020	Tatar
2023	Twi	2209	Vietnamese	2515	Yoruba
2111	Ukrainian	2215	Volapük	2621	Zulu
2118	Urdu	2315	Wolof		
2126	Uzbek	2408	Xhosa		

■ When a rear passenger selects “Setup Menu”

To cancel the set up operation from the rear seat, select “Play”.

■ Error messages

If “Region Code Error” is displayed, check if the region code printed on the DVD matches the player’s region code.

If a different message is displayed: →P. 486

CD/DVD player and DVD video disc information

Error messages

If the following error messages appear on the screen, refer to the table and take the appropriate measures. If the problem is not rectified, take the vehicle to your Lexus dealer.



The error messages may differ from those shown below depending on the language selected.

Message	Cause	Correction Procedures
No disc found.	There is no disc in the player.	Insert a disc.
Check DISC	• The disc is dirty or damaged. • The disc is inserted upside down. • The disc is not playable with the player.	• Clean the disc. • Insert the disc correctly. • Confirm the disc is playable with the player.
DISC Error	• There is a malfunction within the system. • Operation is stopped due to a high temperature inside the player.	• Eject the disc. • Eject the disc and allow the player to cool down.
No music files found.	This indicates that no playable data is included in the disc.	Eject the disc.

DVD video discs

- The DVD player conforms to NTSC/PAL color TV formats. DVD video discs conforming to another format such as SECAM cannot be used.
- Region code: Some DVD video discs have a region code indicating the region in which you can use the DVD video disc. If the DVD video disc is not labeled as “ALL” or “1”, you cannot use it on this DVD player. If you attempt to play an inappropriate DVD video disc on this player, “Region Code Error” appears on the screen. Even if the DVD video disc does not have a region code, you may not be able to use it.

■ Symbols shown on DVD video discs

Symbol	Meaning
NTSC/PAL	Indicates NTSC/PAL format of color TV
	Indicates the number of audio tracks
	Indicates the number of language subtitles
	Indicates the number of angles
	Indicates the screen display ratios available Wide screen: 16:9 Standard: 4:3
	Indicates the disc's region code ALL: in all countries Number: region code

■ Discs that can be used

Discs with the marks shown below can be used.

Playback may not be possible depending on recording format or disc features, or due to scratches, dirt or deterioration.



Use only discs marked as shown above. The following products may not be playable on your player:

- SACD
- dts CD
- Copy-protected CD
- DVD audio
- Video CD
- DVD-R
- DVD+R
- DVD-RW
- DVD+RW
- DVD-RAM

■ CD/DVD player protection feature

To protect the internal components, playback is automatically stopped when a problem is detected.

■ If discs are left inside the CD/DVD player or in the ejected position for extended periods

Discs may be damaged and may not play properly.

■ Lens cleaners

Do not use lens cleaners. Doing so may damage the CD/DVD player.

■ DVD video disc information

● DVD video discs

A DVD video disc is a Digital Versatile Disc that holds video. DVD video discs have adopted “MPEG2”, one of the world standards of digital compression technologies. The picture data is compressed by 1/40 on average and stored. Variable rate encoded technology in which the volume of data assigned to the picture is changed depending on the picture format has also been adopted. Audio data is stored using PCM and Dolby Digital, which enables higher quality of sound. Furthermore, multi-angle and multi-language features will also help you enjoy the more advanced technology of DVD video.

● Viewer restrictions

This feature limits what can be viewed in conformity with the level of restrictions of the country. The level of restrictions varies depending on the DVD video disc. Some DVD video discs cannot be played at all, or violent scenes are skipped or replaced with other scenes.

Level 1: DVD video discs for children can be played.

Level 2-7: DVD video discs for children and G-rated movies can be played.

Level 8: All types of DVD video discs can be played.

● Multi-angle option

You can enjoy the same scene from different angles.

● Multi-language option

You can select the subtitle and audio languages.

● Region codes

The region codes are provided on DVD players and DVD discs. If the DVD video disc does not have the same region code as the DVD player, you cannot play the disc on the DVD player. (→P. 487)

● Audio

This DVD player can play linear PCM, Dolby Digital and MPEG audio format DVDs. Other decoded types cannot be played.

● Title and chapter

Video and audio programs stored in DVD video discs are divided into parts by title and chapter.

Title: The largest unit of the video and audio programs stored on DVD video discs. Usually, one movie, one album, or one audio program is assigned as a title.

Chapter: A title is comprised of one or more chapters.

■ Sound

Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.

■ MP3 and WMA files

MP3 (MPEG Audio LAYER 3) is a standard audio compression format.

Files can be compressed to approximately 1/10 of their original size by using MP3 compression.

WMA (Windows Media Audio) is a Microsoft audio compression format.

This format compresses audio data to a size smaller than that of the MP3 format.

There is a limit to the MP3 and WMA file standards that can be used and to the media/formats on which the files are recorded.

● MP3 file compatibility

- Compatible standards
MP3 (MPEG1 LAYER3, MPEG2 LSF LAYER3)
- Compatible sampling frequencies
MPEG1 LAYER3: 32, 44.1, 48 (kHz)
MPEG2 LSF LAYER3: 16, 22.05, 24 (kHz)
- Compatible bit rates (compatible with VBR)
MPEG1 LAYER3: 32, 64, 80, 96, 112, 128, 160, 192, 224, 256, 320 (kbps)
MPEG2 LSF LAYER3: 8, 32, 64, 80, 96, 112, 128, 144, 160 (kbps)
- Compatible channel modes: stereo, joint stereo, dual channel and monaural

● WMA file compatibility

- Compatible standards
WMA Ver. 7, 8, 9
- Compatible sampling frequencies
32, 44.1, 48 (kHz)
- Compatible bit rates (only compatible with 2-channel playback)
Ver. 7, 8: CBR 48, 64, 80, 96, 128, 160, 192 (kbps)
Ver. 9: CBR 48, 64, 80, 96, 128, 160, 192, 256, 320 (kbps)

● Compatible media

Media that can be used for MP3 and WMA playback are CD-Rs and CD-RWs.

Playback in some instances may not be possible if the CD-R or CD-RW is not finalized. Playback may not be possible or the audio may jump if the disc is scratched or marked with fingerprints.

● Compatible disc formats

The following disc formats can be used:

- Disc formats: CD-ROM Mode 1 and Mode 2
CD-ROM XA Mode 2, Form 1 and Form 2
- File formats: ISO9660 Level 1, Level 2, (Romeo, Joliet)
MP3 and WMA files written in any format other than those listed above may not play correctly, and their file names and folder names may not be displayed correctly.

Items related to standards and limitations are as follows:

- Maximum directory hierarchy: 8 levels (including the root)
- Maximum length of folder names/file names: 32 characters
- Maximum number of folders: 192 (including the root)
- Maximum number of files per disc: 255

● File names

The only files that can be recognized as MP3/WMA and played are those with the extension .mp3 or .wma.

● Discs containing multi-session recordings

As the audio system is compatible with multi-sessions, it is possible to play discs that contain MP3 and WMA files. However, only the first session can be played.

● ID3 and WMA tags

ID3 tags can be added to MP3 files, making it possible to record the track title, artist name, etc.

The system is compatible with ID3 Ver. 1.0, 1.1, and Ver. 2.2, 2.3 ID3 tags. (The number of characters is based on ID3 Ver. 1.0 and 1.1.)

WMA tags can be added to WMA files, making it possible to record the track title and artist name in the same way as with ID3 tags.

● MP3 and WMA playback

When a disc containing MP3 or WMA files is inserted, all files on the disc are first checked. Once the file check is finished, the first MP3 or WMA file is played. To make the file check finish more quickly, we recommend you do not write in any files other than MP3 or WMA files or create any unnecessary folders.

Discs that contain a mixture of music data and MP3 or WMA format data cannot be played.

● Extensions

If the file extensions .mp3 and .wma are used for files other than MP3 and WMA files, they may be mistakenly recognized and played as MP3 and WMA files. This may result in large amounts of interference and damage to the speakers.

● Playback

- To play MP3 files with steady sound quality, we recommend a fixed bit rate of at least 128 kbps and a sampling frequency of 44.1 kHz.
- CD-R or CD-RW playback may not be possible in some instances, depending on the characteristics of the disc.
- There is a wide variety of freeware and other encoding software for MP3 and WMA files on the market, and depending on the status of the encoding and the file format, poor sound quality or noise at the start of playback may result. In some cases, playback may not be possible at all.
- When files other than MP3 or WMA files are recorded on a disc, it may take more time to recognize the disc and in some cases, playback may not be possible at all.
- Microsoft, Windows, and Windows Media are the registered trademarks of Microsoft Corporation in the U.S. and other countries.

■ The Gracenote® media database

- Music recognition technology and related data are provided by Gracenote®. Gracenote is the industry standard in music recognition technology and related content delivery. For more information visit www.gracenote.com.



- CD and music-related data from Gracenote, Inc., copyright © 2000 to present Gracenote. Gracenote Software, copyright © 2000 to present Gracenote. One or more patents owned by Gracenote apply to this product and service. See the Gracenote website for a non-exhaustive list of applicable Gracenote patents. Gracenote, CDDb, MusicID, MediaVOCS, the Gracenote logo and logotype, and the “Powered by Gracenote” logo are either registered trademarks or trademarks of Gracenote in the United States and/or other countries.

■ Gracenote® End User License Agreement

This application or device contains software from Gracenote, Inc. of Emeryville, California (“Gracenote”). The software from Gracenote (the “Gracenote Software”) enables this application to perform disc and/or file identification and obtain music-related information, including name, artist, track, and title information (“Gracenote Data”) from online servers or embedded databases (collectively, “Gracenote Servers”) and to perform other functions. You may use Gracenote Data only by means of the intended End-User functions of this application or device.

You agree that you will use Gracenote Data, the Gracenote Software, and Gracenote Servers for your own personal non-commercial use only. You agree not to assign, copy, transfer or transmit the Gracenote Software or any Gracenote Data to any third party.

YOU AGREE NOT TO USE OR EXPLOIT GRACENOTE DATA, THE GRACENOTE SOFTWARE, OR GRACENOTE SERVERS, EXCEPT AS EXPRESSLY PERMITTED HEREIN.

You agree that your non-exclusive license to use the Gracenote Data, the Gracenote Software, and Gracenote Servers will terminate if you violate these restrictions. If your license terminates, you agree to cease any and all use of the Gracenote Data, the Gracenote Software, and Gracenote Servers. Gracenote reserves all rights in Gracenote Data, the Gracenote Software, and the Gracenote Servers, including all ownership rights. Under no circumstances will Gracenote become liable for any payment to you for any information that you provide. You agree that Gracenote, Inc. may enforce its rights under this Agreement against you directly in its own name.

The Gracenote service uses a unique identifier to track queries for statistical purposes. The purpose of a randomly assigned numeric identifier is to allow the Gracenote service to count queries without knowing anything about who you are. For more information, see the web page for the Gracenote Privacy Policy for the Gracenote service.

The Gracenote Software and each item of Gracenote Data are licensed to you "AS IS." Gracenote makes no representations or warranties, express or implied, regarding the accuracy of any Gracenote Data from in the Gracenote Servers. Gracenote reserves the right to delete data from the Gracenote Servers or to change data categories for any cause that Gracenote deems sufficient. No warranty is made that the Gracenote Software or Gracenote Servers are error-free or that functioning of Gracenote Software or Gracenote Servers will be uninterrupted. Gracenote is not obligated to provide you with new enhanced or additional data types or categories that Gracenote may provide in the future and is free to discontinue its services at any time.

GRACENOTE DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NON-INFRINGEMENT. GRACENOTE DOES NOT WARRANT THE RESULTS THAT WILL BE OBTAINED BY YOUR USE OF THE GRACENOTE SOFTWARE OR ANY GRACENOTE SERVER. IN NO CASE WILL GRACENOTE BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES OR FOR ANY LOST PROFITS OR LOST REVENUES.

copyright © 2000 to present Gracenote

 CAUTION**■ DVD video precaution**

Conversational speech on some DVDs is recorded at a low volume to emphasize the impact of sound effects. If you adjust the volume assuming that the conversations represent the maximum volume level that the DVD will play, you may be startled by louder sound effects or startled when you change to a different audio source.

Loud sounds may have a significant impact on the human body or pose a driving hazard. Keep this in mind when you adjust the volume.


 NOTICE**■ Discs and adapters that cannot be used**

Do not use the following types of discs.


Also, do not use 3 in. (8 cm) disc adapters, Dual Discs or printable discs.

Doing so may damage the player and/or disc insert/eject function.


- Discs that have a diameter that is not 4.7 in. (12 cm)




- Low-quality or deformed discs



- Discs with a transparent or translucent recording area



- Discs that have tape, stickers or CD-R labels attached to them, or that have had the label peeled off



**NOTICE****■ Player precautions**

Failure to follow the precautions below may result in damage to the discs or the player itself.


- Do not insert anything other than discs into the disc slot.
- Do not apply oil to the player.
- Store discs away from direct sunlight.
- Never try to disassemble any part of the player.

Listening to Bluetooth® audio

The Bluetooth® audio system enables users to enjoy music played on a portable player from the vehicle speaker via wireless communication. This audio system supports Bluetooth®, a wireless data system capable of playing portable audio music without cables. If your portable player does not support Bluetooth®, the Bluetooth® audio system will not function.

Press the “MEDIA” button if a Bluetooth® audio player has already been connected.

Select the “BT Audio” tab or press the “MEDIA” button repeatedly until the “BT Audio” tab is selected.

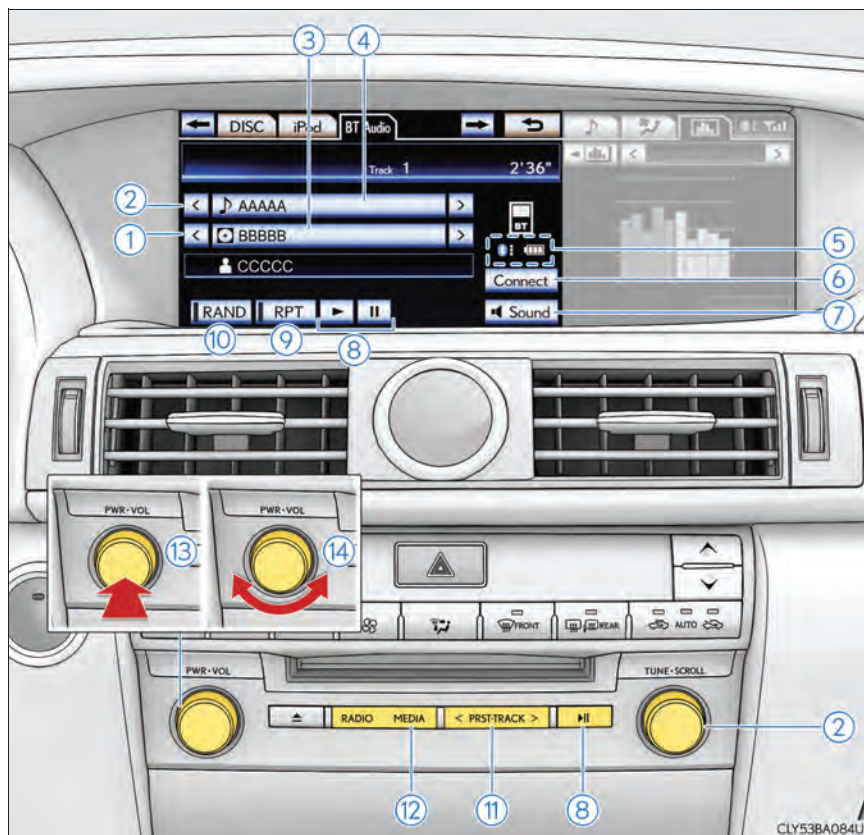

- | | |
|---|---|
| ① Album selection | ⑧ Play/pause |
| ② Track selection | ⑨ Repeat play |
| ③ Displays folder/album list | ⑩ Random playback |
| ④ Displays track list | ⑪ Track selection/fast forward/
rewind |
| ⑤ Connection status | ⑫ Media selection |
| ⑥ Connecting Bluetooth® audio
player | ⑬ Power |
| ⑦ Setting the sound (→P. 530) | ⑭ Volume |

CLY53BA084U

Status display

You can check such indicators as signal strength and battery charge on the screen.

- ① Connection status
- ② Battery charge



Indicators	Conditions	
Connection status	Good 	No connection 
Battery charge	Full 	Empty 

Connecting Bluetooth® audio player

To use the Bluetooth® audio system, you need to enter your portable player into the system. Once registered, you can enjoy your music on the vehicle's audio system. (→P. 660)

For the operation procedure for the portable player, consult your player's accompanying instruction manual.


■ When "Bluetooth* Power" is turned on

When the portable player is on standby for the connection, it will be automatically connected whenever the power switch is in either ACCESSORY or ON mode.


■ When "Bluetooth* Power" is turned off

Manually connect the portable player in accordance with the following procedure.

- 1 Select "Connect".

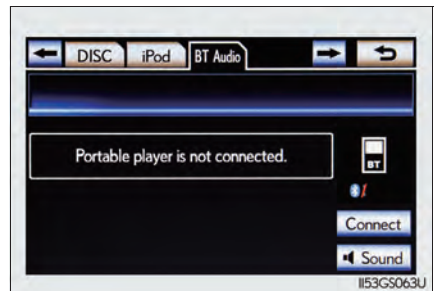


- 2 Select the desired portable player.

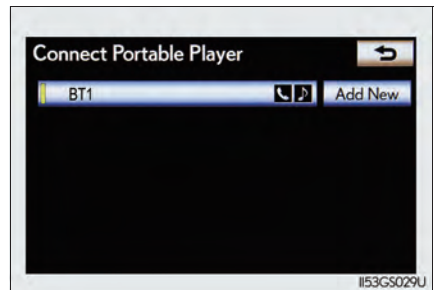

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

- 3 When the connection is completed, this screen is displayed. It is now possible to use the portable player.

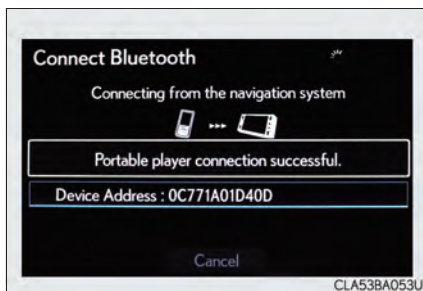

Playing Bluetooth® audio

Select  to play, select  to pause or press  to play/pause.

Some titles may not be displayed depending on the type of portable player.




Selecting a folder/album

■ On the audio top screen

Select "<" or ">" on the screen to select the next/previous folder/album.

■ On the playlist screen

- 1 Select the album name on the screen to display the playlist screen.

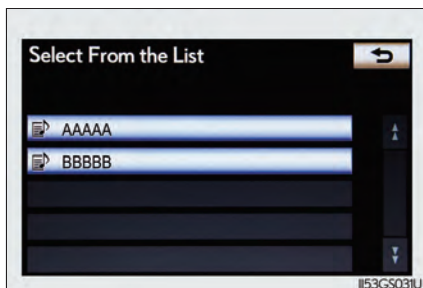

2 Select the desired screen button.

If the folder name on the screen is selected, the track list screen is displayed.


3 Select the desired track name on the screen.

 : Select to move the list up or down by 5 track groups.

“PRST•TRACK” button: Press “<” or “>” on the “PRST•TRACK” button to scroll through the track list one by one.

“TUNE•SCROLL” knob: Turn the knob clockwise or counterclockwise to quickly scroll up or down the track list.

 : If  appears to the right of an item name, the complete name is too long for the screen. Select  to scroll to the end of the name. Select  to move to the beginning of the name.

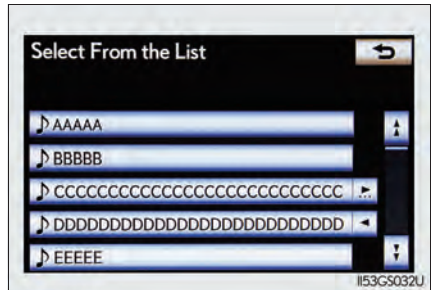

Selecting, fast forwarding or rewinding a track

■ Selecting a track

Select “<” or “>” on the screen to select the next/previous track.

Press “<” or “>” on the “PRST•TRACK” button or turn the “TUNE•SCROLL” knob to select the desired track number.

■ Selecting a track from the track list

- 1 Select the track name on the screen to display the following track list screen.


- 2 Select the desired track number.

 : Select to move the list up or down by 5 track groups.

“PRST•TRACK” button: Press “<” or “>” on the “PRST•TRACK” button to scroll through the track list one by one.

“TUNE•SCROLL” knob: Turn the knob clockwise or counterclockwise to quickly scroll up or down the track list.

 : If  appears to the right of an item name, the complete name is too long for the screen. Select  to scroll to the end of the name. Select  to move to the beginning of the name.

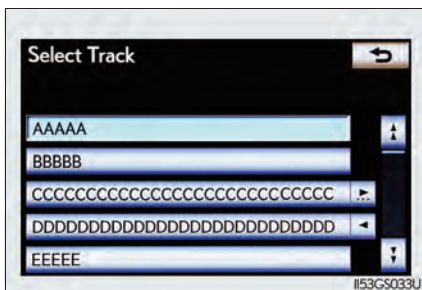

■ Fast forwarding and rewinding a track

Press and hold “<” or “>” on the “PRST•TRACK” button to fast forward or rewind.

Random playback

■ Playing the tracks on the album in random order

Select “RAND” on the screen.

Each time “RAND” is selected, the mode changes as follows:
album random → all track random → off

■ Playing tracks from all the albums in random order

Select “RAND” repeatedly until “ALB.RAND” appears on the screen.

To cancel, select “RAND” again.

Repeat play

■ Repeating a track

Select “RPT” on the screen.

Each time “RPT” is selected, the mode changes as follows:
track repeat → album repeat → off

■ Repeating an album

Select “RPT” repeatedly until “ALB.RPT” appears on the screen.

To cancel, select “RPT” again.

■ If you select

The display returns to the previous screen.

■ Connecting Bluetooth® audio player

- Selecting “Connect Portable Player” on the “Bluetooth*” screen also connects a Bluetooth® audio player. (→P. 660)
- When none of the selectable portable players have been registered, a screen confirming registration is displayed. The registration method is the same as phone registration. (→P. 653)
- When the currently connected portable player is selected, a screen confirming the selected player’s disconnection is displayed. (→P. 653)
- If connection fails once, a changing connection method confirmation screen is displayed. If connection fails 2 or more times, a message will be displayed. When this message is displayed, try again.

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

■ When using the Bluetooth® audio system

- In the following conditions, the system may not function.
 - The portable player is turned off
 - The portable player is not connected
 - The portable player battery is low
- There may be a delay if phone connection is carried out during Bluetooth® audio play.
- Depending on the type of portable player that is connected to the system, operation may differ slightly and certain functions may not be available.

■ Bluetooth® antenna

The antenna is built into the instrument panel. If the portable player is behind the seat or in the glove box or console box, or is touching or covered by metal objects, connection status may deteriorate.

■ Battery charge/signal status

This display may not correspond exactly with the portable player, and this system does not have a charging function.

■ About Bluetooth®

Bluetooth is a registered trademark of Bluetooth SIG, Inc.



■ Compatible models

Portable players must correspond to the following specifications:

- Bluetooth® specification
 - Ver. 1.1 or higher
 - (Recommended: Ver. 2.1+EDR or higher)
- Profile
 - A2DP (Advanced Audio Distribution Profile) Ver. 1.0 or higher
 - (Recommended: Ver. 1.2 or higher)
 - AVRCP (Audio/Video Remote Control Profile) Ver. 1.0 or higher
 - (Recommended: Ver. 1.4 or higher)

However, please note that some functions may be limited depending on the type of portable player. Also, the different screen is displayed depending on which portable player is connecting.

Please go to the website at <http://www.lexus.com/MobileLink> to find approved portable players for this system.

■ Certification

→P. 605

■ Reconnecting the portable player

If the portable player is disconnected with a poor reception when the power switch is in ACCESSORY or ON mode, the system automatically reconnects the portable player.

If you have switched off the portable player yourself, follow the instructions below to reconnect:

- Select the portable player again
- Register the portable player

■ When transferring ownership of your vehicle

Be sure to remove the registered portable player from the system. (→P. 655)

CAUTION

■ While driving

Do not use the portable player or connect the Bluetooth® system.

■ Caution regarding interference with electronic devices

- Your audio unit is fitted with Bluetooth® antennas. People with implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should maintain a reasonable distance between themselves and the Bluetooth® antennas. The radio waves may affect the operation of such devices.
- Before using Bluetooth® devices, users of any electrical medical device other than implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should consult the manufacturer of the device for information about its operation under the influence of radio waves. Radio waves could have unexpected effects on the operation of such medical devices.

NOTICE


■ When leaving the vehicle

Do not leave your portable player in the vehicle. The inside of the vehicle may become hot, causing damage to the portable player.

Listening to a USB memory

Connecting a USB memory enables you to enjoy music from the vehicle speakers.

Press the “MEDIA” button if a USB memory has already been connected. Select the “USB” tab or press the “MEDIA” button repeatedly until the “USB” tab is selected.

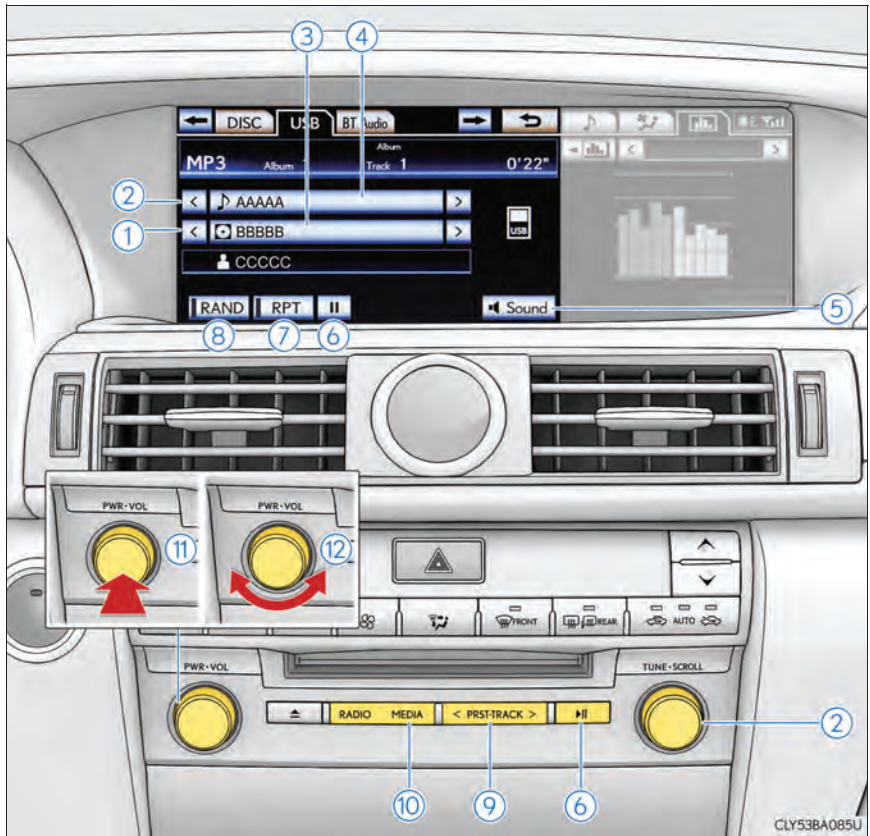


- | | |
|-------------------------------|--|
| ① Folder/album selection | ⑦ Repeat play |
| ② File/track selection | ⑧ Random playback |
| ③ Displays folder/album list | ⑨ File/track selection/fast forward/rewind |
| ④ Displays file/track list | ⑩ Media selection |
| ⑤ Setting the sound (→P. 530) | ⑪ Power |
| ⑥ Play/pause | ⑫ Volume |

Connecting the USB memory

Open the console box, open the cover and connect a USB memory.

Turn on the power of the USB memory if it is not turned on.

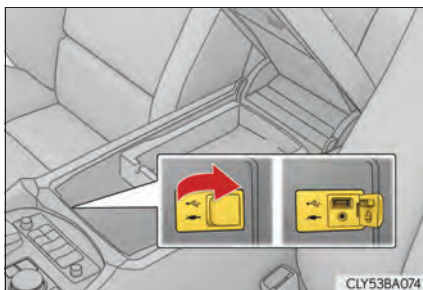


Playing a USB memory

■ Play/pause

Select  to play, select  to pause or press  to play/pause.

► Tag mode

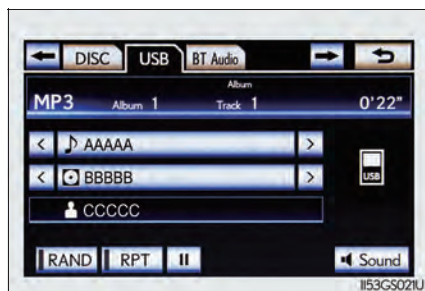

► Folder mode




Selecting a folder/album

Select "<" or ">" on the screen to select the next/previous folder/album.



Selecting a folder, artist or album

- 1 Select the folder/album name on the screen.

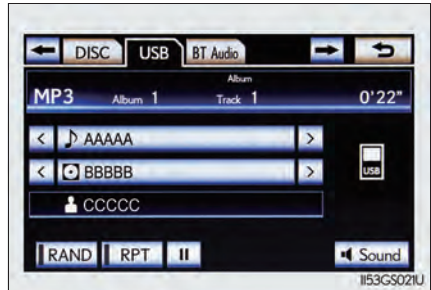

- 2 Select the desired tab and select the desired folder, artist or album.


Character screen buttons, “ABC”, “DEF” etc., allow a direct jump to list entries that begin with the same letter as the character button.

Each time the same character screen button is selected, the list starting with the subsequent character is displayed.

, : Select to move the list up or down by 5 folder/artist/album groups.

“TUNE•SCROLL” knob: Turn the knob clockwise or counterclockwise to quickly scroll up or down the folder/artist/album list.

, : If appears to the right of an item name, the complete name is too long for the screen. Select to scroll to the end of the name. Select to move to the beginning of the name.

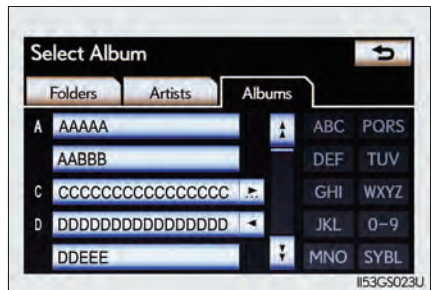

Selecting, fast forwarding or rewinding a file/track

■ Selecting a file/track

Select “<” or “>” on the screen to select the next/previous file/track.

Press “<” or “>” on the “PRST•TRACK” button or turn the “TUNE•SCROLL” knob to select the desired file/track number.

■ Selecting a file/track from the file/track list

- 1 Select the file/track name on the screen to display the following file/track list screen.

- 2 Select the desired file/track number.




Select to move the list up or down by 5 file/track groups.

“PRST•TRACK” button: Press “<” or “>” on the “PRST•TRACK” button to scroll through the file/track list one by one.

“TUNE•SCROLL” knob: Turn the knob clockwise or counterclockwise to quickly scroll up or down the file/track list.



If  appears to the right of an item name, the complete name is too long for the screen. Select  to scroll to the end of the name. Select  to move to the beginning of the name.

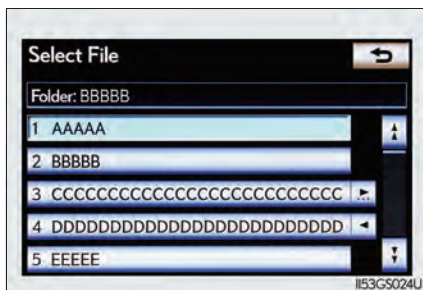

■ Fast forwarding or rewinding a file/track

Press and hold “<” or “>” on the “PRST•TRACK” button to fast forward or rewind.

Random playback

■ Playing files/tracks from a particular folder in random order

Select "RAND" on the screen.

Each time "RAND" is selected, the mode changes as follows:

random (1 folder/album random) → folder/album random (all folders/albums random) → off

■ Playing the folders/albums in random order

Select "RAND" repeatedly until "FLD.RAND"/"ALB.RAND" appears on the screen.

To cancel, select "RAND" again.

Repeat play

■ Repeating a file/track

Select "RPT" on the screen.

Each time "RPT" is selected, the mode changes as follows:

- When "RAND" is off
file/track repeat → folder/album repeat → off
- When "RAND" is on
file/track repeat → off

■ Repeating a folder/album

Select "RPT" repeatedly until "FLD.RPT"/"ALB.RPT" appears on the screen.

To cancel, select "RPT" again.

Available except when random playback is selected

**■ If you select **

The display returns to the previous screen.

■ USB memory functions

- When the USB memory is connected and the audio source is changed to USB memory mode, the USB memory will start playing the first file/track in the first folder/album. If the same device is removed and reinserted (and the contents have not been changed), the USB memory will resume playing from the same point it was last used.
- Depending on the USB memory that is connected to the system, certain functions may not be available. Disconnecting the device and reconnecting it once again may resolve some malfunctions.

■ When using a USB memory

You may be unable to use the console box power outlet if the USB memory is connected to the USB port at the same time.

■ Error messages for USB memory

“USB Error”: This indicates a problem in the USB memory or its connection.

“No music files found.”: This indicates that no MP3/WMA files are included in the USB memory.

■ USB memory

- Compatible devices
USB memory that can be used for MP3 and WMA playback.

- Compatible device formats
The following device formats can be used:

- USB communication formats: USB2.0 HS (480 Mbps) and FS (12 Mbps)
- File formats: FAT16/32 (Windows)
- Correspondence class: Mass storage class

MP3 and WMA files written in any format other than those listed above may not play correctly, and their file names and folder names may not be displayed correctly.

Items related to standards and limitations are as follows:

- Maximum directory hierarchy: 8 levels
- Maximum number of folders in a device: 3000 (including the root)
- Maximum number of files in a device: 9999
- Maximum number of files per folder: 255

- MP3 and WMA files

MP3 (MPEG Audio LAYER 3) is a standard audio compression format.

Files can be compressed to approximately 1/10 of their original size using MP3 compression.

WMA (Windows Media Audio) is a Microsoft audio compression format.

This format compresses audio data to a size smaller than that of the MP3 format.

There is a limit to the MP3 and WMA file standards that can be used and to the media/formats on which the files are recorded.

- MP3 file compatibility

- Compatible standards
MP3 (MPEG1 AUDIO LAYER II, III, MPEG2 AUDIO LAYER II, III, MPEG2.5)
- Compatible sampling frequencies
MPEG1 AUDIO LAYER II, III: 32, 44.1, 48 (kHz)
MPEG2 AUDIO LAYER II, III: 16, 22.05, 24 (kHz)
- Compatible bit rates (compatible with VBR)
MPEG1 AUDIO LAYER II, III: 32-320 (kbps)
MPEG2 AUDIO LAYER II, III: 8-160 (kbps)
- Compatible channel modes: stereo, joint stereo, dual channel and monaural

- WMA file compatibility

- Compatible standards
WMA Ver. 9
- Compatible sampling frequencies
HIGH PROFILE 32, 44.1, 48 (kHz)
- Compatible bit rates
HIGH PROFILE 48-320 (kbps, VBR)

- File names

The only files that can be recognized as MP3/WMA and played are those with the extension .mp3 or .wma.

- ID3 and WMA tags

ID3 tags can be added to MP3 files, making it possible to record the track title, artist name, etc.

The system is compatible with ID3 Ver. 1.0, 1.1, and Ver. 2.2, 2.3, 2.4 ID3 tags.

(The number of characters is based on ID3 Ver. 1.0 and 1.1.)

WMA tags can be added to WMA files, making it possible to record the track title and artist name in the same way as with ID3 tags.

- MP3 and WMA playback

- When a device containing MP3 or WMA files is connected, all files in the USB memory device are checked. Once the file check is finished, the first MP3 or WMA file is played. To make the file check finish more quickly, we recommend that you do not include any files other than MP3 or WMA files or create any unnecessary folders.
- When the USB device is connected and the audio source is changed to USB memory mode, the USB device will start playing the first file/track in the first folder/album. If the same device is removed and reinserted (and the contents have not been changed), the USB device will resume play from the same point in which it was last used.

- Extensions

If the file extensions .mp3 and .wma are used for files other than MP3 and WMA files, they will be skipped (not played).

- Playback

- To play MP3 files with steady sound quality, we recommend a fixed bit rate of at least 128 kbps and a sampling frequency of 44.1 kHz.
- There is a wide variety of freeware and other encoding software for MP3 and WMA files on the market, and depending on the status of the encoding and the file format, poor sound quality or noise at the start of playback may result. In some cases, playback may not be possible at all.
- Microsoft, Windows, and Windows Media are registered trademarks of Microsoft Corporation in the U.S.A. and other countries.

 CAUTION **While driving**

Do not connect a USB memory or operate the controls.

 NOTICE **If the armrest cannot be fully closed**

Depending on the size and shape of the USB memory that is connected to the system, the armrest may not close fully. In this case, do not forcibly close the armrest as this may damage the USB memory or the terminal, etc.

 To prevent damage to the USB memory or its terminal


-  Do not leave USB memory in the vehicle. The temperature inside of the vehicle may become high, resulting in damage to the USB memory.
-  Do not push down on or apply unnecessary pressure to the USB memory while it is connected.
-  Do not insert foreign objects into the port.

Listening to an iPod

Connecting an iPod enables you to enjoy music from the vehicle speakers.

Press the “MEDIA” button if an iPod has already been connected.

Select the “iPod” tab or press the “MEDIA” button repeatedly until the “iPod” tab is selected.

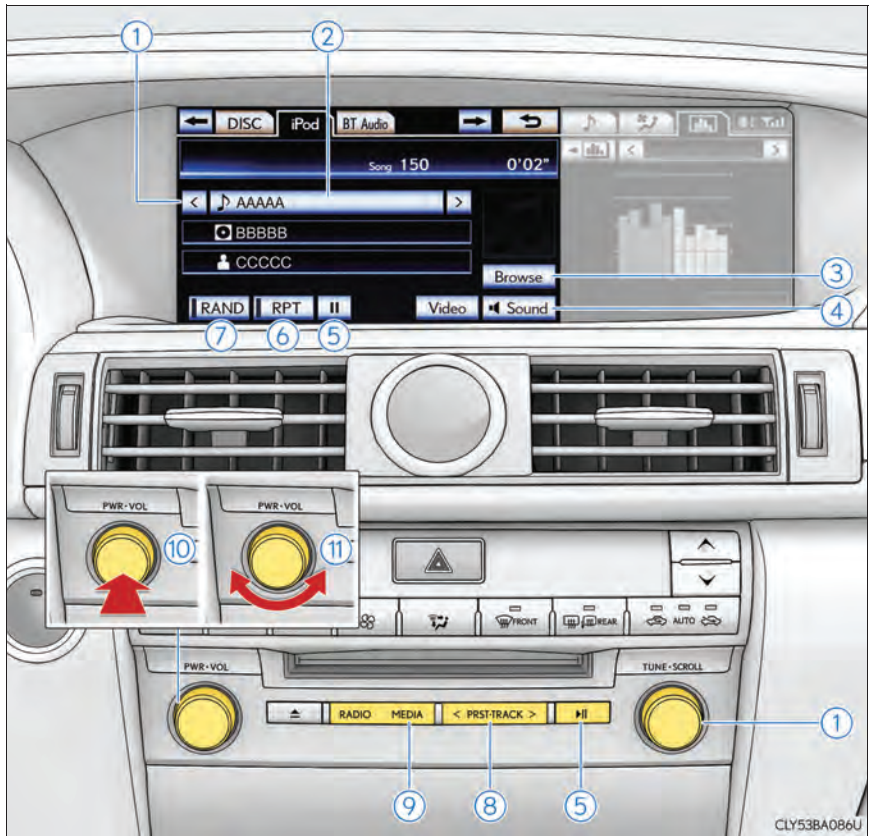


- | | |
|-------------------------------|---------------------------------------|
| ① Track selection | ⑦ Random playback |
| ② Displays track list | ⑧ Track selection/fast forward/rewind |
| ③ Selecting a play mode | ⑨ Media selection |
| ④ Setting the sound (→P. 530) | ⑩ Power |
| ⑤ Play/pause | ⑪ Volume |
| ⑥ Repeat play | |

Connecting an iPod

Open the console box, open the cover and connect an iPod using an iPod cable.


Turn on the power of the iPod if it is not turned on.

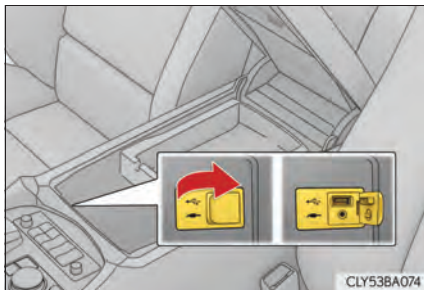

Playing iPod

■ Play/pause

Select  to play, select  to pause or press  to play/pause.

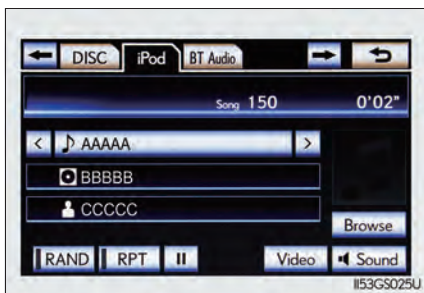


■ Selecting a play mode

1 Select "Browse".



2 Select the desired play mode.

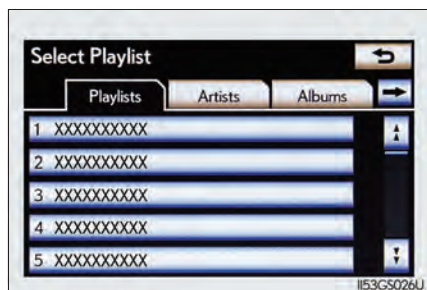

Selecting, fast forwarding or rewinding a track

■ Selecting a track

Select “<” or “>” on the screen to select the next/previous track.

Press “<” or “>” on the “PRST•TRACK” button or turn the “TUNE•SCROLL” knob to select the desired track number.

■ Selecting a track from the track list

- 1 Select the track name on the screen to display the following track list screen.


- 2 Select the desired track number.

 : Select to move the list up or down by 5 track groups.

“PRST•TRACK” button: Press “<” or “>” on the “PRST•TRACK” button to scroll through the track list one by one.

“TUNE•SCROLL” knob: Turn the knob clockwise or counterclockwise to quickly scroll up or down the track list.

 : If  appears to the right of an item name, the complete name is too long for the screen. Select  to scroll to the end of the name. Select  to move to the beginning of the name.

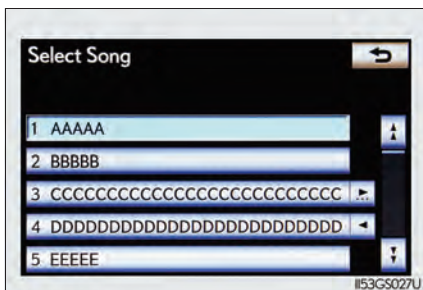

■ Fast forwarding or rewinding a track

Press and hold “<” or “>” on the “PRST•TRACK” button to fast forward or rewind.

Random playback

■ Playing tracks in random order

Select “RAND” on the screen.

Each time “RAND” is selected, the mode changes as follows:

track shuffle → album shuffle → off

■ Playing the albums in random order

Select “RAND” repeatedly until “ALB.RAND” appears on the screen.

To cancel, select “RAND” again.

Repeat play

Select “RPT” on the screen.


“RPT” appears on the screen.



To cancel, select “RPT” again.

Cover art display settings

When the track currently being played has cover art data, it can be displayed.

- 1** Press the “MENU” button on the Remote Touch and select “Setup” on the “Menu” screen.
- 2** Select “Audio” on the “Setup” screen.
- 3** Select “iPod Settings”.

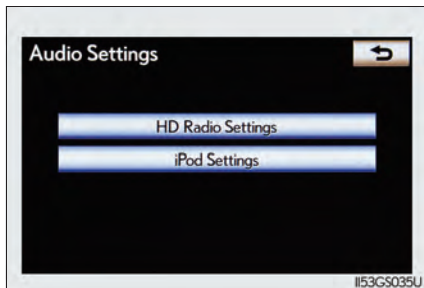

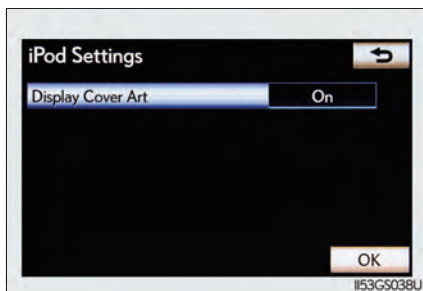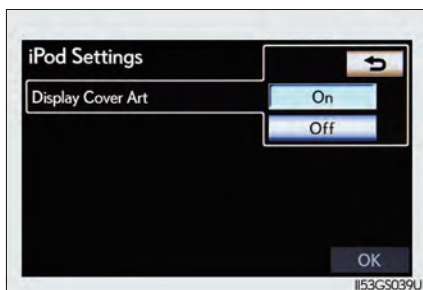4 Select “Display Cover Art”**5** Select “On” or “Off”.**6** After iPod setting has been changed, select “OK”.**■ If you select**

The display returns to the previous screen.

■ About iPod

Made for



iPod



iPhone

- “Made for iPod” and “Made for iPhone” mean that an electronic accessory has been designed to connect specifically to iPod, or iPhone, respectively, and has been certified by the developer to meet Apple performance standards.
- Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod or iPhone may affect wireless performance.
- iPhone, iPod, iPod classic, iPod nano and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.

■ iPod cover art

- Depending on the iPod and the songs in the iPod, iPod cover art may be displayed. This function can be changed to “On” or “Off”. (→P. 523)
- It may take time to display iPod cover art, and the iPod may not be operated while the cover art display is in process.
- Only iPod cover art that is saved in JPEG format can be displayed.

■ iPod functions

- When the iPod connected to the system includes iPod video, the system can only output the sound by selecting “Video” on the “iPod” screen.
- Depending on the iPod, the video sound may not be able to be heard.
- When an iPod is connected and the audio source is changed to iPod mode, the iPod will resume play from the same point in which it was last used.
- Depending on the iPod that is connected to the system, certain functions may not be available. If a function is unavailable due to a malfunction (as opposed to a system specification), disconnecting the device and reconnecting it once again may resolve the problem.

■ When using an iPod


You maybe unable to use the console box power outlet if the iPod is connected to the USB port at the same time.

■ Battery charge

When an iPod is connected using a genuine iPod cable, the iPod starts charging its battery.

■ Routing portable audio device cables (4-seat models or 5-seat models without rear seat entertainment system)

There are grooves in the tray allowing audio devices and cellular phones to be connected to the sockets while they are on the tray in the console box.



■ Error messages for iPod

“iPod Error”:

This indicates a problem in the iPod or its connection.

“No music files found.”:

This indicates that there is no music data in the iPod.

“Please check the iPod firmware version.”:

This indicates that the software version is not compatible. Perform the iPod firmware updates and try again.

“iPod authorization failed.”:

This indicates that it failed to authorize the iPod. Please check your iPod.

■ Compatible models

The following iPod[®], iPod nano[®], iPod classic[®], iPod touch[®] and iPhone[®] devices can be used with this system.

■ Made for

- iPod touch (4th generation)
- iPod touch (3rd generation)
- iPod touch (2nd generation)
- iPod touch (1st generation)
- iPod classic
- iPod with video
- iPod nano (6th generation)
- iPod nano (5th generation)
- iPod nano (4th generation)
- iPod nano (3rd generation)
- iPod nano (2nd generation)
- iPod nano (1st generation)
- iPhone 4
- iPhone 3GS
- iPhone 3G
- iPhone

Depending on differences between models or software versions etc., some models might be incompatible with this system.

 CAUTION **While driving**

Do not connect an iPod or operate the controls.

 NOTICE **If the armrest cannot be fully closed**

Depending on the size and shape of the iPod that is connected to the system, the armrest may not close fully. In this case, do not forcibly close the armrest as this may damage the iPod or the terminal, etc.


 To prevent damage to the iPod or its terminal

-  Do not leave the iPod in the vehicle. The temperature inside the vehicle may become high, resulting in damage to the iPod.
-  Do not push down on or apply unnecessary pressure to the iPod while it is connected.
-  Do not insert foreign objects into the port.


Using the AUX port

This port can be used to connect a portable audio device and listen to it through the vehicle's speakers.

- 1 Open the console box, open the cover and connect the portable audio device.

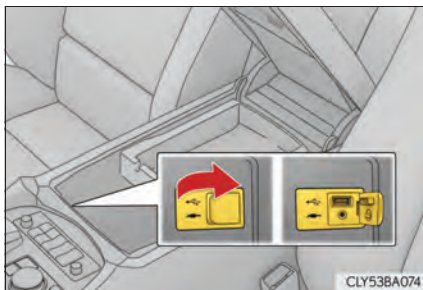

- 2 Press the "MEDIA" button.

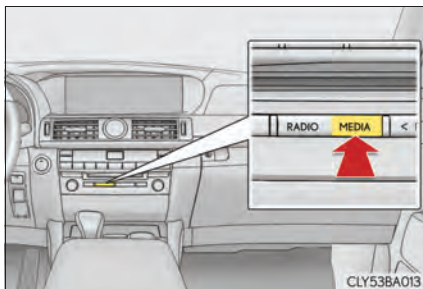

- 3 Select the "AUX" tab on the screen or press the "MEDIA" button repeatedly to change to AUX mode.

■ When using a portable audio device connected to the power outlet

Noise may occur during playback. Use the power source of the portable audio device.

■ Routing portable audio device cables

→P. 525

 CAUTION **Caution while driving**

Do not connect portable audio device or operate the controls.

 NOTICE **If the armrest cannot be fully closed**

Depending on the size and shape of the portable audio device that is connected to the system, the armrest may not close fully. In this case, do not forcibly close the armrest as this may damage the portable audio device or the terminal, etc.

 To prevent damage to portable audio device

-  Do not leave portable audio device in the vehicle. The temperature inside the vehicle may become high, resulting in damage to the player.
-  Do not push down on or apply unnecessary pressure to the portable audio device while it is connected as this may damage the portable audio device or its terminal.
-  Do not insert foreign objects into the port as this may damage the portable audio device or its terminal.

Optimal use of the audio/video system


Select **Sound** to adjust the sound settings.

After sound setting has been changed, select "OK".




■ "Sound" tab

- ① ② ③ Select "-" or "+" to adjust the treble, mid or bass.
- ④ ⑤ Select "Front" or "Rear" to adjust the front/rear audio balance.
- ⑥ ⑦ Select "L" or "R" to adjust the left/right audio balance.

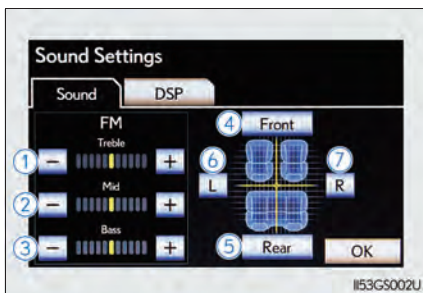

■ "DSP" tab

- ① Automatic Sound Levelizer (ASL) on/off
- ② Surround on/off

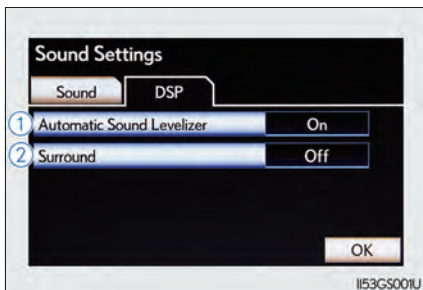

■ The sound quality level is adjusted individually


The treble, mid and bass levels can be adjusted for the each audio mode separately.

■ About Automatic Sound Levelizer (ASL)

ASL automatically adjusts the volume and tone quality according to the vehicle speed, wind noise or other noise.

Using the rear seat audio controls

Some front audio features can be controlled from the rear seats.

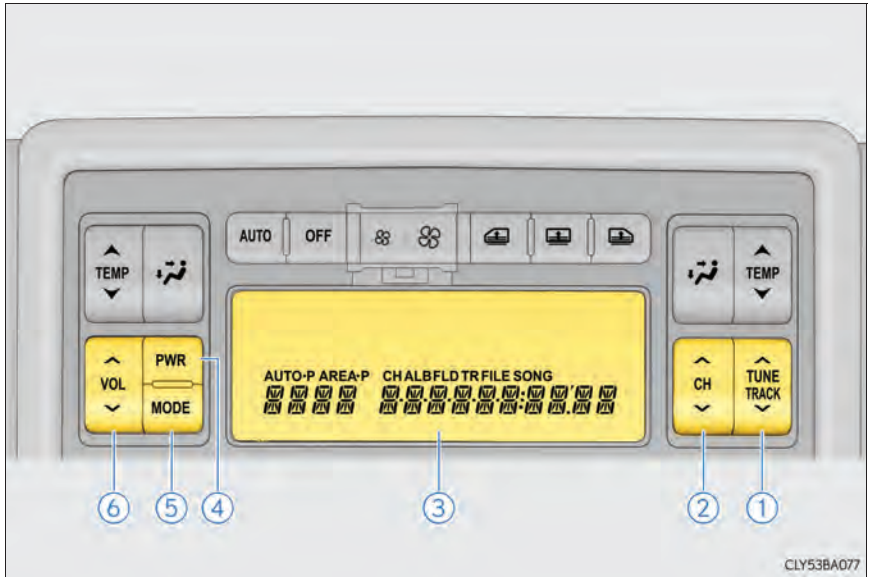

- ① Selecting a track or file etc.
- ② Selecting a preset station or folder etc.
- ③ Display
- ④ Power on/off
- ⑤ Selecting an audio source
- ⑥ Volume up/down

Turning the power on/off

Press the “PWR” switch to turn the front audio system on.

Pressing the button again turns the system off.

Changing the audio source

Press the “MODE” switch to change the audio source.

Each press changes the mode sequentially if the desired mode is ready to use.

Adjusting the volume

Press “^” on the “VOL” switch to increase the volume and “v” to decrease the volume.

Press and hold the button to continue increasing or decreasing the volume.

Selecting a radio station/channel

■ Select a radio station/channel

- 1** Press the “MODE” switch to select a frequency band.
- 2** Press “^” or “v” on the “TUNE/TRACK” switch to adjust the frequency.

To seek for receivable stations/channels, press and hold the “TUNE/TRACK” switch until you hear a beep.

■ Select a preset station/channel

- 1** Press the “MODE” switch to select a frequency band.
- 2** Press “^” or “v” on the “CH” switch to select a preset station/channel.

Selecting a track/file or chapter

- 1** Press the “MODE” switch to select the audio CD, MP3/WMA disc, DVD, Bluetooth[®] audio, iPod, or USB memory mode.
- 2** Press “^” or “v” on the “TUNE/TRACK” switch to select a file/track/chapter.

To return to the beginning of the current track, file or chapter, press “v” on the “TUNE/TRACK” switch once quickly.

Selecting a folder/album

- 1** Press the "MODE" switch to select the MP3/WMA disc, Bluetooth[®] audio or USB memory mode.
- 2** Press "∧" or "∨" on the "CH" switch to select a folder/album.

■ Fast forwarding or rewinding a chapter or track/file

Press and hold "∧" or "∨" on the "TUNE/TRACK" switch.

■ Button lock function

To prevent inadvertent operation, some buttons on the rear armrest can be locked. (→P. 424)

■ Rear control panel illumination off function

Control panel illumination on the rear armrest can be turned off. (→P. 424)

■ When "ERROR", "WAIT" or "NO MUSIC" is shown on the display

Refer to the following and take the appropriate measures. If the problem is not rectified, take the vehicle to your Lexus dealer.

"ERROR": This indicates a trouble either in the disc or inside the player. The disc may be dirty, damaged, or inserted up-side down.


"WAIT": Operation is stopped due to a high temperature inside the player. Eject the disc and allow the player to cool down.

"NO MUSIC": This indicates that an MP3/WMA file is not included in the disc.

Using the steering wheel audio switches

Some audio features can be controlled using the switches on the steering wheel.

- ① Volume
- ② Radio mode: Selects a radio station/channel
- Audio CD mode:
Selects a track
- MP3/WMA disc mode:
Selects a file and folder
- DVD mode: Selects a chapter
- Bluetooth[®] audio mode:
Selects a track and album
- iPod mode: Selects a track
- USB memory mode:
Selects a file/track and folder/album
- ③ Turns the power on, selects audio source

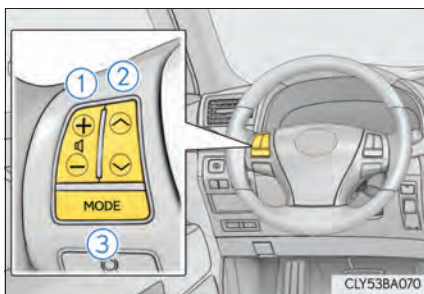

Turning the audio system on

To turn the audio system on, press the “MODE” switch.

Changing the audio source

Press the “MODE” switch to change the audio source.

Each press changes the mode sequentially if the desired mode is ready to use.

Adjusting the volume

Press the “+” switch to increase the volume and the “-” switch to decrease the volume.

Press and hold the button to continue increasing or decreasing the volume.

Silencing a sound or pause the current operation

Press and hold the “MODE” switch.

To cancel, press and hold the “MODE” switch again.

Selecting the preset station/channel

- 1** Press the “MODE” switch to select the radio mode.
- 2** Press the “^” switch or the “v” switch to select.

Seeking a radio station/channel

- 1** Press the “MODE” switch to select the radio mode.
- 2** Press and hold the “^” switch or the “v” switch until you hear a beep.

To cancel, press either switch.

Selecting a track/file or chapter

- 1** Press the “MODE” switch to select the audio CD, MP3/WMA disc, DVD, Bluetooth[®] audio, iPod, or USB memory mode.
- 2** Press the “^” switch or the “v” switch to select.

To return to the beginning of the current track, file or chapter, press the “v” switch once quickly.

Selecting a folder/album

- 1** Press the “MODE” switch to select the MP3/WMA disc, Bluetooth[®] audio or USB memory mode.
- 2** Press and hold the “^” switch or the “v” switch until a beep is heard to select.

CAUTION


To reduce the risk of an accident

Exercise care when operating the audio switches on the steering wheel.

Rear seat entertainment system features*


The rear seat entertainment system is designed for the rear passengers to enjoy video such as Blu-ray Disc™ (BD) and DVD disc separately from the front audio system.

► 5-seat models

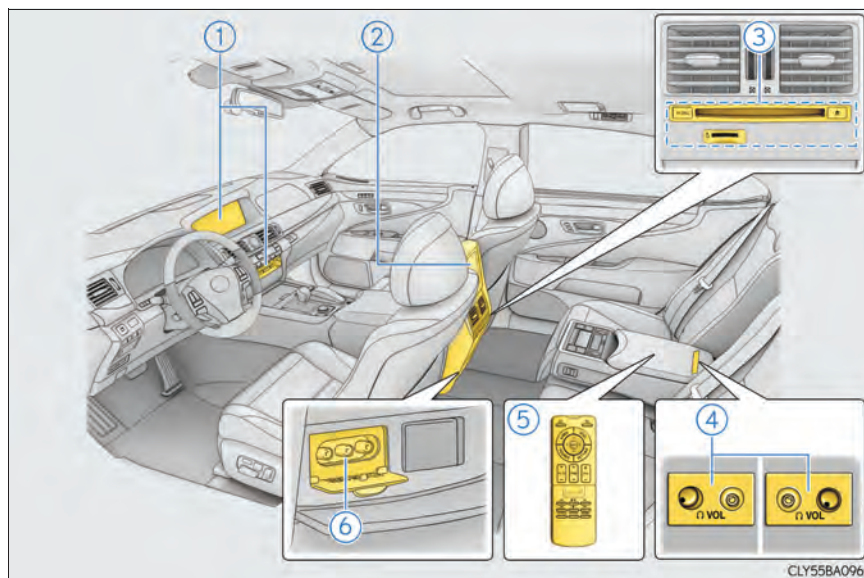

- ① Front audio system
- ② Display
- ③ BD/DVD player
- ④ Headphone volume control dials and headphone jacks
- ⑤ Remote controller
- ⑥ A/V input port

► 4-seat models

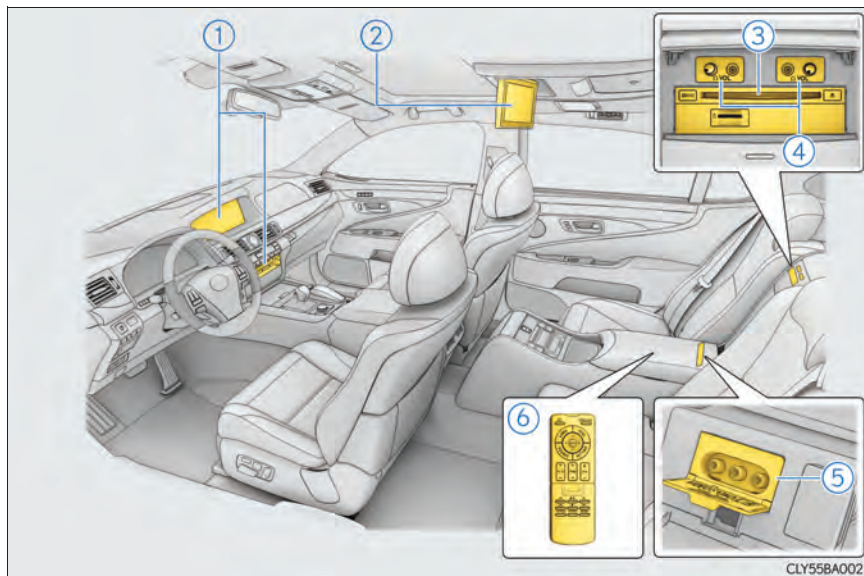


- ① Front audio system
- ② Display
- ③ BD/DVD player
- ④ Headphone volume control dials and headphone jacks
- ⑤ A/V input port
- ⑥ Remote controller

Remote controller


The rear seat entertainment system can be operated with the remote controller. The system cannot be operated by touching the switches on the screen directly.

To use the buttons under the cover, slide the cover down.

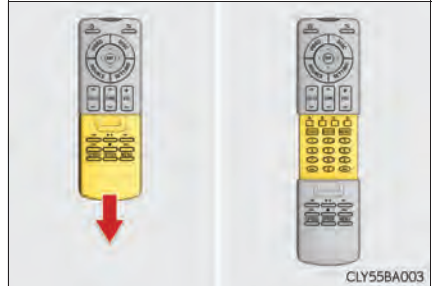

■ Basic operation

- ① Turning on/off the rear seat entertainment system
- ② Selecting a control icon
- ③ Displaying the source screen
- ④ Opening or closing the display (with overhead display)
- ⑤ Turning off the display (with rear console display)
- ⑥ Inputting the selected control icon
- ⑦ Displaying the setting screen
- ⑧ Adjusting the volume

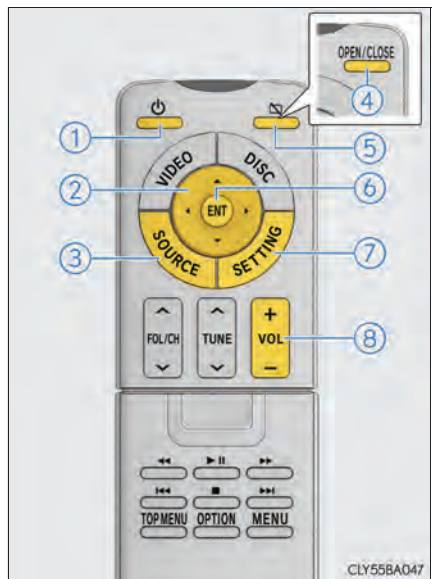

■ Selecting a control icon

Press “▲”, “▼”, “▶” or “◀” on  to select the control icon on the screen and then press “ENT” to enter.

Turning on or off the display (with rear console display)

● On

Press , "DISC", "VIDEO" or "SOURCE".

● Off

Press  or .

When you press , the sound will not be turned off.

Turning on or off operations can be performed from the front seat. (→P. 545)



Opening or closing the display (with overhead display)

■ Opening or closing the display

● Open

Press "OPEN/CLOSE", , "DISC", "VIDEO" or "SOURCE".


● Close

Press "OPEN/CLOSE" or .

If the display is closed with an image shown, the image will automatically turn off. When you press "OPEN/CLOSE", the sound will not be turned off.


Opening and closing operations can be performed from the front seat. (→P. 545)

Opening and closing operation can be set to auto. (→P. 600)

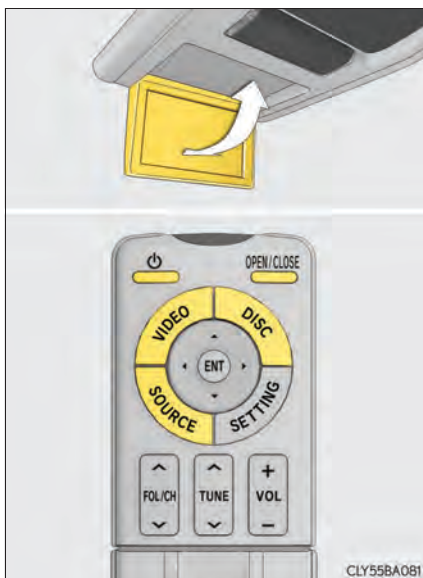


Loading and ejecting a disc

► 5-seat models

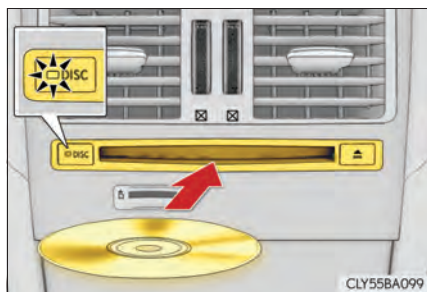

► 4-seat models

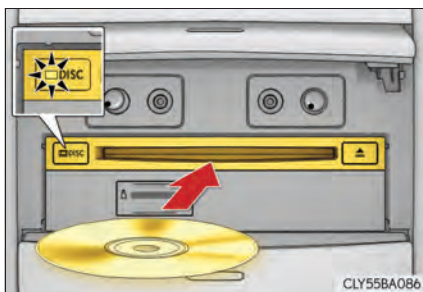


Insert the disc into the slot with the label side up.

The “DISC” indicator light turns on when the disc is loaded.

The player will start to play the disc automatically.

► 5-seat models

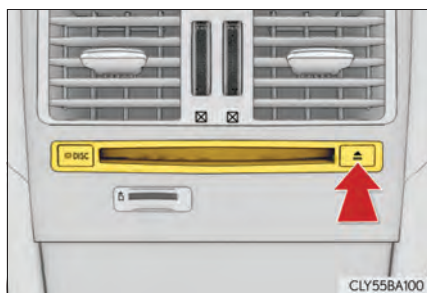

► 4-seat models




Press  and remove the disc.

If a disc cannot be ejected, do not forcibly take out the disc. Keep pressing  for approximately 10 seconds and release it.


If the ejected disc remains in the slot for 15 seconds, the player will automatically reload the disc.

Inserting and ejecting an SD card

► 5-seat models

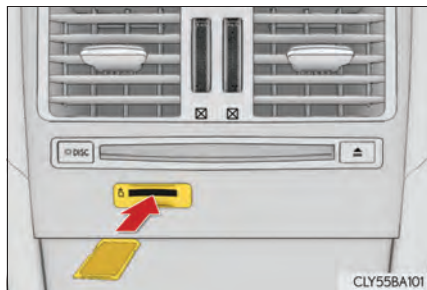


► 4-seat models

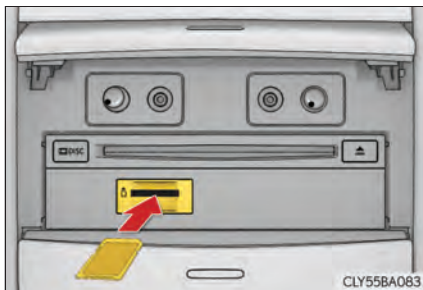


Insert the SD card with the label side up, positioning the cut off corner to the right. When it is inserted, push it straight in until you hear a click.

► 5-seat models

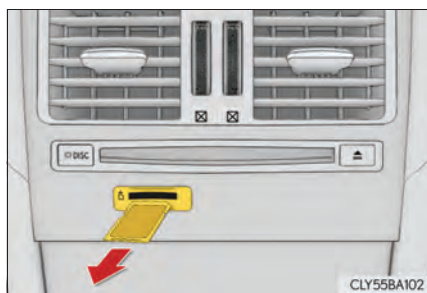

► 4-seat models

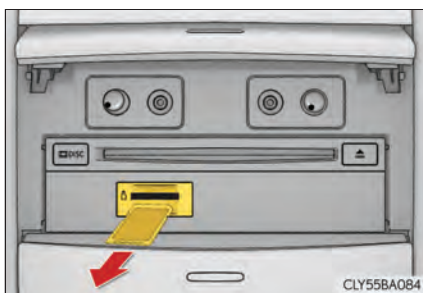

To eject the SD card, push on the center of the SD card. When it is ejected slightly, pull it straight out.

Changing the source

- 1 Press "SOURCE" to display the source screen.




- 2 Select the desired source.



Headphone jacks

► 5-seat models

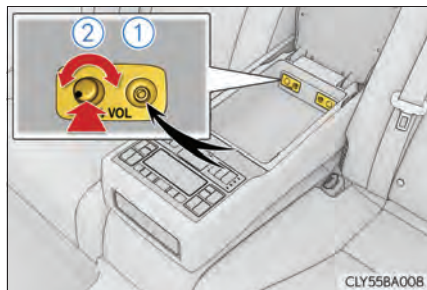

► 4-seat models



To listen to the rear seat entertainment system, use headphone.

① To use the headphone

Connect it to the jack.

② To adjust the volume

Push and turn it clockwise to increase the volume. Turn it counterclockwise to decrease the volume.

Changing the speaker output

To play the rear seat entertainment system over the speakers in the vehicle, turn "Speaker Output" on.




Operating from the front seats

The rear seat entertainment system can be operated from the front seats.

- 1 Display the audio control screen.
(→P. 427)

- 2 Select the “Rear” tab.

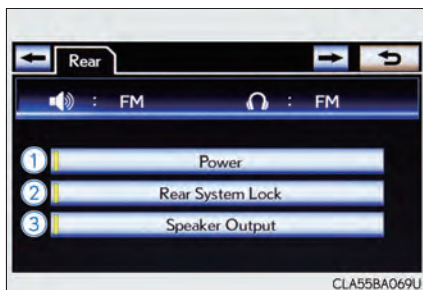

- ① Turns the rear seat entertainment system on/off.

- ② Locks the system so passengers in the rear seats cannot operate the rear seat entertainment system.

- ③ To play the rear seat entertainment system over the speakers in the vehicle, turn “Speaker Output” on.

- 3 Select the desired button. The selected button indicator is highlighted.

■ The rear seat entertainment system can be used when

The power switch is in ACCESSORY or ON mode.

■ Jam protection function (with overhead display)

The display will stop closing and return to its previous position if something gets in the way of it closing.

■ Caution screen

Caution screen appears for a few seconds when the rear display turns on.


During this time, only “OPEN/CLOSE” can be operated. (with overhead display)

■ When appears on the screen


It indicates that the selected icon cannot be used at this time.

■ Before using the remote controller (for new vehicle owners)

An insulating sheet is set to prevent the batteries from being depleted. Remove the insulating sheet before using the remote controller.

**■ When the remote controller batteries are fully depleted**

Remove the depleted batteries and install new batteries.

**■ If the remote controller batteries are discharged**

The following symptoms may occur.

- The remote controller will not function properly.
- The operational range is reduced.

■ Use two AA batteries

- Batteries can be purchased at Lexus dealer, electric appliance shop, or camera stores.
- Replace only with the same or equivalent type recommended by Lexus dealer.
- Dispose of used batteries according to the local laws.

■ Headphones

Infrared wireless headphones can also be used. However, with some headphones generally available in the market, it may be difficult to catch signals properly. Lexus recommends the use of Lexus genuine wireless headphones.

Contact your Lexus dealer for further details.

■ Volume

- Adjust the volume when you connect the headphone to the jack. Loud sounds may have a significant impact on the human body.
- Conversational speech on some BD/DVDs is recorded at a low volume to emphasize the impact of sound effects. If you adjust the volume assuming that the conversations represent the maximum volume level that the BD/DVD will play, you may be startled by louder sound effects or when you change to a different audio source. Be sure to adjust the volume with this in mind.

■ Discs that can be used

Discs with the marks shown below can be used.

Playback may not be possible depending on recording format or disc features, or due to scratches, dirt or deterioration.



The following discs cannot be used on this system:

- BD-XL™ disc
- BD-RE with the cartridge
- HD DVD
- DVD audio
- Video CD
- SACD

■ SD cards that can be used

- Memory cards are restricted to the following conditions based on SD standards.
 - SD memory card (from 512 MB to 2 GB)
 - SDHC memory card (from 4 GB to 32 GB)
 - SDXC memory card (from 48 GB to 128 GB)
- Mini SD cards and Micro SD cards can be used, but must be used with an adaptor card.
- MultiMedia Card (MMC) cannot be used.

■ SD card functions

- This system can play JPEG pictures and AVCHD video images that are stored in an SD card. It does not support music playback.
- Local storage
 - Some BD videos have a feature to memorize disc information, such as a resume point, in a local storage. The rear seat entertainment system uses an SD card as a local storage device. To use this function, insert an SD card into the SD card slot.
 - The SD card memory function may differ depending on the BD videos played.
 - When an SD card that contains any kind of data is inserted, BD video disc information will not be stored into the SD card to protect the existing data in the card. To use an SD card as a local storage, use another SD card that does not contain any data.

■ Copyrights and trademarks

- Blu-ray Disc™, Blu-ray™, BD-Live™, BDXL™, and the logos are trademarks of the Blu-ray Disc Association.



- Java is a registered trademark of Oracle and/or its affiliates.



- “AVCHD”, “AVCHD Progressive” and the “AVCHD Progressive” logo are trademarks of Panasonic Corporation and Sony Corporation.



- “DVD Logo” is a trademark of DVD Format/Logo Licensing Corporation.



- SDXC Logo is a trademark of SD-3C, LLC.



- Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.



- Manufactured under license under U.S. Patent Nos: 5,956,674; 5,974,380; 6,226,616; 6,487,535; 7,392,195; 7,272,567; 7,333,929; 7,212,872 & other U.S. and worldwide patents issued & pending. DTS-HD, the Symbol, & DTS-HD and the Symbol together are registered trademarks & DTS-HD Master Audio | Essential is a trademark of DTS, Inc. Product includes software. © DTS, Inc. All Rights Reserved.



- HDMI, the HDMI Logo, and High - Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

HDMI

- This product is licensed under the AVC patent portfolio license and the VC-1 patent portfolio license for the personal use of a consumer or other uses in which it does not receive remuneration to (i) encode video in compliance with the AVC Standard and the VC-1 Standard ("AVC/VC-1 Video") and/or (ii) decode AVC/VC-1 Video that was encoded by a consumer engaged in a personal activity and/or was obtained from a video provider licensed to provide AVC/VC-1 Video. No license is granted or shall be implied for any other use. Additional information may be obtained from MPEG LA, LLC.
See <http://www.mpegla.com>.

- Cinavia Notice

This product uses Cinavia technology to limit the use of unauthorized copies of some commercially-produced film and videos and their soundtracks. When a prohibited use of an unauthorized copy is detected, a message will be displayed and playback or copying will be interrupted.

More information about Cinavia technology is provided at the Cinavia Online Consumer Information Center at <http://www.cinavia.com>. To request additional information about Cinavia by mail, send a postcard with your mailing address to: Cinavia Consumer Information Center, P.O. Box 86851, San Diego, CA, 92138, USA.

- This product incorporates proprietary technology under license from Verance Corporation and is protected by U.S. Patent 7,369,677 and other U.S. and worldwide patents issued and pending as well as copyright and trade secret protection for certain aspects of such technology. Cinavia is a trademark of Verance Corporation. Copyright 2004-2010 Verance Corporation. All rights reserved by Verance. Reverse engineering or disassembly is prohibited.

- WMA (Windows Media Audio), Microsoft, Windows, and Windows Media are the registered trademarks of Microsoft Corporation in the U.S. and other countries. This product is protected by certain intellectual property rights of Microsoft Corporation and third parties. Use or distribution of such technology outside of this product is prohibited without a license from Microsoft or an authorized Microsoft subsidiary and third parties.
- This item incorporates copy protection technology that is protected by U.S. patents and other intellectual property rights of Rovi Corporation. Reverse engineering and disassembly are prohibited.
- This product incorporates the following software:
 - (1) the software developed independently by or for Panasonic Corporation,
 - (2) the software owned by third party and licensed to Panasonic Corporation,
 - (3) the software licensed under the GNU General Public License, Version 2 (GPL V2),
 - (4) the software licensed under the GNU LESSER General Public License, Version 2.1 (LGPL v2.1) and/or,
 - (5) open sourced software other than the software licensed under the GPL v2 and/or LGPL v2.1

For the software categorized as (3) and (4), please refer to the terms and conditions of GPL v2 and LGPL v2.1, as the case may be at

<http://www.gnu.org/licenses/old-licenses/gpl-2.0.html> and

<http://www.gnu.org/licenses/old-licenses/lgpl-2.1.html>.

In addition, the software categorized as (3) and (4) are copyrighted by several individuals. Please refer to the copyright notice of those individuals at <http://car.panasonic.jp/oss/VpqKvt4e/>

The GPL/LGPL software is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY, without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

At least three (3) years from delivery of products, we will give to any third party who contacts us at the contact information provided below, for a charge no more than our cost of physically performing source code distribution, a complete machine-readable copy of the corresponding source code covered under GPL v2/LGPL v2.1.

[Contact address]

GPL Manager Panasonic Corporation 4261 Ikonobe-cho, Tsuzuki-ku, Yokohama City 224-8520, Japan

Source code is also freely available to you and any other member of the public via our website below.

<http://car.panasonic.jp/oss/VpqKvt4e/>

For the software categorized as (5) includes as follows.

1. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)
2. This product includes software developed by the University of California, Berkeley and its contributors.
3. Free Type code.
4. The Independent JPEG Group's JPEG software.
5. Vera Fonts. (<http://www.gnome.org/fonts/>)



CAUTION

■ When the rear seat entertainment system is not used (with overhead display)

Keep the display closed. In the event of an accident or sudden braking, the opened display may hit an occupant's body, resulting in injury.

■ To prevent accidents and electric shock

Do not disassemble or modify the remote controller.

■ When the remote controller is not used

Stow the remote controller.

Injuries may result in the event of an accident or sudden braking.

■ Closing the display (with overhead display)

Never use any part of your body to intentionally activate the jam protection function.

■ Removed battery and other parts

These parts are small and if swallowed by a child they can cause choking. Keep away from children. Failure to do so could result in death or serious injury.

 NOTICE**■ Cleaning the display**

Wipe the display with a dry soft cloth. If the screen is wiped with a rough cloth, the surface of the screen may be scratched.

■ To prevent damage to the remote controller

- Keep the remote controller away from direct sunlight, heat and high humidity.
- Do not drop or strike the remote controller against hard objects.
- Do not sit on or place heavy objects on the remote controller.

■ BD/DVD player

Never try to disassemble or oil any part of the BD/DVD player. Do not insert anything other than a disc into the slot.

■ Closing the display (with overhead display)

Do not close the display using your hand. Doing so may result in a malfunction.

■ For normal operation after replacing the battery

Observe the following precautions to prevent accidents.

- Always work with dry hands.
Moisture may cause the battery to rust.
- Do not touch or move any other components inside the remote controller.
- Do not bend either of the battery terminals.

Playing a Blu-ray Disc™ (BD) and DVD disc

This system can play Blu-ray Disc™ (BD) videos with digital sound. In addition to commercial BD and DVD titles, AVCHD and BDAV videos can be played on this system, so digital TV recorded by home digital video recorders and BD/DVD home videos recorded by home digital video cameras can also be played on this system.


■ Switching to BD/DVD mode

Select “Rr-DISC” on the source screen or press “DISC” if a disc has already been loaded in the disc slot.


■ Remote controller

- ① Inputting the selected control icon
- ② Turning on the BD/DVD mode
- ③ Selecting a control icon
- ④ Volume up/down
- ⑤ Fast-forward/rewind
- ⑥ Stop
- ⑦ Displaying the menu screen
- ⑧ Displaying the option screen
- ⑨ Displaying the top menu screen
- ⑩ Selecting a chapter
- ⑪ Play/pause
- ⑫ Color buttons (→P. 566)
- ⑬ 10 key buttons (→P. 566)

► The cover is closed

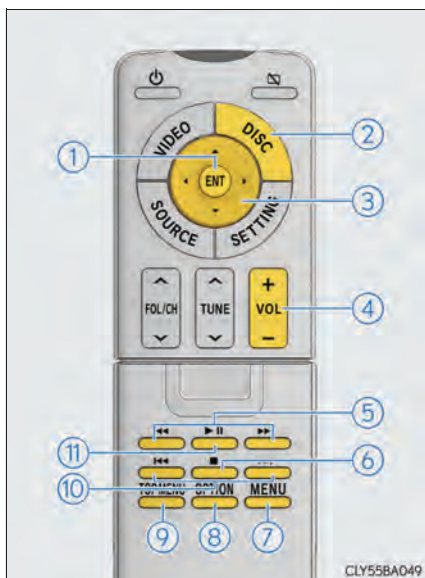

► The cover is opened

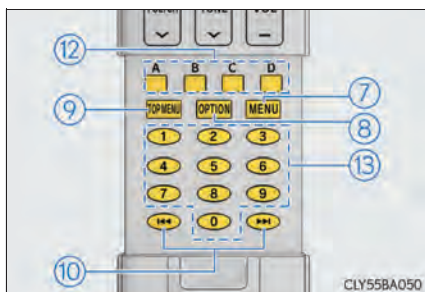


■ Option screen

Press "OPTION" while watching a BD/DVD video, the following screen appears.


● BD video

- ① Turning off the option screen
- ② Displaying the third page
- ③ Displaying the second page
- ④ Fast-forward
- ⑤ Play/pause
- ⑥ Stop
- ⑦ Rewind
- ⑧ Displaying the pop-up menu
- ⑨ Displaying the top menu screen
- ⑩ Displaying the initial setup screen
- ⑪ Displaying the top page
- ⑫ Changing the angle
- ⑬ Changing the subtitle language
- ⑭ Changing the audio language
- ⑮ Returning to the predetermined scene
- ⑯ Searching for a chapter
- ⑰ Searching for a title
- ⑱ Changing the secondary audio


► Top page

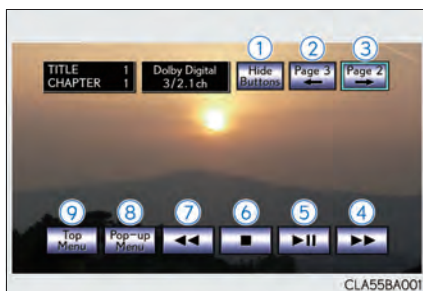

► Second page

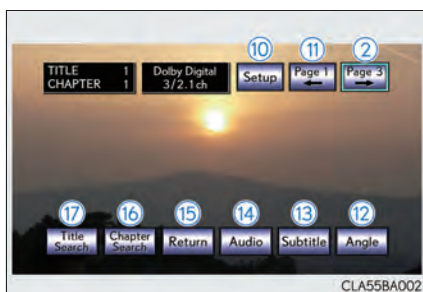

► Third page

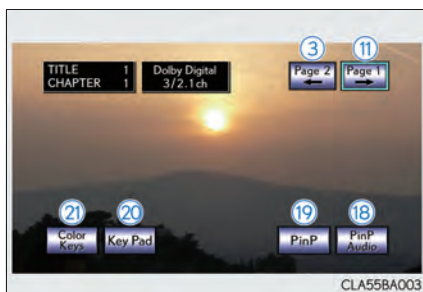

- ①⑨ Displaying the secondary video (Picture-in-picture)
- ②⑩ Displaying the 10 key pad
- ③⑪ Displaying the color key buttons

● BDAV

- ① Turning off the option screen
- ② Displaying the settings screen
- ③ Fast-forward
- ④ Play/pause
- ⑤ Stop
- ⑥ Rewind
- ⑦ Displaying the initial setup screen
- ⑧ Changing the audio channel
- ⑨ Changing the angle
- ⑩ Changing the audio language
- ⑪ Changing the playback mode
- ⑫ Searching for a chapter
- ⑬ Searching for a title

► Top page



► Second page



● AVCHD

- ① Turning off the option screen
- ② Displaying the settings screen
- ③ Fast-forward
- ④ Play/pause
- ⑤ Stop
- ⑥ Rewind
- ⑦ Displaying the top menu screen
- ⑧ Displaying the initial setup screen
- ⑨ Changing the subtitle language
- ⑩ Changing the audio language
- ⑪ Returning to the predetermined scene
- ⑫ Searching for a chapter
- ⑬ Searching for a title

► Top page



► Second page



● DVD video

- ① Turning off the option screen
- ② Displaying the settings screen
- ③ Fast-forward
- ④ Play/pause
- ⑤ Stop
- ⑥ Rewind
- ⑦ Displaying the menu screen
- ⑧ Displaying the top menu screen
- ⑨ Displaying the initial setup screen
- ⑩ Changing the angle
- ⑪ Changing the subtitle language
- ⑫ Changing the audio language
- ⑬ Returning to the predetermined scene
- ⑭ Searching for a title

► Top page



► Second page



Turning on the BD/DVD mode

Insert a disc or Press “DISC” with a disc inserted.

The player will start to play the disc automatically.

Playing/pausing a disc

Press  to play/pause.

Press and hold  while pausing, the video is played slowly.

Selecting a chapter

Press  or  until the desired chapter appears.

Fast forwarding/rewinding a disc


Press and hold  or .

Operating the disc menu

1 Press “TOP MENU” or “MENU”.

2 Select the menu item using the

“▲”, “▼”, “▶” or “◀” on ,
and press “ENT” to enter.

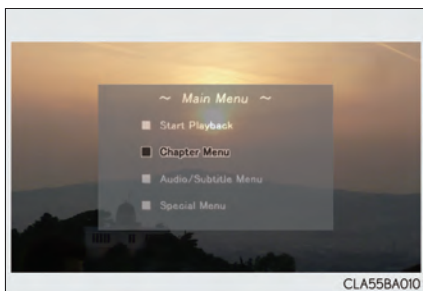


Option screen

■ Displaying the option screen

- 1 Press "OPTION".
- 2 The option screen is displayed.

Press "OPTION" once again or select "Hide Buttons" to turn off the option screen.

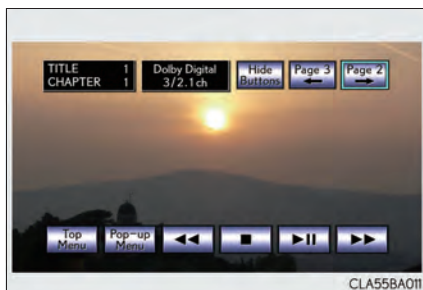


■ Displaying the pop-up menu (BD video)

Some BD video discs have a pop-up navigation menu that can be called up and be operated on the screen without interrupting playback.

- 1 Select "Pop-up Menu".
- 2 Select the menu item using the "▲", "▼", "▶" or "◀" on




, and press "ENT" to enter.

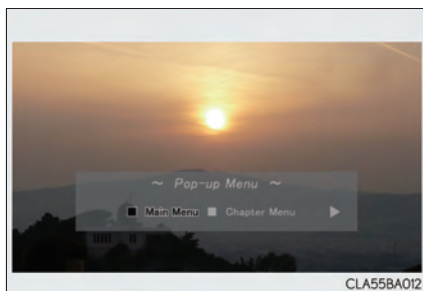

■ Searching for a title or chapter


- 1 Select “Page 2” or “Settings”.
- 2 Select “Title Search” or “Chapter Search”.
- 3 Input the title number or chapter number, and select “OK”.

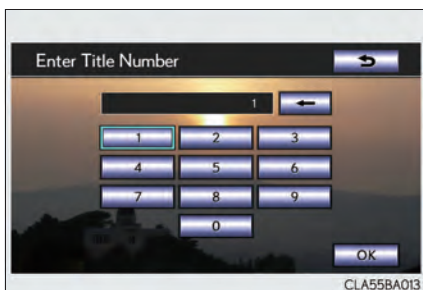

■ Changing the angle (BD video/DVD video/BD-RE)

The angle can be changed for discs that are multi-angle compatible when the angle mark appears on the screen.

- 1 Select “Page 2” or “Settings”.
- 2 Select “Angle”.
- 3 Each time “Angle” is selected, the angle changes.

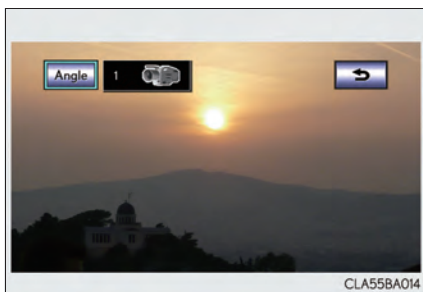


■ Changing the subtitle language (BD video/DVD video/AVCHD)

The subtitle language can be changed for discs with multiple subtitle languages.

- 1 Select "Page 2" or "Settings".
- 2 Select "Subtitle".
- 3 Each time "Subtitle" is selected, another language available on the disc is selected.

"Hide": Subtitle can be hidden


"Style" (BD video only): Subtitle style can be changed

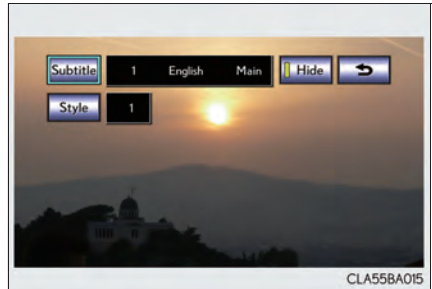

■ Changing the audio language

The audio language can be changed for discs with multiple audio languages.

- 1 Select "Page 2" or "Settings".
- 2 Select "Audio".
- 3 Each time "Audio" is selected, another language available on the disc is selected.

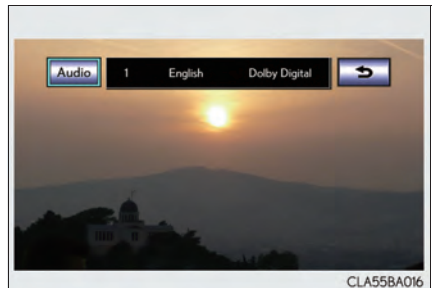

■ Changing the audio channel (BDAV)

The audio channel can be changed for discs with multiple audio channels.

- 1 Select "Settings".
- 2 Each time "MAIN/SUB" is selected, the mode changes in the following order:

"MAIN": Main audio channel



"SUB": Sub audio channel



"MAIN/SUB": Both the main and sub audio channels



■ Changing the playback mode (BDAV)

The playback mode can be changed to program mode or playlist mode. Playlist mode cannot be selected if a playlist is not stored on the disc.

- 1 Select "Settings".
- 2 Select "Playback Mode".
- 3 Each time "Playback Mode" is selected, the mode changes.

Program mode: Playback the disc in order of program number

Playlist mode: Playback the disc in order of playlist number




■ Displaying the secondary video (Picture-in-picture) (BD video)

Picture-in-picture is a secondary video that plays embedded in the primary video. The secondary video can be played from a disc compatible with the picture-in-picture function.

- 1 Select "Page 3".
- 2 Select "PinP".
- 3 The secondary video is displayed on the screen.

Each time "PinP" is selected, another secondary video available on the disc is selected.

"Hide": Secondary video can be hidden

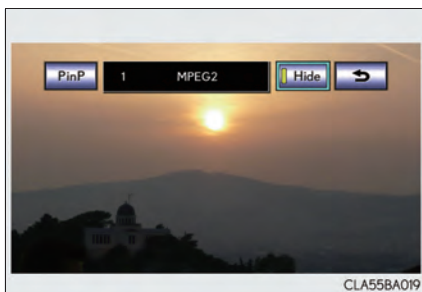

■ Changing the secondary audio (BD video)

The secondary audio that for the secondary video can be changed.

- 1 Select "Page 3".
- 2 Select "PinP Audio".
- 3 Each time "PinP Audio" is selected, another secondary audio stored on the disc is selected.

"OFF": Secondary audio can be turned off




■ Displaying the color key buttons (BD video)

The color button is used for various uses according to directions of contents.

- 1 Select "Page 3".
- 2 Select "Color Keys".
- 3 The color key buttons are displayed on the screen.

You can also use the color buttons (A-D) on the remote controller.

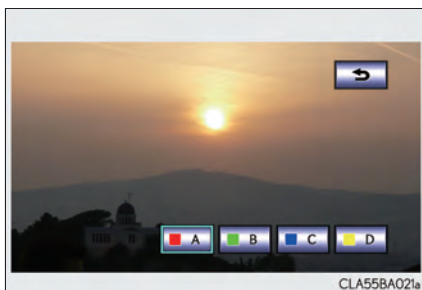


■ Displaying the 10 key pad (BD video)

The 10 key pad is used when inputting numbers according to directions of contents.

- 1 Select "Page 3".
- 2 Select "Key Pad".
- 3 The 10 key pad is displayed on the screen.

You can also use the 10 key buttons (1-0) on the remote controller.

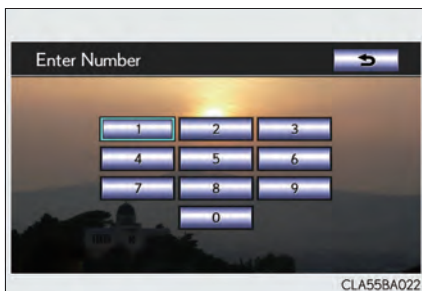

■ Initial setup

● Displaying the initial setup screen

- 1 Select "Page 2" or "Settings".
- 2 Select "Setup".
- 3 Select the settings to be changed.

▶ Page 1


"Page 2": Goes to next page

"Default": Restores default settings

"Clear BD History": BD history data such as bookmarks and resume point can be deleted.



▶ Page 2

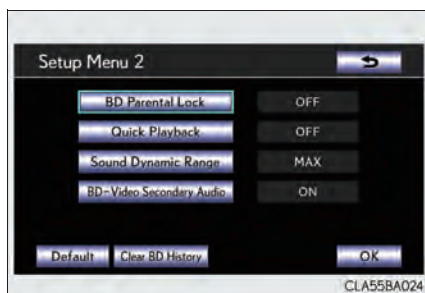

After the settings are changed, select "OK".

- Changing the initial audio language

- 1 Select "Audio Language".
- 2 Select the desired language.

If you cannot find the desired language, select "Other" and input the desired language code. (→P. 576)



- Changing the initial subtitle language

- 1 Select "Subtitle Language".
- 2 Select the desired language.

If you cannot find the desired language, select "Other" and input the desired language code. (→P. 576)



- Changing the initial language of the disc menu

- 1 Select "Disc Menu Language".
- 2 Select the desired language.

If you cannot find the desired language, select "Other" and input the desired language code. (→P. 576)



- Setting the angle mark

If the BD/DVD disc has angle options, you can turn the angle mark on/off.

Each time “Angle Mark” is selected, “ON” or “OFF” can be selected.



- Setting the DVD parental lock

The level of viewer restrictions can be set.

1 Select “DVD Parental Lock”.

2 Input the 4-digit personal code and then select “OK”.

Select  10 times to reset the personal code in case the code was forgotten.



3 Select a restriction level (1-8) and then select “OK”.



- Setting the BD parental lock

The age of viewer restrictions can be set.

- 1 Select "BD Parental Lock".
- 2 Input the 4-digit personal code and then select "OK".

Select  10 times to reset the personal code in case the code was forgotten.




- 3 Input a restriction age (0-255) and then select "OK".



- Setting a quick playback (BD video)

After inserting a BD disc you can skip over to the first playback point and can immediately playback the main story.

Each time "Quick Playback" is selected, "ON" or "OFF" can be selected.

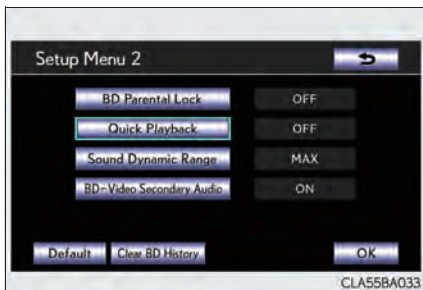

- Setting a sound dynamic range

The difference between the lowest and highest sound volumes can be adjusted.

Each time “Sound Dynamic Range” is selected, the setting changes in the following order:

“MAX”: Maximum dynamic range



“STD”: Standard dynamic range



“MIN”: Minimum dynamic range




“TrueHD”: TrueHD dynamic range

- BD Video secondary audio

BD Video secondary audio can be set.

Each time “BD-Video Secondary Audio” is selected, “ON” or “OFF” can be selected.

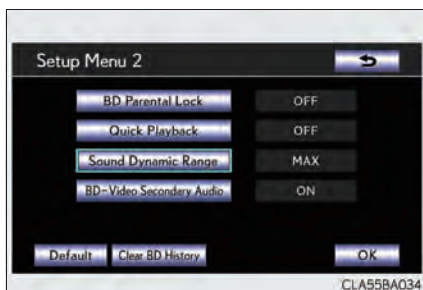

■ Discs that can be used (→P. 547)**■ Sound dynamic range**

“Sound Dynamic Range” can be set only when Dolby Digital or Dolby TrueHD is selected.

When Dolby TrueHD is selected, the sound dynamic range is the same as “MAX” even when set to “MIN”.

■ BD Video secondary audio

If BD Video secondary audio is set to on, secondary audio is output during sections that have secondary audio recorded. During these sections, HD sounds, such as 7.1 ch, will not be output.

However, if you are playing sections that meet all of the following conditions, HD sounds can be output:

- There is no interactive audio
- There is no secondary audio
- There are no BD-J titles

If BD Video secondary audio is set to off, HD sounds can be output. However, for sections that have secondary audio recorded, secondary audio will not be output.

■ BD/DVD video discs**● Compatible media**

Media that can be used for playback are BD-ROMs, BD-Rs, BD-REs, DVD-ROMs, DVD-Rs and DVD-RWs.

● Compatible disc formats

Disc formats that can be used for playback are BD video formats, BDAV formats, AVCHD formats, and DVD video formats

● This player conforms to NTSC/PAL color TV formats.**● Region codes**

Some BD/DVD video discs have a region code indicating the region in which you can use the BD/DVD video disc.

If the BD video disc is not labeled “A” or “ABC” or if the DVD video disc is not labeled “1” or “ALL”, you cannot use it on this player.

If you attempt to play BD/DVD video discs with incompatible region codes on this player, an error message appears on the screen. Even if the BD/DVD video disc does not have a region code, in some cases it cannot be used.

- When storing content on BD-R, BD-RE, DVD-R or DVD-RW discs, they must be finalized using a recorder. Discs that are not finalized cannot be played by this system.
 - Discs that are recorded with multi session cannot be played by this system.
 - BD-Live™ is not supported.
- Symbols shown on BD/DVD video discs

Symbol	Meaning
	Indicates PAL/NTSC format
	Indicates the number of audio tracks
	Indicates the number of language subtitles
	Indicates the number of angles
	Indicates the screen display ratios available Wide screen: 16:9 Standard: 4:3
	Indicates the disc's region code • BD video "ABC": all regions - Alphabet: region code • DVD video "ALL": all regions - Number: region code

■ BD/DVD video disc information

● Parental controls

This feature limits what can be viewed in conformity with the level of restrictions of the country. The level of restrictions varies depending on the BD/DVD video disc. Some BD/DVD video discs cannot be played at all, or violent scenes are skipped or replaced with other scenes.

- DVD video

Level 1: DVD video discs for children can be played.

Level 2 - 7: DVD video discs for children and G-rated movies can be played.

Level 8: All types of DVD video discs can be played.

- BD video

Parental controls of BD videos can be set up by inputting an age. If the target age of BD video exceeds the age restriction that was set up, then playback will not be possible.

● Multi-angle feature

You can enjoy the same scene from different angles.

● Multi-language option

You can select the subtitle and audio languages.

● Region codes

The region codes are provided on BD/DVD players and BD/DVD discs. If the BD/DVD disc does not have the same region code as the BD/DVD player, you cannot play the disc on the player.

● Title and chapter

Video and audio programs stored in BD/DVD video discs are divided into parts by title and chapter.

Title: The largest unit of the video and audio programs stored on BD/DVD video discs. Usually, one movie, one album, or one audio program is assigned as a title.

Chapter: A title comprises of one or more chapters.

- AVCHD

AVCHD is a new format (standard) for high definition video cameras that can record and play high-resolution HD images.

DVDs and SD cards with videos recorded in AVCHD format can playback on this system.

- BDAV (Blu-ray Disc™ Audio/Visual)

BDAV is one of the audio/video recording formats for Blu-ray Disc™, has been made primarily for the purpose of broadcasting the recording.

It is used when recording to BD-R and BD-RE by Blu-ray™ recorder.

- BD-J

Some BD video discs contain Java applications, and these applications are called BD-J. You can enjoy various interactive features in addition to playing normal video.

- Pop-up menu

Some BD video discs have a pop-up navigation menu that can be called up and be operated on the screen without interrupting playback.

- Picture-in-picture

This is a function of BD video that plays the primary video and secondary video simultaneously. For instance, the function is capable of playing the original movie as the primary video while playing video commentary from the film director on a small screen as a secondary video.

- DUBA (Disc Unbound BD-J Application)

For BD videos that come as a 2 disc set or more, after finishing and ejecting one of the discs, continuation of the video can be seen shortly after replacing the disc with the proper disc.

- Playlist (BDAV only)

A playlist of favorite scenes by Blu-ray™ recorder can be created and the scenes can playback via playlist.

- Audio

This player can play liner PCM, Dolby digital, DTS and MPEG audio format. Other decoded types cannot be played.

■ Language codes list

Code	Language
0514	English
0618	French
0405	German
0920	Italian
0519	Spanish
2608	Chinese
1412	Dutch
1620	Portuguese
1922	Swedish
1821	Russian
1115	Korean
0512	Greek
0101	Afar
0102	Abkhazian
0106	Afrikaans
0113	Amharic
0118	Arabic
0119	Assamese
0125	Aymara
0126	Azerbaijani
0201	Bashkir
0205	Byelorussian
0207	Bulgarian
0208	Bihari
0209	Bislama
0214	Bengali

Code	Language
0215	Tibetan
0218	Breton
0301	Catalan
0315	Corsican
0319	Czech
0325	Welsh
0401	Danish
0426	Bhutani
0515	Esperanto
0520	Estonian
0521	Basque
0601	Persian
0609	Finnish
0610	Fiji
0615	Faroese
0625	Frisian
0701	Irish
0704	Scots-Gaelic
0712	Galician
0714	Guarani
0721	Gujarati
0801	Hausa
0809	Hindi
0818	Croatian
0821	Hungarian
0825	Armenian

Code	Language
0901	Interlingua
0905	Interlingue
0911	Inupiak
0914	Indonesian
0919	Icelandic
0921	Inuktitut
0923	Hebrew
1001	Japanese
1009	Yiddish
1023	Javanese
1101	Georgian
1111	Kazakh
1112	Greenlandic
1113	Cambodian
1114	Kannada
1119	Kashmiri
1121	Kurdish
1125	Kirghiz
1201	Latin
1214	Lingala
1215	Laothian
1220	Lithuanian
1222	Latvian
1307	Malagasy
1309	Maori
1311	Macedonian

Code	Language
1312	Malayalam
1314	Mongolian
1315	Moldavian
1318	Marathi
1319	Malay
1320	Maltese
1325	Burmese
1401	Nauru
1405	Nepali
1415	Norwegian
1503	Occitan
1513	(Afan) Oromo
1518	Oriya
1601	Punjabi
1612	Polish
1619	Pashto, Pushto
1721	Quechua
1813	Rhaeto-Romance
1814	Kirundi
1815	Romanian
1823	Kinyarwanda
1901	Sanskrit
1904	Sindhi
1907	Sangho
1908	Serbo-Croatian
1909	Sinhalese

Code	Language
1911	Slovak
1912	Slovenian
1913	Samoaan
1914	Shona
1915	Somali
1917	Albanian
1918	Serbian
1919	Siswati
1920	Sesotho
1921	Sundanese
1923	Swahili
2001	Tamil
2005	Telugu
2007	Tajik
2008	Thai
2009	Tigrinya
2011	Turkmen
2012	Tagalog

Code	Language
2014	Setswana
2015	Tonga
2018	Turkish
2019	Tsonga
2020	Tatar
2023	Twí
2107	Uighur
2111	Ukrainian
2118	Urdu
2126	Uzbek
2209	Vietnamese
2215	Volapük
2315	Wolof
2408	Xhosa
2515	Yoruba
2601	Zhuang
2621	Zulu

 CAUTION**■ Certification for the player**

This product is a class I laser product.

- A laser beam leak may result in hazardous radiation exposure.
- Do not open the cover of the player or attempt to repair the unit yourself. Refer servicing to qualified personnel.
- Laser power: No hazardous

■ BD/DVD video precaution

Conversational speech on some BDs/DVDs is recorded at a low volume to emphasize the impact of sound effects. If you adjust the volume assuming that the conversations represent the maximum volume level that the BD/DVD will play, you may be startled by louder sound effects or startled when you change to a different audio source.

Loud sounds may have a significant impact on the human body or pose a driving hazard. Keep this in mind when you adjust the volume.


 NOTICE**■ Discs and adapters that cannot be used**

Do not use the following types of discs.


Also, do not use 3 in. (8 cm) disc adapters, Dual Discs or printable discs.

Doing so may damage the player and/or disc insert/eject function.


- Discs that have a diameter that is not 4.7 in. (12 cm).




- Low-quality or deformed discs.



- Discs with a transparent or translucent recording area.



- Discs that have tape, stickers or labels attached to them, or that have had the label peeled off.



**NOTICE****■ Player precautions**

Failure to follow the precautions below may result in damage to the discs or the player itself.

- Do not insert anything other than discs into the disc slot.
- Do not apply oil to the player.
- Store discs away from direct sunlight.
- Never try to disassemble any part of the player.

Playing an audio CD and MP3/WMA discs


Audio CD and MP3/WMA discs can be played on this system.

■ Switching to the audio CD and MP3/WMA mode

Select “Rr-DISC” on the source screen or press “DISC” if a disc has already been loaded in the disc slot. The player will start to play the disc automatically.

■ Remote controller

- ① Inputting the selected control icon
- ② Turning on the audio CD and MP3/WMA mode
- ③ Selecting a control icon
- ④ Volume up/down
- ⑤ Fast-forward/rewind
- ⑥ Selecting a track/file
- ⑦ Play/pause
- ⑧ Selecting a folder

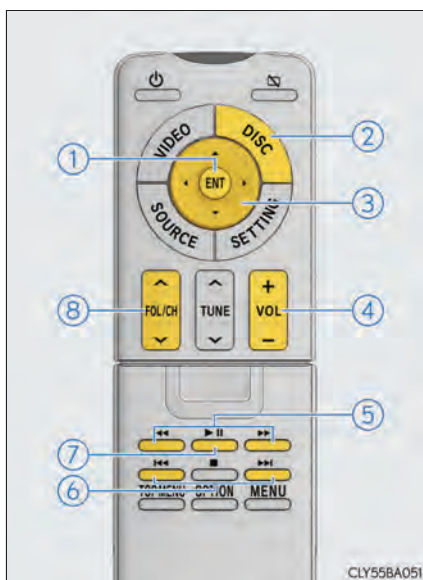

Turning on the audio CD and MP3/WMA mode

Insert a disc or Press “DISC” with a disc inserted.

The player will start to play the disc automatically.

Playing/pausing a disc

Press  to play/pause.

Selecting a track/file

Press  or  until the desired track/file number appears.

Fast forwarding or rewinding a track/file

Press and hold  or .

Selecting a folder (MP3/WMA)

Press “^” or “v” of “FOL/CH” until the desired folder number appears.

Press and hold “v”, the top file stored in the top folder in the disc will be selected.

■ Discs that can be used (→P. 547)**■ Displaying the title and artist name**

If a CD-TEXT disc is inserted, the titles of the disc and track will be displayed.

■ MP3 and WMA files

MP3 (MPEG Audio LAYER3) is a standard audio compression format.

Files can be compressed to approximately 1/10 of their original size by using MP3 compression.

WMA (Windows Media Audio) is a Microsoft audio compression format.

This format compresses audio data to a size smaller than that of the MP3 format.

There is a limit to the MP3 and WMA file standards and to the media/formats recorded by them that can be used.

● MP3 file compatibility

- Compatible standards
MP3 (MPEG1 LAYER3, MPEG2 LSF LAYER3)
- Compatible sampling frequencies
MPEG1 LAYER3: 32, 44.1, 48 (kHz)
MPEG2 LSF LAYER3: 16, 22.05, 24 (kHz)
- Compatible bit rates (compatible with VBR)
MPEG1 LAYER3: 64, 80, 96, 112, 128, 160, 192, 224, 256, 320 (kbps)
MPEG2 LSF LAYER3: 64, 80, 96, 112, 128, 144, 160 (kbps)
- Compatible channel modes: stereo, joint stereo, dual channel and mono

● WMA file compatibility

- Compatible standards
WMA Ver. 7, 8, 9
- Compatible sampling frequencies
32, 44.1, 48 (kHz)
- Compatible bit rates (only compatible with 2-channel playback)
Ver. 7, 8, 9: CBR 48, 64, 80, 96, 128, 160, 192 (kbps)

● Compatible media

Media that can be used for MP3 and WMA playback:

- CD-ROM/R/RW
- DVD-ROM/R/RW

Playback in some instances may not be possible, depending on the status of the disc. Playback may not be possible or the audio may jump if the disc is scratched or marked with fingerprints.

● Compatible disc formats

The following disc formats can be used.

- Disc formats: CD-ROM Mode 1
CD-ROM XA Mode 2 Form 1
- File formats: ISO9660 Level 1, Level 2 (Romeo, Joliet)
UDF (2.01 or lower)

MP3 and WMA files written in any format other than those listed above may not play correctly, and their file names and folder names may not be displayed correctly.

Items related to standards and limitations are as follows.

- Maximum directory hierarchy: 8 levels
- Maximum length of folder names/file names: 20 characters
- Maximum number of folders: 255 (including the root)
- Maximum number of files per disc: 512

● File names

The only files that can be recognized as MP3/WMA and played are those with the extension .mp3 or .wma.

● Multi-sessions

As the audio system is compatible with multi-sessions, it is possible to play discs that contain MP3 and WMA files.

● ID3 and WMA tags

ID3 tags can be added to MP3 files, making it possible to record the track title, artist name, etc.

The system is compatible with ID3 Ver. 1.0, 1.1, and Ver. 2.3 ID3 tags. (The number of characters is based on ID3 Ver. 1.0 and 1.1.)

WMA tags can be added to WMA files, making it possible to record the track title and artist name in the same way as with ID3 tags.

● MP3 and WMA playback

When a disc containing MP3 or WMA files is inserted, all files on the disc are first checked. Once the file check is finished, the first MP3 or WMA file is played. To make the file check finish more quickly, we recommend you do not write in any files other than MP3 or WMA files or create any unnecessary folders.

If the discs contain a mixture of music data and MP3 or WMA format data, only music data can be played.

● Extensions

If the file extensions .mp3 and .wma are used for files other than MP3 and WMA files, they will be mistakenly recognized and played as MP3 and WMA files. This may result in large amounts of interference and damage to the speakers.

● Playback

- To play MP3 files with steady sound quality, we recommend a fixed bit rate of 128 kbps and a sampling frequency of 44.1 kHz.
- Playback may not be possible in some instances, depending on the characteristics of the disc.
- There is a wide variety of freeware and other encoding software for MP3 and WMA files on the market, and depending on the status of the encoding and the file format, poor sound quality or noise at the start of playback may result. In some cases, playback may not be possible at all.
- When files other than MP3 or WMA files are recorded on a disc, it may take more time to recognize the disc and in some cases, playback may not be possible at all.

NOTICE

■ Discs and adapters that cannot be used (→P. 580)

■ Player precautions (→P. 581)

Playing an SD card


This system can play still pictures and AVCHD video that are stored in an SD card. It does not support music playback.

■ Switching to SD card mode

Select “Rr-SD” on the source screen if an SD card has already been inserted in the SD card slot.

■ Remote controller

- ① Inputting the selected control icon
- ② Selecting a control icon
- ③ Volume up/down
- ④ Fast-forward/rewind
- ⑤ Stop
- ⑥ Displaying the option screen
- ⑦ Selecting a chapter
- ⑧ Play/pause

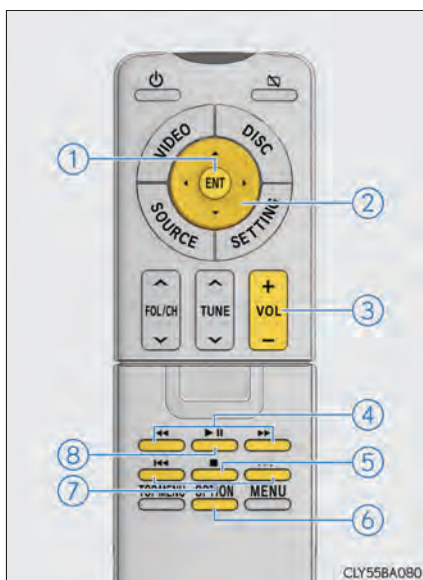


5

Interior features

■ Main menu

- ① Playing still pictures
- ② Playing AVCHD video
- ③ Deleting the BD history data
- ④ Formatting the SD card

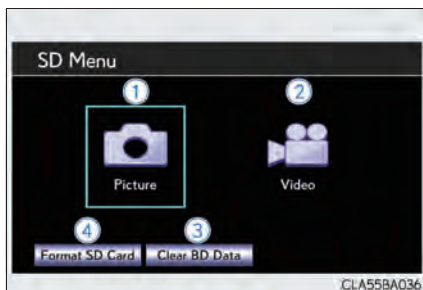


Playing still pictures

■ Displaying the still pictures


You can display still pictures that are stored in an SD card.

- 1 Select "Picture".

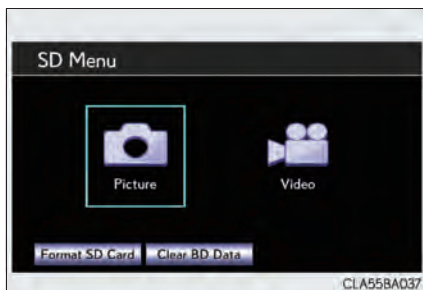

- 2 Select the desired still picture to show.


Select  or  to show the next or previous page.

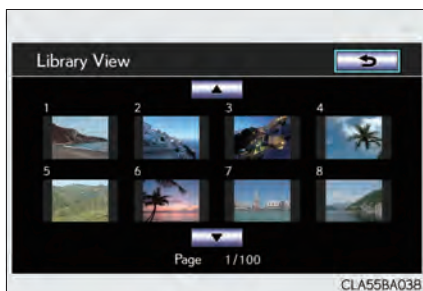

- 3 Selected picture is displayed on the screen.

Press "◀" or "▶" on  to display the next or previous still picture.

To return to the "Library View" screen, press "ENT".

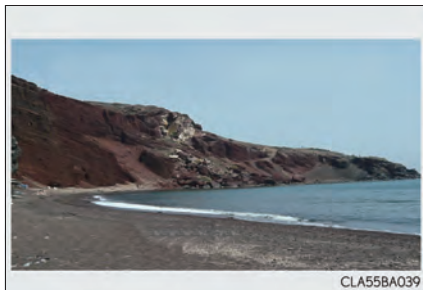

■ Option screen

- Displaying the option screen

- 1 Press "OPTION".
- 2 The option screen is displayed.

Press "OPTION" once again or select "Hide Buttons" to turn off the option screen.

"Library View": Return to "Library View" screen



- Starting slideshow

You can display still pictures one by one at a constant interval. Select "Slideshow" to start slideshow.

When pressing "◀" or "▶" on  during slideshow, the previous or next still picture will be shown, and the slideshow will continue from that picture.

Press "ENT" or "OPTION" to stop slideshow.

- Rotating the still pictures

Select  or  to rotate a still picture.

The rotate information will be maintained until the system is turned off or the SD card is removed.

- Zooming the still pictures

This function is only available for small-sized still pictures.

Select  to zoom in the still pictures.

Select  again to cancel zoom in.

● Slideshow settings


- 1 Select "Setup".
- 2 The slideshow settings can be changed. After the settings are changed, select "OK".
- 1 Selects slideshow interval time
 "5s" → "10s" → "15s" → "30s" → "60s"
- 2 Selects slideshow effect
 "Fade" → "Slide" → "Wipe1" → "Wipe2" → "Dissolve" → "Zoom" → "OFF"
- 3 Selects on/off to repeat slideshow
- 4 Restores default settings



Playing AVCHD video

You can play AVCHD videos that are stored in an SD card.

- 1 Select "Video".

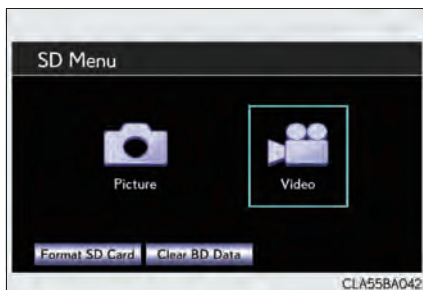

- 2 AVCHD video will start playing.

Controls for AVCHD video
 (→P. 554)

To return to the "SD Menu" screen, press "SOURCE" and then select "Rr-SD".



Formatting the SD card

- 1 Select “Format SD Card” on the “SD Menu” screen.
- 2 Select “Yes” to format the SD card.

If the SD card is formatted, all data on the card will be erased.

Deleting the BD history data

The BD history data such as bookmarks and resume information can be deleted.

- 1 Select “Clear BD Data” on the “SD Menu” screen.
- 2 Select “Yes” to delete the BD history data.

■ SD cards that can be used (→P. 547)

■ Compatible files

The following files can be displayed.

- Picture file format: JPEG
 - Picture resolution: between 34×34 and 8192×8192 pixels
 - Gray scale JPEG is not supported
- Video file format: AVCHD

■ SD cards

- An SD card is not provided with the rear seat entertainment system and needs to be purchased separately.
- Compatible formats

This system is compatible with SD memory cards that meet SD card specifications FAT16 formats, SDHC memory cards in FAT32 format, and SDXC memory cards in exFAT format.
- The Panasonic SD memory card format software version 3.1 or higher is recommended.
- Data stored in an SD card may be lost. Before playing back pictures and videos stored in an SD card, make certain to back up the data.
- Before an SD card that contains any kind of data is played, slide the lock switch on the SD card to “LOCK” in order to prevent any data from being accidentally deleted or overwritten.

- When discarding or transferring ownership of an SD card

When using format or delete functions on this system or a personal computer, file management data changes but the data on the SD card is not completely erased.

Destroying the body of the SD card or using commercial computer software that erases data is recommended when discarding or transferring ownership of an SD card to completely erase the data stored on the card. The management of data stored on an SD card is the customer's responsibility.

CAUTION

■ SD cards

Keep away from children.

These are small and if swallowed by a child they can cause choking.

NOTICE

■ SD card precautions

Failure to follow the precautions below may result in damage to the SD cards or the SD card slot.

- Do not insert anything other than an SD card into the SD card slot.
- Do not stick labels or stickers on SD card. There is a possibility that it may become impossible to eject the SD card from inside the slot.
- Do not handle an SD card with wet hands. Doing so may cause electric shock or a malfunction.
- Do not allow hands or metal objects to contact the interface pins of SD cards.
- Do not place SD cards on the instrument panel, on any place with direct sunlight or in areas with a lot of moisture.
- Do not use SD cards in any place where static electricity or electric noise adversely affects SD cards. This may cause data corruption or data loss.
- Always place the SD card in its storage case when not in use.

Using the front audio system

Front audio system can be controlled from the rear seat entertainment system.

For details of the DVD video operation: →P. 554


One of Apps' features is the ability to listen to internet radio. In order to use this service, an Apps compatible phone and the navigation system needs to be set. For details, refer to the "Navigation System Owner's Manual".

Selecting a source

Select the desired source on the source screen.

Remote controller

- ① Inputting the selected control icon
- ② Selecting a control icon
- ③ Volume up/down
- ④ Seeking a radio station/channel
- ⑤ Fast-forward/rewind
- ⑥ Stop
- ⑦ Selecting a track/file
- ⑧ Play/pause
- ⑨ Selecting a station/channel or folder/album
- ⑩ Displaying the source screen

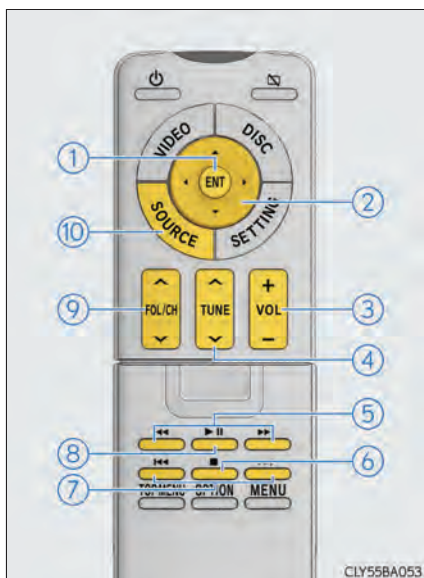

Selecting a radio station/channel

■ Select a radio station/channel

- 1** Select “AM”, “FM” or “SAT” on the source screen.
- 2** Press “^” or “v” on the “TUNE” to adjust the frequency.

To seek for receivable stations/channels, press and hold the “TUNE” switch until you hear a beep.

■ Select a preset station/channel

- 1** Select “AM”, “FM” or “SAT” on the source screen.
- 2** Press “^” or “v” on the “FOL/CH” to select a preset station/channel.

Selecting a track/file

- 1** Select “DISC”, “iPod”, “USB” or “BT-A” on the source screen.
- 2** Press “^” or “v” on the “TUNE” to select a file/track.
To return to the beginning of the current track, file, press “v” on the “TUNE” once quickly.

Selecting a folder/album

- 1** Select “DISC”, “USB” or “BT-A” on the source screen.
- 2** Press “^” or “v” on the “FOL/CH” switch to select a folder/album.


Using the video mode

The rear seat entertainment system plays videos and sound when audio-video equipment is connected to the A/V input port.

Select “Rr-A/V” on the source screen or press “VIDEO” to turn on the video mode.

■ Remote controller

- ① Turning on the video mode
- ② Volume up/down

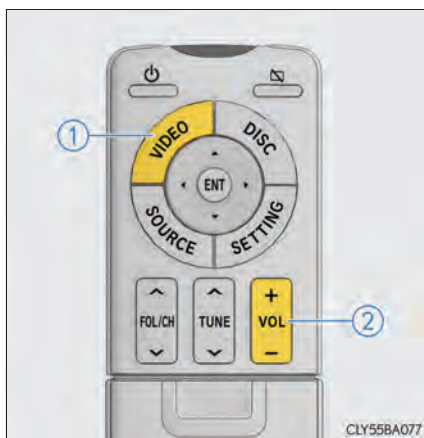


■ Using the A/V input port

► 5-seat models



► 4-seat models

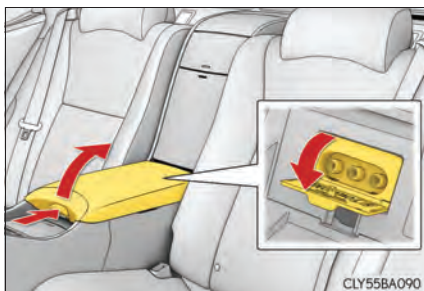

- 1** Open the cover and connect audio-video equipment to the A/V input port.

The A/V input port is composed of 3 input jacks.

Yellow: Video input

White: Left channel audio input

Red: Right channel audio input

- 2** Turn on the power of the audio-video equipment
- 3** Press "VIDEO" to turn on the video mode.

■ Operating the audio-video equipment connected to the system

The volume can be adjusted using the vehicle's audio controls. All other operations must be made on the audio-video equipment itself.

For details about operation of audio-video equipment, refer to the manufacturer's instructions.

NOTICE

■ When the A/V input port is not in use

Keep the A/V input port cover closed.

Inserting anything other than an appropriate plug may cause electrical failure or a short circuit.



Changing other setting

Switching to setting mode

Press "SETTING" to display the setting screen.

► With rear console display

► With overhead display

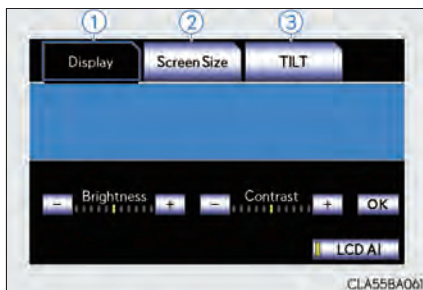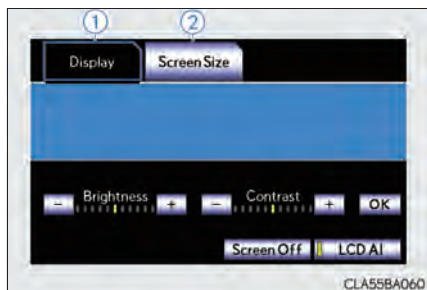

- ① Adjusting the screen (→P. 597)
- ② Changing the screen size (→P. 599)
- ③ Tilting the display (→P. 600)


Adjusting the screen settings

You can adjust the color, contrast, tone and brightness of the screen.

The screen setting levels can be adjusted for day mode and night mode individually.

- 1 Press "SETTING".
- 2 Select "Display" tab on the screen.
- 3 The screen settings can be adjusted. After adjustments, select "OK".

- ▶ “DISC”/“Rr-DISC”/“Rr-SD” mode
- ▶ “Rr-A/V” mode

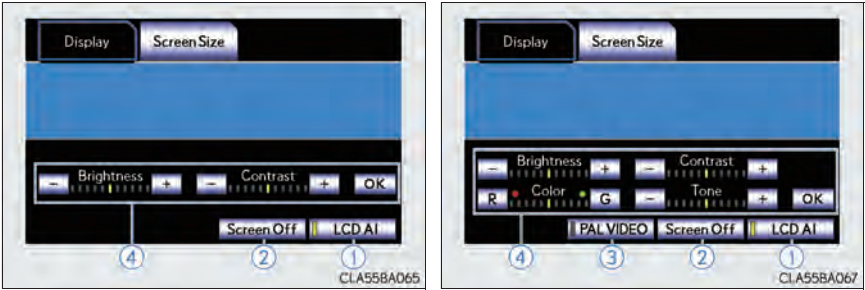

- ① Turning on/off the “LCD AI”
- ② Display off (with rear console display)
- ③ PAL VIDEO on/off (video mode)
- ④ Adjusting the screen settings

The “LCD AI” automatically determines the tone of the video image and sets the contrast to an optimum level, displaying a sharp image.


	Screen button	Function
“Color”	“R”	Strengthens the red color
	“G”	Strengthens the green color
“Tone”	“- ”	Weakens the tone
	“+ ”	Strengthens the tone
“Contrast”	“- ”	Weakens the contrast
	“+ ”	Strengthens the contrast
“Brightness”	“- ”	Darkens the screen
	“+ ”	Brightens the screen

Changing the screen size

- 1** Press "SETTING".
- 2** Select "Screen Size" tab on the screen.
- 3** Select the desired screen size.

- ① Displays the screen at the original ratio
- ② Widens the 4:3 aspect screen horizontally to fill the screen
- ③ Widens the screen vertically and horizontally, at the same ratio, to fill the entire screen
- ④ Zooms in the screen


Select  again to cancel zoom in.

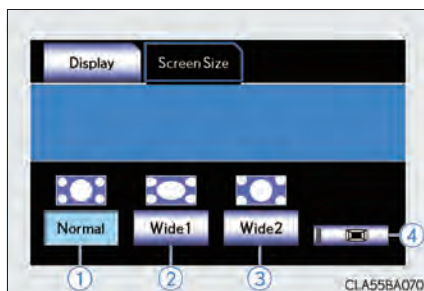

The screen size can be changed for each media mode individually

Tilting the display (with overhead display)

- 1** Press "SETTING".
- 2** Select "TILT" tab on the screen.
 - ①** Automatic closing of the display on/off
If "Auto Close" is on, the display will automatically close when the power switch is turned OFF.
The display will automatically open when the power switch is turned to ACCESSORY or ON mode.
 - ②** Adjusting the display angle
The display angle is memorized and will be recalled when the power switch is turned to ACCESSORY or ON mode again.

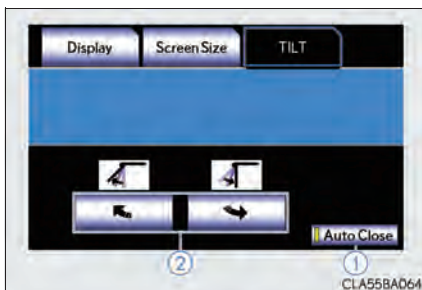

Hands-free system (for cellular phone)

The hands-free system is a function that allows you to use your cellular phone without touching it.

This system supports Bluetooth® cellular phones. Bluetooth® is a wireless data system that allows a cellular phone to wirelessly connect to the hands-free system and outgoing/incoming calls.


To use the hands-free system, you must register your Bluetooth® phone in the system. (→P. 608)

The illustrations of the hands-free system screens shown here may slightly vary depending on the type of the system.

The hands-free system function can be displayed and operated on the "Side Display". (→P. 382)

Telephone switch


- ① Off hook switch
 - Sending
 - Receiving
 - "Phone" screen display
- ② On hook switch
 - End call
 - Refuse call

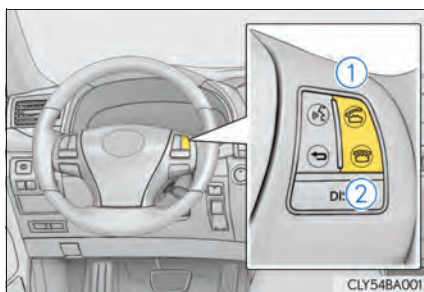

Microphone

You can use the microphone when talking on the phone.

The person you are speaking to can be heard from the front speakers.

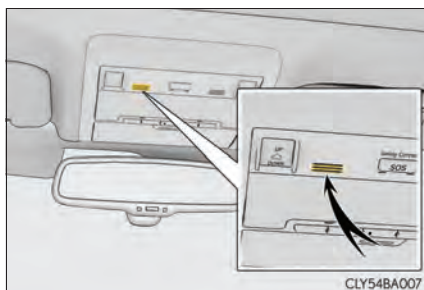


Steering switch

① Adjusting the volume

Press the “+” switch to increase the volume and the “-” switch to decrease the volume.
Hold the switch in that position to continue increasing or decreasing the volume.

② Back switch

Press .
To return to the previous screen.

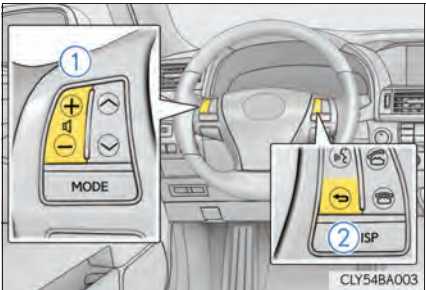

Status display

You can check indicators such as signal strength and battery charge on the “Phone” screen.

- ① Connection status
- ② Battery charge
- ③ Call area
- ④ Signal strength



Indicators	Conditions	
Connection status	Good 	No connection 
Battery charge	Full 	Empty 
Call area	“Rm”: Roaming area	
Signal strength	Excellent 	Poor 

■ When using the hands-free system

- The audio system is muted when making a call.
- If both parties speak at the same time, it may be difficult to hear.
- If the incoming call volume is overly loud, an echo may be heard.
- Try to face toward the microphone as much as possible when speaking.
- In the following circumstances, it may be difficult to hear the other party:
 - When driving on unpaved roads
 - When driving at high speeds
 - If a window is open
 - If the air conditioning is blowing directly on the microphone
 - If the air conditioning is set to high
 - There is an effect from the network of the cellular phone

■ Conditions under which the system will not operate

- If using a cellular phone that does not support Bluetooth®
- If the cellular phone is turned off
- If you are outside service range
- If the cellular phone is not connected
- If the cellular phone's battery is low
- When the cellular phone is not connected, "No Connect" is displayed.

■ Bluetooth® antenna

The antenna is built into the instrument panel. If the cellular phone is behind the seat or in the console box, or touching or covered by metal objects, connection status may deteriorate.

■ Battery charge/Signal status

- This display may not correspond exactly with the cellular phone itself.
- This system does not have a charging function.
- The Bluetooth® phone battery will burn quickly when it is connected to Bluetooth®.
- When the cellular phone is out of the service area or in a place inaccessible by radio waves, "No Service" is displayed.

■ When using Bluetooth® audio and hands-free system at the same time

The following problems may occur.

- The Bluetooth® connection may be cut.
- Noise may be heard on the Bluetooth® audio playback.

■ About the phonebook in this system

The following data is stored for every registered phone. When another phone is connecting, you cannot read the registered data.

- Phonebook data
- Call history data
- Speed dial data
- Image data
- All phone settings
- Messages
- Quick reply messages

When you delete the phone, the above-mentioned data is also deleted.

■ When you release your car

Be sure to initialize your data. (→P. 378)

■ About Bluetooth®

Bluetooth is a registered trademark of Bluetooth SIG, Inc.



■ Compatible models

This system supports the following service.

- Bluetooth® Specification Ver. 1.1 or higher (Recommended: Ver. 2.1+EDR or higher)
- Profiles
 - HFP (Hands Free Profile) Ver. 1.0 or higher (Recommended: Ver. 1.5 or higher)
 - OPP (Object Push Profile) Ver. 1.1 or higher
 - PBAP (Phone Book Access Profile) Ver. 1.0 or higher
 - MAP (Message Access Profile) Ver. 1.0 or higher
 - SPP (Serial Port Profile) Ver. 1.1 or higher*

*: This profile is necessary when using Apps. For details, refer to the “Navigation System Owner’s Manual”.

If your cellular phone does not support HFP, you cannot enter the Bluetooth® phone, and take OPP, PBAP, MAP or SPP service individually.

If the connected Bluetooth® phone version is older than recommended or incompatible, this function may not be used.

Please go to <http://www.lexus.com/MobileLink> to find approved Bluetooth® phones for this system.

■ Certification

FCC ID: AJDK053

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65. This equipment has very low levels of RF energy that it is deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20 cm or more away from person’s body (excluding extremities: hands, wrists, feet and ankles).

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IC ID: 775E-K053

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment and meets RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20 cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles).

Cet équipement est conforme aux limites d'exposition aux rayonnements énoncées pour un environnement non contrôlé et respecte les règles d'exposition aux fréquences radioélectriques (RF) CNR-102 de l'IC. Cet équipement émet une énergie RF très faible qui est considérée conforme sans évaluation de l'exposition maximale autorisée. Cependant, cet équipement doit être installé et utilisé en gardant une distance de 20 cm ou plus entre le dispositif rayonnant et le corps (à l'exception des extrémités : mains, poignets, pieds et chevilles).

The Bluetooth antenna cannot be removed (or replaced) by user.

L'antenne Bluetooth ne peut pas être supprimé (ou remplacé) par l'utilisateur.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

**CAUTION****■ FCC WARNING**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

■ Caution while driving

Do not use the cellular phone or connect the Bluetooth® system.

■ Caution regarding interference with electronic devices

- Your audio unit is fitted with Bluetooth® antennas. People with implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should maintain a reasonable distance between themselves and the Bluetooth® antennas. The radio waves may affect the operation of such devices.
- Before using Bluetooth® devices, users of any electrical medical device other than implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should consult the manufacturer of the device for information about its operation under the influence of radio waves. Radio waves could have unexpected effects on the operation of such medical devices.

**NOTICE****■ When leaving the vehicle**

Do not leave your cellular phone in the vehicle. The inside of the vehicle may become hot, causing damage to the phone.

Using a Bluetooth® phone

- ① Device name
- ② Bluetooth® connection status
- ③ Character deletion
- ④ Make a call



To display the screen shown above, press the “MENU” button on the Remote Touch, then select “Phone” or press  on the steering wheel.

Registering a Bluetooth® phone

You can register up to 5 phones in the system.

- 1 Display the “Phone” screen. (→P. 608)
- 2 Select “Yes”.

If 5 Bluetooth® devices have already been registered, a registered device needs to be deleted. (→P. 612)



- 3** When this screen is displayed, operate the Bluetooth® device.

Search for the system displayed on the system's screen using your Bluetooth® device, and register the Bluetooth® device.

For the operation of the phone, see the manual that comes with your cellular phone.

A passcode is not required for SSP (Secure Simple Pairing) compatible Bluetooth® phones. Depending on the type of Bluetooth® phone being connected, a message confirming registration may be displayed on the Bluetooth® phone's screen. Respond and operate the Bluetooth® phone according to the confirmation message.

If you want to cancel it, select "Cancel".

If a completion message is displayed, registration is complete.

If an error message is displayed, follow the guidance on the screen to try again.



Bluetooth® phone connection

There are two connection methods available – automatic and manual.


■ Automatic

When you register your phone, auto connection will be activated. Always set it to this mode and leave the Bluetooth® phone on the place where connection can be established.

When the power switch is turned to ACCESSORY or ON mode, the system will search for a nearby cellular phone you have registered. The system will connect with the phone that was last connected, if it is nearby.

When “Display Phone Status” is set to “On”, the connection status is displayed. (→P. 663)

Depending on the type of mobile phone, mobile phone operations may be necessary.

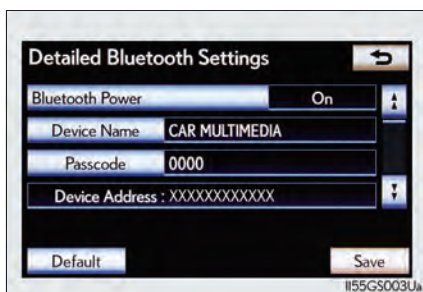

■ Manual

When the auto connection has failed or “Bluetooth* Power” is turned off, you must connect Bluetooth® manually.

- 1 Display the “Phone” screen. (→P. 608)
- 2 Select “Connect Phone”.



- 3 Select the screen button corresponding to the desired phone connection.

When the cellular phone's device name has not been able to be obtained, “Device 1” to “Device 5” will be displayed in the order the phones were registered.



- 4 This screen is displayed.

If a completion message is displayed, connection is complete.



*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

■ Reconnecting to the Bluetooth® phone

If the system cannot connect due to poor signal strength with the power switch in ACCESSORY or ON mode, the system will automatically attempt to reconnect.

If the phone is turned off, the system will not attempt to reconnect. In this case, it must be connected manually, or the phone must be re-selected or re-entered.

■ Connecting the phone while Bluetooth® audio is playing

- Bluetooth® audio will stop temporarily.

- It may take time to connect.

■ Connecting the phone while another Bluetooth® device is connected

When another Bluetooth® device is currently connected, a confirmation message will be displayed. To disconnect the Bluetooth® device, select “Yes”.

■ Connecting the phone while 5 Bluetooth® devices have already been registered

When 5 Bluetooth® devices have already been registered, a registered device needs to be deleted. Select “Yes” to delete one or more.

Select the device to be deleted, then select “Remove”, and “Yes”.

■ If the Bluetooth® phone has a Bluetooth® audio function

When the Bluetooth® phone to be registered has a Bluetooth® audio function, this audio function will be registered automatically at the same time and confirmation message may be displayed. If this screen is displayed, select “Yes” to connect the audio function or select “No” to cancel the connection.


Making a call

Once the Bluetooth® phone is registered, you can make a call using the following procedure:

■ “Side Display”

A calling screen will be shown on the “Side Display” when the following operations are carried out on the “Main Display”.

- When  on the phone screen is selected.
- When the desired number is selected on the “Speed Dial” screen.
- When  on the mail screen is selected.

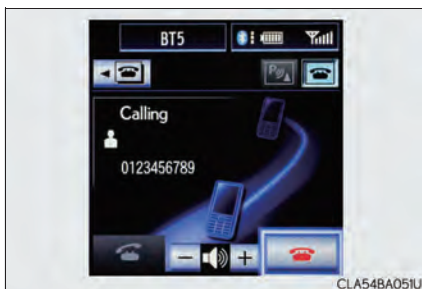


■ Dialing

1 Display the “Phone” screen. (→P. 608)

2 Input the phone number.

To delete the inputted phone number, select .

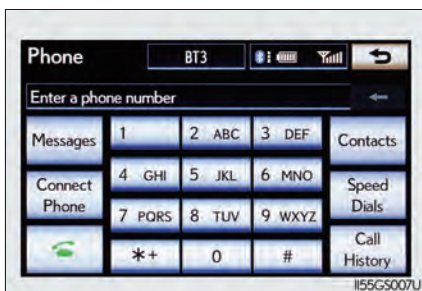

3 Select  or press  on the steering wheel.

Depending on the type of mobile phone, mobile phone operations may be necessary.


■ Dialing from the phonebook

You can dial a number from the phonebook data imported from your cellular phone. The system has one phonebook for each phone. Up to 1000 entries may be stored in each phonebook. (→P. 630)

- 1 Display the “Phone” screen. (→P. 608)
- 2 Select “Contacts” on the “Phone” screen.
- 3 Choose the desired data to call from the list.



- 4 Choose the number and then select  or press  on the steering wheel.

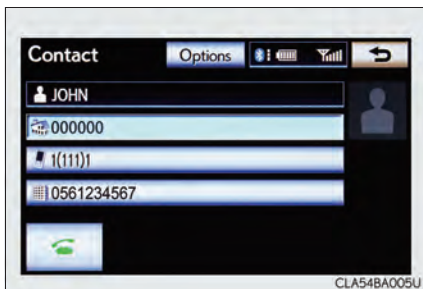

■ When the phonebook is empty

If your cellular phone is neither PBAP nor OPP compatible, the phonebook cannot be transferred.

- 1 Display the "Phone" screen. (→P. 608)
- 2 Select "Contacts" on the "Phone" screen.
 - ▶ For PBAP compatible models
- 3 Select "Yes".



- ▶ For PBAP incompatible but OPP compatible models

- 3 Select "Transfer".




- 4** Transfer the phonebook data to the system using the Bluetooth® phone.

This screen appears while transferring. To cancel this function, select “Cancel”.

This operation may be unnecessary depending on the cellular phone model.

Depending on the type of mobile phone:


- OBEX authentication may be required when transferring phonebook data. Enter “1234” into the Bluetooth® phone.
 - It may be necessary to perform additional steps on the phone when transferring phonebook data.
 - The registered image on the phonebook may not appear when phonebook data is transferred.
- 5** When the data transfer from a PBAP incompatible but OPP compatible model is complete, “Done” will appear on the screen. Select “Done”.

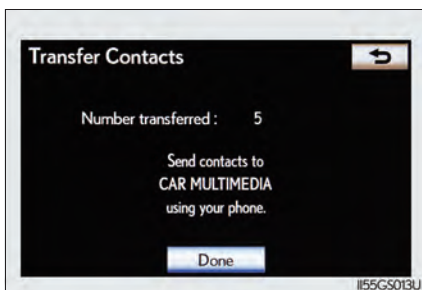

■ Calling using speed dial

You can make a call using numbers registered from the phonebook. (→P.630)

- 1 Display the “Phone” screen. (→P.608)
- 2 Select “Speed Dials” on the “Phone” screen.
- 3 Select the desired tab and choose the desired number to make a call.

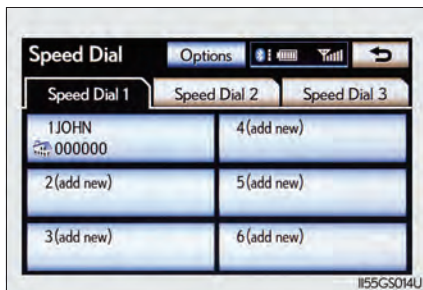

■ Dialing from history

You can call using the call history which has the 4 functions below.

“All”: All the numbers below which were memorized


“Missed”: Calls which you missed

“Incoming”: Calls which you received


“Outgoing”: Numbers which you called

You can call using the 30 most recently called numbers shown by “All” tab while driving.

- 1 Display the “Phone” screen. (→P.608)
- 2 Select “Call History” on the “Phone” screen.
- 3 Select the desired tab and choose the desired data from the list.

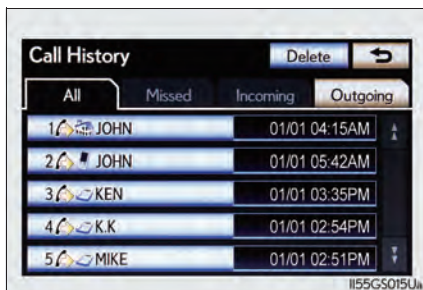

- 4 Select  or press  on the steering wheel.

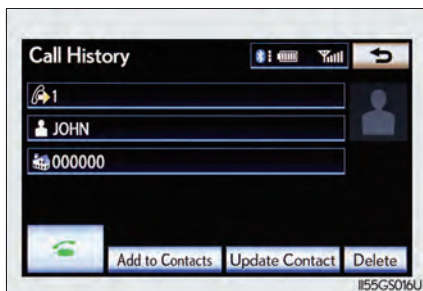

■ Calling using voice command

You can call by giving a voice command. (→P. 391)

Press .




The “Call <name> <type>” and “Dial <number>” operating procedures are explained here. Other operating procedures are also similar.

● Calling by name

You can call by giving a name registered in the phonebook. (→P. 630)

- 1 Press .
- 2 Following the system guidance, wait for the beep and then after saying “Call” say the desired name, or the name and type of phone.

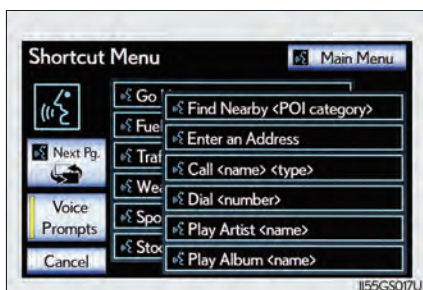


- 3 Following the system guidance, wait for the beep and then say “Dial”. (You can also call by pressing  on the steering wheel.)

● Calling by dial number

You can call by giving a phone number.

- 1 Press .
- 2 Following the system guidance, wait for the beep and then after saying "Dial" say the phone number.

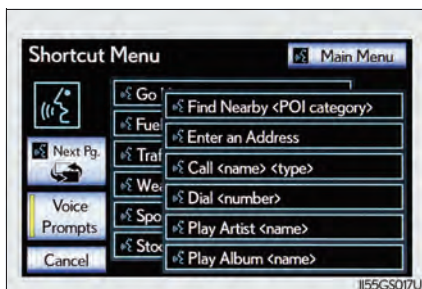

- 3 Following the system guidance, wait for the beep and then say "Dial". (You can also call by pressing  on the steering wheel.)

■ Calling using SMS/MMS message

You can call using the SMS (Short Message Service)/MMS (Multimedia Messaging Service) message sender's phone number.

- 1 Display the "Phone" screen. (→P. 608)
- 2 Select "Messages".

When "Message Transfer" is set to "Off", a confirmation screen will be displayed. Select "Yes".



- 3 Select the "SMS/MMS" tab and then select the desired received message from the list.

The tab display may vary depending on the type of cellular phone.

- 4 Select  or press  on the steering wheel.

■ Calling using POI (vehicles with the navigation system)

You can make a call using a Point Of Interest.

■ Call history list

- If you make a call to or receive a call from a number registered in the phone book, the name is displayed in the call history.
- If you make multiple calls to the same number, only the last call made is displayed in the call history.
- Number-withheld calls are also memorized in the system.

■ When driving

The functions “Dialing”, “Dialing from the phonebook”, and “Dialing from history” (except for call using the 30 most recently called numbers shown by “All” tab) are unavailable.

■ When calling by registered name in the phonebook

- When “Call <name> <type>” on the “Shortcut Menu” screen is dimmed, the phonebook’s voice command recognition cannot be used. Check the Bluetooth® connection and if the contacts have been transferred to the system.
- Short or abbreviated names in the phonebook may not be recognized. Change names in the phonebook to full names.
- Sometimes a voice recognition result confirmation screen will be displayed. After confirming the result, say “Yes” or “No”.
- When the system recognizes multiple names from the phonebook, a name candidate list will be displayed on the screen. If the desired name is not displayed on the top of the screen, say the number of the name from the candidate list (number 1 and number 2) to select a name from the candidate list.
- When a contact has multiple phone numbers registered in the phonebook, a candidate list will be displayed. If the desired phone number is not displayed on the top of the screen, say the number of the desired phone number from the candidate list (number 1 and number 2) to select a phone number from the candidate list.

■ When calling by phone number

- Say the phone number one digit at a time. For example, if the phone number is 2345678, say “two three four five six seven eight”.
- The system can recognize the following types of phone numbers:
 - 3 digit numbers (911, 411, 611)
 - 7 digit numbers (Local phone numbers)
 - 10 digit numbers (Area code + Local phone number)
 - 11 digit phone numbers (1 + Area code + Local phone number)
- As the system cannot recognize additional numbers, say the complete number without stopping.
- When the system recognizes multiple phone numbers, a phone number candidate list will be displayed on the screen. If the desired phone number is not displayed on the top of the screen, say the number of the desired phone number from the candidate list (number 1 and number 2) to select a phone number from the candidate list.

■ International calls

To dial a phone number that is not a 3, 7, 10 or 11 digit number, for example an international number, use “International Call”.

- 1 Press  on the steering wheel to display the “Shortcut Menu” screen and saying “Main menu” or select “Main Menu”.
- 2 Say “Use the phone”.
- 3 Say “International call”.

Up to 24 digits can be recognized when using the international call function. The number can also be divided into multiple groups and recognized.

You may not be able to make international calls, depending on the cellular phone in use.

■ Calling by using the latest call history item

- 1 Press  on the steering wheel to display the “Phone” screen.
- 2 Press  on the steering wheel to display the “Call History” screen.
- 3 Press  on the steering wheel to select the most recent number in the history.
- 4 Select  or press  on the steering wheel.

■ To cancel voice recognition

- Press and hold .
- Press  on the steering wheel.
- Select “Cancel”.

■ When using voice recognition

Use correct commands and speak clearly, otherwise the system may not correctly recognize the command. Wind or other noises may also cause the system not to recognize the desired command.

Receiving a call

When a call is received, the following screen is displayed together with a sound.

▶ “Main Display”



▶ “Side Display”



Select  or press  on the steering wheel.

■ To refuse a call

Select  or press  on the steering wheel.

■ To adjust the incoming call volume

Select “-” or “+”, turn the “PWR•VOL” knob, or use the volume switch on the steering wheel.

■ International calls

Received international calls may not be displayed correctly depending on the cellular phone in use.

■ Ring tone

The ring tone that has been set in the “Phone Sound Settings” screen sounds when there is an incoming call. Depending on the type of Bluetooth® phone, both the system and Bluetooth® phone may sound simultaneously when there is an incoming call. (→P. 629)

Speaking on the phone

The following screen is displayed when speaking on the phone.

▶ “Main Display”



▶ “Side Display”



■ To adjust the receiver volume

Select “-” or “+”, turn the “PWR•VOL” knob, or use the volume switch on the steering wheel.

■ To adjust your voice volume that the other party hears from their speaker

Select “Transmit Volume” and select “-” or “+” to adjust the transmit volume. Select “OK”.

■ To prevent the other party from hearing your voice

Select “Mute”.

■ Inputting tones (“Main Display”)

When using phone services such as an answering service or a bank, you can store phone numbers and code numbers in the phonebook.


1 Select “0-9” on the “Call” screen.

2 Input the number.

If repeated tone symbols* are stored in the phonebook, “Send” and “Clear” are displayed on the right side of the screen.

*: Repeated tone symbols are symbols or numbers displayed as p or w, that come after the phone number.

(e.g. 056133w0123p#1*)

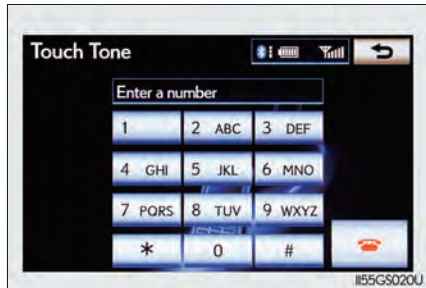

3 Confirm the number displayed on the screen, and select “Send”.

If you select “Clear”, this function will end.

■ To transfer a call

Select “Handset Mode” to change from hands-free call to cellular phone call. Select “Handsfree Mode” to change from cellular phone call to hands-free call.

■ To hang up

Select  or press  on the steering wheel.

■ Call waiting

When a connected call is interrupted by the third party, the incoming call message will be displayed.

- To talk with the other party: Select  or press  on the steering wheel.
- To refuse the call: Select  or press  on the steering wheel.

Every time you select  or press  on the steering wheel after a call is interrupted, you will be switched to the other party.

If your cellular phone is not accepted in HFP Ver. 1.5, this function cannot be used.

The ring tone that has been set in the “Phone Sound Settings” screen sounds when there is an incoming call. Depending on the type of Bluetooth® phone, both the system and Bluetooth® phone may sound simultaneously when there is an incoming call. (→P. 629)

■ Transferring calls

- It is not possible to transfer from hands-free to a cellular phone while driving.
- If you transfer from a cellular phone to hands-free, the hands-free screen will be displayed, and you can operate the system using the screen.
- Transfer method and operation may vary according to the cellular phone used.
- For operation of the cellular phone in use, see the phone’s manual.

■ Repeated tone symbols

When the “p” pause tone is used, after waiting 2 seconds the tone data up until the next pause tone will be automatically sent. When the “w” pause tone is used, the tone data up until the next pause tone will be automatically sent after user operation.

■ While driving

Key input is unavailable.

■ Voice recognition during a call

“Send Tones” can be operated by voice recognition. (→P. 391)

■ Interrupt call operation

Interrupt call operation may differ from depending on your phone company and the cellular phone.

Using a Bluetooth® phone message

Received messages can be forwarded from the connected Bluetooth® phone, enabling checking and replying (Quick reply).

■ Checking a message


- 1 Display the “Phone” screen. (→P. 608)
- 2 Select “Messages” on the “Phone” screen.

When “Message Transfer” is set to “Off”, a confirmation screen will be displayed. Select “Yes”.

- 3 Select the desired message to check.

The text of the message is not displayed while driving.

Selecting “Previous” or “Next” displays the previous or next message.

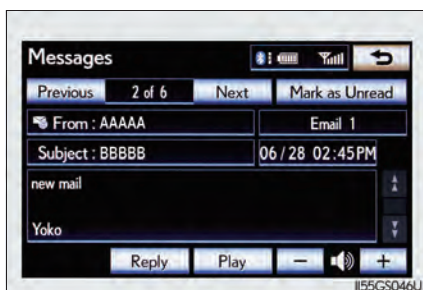


- 4 Select “Play” to start reading out of the message. Select “Stop” to stop the function.

■ To adjust the message reading out volume

Select “-” or “+”, turn the “PWR•VOL” knob, or use the volume switch on the steering wheel.


■ Replying a message (Quick reply)

- 1 Select “Reply” on the desired message screen.

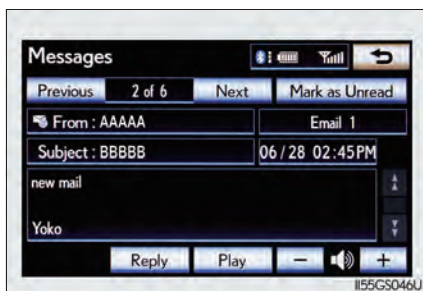

- 2** Select the desired message.
Select “Send”.

While the message is being sent, a sending message screen is displayed.

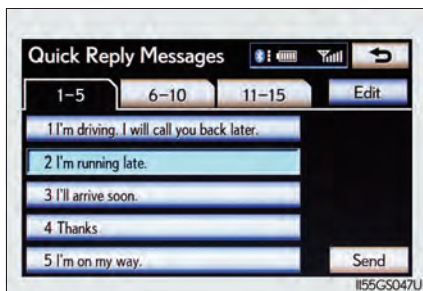

■ To check the message

- Messages are displayed in the appropriate connected Bluetooth® phone's registered mail address folder. Select the tab of the desired folder to be displayed.
- Only received messages on the connected Bluetooth® phone can be displayed.
- When the received message is an e-mail and “Update Message Read Status on Phone” is set to “On”, “Mark as Unread” or “Mark as Read” can be selected. Select “Mark as Unread” to mark mails that have been read on the Bluetooth® phone as unread. Conversely, select “Mark as Read” to mark mails that have not been read on the Bluetooth® phone as read. (→P. 646)

■ Calling using SMS/MMS message

You can call using the SMS (Short Message Service)/MMS (Multimedia Messaging Service) message sender's phone number. (→P. 619)

■ If the message delivery failed

If message delivery has failed, a notification will be displayed on the screen.

Select “Retry” to attempt to send the message again or select “Cancel” to cancel.

■ Editing a quick reply message

You can edit the “Quick Reply Messages”. (→P. 648)


■ New message notification

If “New Message Pop-up” and “New Message Voice Notification” are set to “On”, a notification appears on the screen and a voice notification will be heard when a new message arrives, select “Read” to check the message, also to check the message later, select “Ignore”. When “Automatic Message Readout” is set to “On”, the message will be automatically read out. (→P. 646)

Setting the hands-free system (for cellular phone)

You can set the hands-free system to your desired settings.

- ① Phone sound settings
- ② Phonebook settings
- ③ Message settings
- ④ Phone display settings


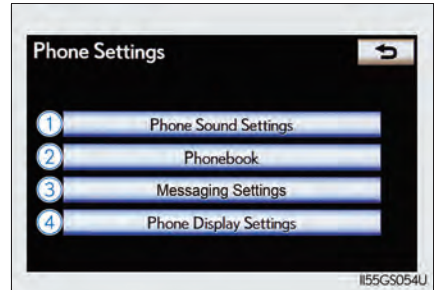


To display the screen shown above, press the “MENU” button on the Remote Touch, then select “Setup”, and select “Phone” on the “Setup” screen.

Phone sound settings

■ Setting the volume

- 1 Display the “Phone Settings” screen. (→P. 628)
- 2 Select “Phone Sound Settings” on the “Phone Settings” screen.
- 3 Choose the volume setting switch.
 “Call Volume”: Changes the speaker volume.
 “Transmit Volume”: Changes the transmit volume.
 “Ring Tone Volume”: Changes the ring tone volume.
- 4 Select “-” or “+” to lower or raise the volume, and then select “OK”.

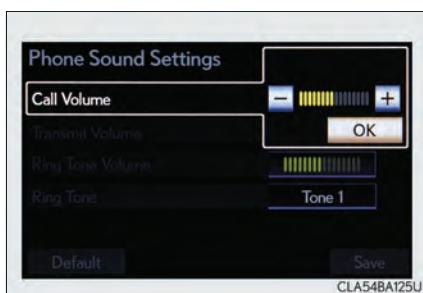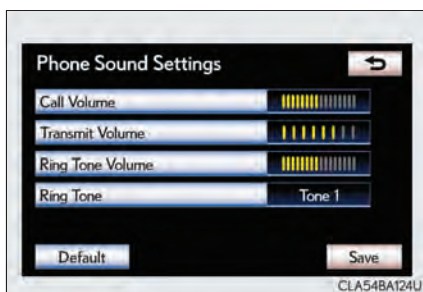


- 5 When you complete all settings, select “Save”.

■ Setting the ring tone

- 1 Display the “Phone Settings” screen. (→P. 628)
- 2 Select “Phone Sound Settings” on the “Phone Settings” screen.
- 3 Select “Ring Tone” on the “Phone Sound Settings” screen.

- 4 Select the screen button corresponding to the desired ring tone.

Ring tones can be heard by selecting the screen buttons, and then "OK".

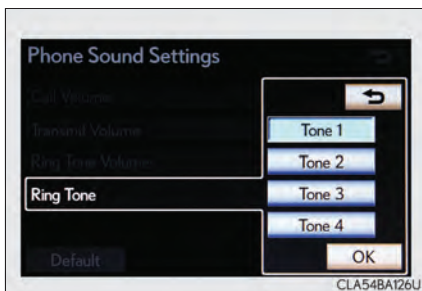

- 5 When you complete setting, select "Save".

Adaptive volume control

When traveling at 50 mph (80 km/h) or more, the system automatically raises the volume.

Transmit volume setting

The sound quality of the voice heard from the other party's speaker may be negatively impacted.


To return to the default phone sound settings

Select "Default", and then "Yes".

Phonebook settings

The phonebook manages a maximum of 5 phonebooks in total. The data for 1000 contacts (up to 3 numbers per contact) can be registered in each phonebook.

- 1 Setting the phonebook
- 2 Setting the speed dials
- 3 Deleting the call history

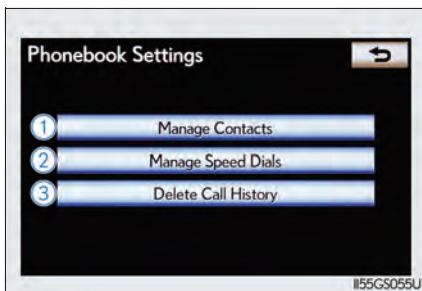

To display the screen above, follow the steps below.

- 1 Press the "MENU" button on the Remote Touch, then select "Setup", and select "Phone" on the "Setup" screen.
- 2 Select "Phonebook" on the "Phone Settings" screen.


■ Setting the phonebook

● Transferring a phone number

You can transfer the phone numbers in your Bluetooth[®] phone to the system. Operation methods differ between PBAP compatible and PBAP incompatible but OPP compatible Bluetooth[®] phones. If your cellular phone is neither PBAP nor OPP compatible, the phonebook cannot be transferred.


► For PBAP compatible models

- 1 Display the "Phonebook Settings" screen. (→P. 630)
- 2 Select "Manage Contacts" on the "Phonebook Settings" screen.
- 3 Select "Transfer Contacts".

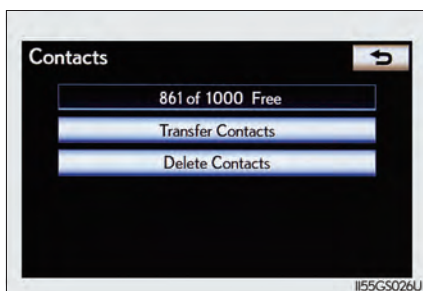

- 4 Select "Update Contacts".

Depending on the type of mobile phone, mobile phone operations may be necessary.

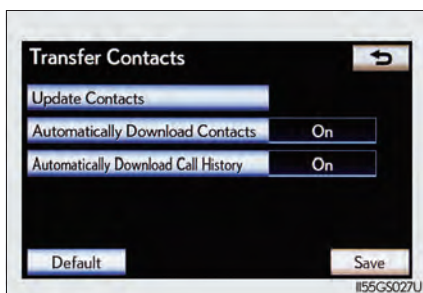

- 5 Transfer the phonebook data to the system using the Bluetooth[®] phone.

This operation may be unnecessary depending on the cellular phone model.

Depending on the type of mobile phone:

- OBEX authentication may be required when transferring phonebook data. Enter “1234” into the Bluetooth[®] phone.
- It may be necessary to perform additional steps on the phone when transferring phonebook data.
- The registered image on the phonebook may not appear when phonebook data is transferred.

If you wish to cancel the transfer before it finishes, select “Cancel”.



- PBAP compatible models automatic data transfer setting


- 1 Display the "Phonebook Settings" screen. (→P. 630)
- 2 Select "Manage Contacts" on the "Phonebook Settings" screen.
- 3 Select "Transfer Contacts" on the "Contacts" screen.
- 4 Select the item to be set.

"Automatically Download Contacts": Transfer the phonebook from a connected cellular phone.

"Automatically Download Call History": Transfer the call history from a connected cellular phone.


- 5 Select "On", and then "Save".

Depending on the type of Bluetooth® phone, the registered image on the phonebook may not appear when phonebook data is transferred.

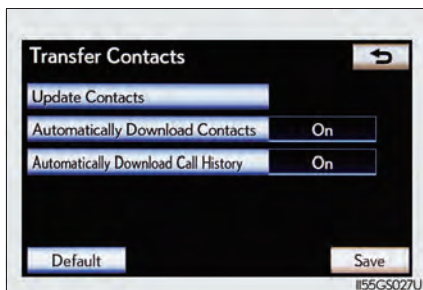

► For PBAP incompatible but OPP compatible models

- 1 Display the “Phonebook Settings” screen. (→P. 630)
- 2 Select “Manage Contacts” on the “Phonebook Settings” screen.
- 3 Select “Transfer Contacts”.

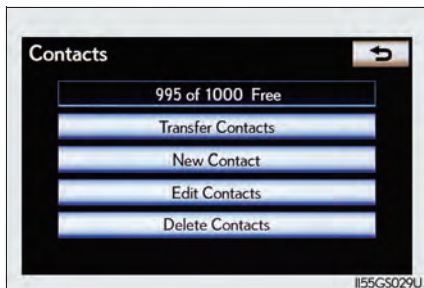

- 4 Select “Replace Contacts” or “Add Contacts”.

In the case that the phonebook contains phonebook data, this screen is displayed.



- 5 Transfer the phonebook data to the system using the Bluetooth® phone.

Depending on the type of mobile phone:

- OBEX authentication may be required when transferring phonebook data. Enter “1234” into the Bluetooth® phone.
- It may be necessary to perform additional steps on the phone when transferring phonebook data.
- The registered image on the phonebook may not appear when phonebook data is transferred.

If you wish to cancel the transfer before it finishes, select “Cancel”.

If “Add Contacts” is selected and there is an interruption during the transfer of data, the phonebook data transferred until then will be stored in the system. Please note, this is not the case when “Cancel” is selected.

- 6 When the transfer is complete, “Done” will appear on the screen. Select “Done”.



● Registering the phonebook data


You can register the phonebook data. Up to 3 numbers per person can be registered. New phonebook data cannot be added for PBAP compatible Bluetooth® phones.

- 1 Display the “Phonebook Settings” screen. (→P. 630)
- 2 Select “Manage Contacts” on the “Phonebook Settings” screen.
- 3 Select “New Contact” on the “Contacts” screen.
- 4 Input the name, and select “OK”.




- 5 Input the phone number, and select “OK”.

If you want to use the tone signal after the phone number, input the tone signal too.

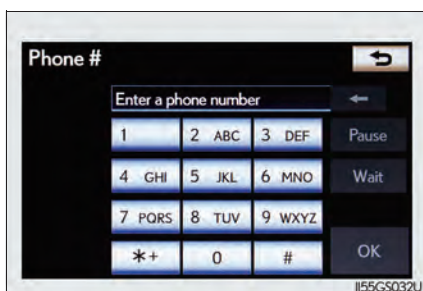

- 6 Select the desired phone type.

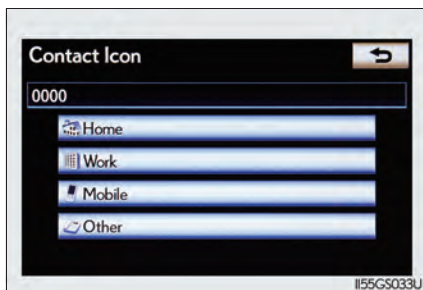

- 7 When two or less numbers in total are registered to this contact, a confirmation screen is displayed. When you want to add a number to this contact, select “Yes”.


● Editing the phonebook data

You can register the phone number separately. Phonebooks cannot be edited for PBAP compatible Bluetooth[®] phones.

- 1 Display the “Phonebook Settings” screen. (→P. 630)
- 2 Select “Manage Contacts” on the “Phonebook Settings” screen.
- 3 Select “Edit Contacts” on the “Contacts” screen.
- 4 Choose the data to edit.



- 5 Select the desired name or number.

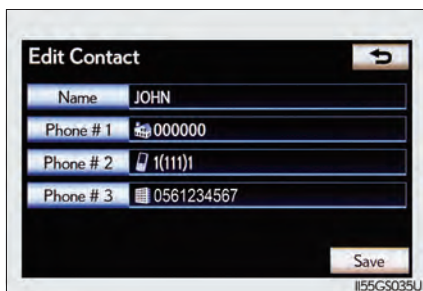


- 6 Edit the name or number. After editing, select “Save”.

● Deleting the phonebook data

- 1 Display the “Phonebook Settings” screen. (→P. 630)
- 2 Select “Manage Contacts” on the “Phonebook Settings” screen.
- 3 Select “Delete Contacts” on the “Contacts” screen.
- 4 Choose the data to delete.

You can select multiple data and delete them at the same time.

To delete all data, select “Select All”.

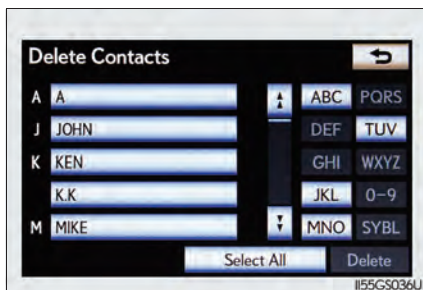

- 5 Select “Delete”. A confirmation message will be displayed. If everything is correct, select “Yes”.

■ Phonebook data

Phonebook data is managed for every registered phone. When another phone is connecting, you cannot read the registered data.

When selling or disposing of the vehicle, delete all your data on the system.

For PBAP compatible models, delete the phonebook data after setting "Automatically Download Contacts" to "Off". (→P. 633)

■ Setting the phonebook in a different way (To display the "Contacts" screen)

- 1 Display the "Phone" screen. (→P. 608)
- 2 Select "Contacts" on the "Phone" screen.
- 3 Select "Options" on the "Contacts" screen.
- 4 Select "Manage Contacts" on the "Contacts" screen.

■ When another Bluetooth® device is connected during transferring a phonebook

- For PBAP compatible models

If another Bluetooth® device is connected when transferring phonebook data, depending on the phone, the connected Bluetooth® device may need to be disconnected.

- For PBAP incompatible but OPP compatible models

When another Bluetooth® device is connected, a confirmation message will be displayed. If you want to disconnect it, select "Yes".

■ Transferring the phone number data in a different way (PBAP incompatible but OPP compatible models)

- 1 Display the "Phone" screen. (→P. 608)
- 2 Select "Contacts" on the "Phone" screen.
- 3 Select "Transfer" on the "Contacts" screen.
- 4 The "Transfer Contacts" screen is displayed. The following operations are performed in the same manner as when they are performed from the "Setup" screen. (→P. 630)

■ Editing the phonebook data in a different way**● From "Contact" screen**

- 1** Display the "Phone" screen. (→P. 608)
- 2** Select "Contacts" on the "Phone" screen.
- 3** Choose the desired data from the list.
- 4** Select "Options" on the "Contact" screen.
- 5** Select "Edit" on the "Contact" screen.
- 6** Follow the steps "Editing the phonebook data" from step **5**. (→P. 637)

● From "Call History" screen

- 1** Display the "Phone" screen. (→P. 608)
- 2** Select "Call History" on the "Phone" screen.
- 3** Choose the desired data from the list.
- 4** Select "Add to Contacts" or "Update Contact" on the "Call History" screen.
- 5** If you select "Add to Contacts", follow the steps "Editing the phonebook data" from step **5**. (→P. 637)
If you select "Update Contact", follow the steps "Editing the phonebook data" from step **4**. (→P. 637)

■ Deleting the phonebook data in a different way (PBAP incompatible but OPP compatible models)

- 1** Display the "Phone" screen. (→P. 608)
- 2** Select "Contacts" on the "Phone" screen.
- 3** Choose the desired data from the list.
- 4** Select "Options" on the "Contact" screen.
- 5** Select "Delete" on the "Contact" screen.
- 6** A confirmation message will be displayed. If everything is correct, select "Yes".

■ When a Bluetooth® phone is deleted


The phonebook data will be deleted at the same time.

Setting the speed dials

■ Registering the speed dial

You can register the desired phone number from the phonebook. Up to 18 numbers per phone can be registered.


- 1 Display the “Phonebook Settings” screen. (→P. 630)
- 2 Select “Manage Speed Dials” on the “Phonebook Settings” screen.
- 3 Select “New”.

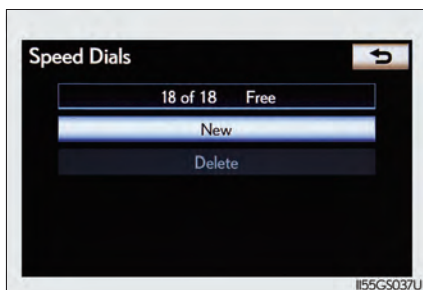


- 4 Choose the data to register.



- 5 Select the desired phone number.

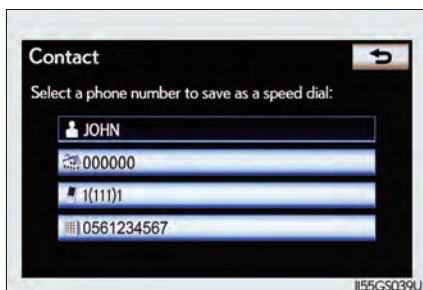

- 6 Select the switch you want to register the number in.

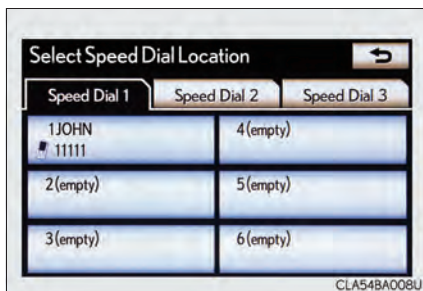


- 7 If you select a switch you registered before, a confirmation message will be displayed. If you want to replace it, select “Yes”.

■ Deleting the speed dial

- 1 Display the “Phonebook Settings” screen. (→P. 630)
- 2 Select “Manage Speed Dials” on the “Phonebook Settings” screen.
- 3 Select “Delete” on the “Speed Dials” screen.
- 4 Choose the data to delete.

You can select multiple data and delete them at the same time.

To delete all data, select “Select All”.

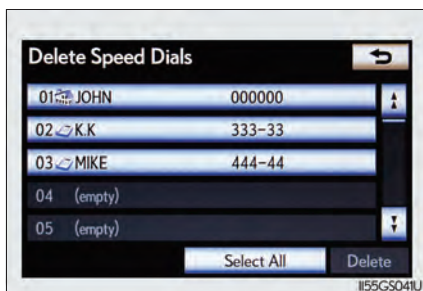

- 5 Select “Delete”. A confirmation message will be displayed. If everything is correct, select “Yes”.

■ Setting the speed dials in a different way

- To display the “Speed Dials” screen

- 1 Display the “Phone” screen. (→P. 608)
- 2 Select “Speed Dials” on the “Phone” screen.
- 3 Select “Options” on the “Speed Dial” screen.

- To display the “Contacts” screen

- 1 Display the “Phone” screen. (→P. 608)
- 2 Select “Contacts” on the “Phone” screen.
- 3 Select “Options” on the “Contacts” screen.
- 4 Select “Manage Speed Dials” on the “Contacts” screen.

■ Registering the speed dial in a different way

- From “Speed Dial” screen

- 1 Display the “Phone” screen. (→P. 608)
- 2 Select “Speed Dials” on the “Phone” screen.
- 3 Select “(add new)” on the “Speed Dial” screen.
- 4 Select “Yes” to set new speed dial.
- 5 Choose the desired data from the list.
- 6 Select the desired phone number.


- From “Contact” screen

- 1 Display the “Phone” screen. (→P. 608)
- 2 Select “Contacts” on the “Phone” screen.
- 3 Choose the desired data from the list.
- 4 Select “Options” on the “Contact” screen.
- 5 Select “Set Speed Dial” on the “Contact” screen.
- 6 Select the desired phone number.
- 7 Follow the steps “Registering the speed dial” from step 6. (→P. 641)


Deleting call history

The call history can be deleted. For PBAP compatible models, delete the call history after setting “Automatically Download Call History” to “Off”. (→P. 633)

- 1** Display the “Phonebook Settings” screen. (→P. 630)
- 2** Select “Delete Call History” on the “Phonebook Settings” screen.
- 3** Choose the desired history to delete.

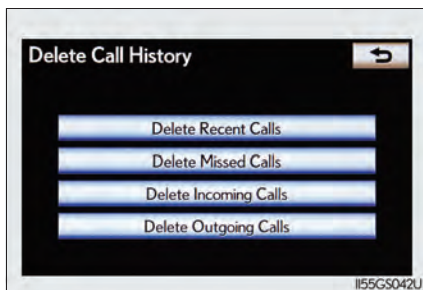

- 4** Choose the data to delete.
You can select multiple data and delete them at the same time.
To delete all data, select “Select All”.

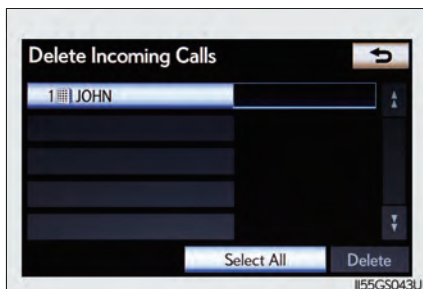

- 5** Select “Delete”. A confirmation message will be displayed. If everything is correct, select “Yes”.

■ Deleting call history in a different way

- 1** Display the “Phone” screen. (→P. 608)
- 2** Select “Call History” on the “Phone” screen.
- 3** Select “Delete” on the “Call History” screen.
- 4** Follow the steps “Deleting call history” from step **4**. (→P. 644)


■ Deleting after call history has been displayed

- 1** Display the “Phone” screen. (→P. 608)
- 2** Select “Call History” on the “Phone” screen.
- 3** Select the desired history to delete.
- 4** Select “Delete” on the “Call History” screen. A confirmation message will be displayed. If everything is correct, select “Yes”.


Message settings

You can change the message settings.

► Page 1

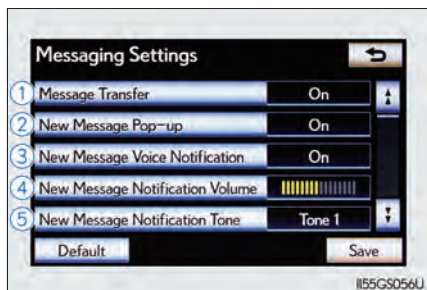

► Page 2

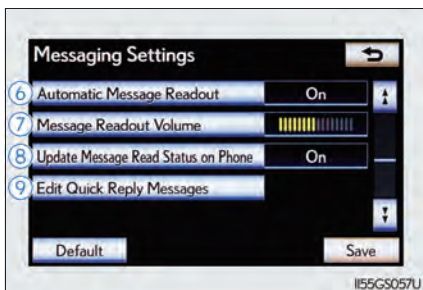


- ① Message forwarding from cellular phone on/off
- ② New message notification display on/off
- ③ New message voice notification on/off
- ④ Changing new message notification volume
- ⑤ Changing new message voice notification tone
- ⑥ Automatic message read out function on/off
- ⑦ Changing a message read out volume
- ⑧ Cellular phone's message read and unread status update function on/off
- ⑨ Editing the quick reply messages

To display the screen above, follow the steps below.

- 1** Press the "MENU" button on the Remote Touch, then select "Setup", and select "Phone" on the "Setup" screen.
- 2** Select "Messaging Settings" on the "Phone Settings" screen.

■ Changing the new message notification volume

- 1 Display the “Messaging Settings” screen. (→P. 646)
- 2 Select “New Message Notification Volume” on the “Messaging Settings” screen.
- 3 Select “-” or “+” to lower or raise the volume, and then “OK”.

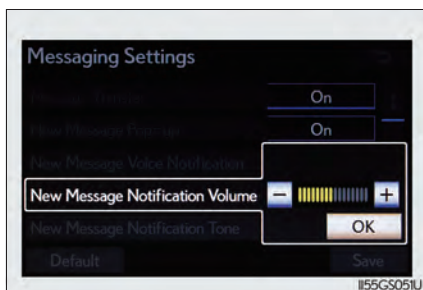


- 4 When you complete setting, select “Save”.

■ Changing the new message notification tone

- 1 Display the “Messaging Settings” screen. (→P. 646)
- 2 Select “New Message Notification Tone” on the “Messaging Settings” screen.
- 3 Select the desired new message notification tone.


New message notification tones can be heard by selecting the screen buttons, and then “OK”.

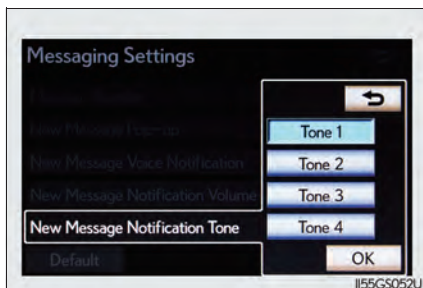

- 4 When you complete setting, select “Save”.

■ Changing the message read out volume

- 1 Display the “Messaging Settings” screen. (→P. 646)
- 2 Select “Message Readout Volume” on the “Messaging Settings” screen.
- 3 Select “-” or “+” to lower or raise the volume, and then “OK”.

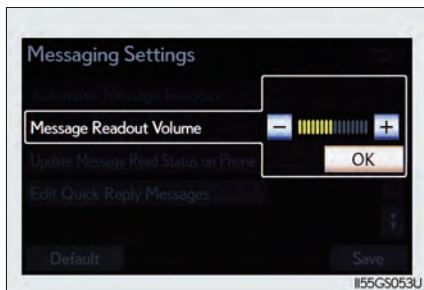


- 4 When you complete setting, select “Save”.

■ Editing the quick reply messages

Quick reply messages can be edited. 15 messages have already been stored.

- 1 Display the “Messaging Settings” screen. (→P. 646)
- 2 Select “Edit Quick Reply Messages” on the “Messaging Settings” screen.
- 3 Select the screen button corresponding to the desired message.

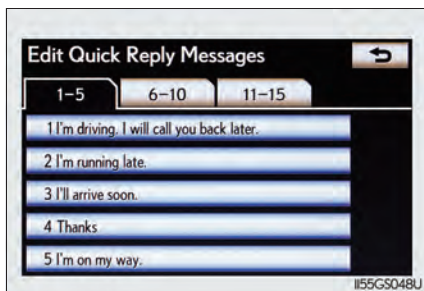

- 4 Edit the message. After editing, select “OK” and then “Save”.

■ To display the “Messaging Settings” screen in a different way

- 1** Display the “Phone” screen. (→P. 608)
- 2** Select “Messages” on the “Phone” screen.
- 3** Select “Options” on the “Messages” screen.

■ Editing the quick reply messages in a different way

- 1** Display the desired message on “Message” screen. (→P. 626)
- 2** Select “Reply” on the desired message screen.
- 3** Select “Edit” on the “Quick Reply Messages”.
- 4** Select the screen button corresponding to the desired message.
- 5** When you complete editing, select “OK” and then  on the “Edit Quick Reply Message” screen.

■ Adaptive volume control

When traveling at 50 mph (80 km/h) or more, the system automatically raises the volume.

■ To return to the default message settings

Select “Default”, and then “Yes”.

Phone display settings


Depending on the phone, this function may not be available even if the phone is PBAP compatible.

- ① Changing the incoming call display mode
- ② Changing the display phonebook transfer status on/off
- ③ Changing the display call history transfer status on/off*
- ④ Changing the contact image during incoming call on/off*
- ⑤ Changing the rotate contact image*

*: For PBAP compatible models

To display the screen above, follow the steps below.

- 1 Press the "MENU" button on the Remote Touch, then select "Setup", and select "Phone" on the "Setup" screen.
- 2 Select "Phone Display Settings" on the "Phone Settings" screen.

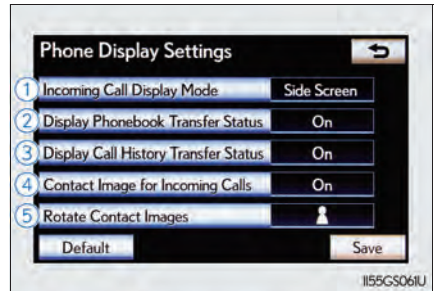

■ Changing the incoming call display mode

You can select the method of the incoming call display.

- 1 Display the “Phone Display Settings” screen. (→P. 650)
- 2 Select “Incoming Call Display Mode” on the “Phone Display Settings” screen.
- 3 Select “Main Screen” or “Side Screen”, and select “Save”.

“Main Screen”: The hands-free screen is displayed when a call is received, and you can operate the system from that screen.

“Side Screen”: A message is displayed at the side screen, and you can only operate the system with the steering switches.



■ Changing the rotating contact images

For PBAP compatible models, when “Contact Image for Incoming Calls” is set to “On”, images stored together with phone numbers in the cellular phone’s phonebook will be transferred and displayed during the incoming call. The orientation of the image can be set.

- 1 Display the “Phone Display Settings” screen. (→P. 650)
- 2 Select “Rotate Contact Images” on the “Phone Display Settings” screen.
- 3 Choose the desired orientation of the image to be displayed, and then “Save”.


■ To return to the default detailed phone settings

Select “Default”, and then “Yes”.

Setting the Bluetooth®

You can confirm and change the Bluetooth® settings.

- ① Registered Devices
- ② Connect Phone
- ③ Connect Portable Player
- ④ Detailed Bluetooth® settings

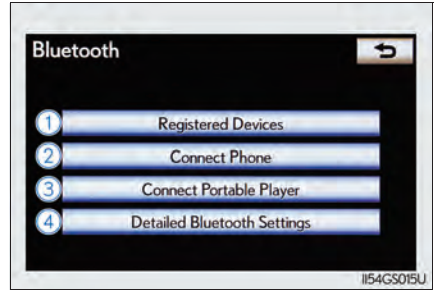

To display the screen shown above, press the "MENU" button on the Remote Touch, then select "Setup", select "Bluetooth*" on the "Setup" screen.

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

Registered devices

■ Registering a Bluetooth® devices

Bluetooth® devices compatible with phones (HFP) and portable players (AVP) can be registered simultaneously. Phones (HFP) and portable players (AVP) (maximum of 5) can be registered.

- 1 Display the “Bluetooth*” screen. (→P. 652)
- 2 Select “Registered Devices” on the “Bluetooth*” screen.
- 3 Select “Add New” to register a Bluetooth® device to the system.

When 5 Bluetooth® devices have already been registered, a registered device needs to be deleted. Select “Yes” to delete one or more. Select the device to be deleted, then select “Remove”, and then “Yes”.



*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

- 4** When this screen is displayed, operate the Bluetooth[®] device.

Search for the system displayed on the system's screen using your Bluetooth[®] device, and register the Bluetooth[®] device.

For the operation of the phone, see the manual that comes with your cellular phone.

A passcode is not required for SSP (Secure Simple Pairing) compatible Bluetooth[®] phones. Depending on the type of Bluetooth[®] phone being connected, a message confirming registration may be displayed on the Bluetooth[®] phone's screen. Respond and operate the Bluetooth[®] phone according to the confirmation message.

If you want to cancel it, select "Cancel".

If a completion message is displayed, registration is complete.

If an error message is displayed, follow the guidance on the screen to try again.




■ Removing a Bluetooth® device

- 1 Display the “Bluetooth*” screen. (→P. 652)
- 2 Select “Registered Devices” on the “Bluetooth*” screen.
- 3 Select “Remove” on the “Registered Devices” screen.
- 4 Choose the desired device.

You can select multiple device and delete them at the same time.

To remove all devices, select “Select All”.

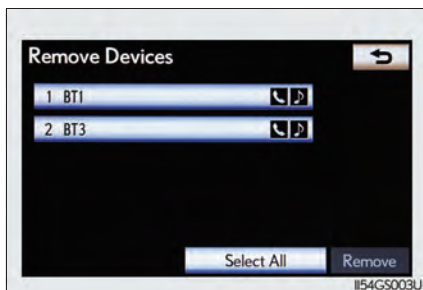

- 5 Select “Remove”. A confirmation message will be displayed. If everything is correct, select “Yes”.

■ Editing a Bluetooth® device

You can see the information of the Bluetooth® device on the system or edit.


● Changing a device name

- 1 Display the “Bluetooth*” screen. (→P. 652)
- 2 Select “Registered Devices” on the “Bluetooth*” screen.
- 3 Select “Details”.




*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.


- 4 Select the device to be edited.

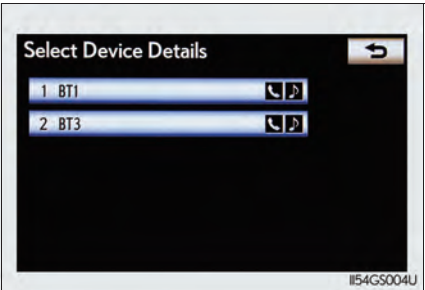

- 5 Select "Device Name".

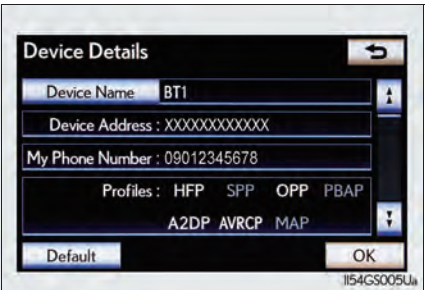


- 6 Input the device name, and select "OK".

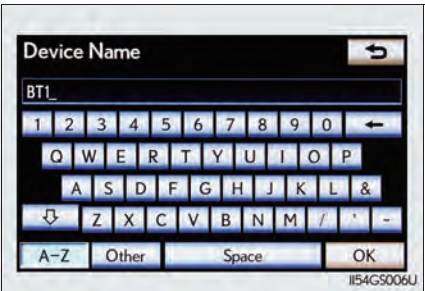

- 7 Confirm the device name and select "OK".

● Setting portable player connection method

- 1 Display the "Bluetooth*" screen. (→P. 652)
- 2 Select "Registered Devices" on the "Bluetooth*" screen.
- 3 Select "Details" on the "Registered Devices" screen.
- 4 Select the device to be edited.
- 5 Select "Connect Portable Player from".

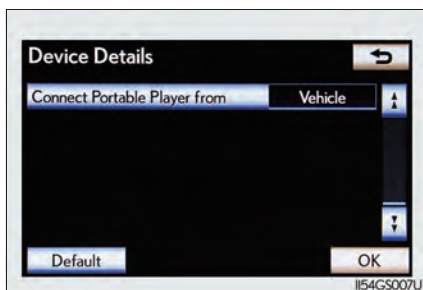


- 6 Select the desired connection method, and select "OK".

"Vehicle": Select to connect the audio system to the portable player.

"Portable Player": Select to connect the portable player to the audio system.

Depending on the portable player, the "Vehicle" or "Portable Player" connection method may be best. As such, refer to the manual that comes with the portable player.

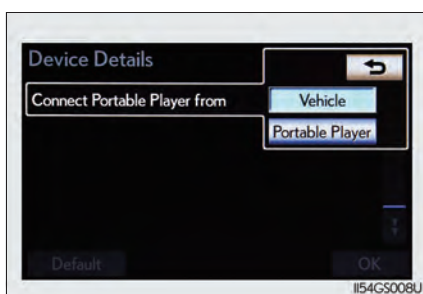

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

■ Editing the “Device Name”

If you change a device name, the name registered in your cellular phone is not changed.

■ About “Device Address”

The address peculiar to the system. It cannot be changed. If you have registered two Bluetooth[®] phones with the same device name and you cannot distinguish one from the other, refer to this address.

■ “My Phone Number”

The phone number of the Bluetooth[®] phone is displayed on the screen. Depending on the type of phone, the phone number may not be displayed.

■ “Profiles”

The compatibility profile of the Bluetooth[®] device is displayed on the screen.

■ “Connect Portable Player from”

There are 2 portable player connection settings available; “Vehicle” and “Portable Player”.

■ When you delete a Bluetooth[®] phone

The phonebook data will be deleted at the same time.


Selecting a Bluetooth® phone

If multiple Bluetooth® phones are registered, follow the procedure below to select the Bluetooth® phone to be used. You can only use one phone at a time.

- 1 Display the “Bluetooth*” screen. (→P. 652)
- 2 Select “Connect Phone” on the “Bluetooth*” screen.
- 3 Choose the phone to be connected.

The Bluetooth® mark is displayed when you connect the phone.

If a completion message is displayed, connection is complete.

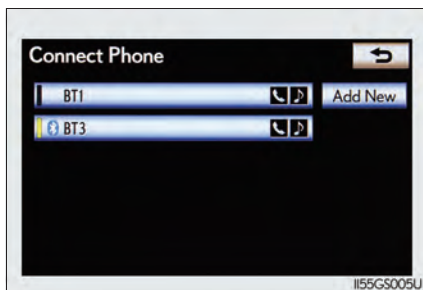

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

■ When another Bluetooth® device is connected during registering or selecting a phone

- When another Bluetooth® device is connected, a confirmation message will be displayed. If you want to disconnect it, select “Yes”.
- The currently connected Bluetooth® phone’s screen button will have a Bluetooth® mark displayed on it. If the currently connected Bluetooth® phone’s screen button is selected, the Bluetooth® phone can be disconnected. Select “Yes” to disconnect.

■ Connecting the phone while Bluetooth® audio is playing

Bluetooth® audio will stop temporarily.


Selecting a portable player

If multiple portable players are registered, follow the procedure below to select the portable player phone to be used. You can only use one portable player at a time.

- 1 Display the “Bluetooth*” screen. (→P. 652)
- 2 Select “Connect Portable Player” on the “Bluetooth*” screen.
- 3 Choose the portable player to be used.

The Bluetooth® mark is displayed when you connect the portable player.

If a completion message is displayed, connection is complete.

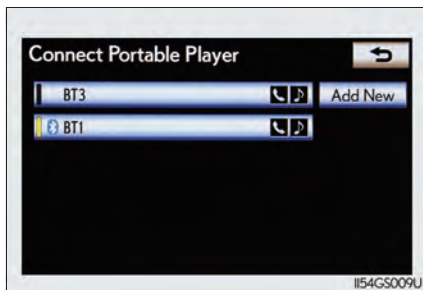

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

■ When another Bluetooth® device is connected during registering or selecting a portable player



- When another Bluetooth® device is connected, a confirmation message will be displayed. If you want to disconnect it, select “Yes”.
- The currently connected portable player’s screen button will have a Bluetooth® mark displayed on it. If the currently connected portable player’s screen button is selected, the portable player can be disconnected. Select “Yes” to disconnect.

Detailed Bluetooth® settings

You can confirm and change the Bluetooth® settings.

► Page 1

► Page 2

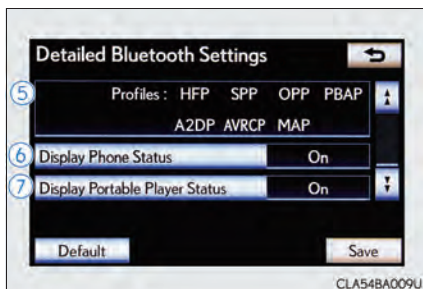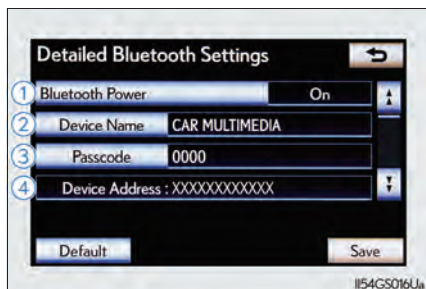

- ① Changing the device connection status
- ② Changing the system name
- ③ Changing the passcode required to connect your Bluetooth® device
- ④ The address peculiar to the system

You cannot change this address. If the same device name is displayed on the screen of your device, refer to it.

- ⑤ The compatibility profile of the system
- ⑥ Setting Bluetooth® device connection status display
- ⑦ Setting Bluetooth® device connection status display

To display the screen above, follow the steps below.


- 1 Display the "Bluetooth*" screen. (→P. 652)
- 2 Select "Detailed Bluetooth* Settings" on the "Bluetooth*" screen.

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

■ Changing Bluetooth® power

The Bluetooth® device is automatically connected when you turn the power switch to ACCESSORY or ON mode. You can change between “On” or “Off”.

- 1 Display the “Detailed Bluetooth* Settings” screen. (→P. 661)
- 2 Select “Bluetooth* Power” on the “Detailed Bluetooth* Settings” screen.
- 3 Select “On” or “Off”, and then “Save”.

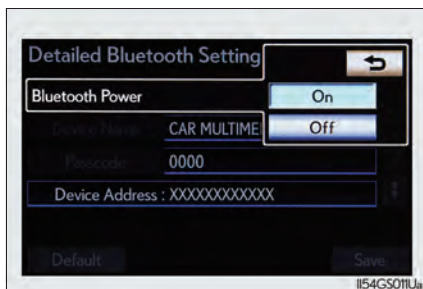

■ Editing the system name

- 1 Display the “Detailed Bluetooth* Settings” screen. (→P. 661)
- 2 Select “Device Name” on the “Detailed Bluetooth* Settings” screen.
- 3 Input the system name, and select “OK”.
- 4 Select “Save” on the “Detailed Bluetooth* Settings” screen.

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

■ Editing the passcode

- 1 Display the “Detailed Bluetooth* Settings” screen. (→P. 661)
- 2 Select “Passcode” on the “Detailed Bluetooth* Settings” screen.
- 3 Input a passcode, and select “OK”.




- 4 Select “Save” on the “Detailed Bluetooth* Settings” screen.

■ Bluetooth® device connection status display settings

When “Bluetooth* Power” is “On” and the power switch is in ACCESSORY or ON mode, the Bluetooth® phone and portable player’s connection status can be displayed. (→P. 662)

- 1 Display the “Detailed Bluetooth* Settings” screen. (→P. 661)
- 2 Select “Display Phone Status” or “Display Portable Player Status” on the “Detailed Bluetooth* Settings” screen.
- 3 Select “On”, and then “Save”.

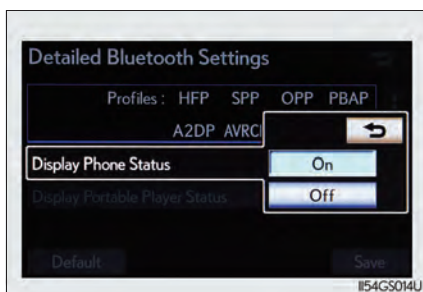

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

■ While driving

You cannot change the state of "Bluetooth^{*} Power" from "On" to "Off" while driving, but it can be changed from "Off" to "On".


■ To return to the default Bluetooth[®] settings

Select "Default", and then "Yes".

If the state of "Bluetooth^{*} Power" is changed from "Off" to "On", Bluetooth[®] connection will begin.

*: Bluetooth is a registered trademark of Bluetooth SIG, Inc.

Interior lights list

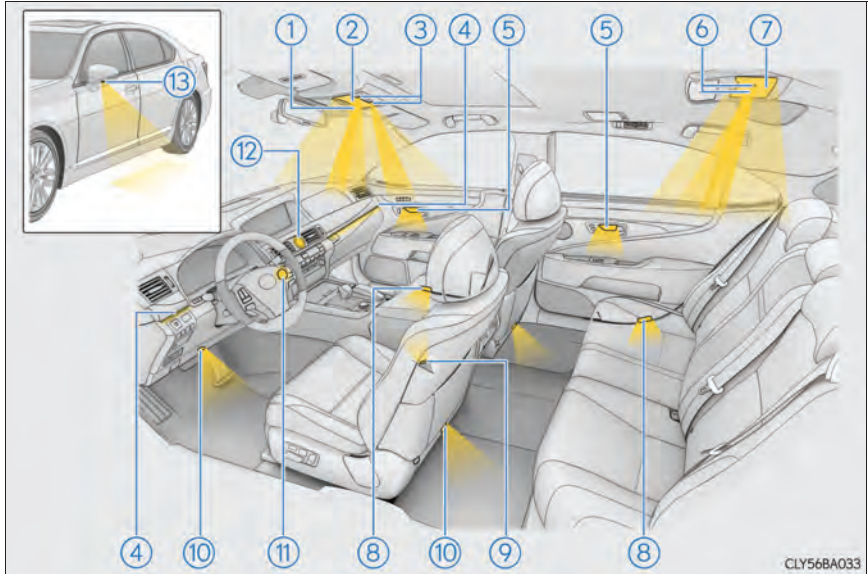


- | | |
|------------------------------------|---------------------------------|
| ① Front interior lights (→P. 666) | ⑦ Rear interior light (→P. 666) |
| ② Shift lever lights | ⑧ Door courtesy lights |
| ③ Front personal lights (→P. 667) | ⑨ Seat belt buckle lights |
| ④ Instrument panel ornament lights | ⑩ Footwell lights |
| ⑤ Inside door handle lights | ⑪ Power switch light |
| ⑥ Rear personal lights (→P. 667) | ⑫ Clock light |
| | ⑬ Outer foot lights |

Interior lights

► Front


- ① "OFF"
- ② Door position on/off
- ③ "ON"

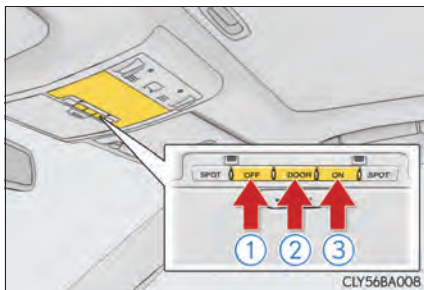

► Rear

On/off


If door position on is selected for the front interior light, the rear interior light is also turned on/off by the opening and closing of a door.

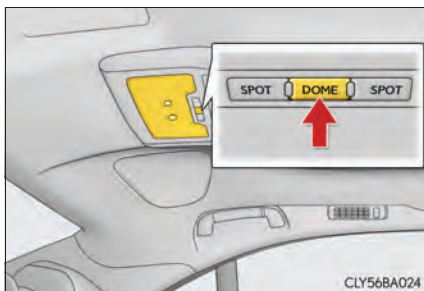

Personal lights


► Front

On/off

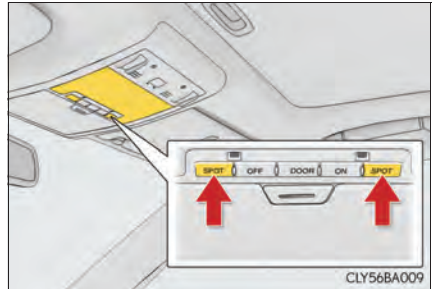


► Rear (vehicles without rear seat entertainment system)

On/off

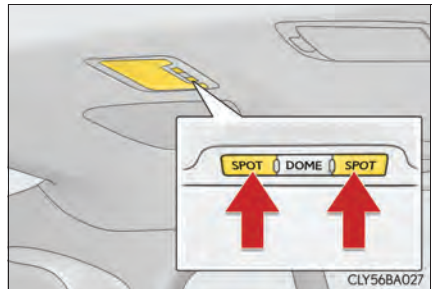

► Rear (vehicles with rear seat entertainment system)

- ① On/off
- ② Press the knob to release it, and turn the knob to the desired brightness.
- ③ Darker
- ④ Brighter

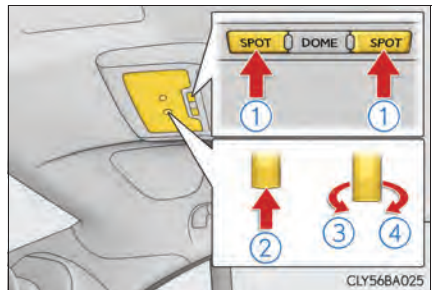

■ Illuminated entry system

The lights automatically turn on/off according to power switch mode, the presence of the electronic key, whether the doors are locked/unlocked, and whether the doors are opened/closed.

■ To prevent the 12-volt battery from being discharged

If the following lights remain on when the power switch is turned off, the lights will go off automatically after 20 minutes:

- Interior lights
- Door courtesy lights
- Personal lights
- Inside door handle lights
- Seat belt buckle lights
- Footwell lights
- Power switch light

■ Customization

Settings (e.g. The time elapsed before lights turn off) can be changed.
(Customizable features → P. 865)




NOTICE

■ To prevent 12-volt battery discharge

Do not leave the lights on longer than necessary when the hybrid system is off.


List of storage features

► 5-seat models

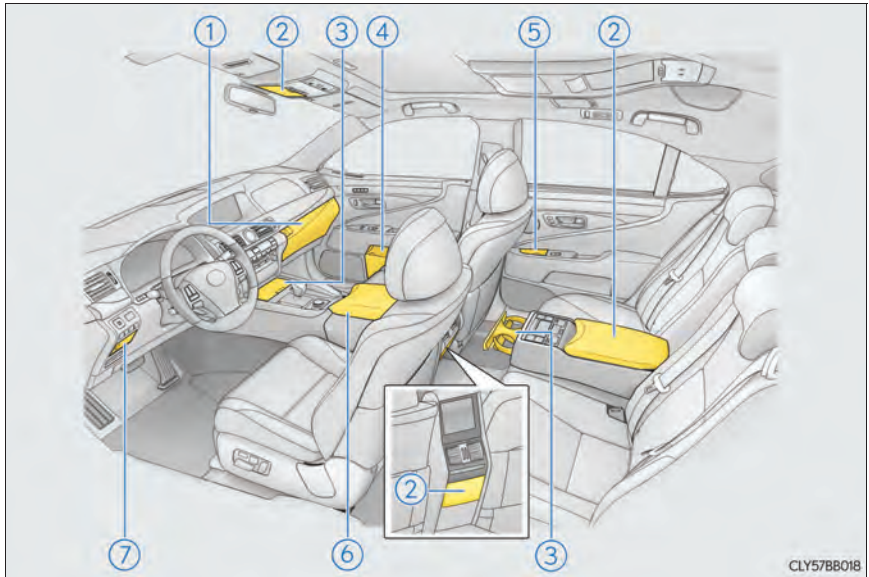

- | | | | |
|---------------------------------|-----------|---------------------------------|-----------|
| ① Glove box | (→P. 671) | ⑤ Auxiliary boxes (if equipped) | (→P. 677) |
| ② Auxiliary boxes (if equipped) | (→P. 677) | Ashtrays (if equipped) | (→P. 685) |
| ③ Cup holders | (→P. 673) | ⑥ Console box | (→P. 675) |
| ④ Door pockets | (→P. 672) | ⑦ Coin holder | (→P. 672) |

► 4-seat models

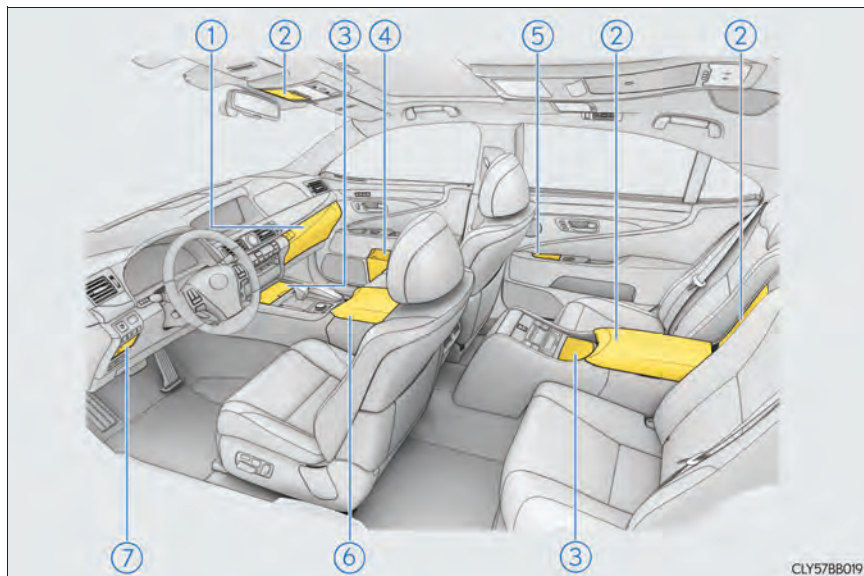

CLY57B8019

- | | | | |
|-------------------|-----------|---------------------------------|-----------|
| ① Glove box | (→P. 671) | ⑤ Auxiliary boxes (if equipped) | (→P. 677) |
| ② Auxiliary boxes | (→P. 677) | Ashtrays (if equipped) | (→P. 685) |
| ③ Cup holders | (→P. 673) | | |
| ④ Door pockets | (→P. 672) | ⑥ Console box | (→P. 675) |
| | | ⑦ Coin holder | (→P. 672) |

⚠ CAUTION


■ Items that should not be left in the storage spaces

Do not leave glasses, lighters or spray cans in the storage spaces, as this may cause the following when cabin temperature becomes high:

- Glasses may be deformed by heat or cracked if they come into contact with other stored items.
- Lighters or spray cans may explode. If they come into contact with other stored items, the lighter may catch fire or the spray can may release gas, causing a fire hazard.

Glove box

- ① Open (push button)
- ② Unlock with the mechanical key
- ③ Lock with the mechanical key

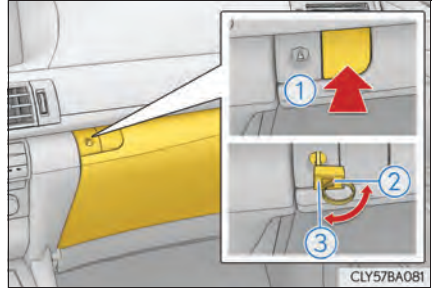

■ Glove box light

The glove box light turns on when the tail lights are on.

■ Trunk opener main switch

The trunk opener main switch is located in the glove box. (→P. 151)


⚠ CAUTION

■ Caution while driving

Keep the glove box closed. In the event of sudden braking or sudden swerving, an accident may occur due to an occupant being struck by the open glove box or the items stored inside.

Coin holder

Press in the button.

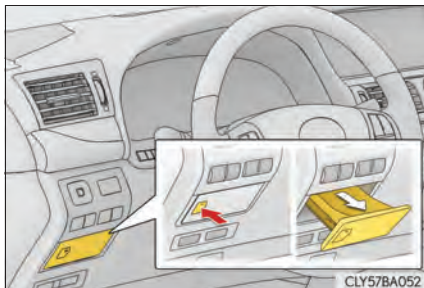

⚠ CAUTION


■ Caution while driving

Keep the coin holder closed.

Injuries may result in the event of an accident or sudden braking.

Door pockets (front)

The front door pockets can be opened and closed.

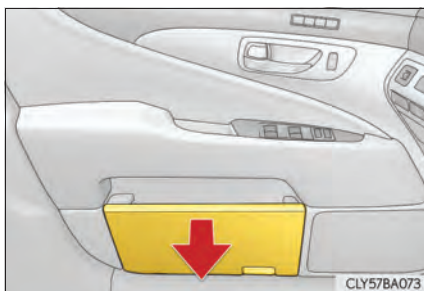

⚠ CAUTION

■ Caution while driving


Keep the door pockets closed.

Injuries may result in the event of an accident or sudden braking.

Cup holders


► Front

Press in and release the button.

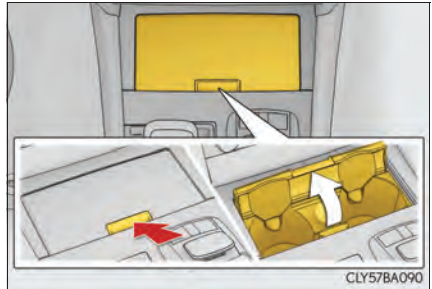


► Rear (5-seat models)

Press in and release the cup holder.

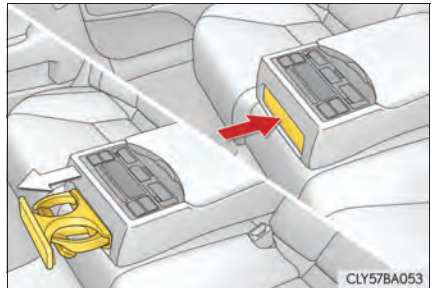

► Rear (4-seat models)

Press in and release the button.

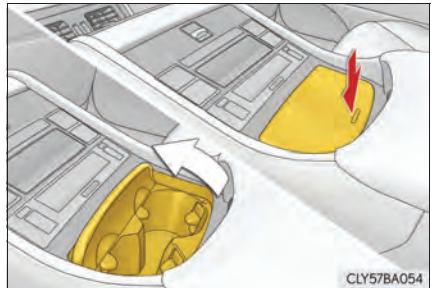

■ When stowing the rear cup holders (5-seat models)

Stow the cup holder with the armrest down. The cup holder cannot be stowed if the armrest is not down.

 CAUTION**■ Items unsuitable for the cup holder**

Do not place anything other than cups or aluminum cans in the cup holders. Other items may be thrown out of the holders in the event of an accident or sudden braking and cause injury. If possible, cover hot drinks to prevent burns.

■ To avoid burns or fires (vehicles with a cigarette lighter)

- Do not touch the metal parts of the cigarette lighter in the front cup holder.
- Do not hold the cigarette lighter in the front cup holder down. It could overheat and cause a fire.

■ When not in use

Keep the cup holders closed.
Injuries may result in the event of an accident or sudden braking.

 NOTICE**■ To prevent damage to the rear cup holder**

Stow the cup holder before stowing the armrest.


■ To avoid damaging the power outlet (vehicles with a power outlet)

Close the lid of the power outlet in the front cup holder when the power outlet is not in use. Foreign objects or liquids that enter the power outlet may cause a short circuit.

Console box


- ▶ 4-seat models or 5-seat models without rear seat entertainment system

- ① Slide the armrest while pressing the button.
- ② Lift the armrest.

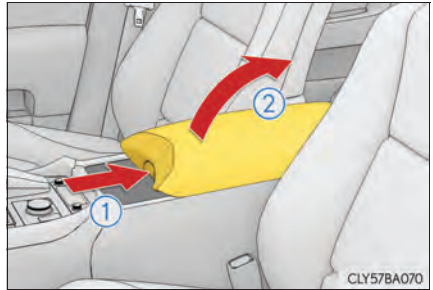


- ▶ 5-seat models with rear seat entertainment system

- ① Press the button.
- ② Lift the armrest.

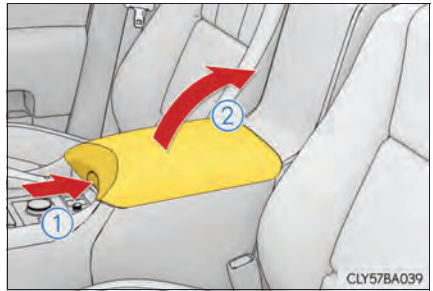

- Tray in the console box (4-seat models or 5-seat models without rear seat entertainment system)

The tray can be raised backward.



■ **Opening and closing assist function (4-seat models or 5-seat models without rear seat entertainment system)**

When the console box is opened or closed partway, this function will apply force in the appropriate direction, helping open or close the console box.

■ **Console box light**

The console box light turns on when the tail lights are on.

 CAUTION

■ **Caution while driving**

Keep the console box closed.

Injuries may result in the event of an accident or sudden braking.

 NOTICE

■ **Tray**


Do not insert items exceeding the height of the tray. Doing so may prevent opening and closing of the lid.

Auxiliary boxes

► Overhead


Press in the button.

This box is useful for temporarily storing sunglasses and similar small items.

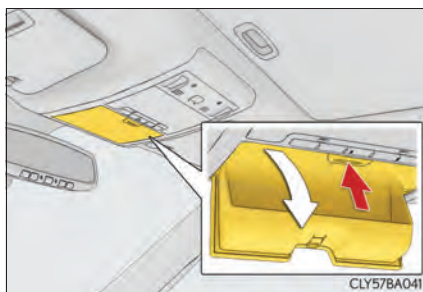

► Rear door (if equipped)


Open the lid.

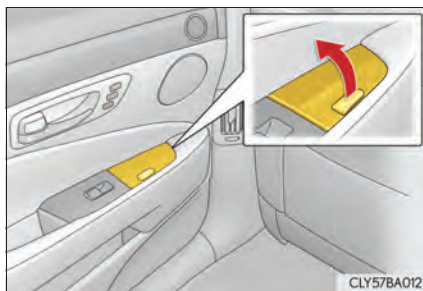

► Rear seat (5-seat models)

1 Pull down the armrest. (→P. 699)


2 Press the button and lift the lid.

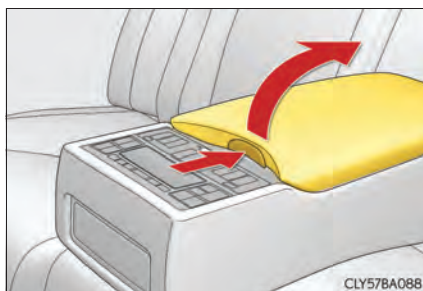

► Rear seat (4-seat models)


Press in the lid.

This box is useful for storing DVD discs and headphones.

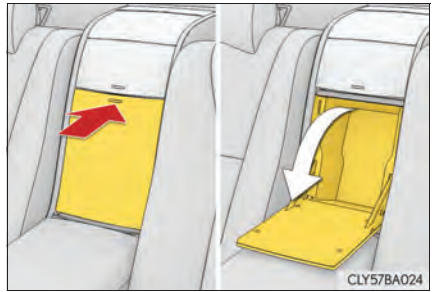


► Rear seat (4-seat models — armrest)

Pull up the lever to release the lock and lift the lid.

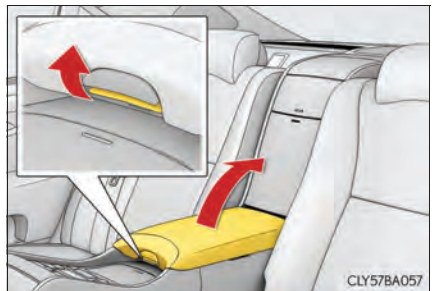


► Rear console (vehicles with rear console display)

Press in the lid.

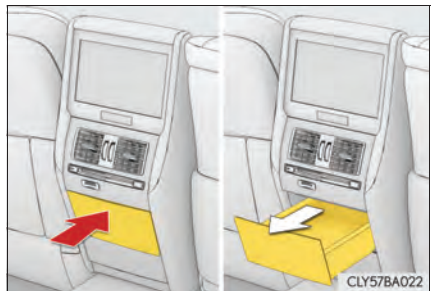

■ Tray in the rear console

The tray can be removed.



⚠ CAUTION

■ Using the auxiliary boxes (rear door)

Do not use the auxiliary boxes as an ashtray.
Doing so may cause a fire.

■ Caution while driving

Do not leave the auxiliary box open while driving.
Items may fall out and cause death or serious injury in case of an accident or sudden stop.

■ Items unsuitable for storing (overhead)



Do not store items heavier than 0.4 lb. (0.2 kg).
Doing so may cause the auxiliary box to open and the items inside may fall out, resulting in an accident.

Trunk features


Cargo net

The cargo net is provided for securing loose items on the floor or items inside the trunk.

Raise the cargo hooks on the floor.
Hook the net on the cargo hooks.

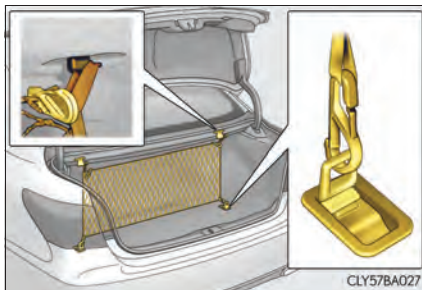
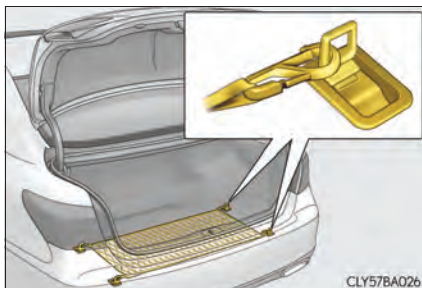


Shopping bag hooks

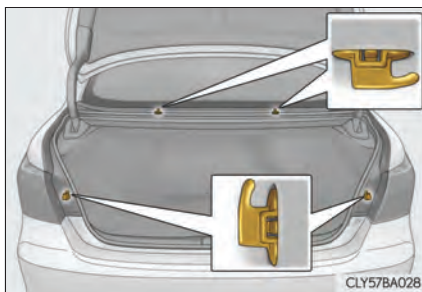


Luggage mat

- 1 Hold the hook and lift up the luggage mat.
- 2 Secure the luggage mat using the hook.

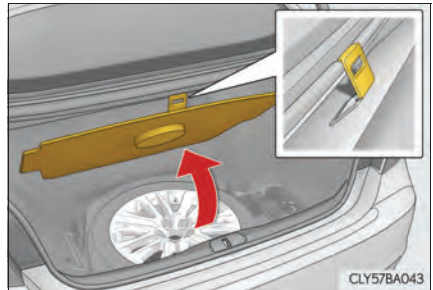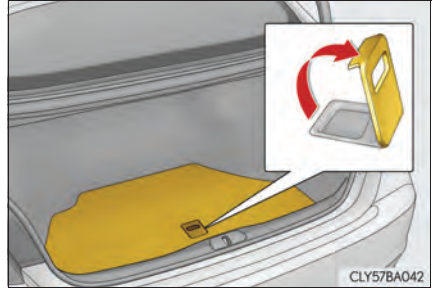

First-aid kit storage belt

- 1 Loosen
- 2 Tighten

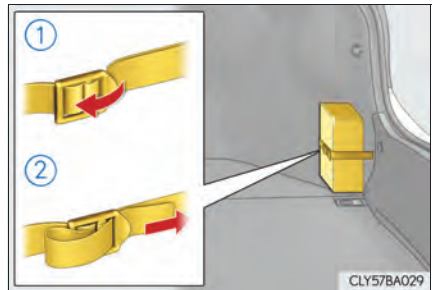

CAUTION


■ When the cargo net is not in use

To avoid injury, always return the cargo hooks on the floor to their stowed positions.

Sun visors and vanity mirrors

Sun visors

- ① To set the visor in the forward position, flip it down.
- ② To set the visor in the side position, flip down, unhook, and swing it to the side.
- ③ To use the side extender, place the visor in the side position, then slide it backward.

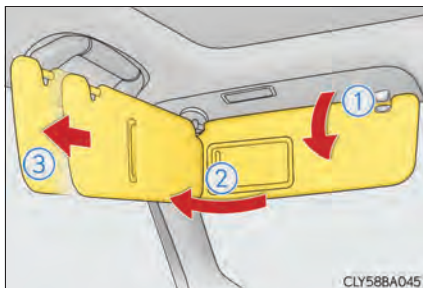


Vanity mirrors

► Front

Slide the cover to open.


The vanity light turns on.

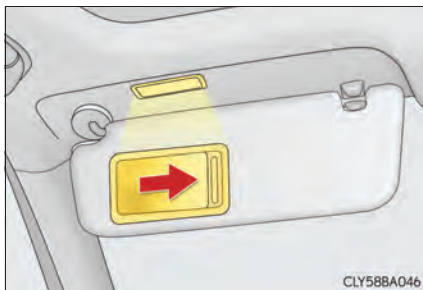

► Rear

Press the button to open.

The vanity light turns on.

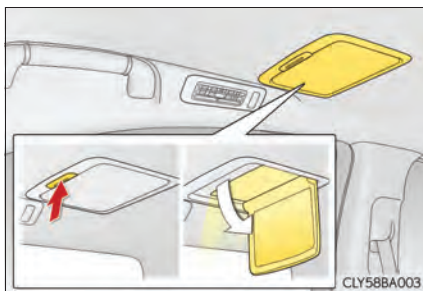

■ To prevent 12-volt battery discharge

If the vanity lights remain on when the power switch is turned off, the lights will go off automatically after 20 minutes.

**NOTICE****■ When not in use**


Keep the rear vanity mirror closed.

■ To prevent the 12-volt battery from being discharged

Do not leave the vanity lights on for extended periods while the hybrid system is off.

Clock


The GPS clock's time is automatically adjusted by utilizing GPS time information. (→P. 368)

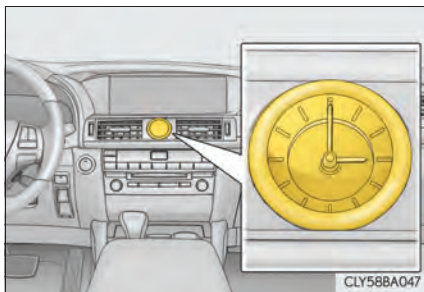

Ashtrays*

Open the ashtray lid.

To remove the ashtray, pull the ashtray lid upwards.

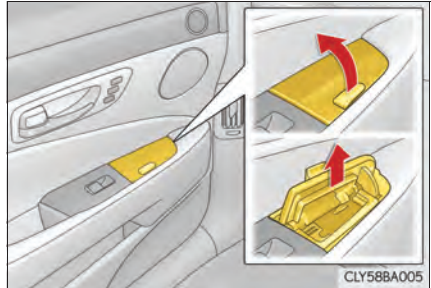

⚠ CAUTION

■ When not in use

Keep the ashtray closed. In the event of sudden braking or sudden swerving, an accident may occur due to an occupant being struck by the open ashtray or ash flying out.

■ To prevent fire


- Fully extinguish matches and cigarettes before putting them in the ashtray, then make sure the ashtray is fully closed.
- Do not place paper or any other type of flammable object in the ashtray.

Cigarette lighters*

► Front

Push the back part of the lid to open, and push the cigarette lighter down.


The cigarette lighter will pop up when it is ready for use.

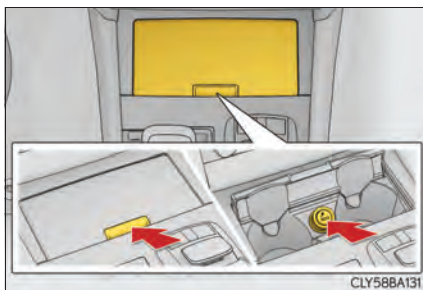

► Rear (5-seat models without rear console display)

Push the cigarette lighter.

The cigarette lighter will pop out when it is ready for use.

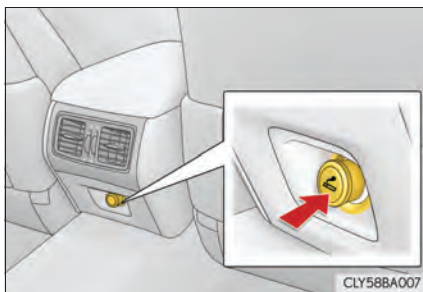

► Rear (4-seat models)

Open the auxiliary box and push the cigarette lighter.

The cigarette lighter will pop out when it is ready for use.



*: If equipped

■ The cigarette lighter can be used when

The power switch is in ACCESSORY or ON mode.

⚠ CAUTION**■ To avoid burns or fires**

- Do not touch the metal parts of the cigarette lighter.
- Do not hold the cigarette lighter down. It could overheat and cause a fire.
- Do not insert anything other than the cigarette lighter into the outlet.

■ When not in use

Keep the ashtray closed.

Injuries may result in the event of an accident or sudden braking.

Power outlets

The power outlet can be used for the following components:


12 V: Accessories that run on less than 10 A.

120 VAC: Accessories that use less than 100 W.

■ 12 V


► Front*

Push the back part of the lid to open, and open the lid.

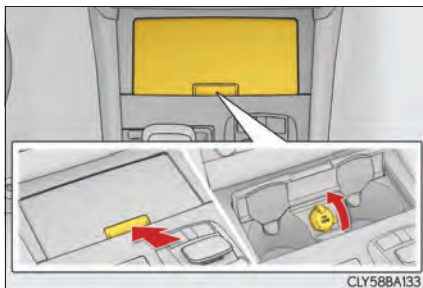


► Console box

Open the console box and open the lid.

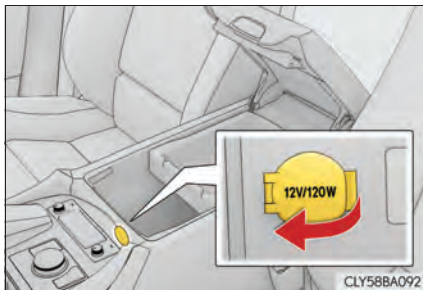

- Rear (5-seat models without rear seat entertainment system)*

Open the lid.

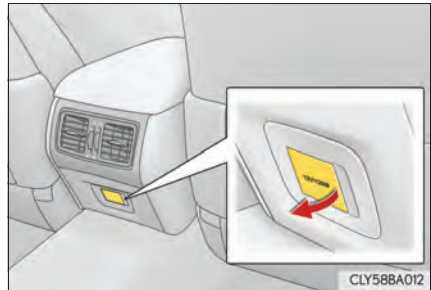

- Rear (5-seat models with rear console display)*

Push the cover to open, and open the lid.



- Rear (4-seat models)*

Open the auxiliary box and open the lid.




*: If equipped

■ 120 VAC


- ▶ 4-seat models or 5-seat models without rear seat entertainment system*

Open the lid.

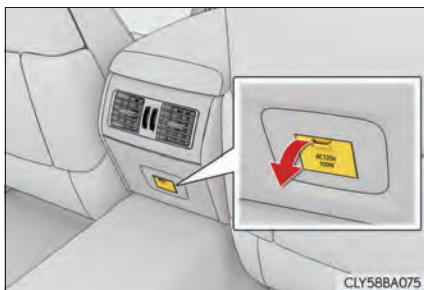

- ▶ 5-seat models with rear console display*

Push the cover to open, and open the lid.

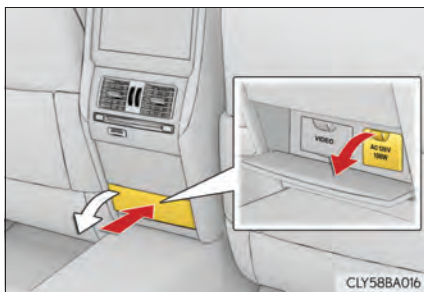

*: If equipped

■ The power outlet can be used when

- ▶ 12 V

The power switch is in ACCESSORY or ON mode.

- ▶ 120 VAC

The power switch is in ON mode.

 NOTICE**■ To avoid damaging the power outlet**

Close the power outlet lid when the power outlet is not in use.
Foreign objects or liquids that enter the power outlet may cause a short circuit.

■ To prevent the fuse from being blown**▶ 12 V**

Do not use an accessory that uses more than 12 V 10 A.

▶ 120 VAC

Do not use a 120 VAC appliance that requires more than 100 W.

If a 120 VAC appliance that consumes more than 100 W is used, the protection circuit will cut the power supply.

■ To prevent the 12-volt battery from being discharged

Do not use the power outlet longer than necessary when the hybrid system is off.

■ Appliances that may not operate properly (120 VAC)

The following 120 VAC appliances may not operate properly even if their power consumption is under 100 W.

- Appliances with high initial peak wattage
- Measuring devices that process precise data
- Other appliances that require an extremely stable power supply

Heated steering wheel

The left and right grip portions of the steering wheel can be heated.

► Automatic operation


Operates automatically according to the outside and cabin temperature when the power switch is turned to ON mode. Automatic operation can be turned off using the switch.

The indicator light comes on when the heater is operating.

► Manual operation

Turns the heated steering wheel on/off.

The indicator light comes on when the heater is operating.

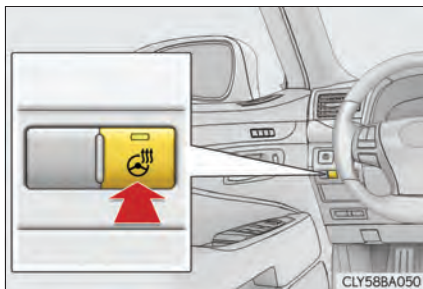

■ Operating condition

The power switch is in ON mode.

■ Timer function

Manual operation: Turns off after approximately 30 minutes.

Automatic operation: Operates for a maximum of 30 minutes. (Turns off according to outside and cabin temperature.)

■ If the indicator light does not come on

If the indicator light does not come on when the switch is pressed, a malfunction may have occurred in the system. Have the vehicle inspected by your Lexus dealer.

■ Customization

The automatic turning on/off of the heated steering wheel can be customized. (Customizable features →P. 865)

 CAUTION**■ Burns**

Only appropriately qualified and capable non-impaired persons should operate the vehicle. However, care should be taken to prevent injury if anyone in the following categories comes into contact with the steering wheel when the heated steering wheel is on:

- Babies, small children, the elderly, the sick and the disabled
- Persons with sensitive skin
- Persons who are fatigued
- Persons who have taken alcohol or drugs that induce sleep (sleeping drugs, cold remedies, etc.)

 NOTICE**■ To prevent the 12-volt battery from being discharged**

Turn the switch off when the hybrid system is off.


Climate control seats

The seats can be heated or cooled. When set to “AUTO” mode, the climate control seats/seat heaters are linked to the air conditioning settings and automatically adjusted.

Front climate control seats

- 1 Press the knob to release the lock.


Press the knob to lock it when not in use.

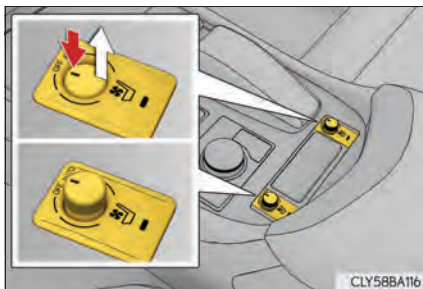

► AUTO setting

- 2 Turn the knob to the “AUTO” position.


When set to “AUTO” mode, seat heater, off, ventilation or seat cooler is automatically selected according to the set temperature of the air conditioning system, outside temperature, etc.

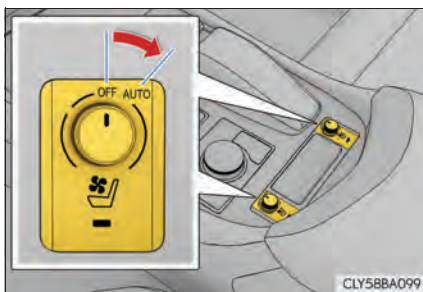

► Manual setting


- 2** Set the temperature by turning the knob to the left or right.

- ① Off
- ② Seat heater
- ③ Ventilation
- ④ Seat cooler

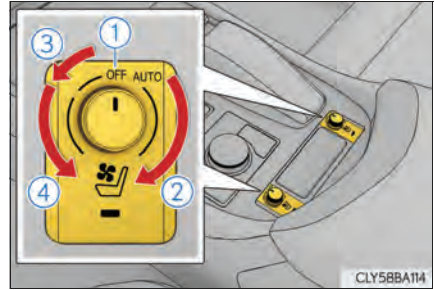


Rear climate control seats

► 5-seat models

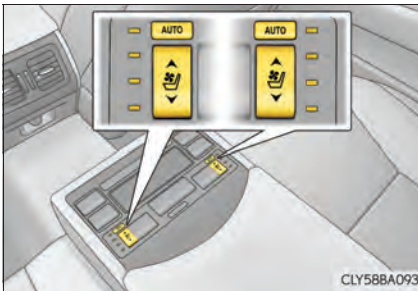

► 4-seat models

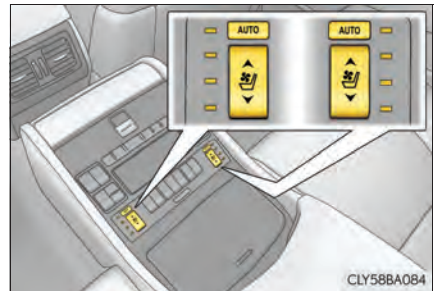

■ **AUTO setting**

The switch turned on/off.

When set to "AUTO" mode, the indicator illuminates.

When set to "AUTO" mode, seat heater, off, ventilation or seat cooler is automatically selected according to the set temperature of the air conditioning system, outside temperature, etc.



■ Manual setting


The strength of the seat heater and seat cooler can be adjusted to 3 levels each.

Seat heater^{*1}: When the system is off, pressing “▲” turns the seat heater on.

Pressing “▲” increases the level and pressing “▼” lowers the level.

Seat cooler^{*2}: When the system is off, pressing “▼” turns the seat cooler on.

Pressing “▼” increases the level and pressing “▲” lowers the level.

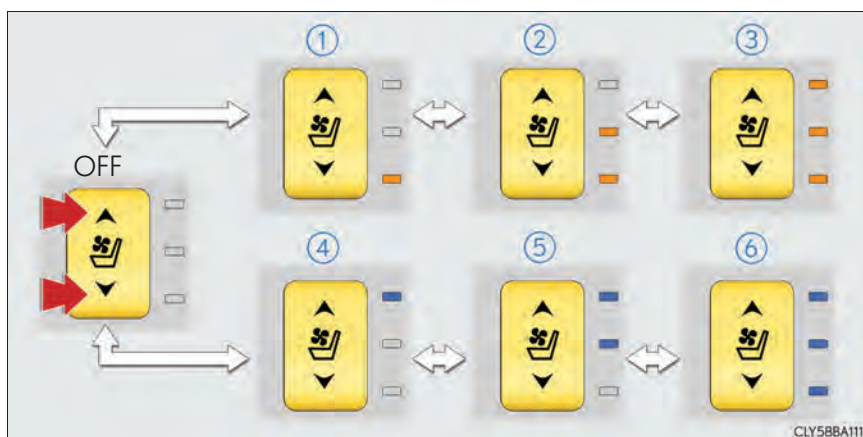

Seat heater^{*1}

- ① Low
- ② Mid
- ③ Hi

Seat cooler^{*2}

- ④ Low
- ⑤ Mid
- ⑥ Hi

^{*1}: The indicator illuminates in amber.

^{*2}: The indicator illuminates in blue.

■ Operating condition

The power switch is in ON mode.

■ Climate control seat operation

Depending on the outside temperature and the temperature of the seat surface, there are cases when heating operation is stronger than usual.

■ Operating the rear climate control seats from the front seats

→P. 411

■ Disabling the switches on the rear controller

→P. 412

■ Replacing the air filters

Filters are installed in the climate control seats. For replacement of the filters, contact your Lexus dealer.

■ Customization

Automatic operation settings can be customized. (Customizable features →P. 865)

 CAUTION**■ Burns/excessive cooling**

- Use caution when seating the following persons in a seat to avoid the possibility of burns or excessive cooling:
 - Babies, small children, elderly persons, sick persons and persons with a physical disability
 - Persons who have sensitive skin
 - Persons who are fatigued
 - Persons who have taken alcohol or drugs which induce sleep, such as sleeping drugs and cold remedies
- Do not cover the seat with anything when using the climate control seat. Using the climate control seat with a blanket or cushion may increase or decrease the temperature of the seat, resulting in overheating or overcooling.
- Do not use the climate control seat more than necessary. Doing so may cool the occupants excessively or may cause minor burns or overheating.

 NOTICE**■ To prevent damage to the climate control seat**


Do not put heavy objects that have an uneven surface on the seat and do not stick sharp objects, such as needles and nails, into the seat.

■ To prevent the 12-volt battery from being discharged

Do not leave the system on longer than necessary when the hybrid system is off.

Armrest (5-seat models)

Pull the armrest down for use.

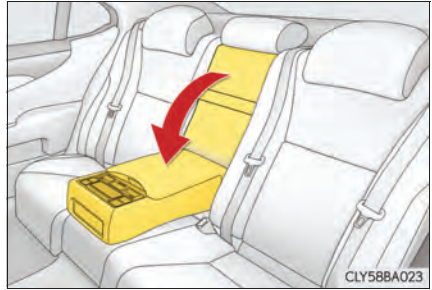


NOTICE

■ **To prevent damage to the armrest**


Do not place too much strain on the armrest.

Retractable table (4-seat models)

- 1** Slide the lever to raise the table.

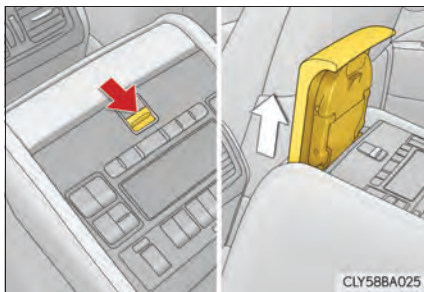



- 2** Pull the table up and pull down the table.

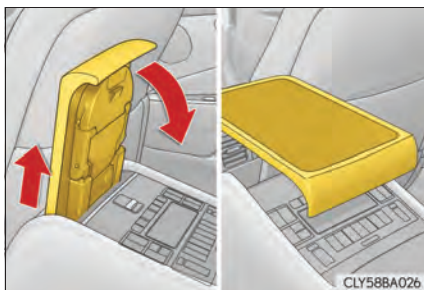

The position of the table can be changed. Before using the table, make sure that the table is securely locked.

When the table is in use, the front seats will stop if they are going to contact the table. (→P. 161, 181)

When returning the table, pull it up while pulling the lock release lever.

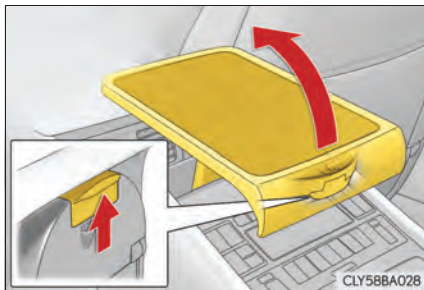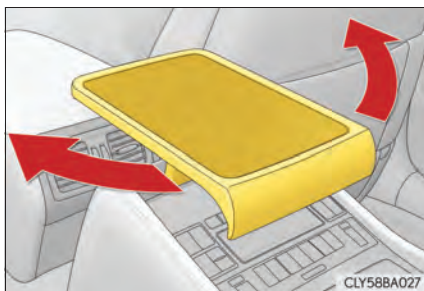

 CAUTION**■ When not in use**

To avoid injury, return the table.

■ Caution while driving

Keep the table stowed properly in its place. In the event of an accident, contact with the table may result in death or serious injury.

■ When using the table

Observe the following precautions. Failure to do so may result in death or serious injury.

- Make sure the table is securely locked.
- Do not lean on the table.
- Do not put anything heavier than 22 lb. (10 kg) on the table.

 NOTICE**■ To prevent damage to the table**

Do not place too much strain on the table.


Rear sunshade

The rear sunshade can be raised and lowered by operating any of the buttons shown below.

■ From front seat


- ▶ Vehicles with power rear seat

Extend/retract

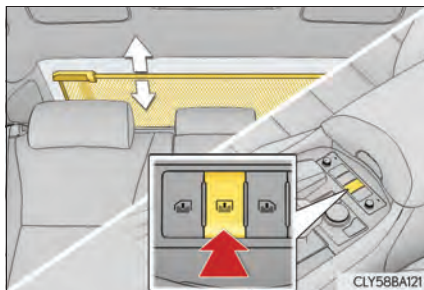

- ▶ Vehicles with relaxation seat


Extend/retract

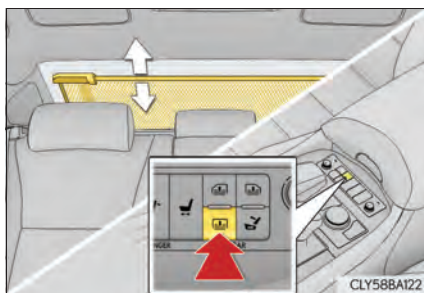

■ From rear seat


- ▶ 5-seat models

Extend/retract

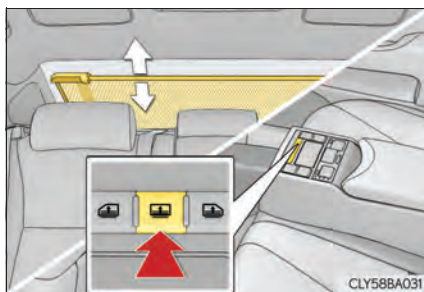

► 4-seat models

Extend/retract

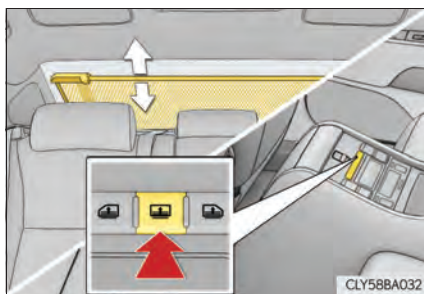■ **The rear sunshade can be used when**

The power switch is in ON mode.

■ **Operating the rear sunshade after turning the hybrid system off**

The rear sunshade can be operated for approximately 60 seconds even after the power switch is switched to ACCESSORY mode or turned off.

■ **Reverse operation feature**

To ensure adequate rear visibility, the rear sunshade automatically lowers when the shift lever is shifted to R.

However, the rear sunshade is raised again if any of the following occurs:

- The button is pressed again.
- The shift lever is shifted to P.
- The shift lever is shifted out of P and R, and the vehicle reaches a speed of 9 mph (15 km/h).

If the hybrid system is turned off when the rear sunshade has been lowered due to the reverse operation feature, it will not be raised even when the hybrid system is turned on again and the vehicle reaches a speed of 9 mph (15 km/h). To raise the sunshade again, press the button.

■ **Button lock function**

To prevent inadvertent operation, some buttons on the rear armrest can be locked. (→P. 424)

 CAUTION**■ When the rear sunshade is being raised or lowered**

Do not place fingers or other objects in the shade mechanism or in the opening as injury may result.

 NOTICE**■ To prevent the 12-volt battery from being discharged**

Do not operate the rear sunshade when the hybrid system is off.

■ To ensure normal operation of the sunshade

Observe the following precautions:

- Do not place excessive load on the motor or other components.
- Do not place objects where they may hinder opening and closing operations.
- Do not attach items to the rear sunshade.
- Keep the opening clean and clear of obstructions.
- Do not operate the rear sunshade continuously for long periods of time.


Rear door sunshades

The rear door sunshades can be extended and retracted by operating any of the buttons shown below.

■ From front seat


- Vehicles with power rear seat

Extend/retract

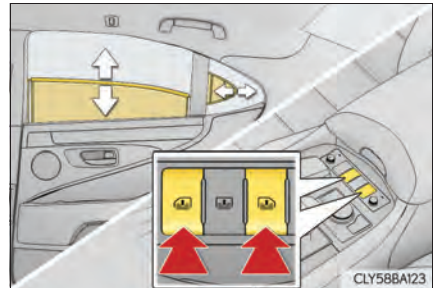

- Vehicles with relaxation seat


Extend/retract

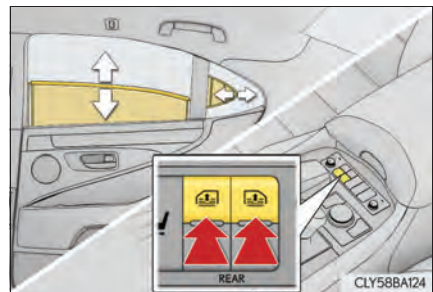

■ From rear seat


- 5-seat models

Extend/retract

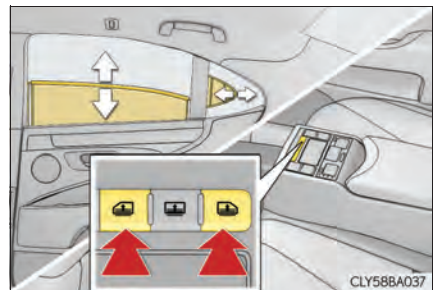

► 4-seat models

Extend/retract

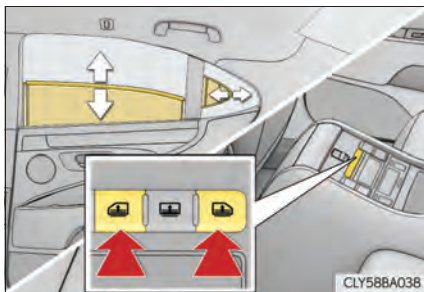■ **Operating conditions**

- The power switch is in ON mode.
- The rear windows are fully closed.

The rear door sunshades automatically retract when the rear windows are opened.

■ **Operating the rear door sunshades after turning the hybrid system off**

The rear door sunshades can be operated for approximately 60 seconds even after the power switch is switched to ACCESSORY mode or turned off.

■ **Jam protection function**

If an object becomes caught between a rear door sunshade and the window frame, the jam protection function will cause the sunshade to detach from its drive mechanism and retract.

- If the jam protection function operates when extending the rear door sunshades

Pressing the button will reconnect the sunshade.

Pressing the button again will allow the sunshades to be operated.

If the sunshade does not operate after the button is pressed, press the button again.

- If the jam protection function operates when retracting the rear door sunshades

Press and hold the button to re-extend the rear door sunshades, and continue pressing for more than 5 seconds after the sunshades have fully extended and stopped.

■ **Button lock function**

To prevent inadvertent operation, some buttons on the rear armrest can be locked. (→P. 424)

■ **When reconnecting the 12-volt battery**

The rear door sunshades will always be retracted the first time the button is pressed.

**CAUTION****■ When the rear door sunshades are being extended or retracted**

Do not place fingers or other objects in the shade mechanism or in the opening as injury may result.

■ Jam protection function

Never use any part of your body to intentionally activate the jam protection function.

**NOTICE****■ To prevent the 12-volt battery from being discharged**

Do not operate the rear door sunshades when the hybrid system is off.


■ To ensure normal operation of the sunshades

Observe the following precautions:

- Do not place excessive load on the motor or other components.
- Do not place objects where they may hinder opening and closing operations.
- Do not attach items to the rear door sunshades.
- Keep the opening clean and clear of obstructions.
- Do not operate the rear door sunshades continuously for long periods of time.

Coat hooks

To use the coat hook, push it on.

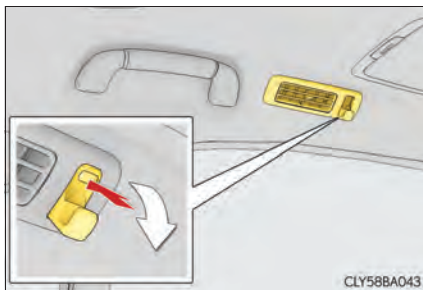


CAUTION

■ Items that must not be hung on the hook

Do not hang a coat hanger or other hard or sharp object on the hook. If the SRS curtain shield airbags deploy, these items may become projectiles that cause death or serious injury.

Assist grips

An assist grip installed on the ceiling can be used to support your body while sitting on the seat.

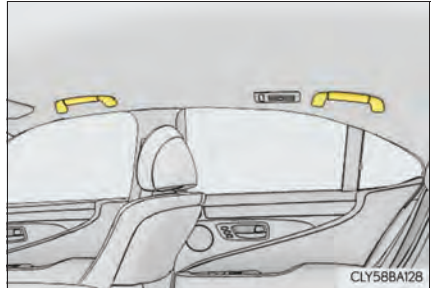

CAUTION

■ Assist grip

Do not use the assist grip when getting in or out of the vehicle or rising from your seat.

Doing so could damage the assist grip, or could cause you to injure yourself by falling over.

NOTICE

■ To prevent damage to the assist grip

Do not hang any heavy object or put a heavy load on the assist grip.

Garage door opener


The garage door opener can be programmed to operate garage doors, gates, entry doors, door locks, home lighting systems, security systems, and other devices.

The garage door opener (HomeLink[®] Universal Transceiver) is manufactured under license from HomeLink[®].

Programming the HomeLink[®]


The HomeLink[®] compatible transceiver in your vehicle has 3 buttons which can be programmed to operate 3 different devices. Refer to the programming method below appropriate for the device.

- ① Indicator
- ② Buttons

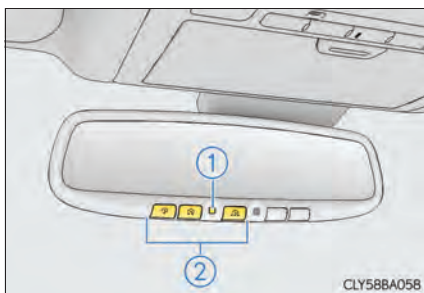


■ Programming the HomeLink[®] (for U.S.A. owners)

- 1 Point the remote control transmitter for the device 1 to 3 in. (25 to 75 mm) from the HomeLink[®] control buttons.
Keep the HomeLink[®] indicator light in view while programming.

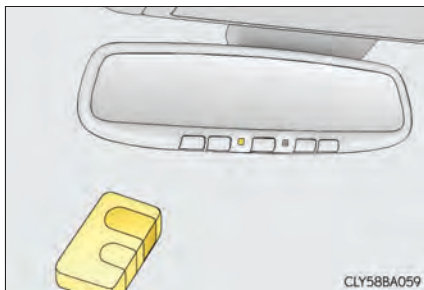

- 2 Press and hold one of the HomeLink[®] buttons and the transmitter button. When the HomeLink[®] indicator light changes from a slow to a rapid flash, you can release both buttons.

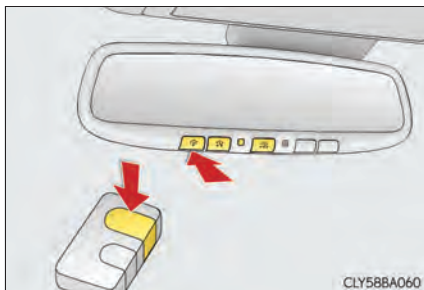


If the HomeLink[®] indicator light comes on but does not flash, the HomeLink[®] button is already programmed. Use the other buttons or follow the "Reprogramming a HomeLink[®] button" instructions. (→P. 714)

The remote control transmitter is of the rolling code type if the HomeLink[®] indicator light flashes rapidly for 2 seconds and then remains lit. If your transmitter is of the rolling code type, proceed to the heading "Programming a rolling code system".

- 3** Test the HomeLink[®] operation by pressing the newly programmed button.

If a HomeLink[®] button has been programmed for a garage door, check to see if the garage door opens and closes. If the garage door does not operate, see if your remote control transmitter is of the rolling code type. Press and hold the programmed HomeLink[®] button. The remote control transmitter is of the rolling code type if the HomeLink[®] indicator light flashes rapidly for 2 seconds and then remains lit. If your transmitter is of the rolling code type, proceed to the heading "Programming a rolling code system".

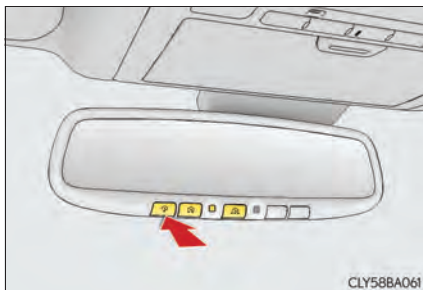

- 4** Repeat the steps above to program another device for each of the remaining HomeLink[®] buttons.

■ Programming a Rolling Code system (for U.S.A. owners)

If your device is Rolling Code equipped, follow the steps under the heading "Programming the HomeLink[®]" before proceeding with the steps listed below.

- 1** Locate the learn button on the ceiling mounted garage door opener motor. The exact location and color of the button may vary by brand of garage door opener motor.

Refer to the operation manual supplied with the garage door opener for the location of the learn button.

- 2** Press the learn button.

Following this step, you have 30 seconds in which to initiate step 3 below.

- 3** Press and hold the vehicle's programmed HomeLink[®] button for 2 seconds and release it. Repeat this step once again. The garage door may open.

If the garage door opens, the programming process is complete. If the door does not open, press and release the button a third time. This third press and release will complete the programming process by opening the garage door.

The ceiling mounted garage door opener motor should now recognize the HomeLink[®] signal and operate the garage door.

- 4** Repeat the steps above to program another rolling code system for any of the remaining HomeLink[®] buttons.

■ **Programming an entry gate (for U.S.A. owners)/Programming all devices in the Canadian market**

- 1** Place your transmitter 1 to 3 in. (25 to 75 mm) away from the surface of the HomeLink[®].

Keep the HomeLink[®] indicator light in view while programming.

- 2** Press and hold the selected HomeLink[®] button.
- 3** Repeatedly press and release (cycle) the device's remote control button for two seconds each until step 4 is completed.
- 4** When the indicator light on the HomeLink[®] compatible transceiver starts to flash rapidly, release the buttons.
- 5** Test the operation of the HomeLink[®] by pressing the newly programmed button. Check to see if the gate/device operates correctly.
- 6** Repeat the steps above to program another device for each of the remaining HomeLink[®] buttons.

■ **Programming other devices**

To program other devices such as home security systems, home door locks or lighting, contact your Lexus dealer for assistance.

■ **Reprogramming a button**

The individual HomeLink[®] buttons cannot be erased but can be reprogrammed. To reprogram a button, follow the "Reprogramming a HomeLink[®] button" instructions.

Operating HomeLink®

Press the appropriate HomeLink® button. The HomeLink® indicator light should turn on.

The HomeLink® compatible transceiver in your vehicle continues to send a signal for up to 20 seconds as long as the button is pressed.


Reprogramming a HomeLink® button

Press and hold the desired HomeLink® button. After 20 seconds, the HomeLink® indicator light will start flashing slowly. Next, while still pressing and holding the HomeLink® button, press and hold the button on the transmitter until the HomeLink® indicator light changes from a slow to a rapid flash.

Erasing the entire HomeLink® memory (all three programs)

Press and hold the 2 outside buttons for 10 seconds until the indicator light flashes.

If you sell your vehicle, be sure to erase the programs stored in the HomeLink® memory.

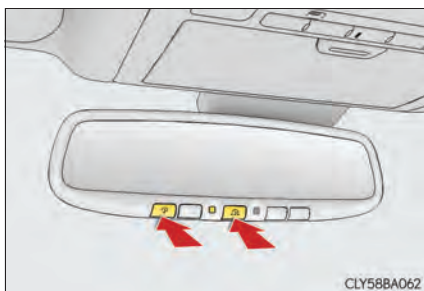

■ Before programming

- Install a new battery in the remote control transmitter.
- The battery side of the remote control transmitter must be pointed away from the HomeLink® button.

■ Certification for the garage door opener

- For vehicles sold in the U.S.A.

FCC ID: NZLOBIHL4

FCC ID: NZLWZLHL4

FCC ID: NZLHSLMHL4

NOTE:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- For vehicles sold in Canada

NOTE:

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

REMARQUE:

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

■ When support is necessary

Visit on the web at www.homelink.com or call 1-800-355-3515.



CAUTION

■ When programming a garage door or other remote control device

The garage door or other device may operate, so ensure people and objects are out of danger to prevent potential harm.

■ Conforming to federal safety standards

Do not use the HomeLink[®] compatible transceiver with any garage door opener or device that lacks safety stop and reverse features as required by federal safety standards.

This includes any garage door that cannot detect an obstruction object. A door or device without these features increases the risk of death or serious injury.

Safety Connect*


Safety Connect is a subscription-based telematics service that uses Global Positioning System (GPS) data and embedded cellular technology to provide safety and security features to subscribers. Safety Connect is supported by Lexus' designated response center, which operates 24 hours per day, 7 days per week.

Safety Connect service is available by subscription on select, telematics hardware-equipped vehicles.

By using the Safety Connect service, you are agreeing to be bound by the Telematics Subscription Service Agreement and its Terms and Conditions, as in effect and amended from time to time, a current copy of which is available at Lexus.com. All use of the Safety Connect service is subject to such then-applicable Terms and Conditions.

■ System components

- ① Microphone
- ② "SOS" button
- ③ LED light indicators

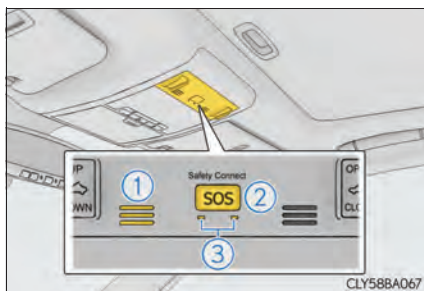

*: If equipped

■ Services

Subscribers have the following Safety Connect services available:

- Automatic Collision Notification*

Helps drivers receive necessary response from emergency service providers. (→P. 719)

*: U.S. Patent No. 7,508,298 B2

- Stolen Vehicle Location

Helps drivers in the event of vehicle theft. (→P. 720)

- Emergency Assistance Button (SOS)

Connects drivers to response-center support. (→P. 720)

- Enhanced Roadside Assistance

Provides drivers various on-road assistance. (→P. 720)

■ Subscription

After you have signed the Telematics Subscription Service Agreement and are enrolled, you can begin receiving services.

A variety of subscription terms is available for purchase. Contact your Lexus dealer, call 1-800-25-LEXUS (1-800-255-3987) or push the “SOS” button in your vehicle for further subscription details.

■ Safety Connect Services Information

- Phone calls using the vehicle's Bluetooth® technology will not be possible during Safety Connect.
- Safety Connect is available beginning Fall 2009 on select Lexus models. Contact with the Safety Connect response center is dependent upon the telematics device being in operative condition, cellular connection availability, and GPS satellite signal reception, which can limit the ability to reach the response center or receive emergency service support. Enrollment and Telematics Subscription Service Agreement required. A variety of subscription terms is available; charges vary by subscription term selected.
- Automatic Collision Notification, Emergency Assistance and Stolen Vehicle Location will function in the United States, including Hawaii and Alaska, and in Canada, and Enhanced Roadside Assistance will function in the United States (except Hawaii) and in Canada. No Safety Connect services will function outside of the United States in countries other than Canada.
- Safety Connect services are not subject to section 255 of the Telecommunications Act and the device is not TTY compatible.

■ Languages

The Safety Connect response center will offer support in multiple languages. The Safety Connect system will offer voice prompts in English and Spanish. Please indicate your language of choice when enrolling.

■ When contacting the response center

You may be unable to contact the response center if the network is busy.

Safety Connect LED light Indicators

When the power switch is turned to ON mode, the red indicator light comes on for 2 seconds then turns off. Afterward, the green indicator light comes on, indicating that the service is active.

The following indicator light patterns indicate specific system usage conditions:

- Green indicator light on = Active service
- Green indicator light flashing = Safety Connect call in process
- Red indicator light (except at vehicle start-up) = System malfunction (contact your Lexus dealer)
- No indicator light (off) = Safety Connect service not active

Safety Connect services

■ Automatic Collision Notification

In case of either airbag deployment or severe rear-end collision, the system is designed to automatically call the response center. The responding agent receives the vehicle's location and attempts to speak with the vehicle occupants to assess the level of emergency. If the occupants are unable to communicate, the agent automatically treats the call as an emergency, contacts the nearest emergency services provider to describe the situation, and requests that assistance be sent to the location.

■ Stolen Vehicle Location

If your vehicle is stolen, Safety Connect can work with local authorities to assist them in locating and recovering the vehicle. After filing a police report, call the Safety Connect response center at 1-800-25-LEXUS (1-800-255-3987) and follow the prompts for Safety Connect to initiate this service.

In addition to assisting law enforcement with recovery of a stolen vehicle, Safety-Connect-equipped vehicle location data may, under certain circumstances, be shared with third parties to locate your vehicle. Further information is available at Lexus.com.

■ Emergency Assistance Button (“SOS”)

In the event of an emergency on the road, push the “SOS” button to reach the Safety Connect response center. The answering agent will determine your vehicle’s location, assess the emergency, and dispatch the necessary assistance required.

If you accidentally press the “SOS” button, tell the response-center agent that you are not experiencing an emergency.

■ Enhanced Roadside Assistance

Enhanced Roadside Assistance adds GPS data to the already included warranty-based Lexus roadside service.

Subscribers can press the “SOS” button to reach a Safety Connect response-center agent, who can help with a wide range of needs, such as: towing, flat tire, fuel delivery, etc. For a description of the Enhanced Roadside Assistance services and their limitations, please see the Safety Connect Terms and Conditions, which are available at Lexus.com.

Safety information for Safety Connect

Important! Read this information before using Safety Connect.

■ Exposure to radio frequency signals

The Safety Connect system installed in your vehicle is a low-power radio transmitter and receiver. It receives and also sends out radio frequency (RF) signals.

In August 1996, the Federal Communications Commission (FCC) adopted RF exposure guidelines with safety levels for mobile wireless phones. Those guidelines are consistent with the safety standards previously set by the following U.S. and international standards bodies.

- ANSI (American National Standards Institute) C95.1 [1992]
- NCRP (National Council on Radiation Protection and Measurement) Report 86 [1986]
- ICNIRP (International Commission on Non-Ionizing Radiation Protection) [1996]

Those standards were based on comprehensive and periodic evaluations of the relevant scientific literature. Over 120 scientists, engineers, and physicians from universities, and government health agencies and industries reviewed the available body of research to develop the ANSI Standard (C95.1).

The design of Safety Connect complies with the FCC guidelines in addition to those standards.

■ Certification for Lexus Enform with Safety Connect

FCC ID: O9EGTM1

FCC ID: O6Y-CDMRF101

FCC ID: N7NGTM2

NOTE:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Maintenance and care

6

6-1. Maintenance and care

Cleaning and protecting the vehicle exterior	724
Cleaning and protecting the vehicle interior	728

6-2. Maintenance

Maintenance requirements	731
General maintenance	734
Emission inspection and maintenance (I/M) programs	738

6-3. Do-it-yourself maintenance

Do-it-yourself service precautions	739
Hood	742
Positioning a floor jack	743
Engine compartment	745
12-volt battery	756
Tires	760
Tire inflation pressure	770
Wheels	773
Air conditioning filter	775
Electronic key battery	778
Checking and replacing fuses	780
Headlight aim	785
Light bulbs	787

Cleaning and protecting the vehicle exterior

Perform the following to protect the vehicle and maintain it in prime condition:

- Working from top to bottom, liberally apply water to the vehicle body, wheel wells and underside of the vehicle to remove any dirt and dust.
- Wash the vehicle body using a sponge or soft cloth, such as a chamois.
- For hard-to-remove marks, use car wash soap and rinse thoroughly with water.
- Wipe away any water.
- Wax the vehicle when the waterproof coating deteriorates.

If water does not bead on a clean surface, apply wax when the vehicle body is cool.

■ Automatic car washes

- Fold the mirrors before washing the vehicle. Start washing from the front of the vehicle. Make sure to extend the mirrors before driving.
- Brushes used in automatic car washes may scratch the vehicle surface and harm your vehicle's paint.

■ High pressure car washes

- Do not allow the nozzles of the car wash to come within close proximity of the windows and the air suspension unit.
- Before using the car wash, check that the fuel filler door on your vehicle is closed properly.

■ Aluminum wheels

- Remove any dirt immediately by using a neutral detergent. Do not use hard brushes or abrasive cleaners. Do not use strong or harsh chemical cleaners. Use the same mild detergent and wax as used on the paint.
- Do not use detergent on the wheels when they are hot, for example after driving for long distance in the hot weather.
- Wash detergent from the wheels immediately after use.

■ Bumpers and side moldings

Do not scrub with abrasive cleaners.

■ Front side windows water-repellent coating

- The following precautions can extend the effectiveness of the water-repellent coating.
 - Remove any dirt, etc. from the front side windows regularly.
 - Do not allow dirt and dust to accumulate on the windows for a long period. Clean the windows with a soft, damp cloth as soon as possible.
 - Do not use wax or glass cleaners that contain abrasives when cleaning the windows.
 - Do not use any metallic objects to remove condensation build up.
- When the water-repellent performance has become insufficient, the coating can be repaired. Contact your Lexus dealer.


⚠ CAUTION**■ When washing the vehicle**

Do not apply water to the inside of the engine compartment. Doing so may cause the electrical components etc. to catch fire.

■ When cleaning the windshield

Set the wiper switch to off.

If the wiper switch is in "AUTO", the wipers may operate unexpectedly in the following situations, and may result in hands being caught or other serious injuries and cause damage to the wiper blades.



- When the upper part of the windshield where the raindrop sensor is located is touched by hand
- When a wet rag or similar is held close to the raindrop sensor
- If something bumps against the windshield
- If you directly touch the raindrop sensor body or if something bumps into the raindrop sensor

■ Precautions regarding the exhaust pipes and rear bumper diffusers

Exhaust gases cause the exhaust pipes and rear bumper diffusers to become quite hot.

When washing the vehicle, be careful not to touch the pipes and diffusers until they have cooled sufficiently, as touching hot exhaust pipes and rear bumper diffusers can cause burns.

■ Precaution regarding the rear bumper with Blind Spot Monitor (if equipped)

If the paint of the rear bumper is chipped or scratched, the system may malfunction. If this occurs, consult your Lexus dealer.

**NOTICE****■ To prevent paint deterioration and corrosion on the body and components (aluminum wheels etc.)**

- Wash the vehicle immediately in the following cases:
 - After driving near the sea coast
 - After driving on salted roads
 - If coal tar or tree sap is present on the paint surface
 - If dead insects, insect droppings or bird droppings are present on the paint surface
 - After driving in an area contaminated with soot, oily smoke, mine dust, iron powder or chemical substances
 - If the vehicle becomes heavily soiled with dust or mud
 - If liquids such as benzene and gasoline are spilled on the paint surface
- If the paint is chipped or scratched, have it repaired immediately.
- To prevent the wheels from corroding, remove any dirt and store in a place with low humidity when storing the wheels.

■ Cleaning the exterior lights

- Wash carefully. Do not use organic substances or scrub with a hard brush. This may damage the surfaces of the lights.
- Do not apply wax to the surfaces of the lights. Wax may cause damage to the lenses.

■ When using an automatic car wash

Set the wiper switch to the off position.

If the wiper switch is in "AUTO", the wipers may operate and the wiper blades may be damaged.

Cleaning and protecting the vehicle interior

The following procedures will help protect your vehicle's interior and keep it in top condition:

Protecting the vehicle interior

Remove dirt and dust using a vacuum cleaner. Wipe dirty surfaces with a cloth dampened with lukewarm water.

Cleaning the leather areas

- Remove dirt and dust using a vacuum cleaner.
- Wipe off any excess dirt and dust with a soft cloth dampened with diluted detergent.
Use a diluted water solution of approximately 5% neutral wool detergent.
- Wring out any excess water from the cloth and thoroughly wipe off all remaining traces of detergent.
- Wipe the surface with a dry, soft cloth to remove any remaining moisture. Allow the leather to dry in a shaded and ventilated area.

Cleaning the synthetic leather areas

- Remove loose dirt using a vacuum cleaner.
- Apply a mild soap solution to the synthetic leather using a sponge or soft cloth.
- Allow the solution to soak in for a few minutes. Remove the dirt and wipe off the solution with a clean, damp cloth.

■ Caring for leather areas

Lexus recommends cleaning the interior of the vehicle at least twice a year to maintain the quality of the vehicle's interior.

■ Shampooing the carpets

There are several commercial foaming-type cleaners available. Use a sponge or brush to apply the foam. Rub in overlapping circles. Do not use water. Wipe dirty surfaces and let them dry. Excellent results are obtained by keeping the carpet as dry as possible.

■ Seat belts

Clean with mild soap and lukewarm water using a cloth or sponge. Also check the belts periodically for excessive wear, fraying or cuts.

⚠ CAUTION

■ Water in the vehicle

- Do not splash or spill liquid in the vehicle, such as on the floor, in the hybrid battery (traction battery) air vents, and in the trunk.
Doing so may cause the hybrid battery, electrical components, etc. to malfunction or catch fire.
- Do not get any of the SRS components or wiring in the vehicle interior wet.
(→P. 46)
An electrical malfunction may cause the airbags to deploy or not function properly, resulting in death or serious injury.

■ Cleaning the interior (especially instrument panel)

Do not use polish wax or polish cleaner. The instrument panel may reflect off the windshield, obstructing the driver's view and leading to an accident, resulting in death or serious injury.

■ Cleaning the leather areas of the instrument panel

Do not use any protective agents (coatings etc). Doing so may cause the instrument panel to reflect onto the windshield, obstructing the front view and possibly causing an accident.

 NOTICE**■ Cleaning detergents**

- Do not use the following types of detergent, as they may discolor the vehicle interior or cause streaks or damage to painted surfaces:
 - Non-seat portions: Organic substances such as benzene or gasoline, alkaline or acidic solutions, dye, and bleach
 - Seats: Alkaline or acidic solutions, such as thinner, benzene, and alcohol
- Do not use polish wax or polish cleaner. The instrument panel's or other interior part's painted surface may be damaged.

■ Preventing damage to leather surfaces

Observe the following precautions to avoid damage to and deterioration of leather surfaces:

- Remove any dust or dirt from leather surfaces immediately.
- Do not expose the vehicle to direct sunlight for extended periods of time. Park the vehicle in the shade, especially during summer.
- Do not place items made of vinyl, plastic, or containing wax on the upholstery, as they may stick to the leather surface if the vehicle interior heats up significantly.

■ Water on the floor

Do not wash the vehicle floor with water.

Vehicle systems such as the audio system may be damaged if water comes into contact with electrical components such as the audio system above or under the floor of the vehicle. Water may also cause the body to rust.

■ When cleaning the inside of the windshield (vehicles with LKA [Lane-Keeping Assist])

Be careful not to touch the camera sensor (→P. 277).

If the camera is accidentally scratched or hit, LKA may not operate properly or may cause a malfunction.

■ Cleaning the inside of the rear window

- Do not use glass cleaner to clean the rear window, as this may cause damage to the rear window defogger heater wires or antenna. Use a cloth dampened with lukewarm water to gently wipe the window clean. Wipe the window in strokes running parallel to the heater wires or antenna.
- Be careful not to scratch or damage the heater wires or antenna.

Maintenance requirements

To ensure safe and economical driving, day-to-day care and regular maintenance are essential. It is the owner's responsibility to perform regular checks. Lexus recommends the following maintenance:

General maintenance

General maintenance should be performed on a daily basis. This can be done by yourself or by a Lexus dealer.

Scheduled maintenance

Scheduled maintenance should be performed at specified intervals according to the maintenance schedule.

For details about maintenance items and schedules, refer to the "Warranty and Service Guide", "Owner's Manual Supplement" or "Scheduled Maintenance".

Do-it-yourself maintenance

You can perform some maintenance procedures by yourself.

Please be aware that do-it-yourself maintenance may affect warranty coverage.

The use of Lexus repair manuals is recommended.

For details about warranty coverage, refer to the separate "Owner's Guide", "Warranty and Service Guide", "Owner's Manual Supplement" or "Warranty Booklet".

■ Repair and replacement

It is recommended that genuine Lexus parts be used for repairs to ensure performance of each system. If non-Lexus parts are used in replacement or if a repair shop other than a Lexus dealer performs repairs, confirm the warranty coverage.

■ Reset the maintenance data (U.S.A. only)


After the required maintenance is performed according to the maintenance schedule, please reset the maintenance data.

To reset the data, follow the procedure described below:

- 1 Switch the display to the trip meter "A" (→P. 103) when the hybrid system is operating.
- 2 Turn the power switch off.
- 3 While pressing the trip meter reset switch (→P. 103), turn the power switch to the ON mode (do not start the hybrid system because otherwise the reset mode will be canceled).

The message shown in the illustration will appear on the display.

Continue to press and hold the button until the trip meter displays "COMPLETE".



■ Allow inspection and repairs to be performed by a Lexus dealer

- Lexus technicians are well-trained specialists and are kept up to date with the latest service information. They are well informed about the operations of all systems on your vehicle.
- Keep a copy of the repair order. It proves that the maintenance that has been performed is under warranty coverage. If any problem should arise while your vehicle is under warranty, your Lexus dealer will promptly take care of it.

 CAUTION**■ If your vehicle is not properly maintained**

Improper maintenance could result in serious damage to the vehicle and possible death or serious injury.

■ Handling of the 12-volt battery

- Engine exhaust, some of its constituents, and a wide variety of automobile components contain or emit chemicals known to the State of California to cause cancer and birth defects and other reproductive harm. Work in a well ventilated area.
- Oils, fuels and fluids contained in vehicles as well as waste produced by component wear contain or emit chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Avoid exposure and wash any affected area immediately.
- 12-volt battery posts, terminals and related accessories contain lead and lead compounds which are known to cause brain damage. Wash your hands after handling. (→P. 756)

General maintenance

Listed below are the general maintenance items that should be performed at the intervals specified in the “Warranty and Service Guide” or “Owner’s Manual Supplement”. It is recommended that any problem you notice should be brought to the attention of your Lexus dealer or qualified service shop for advice.

Engine compartment

Items	Check points
Brake fluid	Is the brake fluid at the correct level? (→P. 754)
Engine/power control unit coolant	Is the engine/power control unit coolant at the correct level? (→P. 751)
Engine oil	Is the engine oil at the correct level? (→P. 748)
Exhaust system	There should not be any fumes or strange sounds.
Radiator/condenser	The radiator and condenser should be free from foreign objects. (→P. 753)
Washer fluid	Is there sufficient washer fluid? (→P. 755)

Luggage compartment

Items	Check points
12-volt battery	Check the connections. (→P. 756)

Vehicle interior

Items	Check points
Accelerator pedal	The accelerator pedal should move smoothly (without uneven pedal effort or catching).
Hybrid transmission "Park" mechanism	When parked on a slope and the shift lever is in P, is the vehicle securely stopped?
Brake pedal	- Does the brake pedal move smoothly? - Does the brake pedal have appropriate clearance from the floor? (→P. 847) - Does the brake pedal have the correct amount of free play? (→P. 847)
Brakes	- The vehicle should not pull to one side when the brakes are applied. - The brakes should work effectively. - The brake pedal should not feel spongy. - The brake pedal should not get too close to the floor when the brakes are applied.

Items	Check points
Head restraints	• Do the head restraints move smoothly and lock securely?
Indicators/buzzers	• Do the indicators and buzzers function properly?
Lights	• Do all the lights come on? • Are the headlights aimed correctly? (→P.785)
Parking brake	• Moves smoothly? • When parked on a slope and the parking brake is on, is the vehicle securely stopped?
Seat belts	• Do the seat belts operate smoothly? • The seat belts should not be damaged.
Seats	• Do the seat controls operate properly?
Steering wheel	• Does the steering wheel rotate smoothly? • Does the steering wheel have the correct amount of free play? • There should not be any strange sounds coming from the steering wheel.

Vehicle exterior

Items	Check points
Doors/trunk	• Do the doors/trunk operate smoothly?
Engine hood	• Does the engine hood lock system work properly?
Fluid leaks	• There should not be any signs of fluid leakage after the vehicle has been parked.
Tires	• Is the tire inflation pressure correct? • The tires should not be damaged or excessively worn. • Have the tires been rotated according to the maintenance schedule? • The wheel nuts should not be loose.
Windshield wipers	• The wiper blades should not show any signs of cracking, splitting, wear, contamination or deformation. • The wiper blades should clear the windshield without streaking or skipping.

CAUTION

If the hybrid system is operating

Turn the hybrid system off and ensure that there is adequate ventilation before performing maintenance checks.

Emission inspection and maintenance (I/M) programs

Some states have vehicle emission inspection programs which include OBD (On Board Diagnostics) checks. The OBD system monitors the operation of the emission control system.

If the malfunction indicator lamp comes on

The OBD system determines that a problem exists somewhere in the emission control system. Your vehicle may not pass the I/M test and may need to be repaired. Contact your Lexus dealer to service the vehicle.

Your vehicle may not pass the I/M test in the following situations:

- When the 12-volt battery is disconnected or discharged
Readiness codes that are set during ordinary driving are erased. Also, depending on your driving habits, the readiness codes may not be completely set.
- When the fuel tank cap is loose
The malfunction indicator lamp comes on indicating a temporary malfunction and your vehicle may not pass the I/M test.

When the malfunction indicator lamp still remains on after several driving trips

The error code in the OBD system will not be cleared unless the vehicle is driven 40 or more times.

If your vehicle does not pass the I/M test

Contact your Lexus dealer to prepare the vehicle for re-testing.

Do-it-yourself service precautions

If you perform maintenance by yourself, be sure to follow the correct procedure as given in these sections.

Items	Parts and tools
12-volt battery condition (→P. 756)	• Grease • Conventional wrench (for terminal clamp bolts)
Brake fluid level (→P. 754)	• FMVSS No.116 DOT 3 or SAE J1703 brake fluid • Rag or paper towel • Funnel (used only for adding brake fluid)
Engine/power control unit coolant level (→P. 751)	• "Toyota Super Long Life Coolant" or a similar high quality ethylene glycol-based non-silicate, non-amine, non-nitrite and non-borate coolant with long-life hybrid organic acid technology For the U.S.A.: "Toyota Super Long Life Coolant" is pre-mixed with 50% coolant and 50% deionized water. For Canada: "Toyota Super Long Life Coolant" is pre-mixed with 55% coolant and 45% deionized water. • Funnel (used only for adding coolant)
Engine oil level (→P. 748)	• "Toyota Genuine Motor Oil" or equivalent • Rag or paper towel • Funnel (used only for adding engine oil)
Fuses (→P. 780)	• Fuse with same amperage rating as original
Headlight aim (→P. 785)	• Phillips-head screwdriver

Items	Parts and tools
Radiator and condenser (→P. 753)	—
Tire inflation pressure (→P. 770)	• Tire pressure gauge • Compressed air source
Washer fluid (→P. 755)	• Water or washer fluid containing anti-freeze (for winter use) • Funnel (used only for adding water or washer fluid)

CAUTION

The engine compartment contains many mechanisms and fluids that may move suddenly, become hot, or become electrically energized. To avoid death or serious injury, observe the following precautions.

■ When working on the engine compartment

- Make sure that the indicator on the power switch and the “READY” indicator are both off.
- Keep hands, clothing and tools away from the moving fan and engine drive belt.
- Be careful not to touch the engine, power control unit, radiator, exhaust manifold, etc. right after driving as they may be hot. Oil and other fluids may also be hot.
- Do not leave anything that may burn easily, such as paper and rags, in the engine compartment.
- Do not smoke, cause sparks or expose an open flame to fuel. Fuel fumes are flammable.

■ When working near the electric cooling fans or radiator grille

Be sure the power switch is off.

With the power switch in ON mode, the electric cooling fans may automatically start to run if the air conditioning is on and/or the coolant temperature is high. (→P. 753)

■ Safety glasses

Wear safety glasses to prevent flying or falling material, fluid spray, etc. from getting in your eyes.

**NOTICE****■ If you remove the air cleaner filter**


Driving with the air cleaner filter removed may cause excessive engine wear due to dirt in the air.

Hood


Release the lock from the inside of the vehicle to open the hood.

- 1 Pull the hood lock release lever.

The hood will pop up slightly.

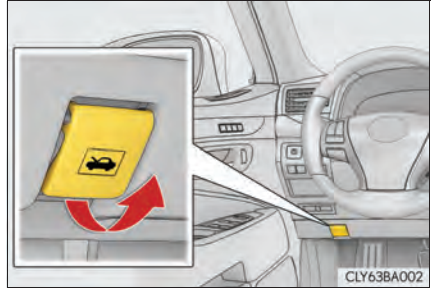

- 2 Pull up the auxiliary catch lever and lift the hood.

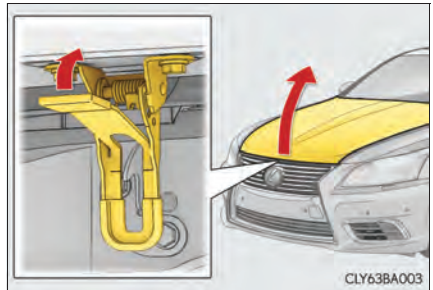

CAUTION

■ Pre-driving check


Check that the hood is fully closed and locked.

If the hood is not locked properly, it may open while the vehicle is in motion and cause an accident, which may result in death or serious injury.


Positioning a floor jack

When raising your vehicle with a floor jack, position the jack correctly. Improper placement may damage your vehicle or cause injury.

◆ Front

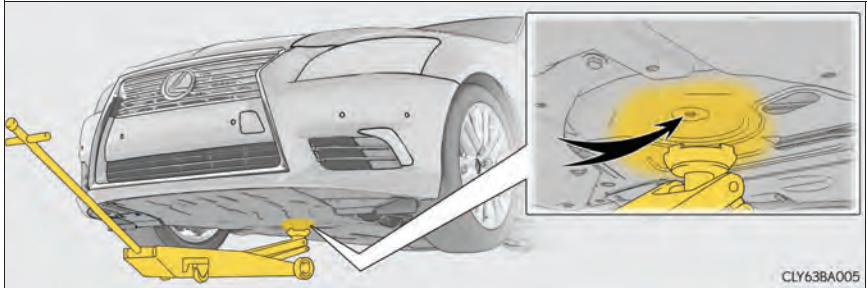


◆ Rear

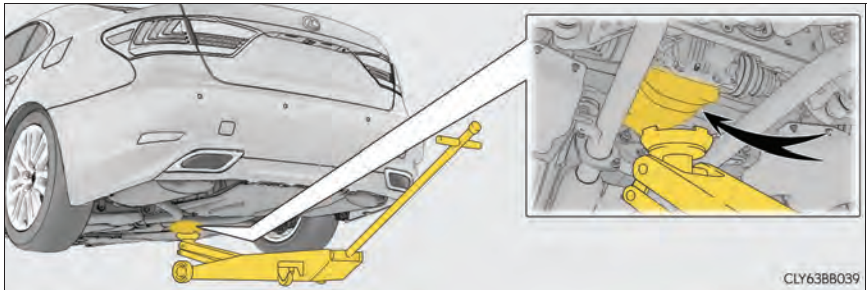

⚠ CAUTION**■ When raising your vehicle**


Make sure to observe the following precautions to reduce the possibility of death or serious injury:

- Lift up the vehicle using a floor jack such as the one shown in the illustration.



- When using a floor jack, follow the instructions of the manual provided with the jack.
- Do not use the jack that was supplied with your vehicle.
- Do not put any part of your body underneath the vehicle when it is supported only by the floor jack.
- Always use floor jack and/or automotive jack stands on a solid, flat, level surface.
- Do not start the hybrid system while the vehicle is supported by the floor jack.
- Stop the vehicle on level, firm ground, firmly set the parking brake and shift the shift lever to P.
- Make sure to set the floor jack properly at the jack point.
Raising the vehicle with an improperly positioned floor jack will damage the vehicle and may cause the vehicle to fall off the floor jack.
- Do not raise the vehicle while someone is in the vehicle.
- When raising the vehicle, do not place any object on top of or underneath the floor jack.
- Be sure to turn off the height control and stop the hybrid system. Otherwise, the vehicle height may change in the automatic leveling function. (→P. 313)

Engine compartment

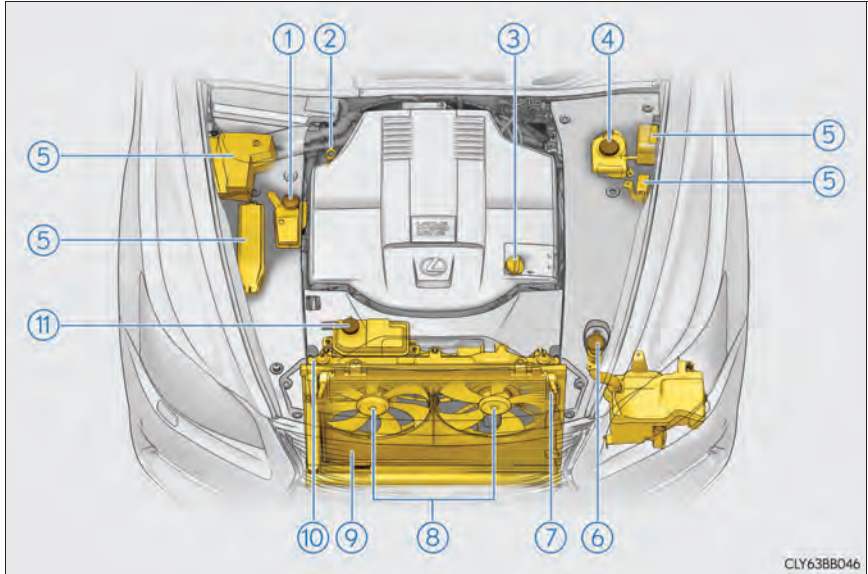

- | | |
|--|---|
| ① Power control unit coolant reservoir (→P. 752) | ⑥ Washer fluid tank (→P. 755) |
| ② Engine oil level dipstick (→P. 748) | ⑦ Power control unit coolant radiator (→P. 753) |
| ③ Engine oil filler cap (→P. 749) | ⑧ Electric cooling fans |
| ④ Brake fluid reservoir (→P. 754) | ⑨ Condenser (→P. 753) |
| ⑤ Fuse boxes (→P. 780) | ⑩ Engine coolant radiator (→P. 753) |
| | ⑪ Engine coolant reservoir (→P. 751) |

■ 12-volt battery

→P. 756


Engine compartment cover

■ Removing the engine compartment cover

► Outside




► Front

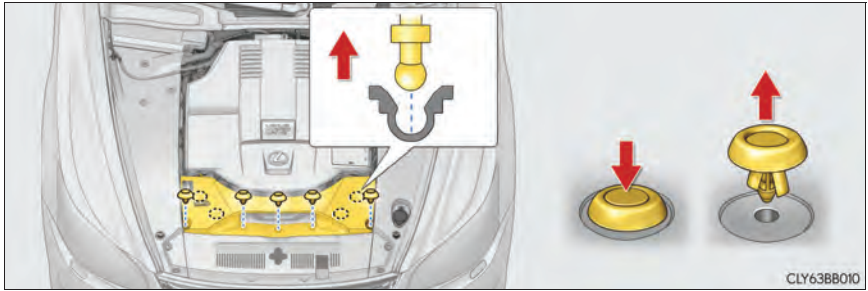

■ Installing the clips


► Type A

- ① Push up center portion
- ② Insert
- ③ Press

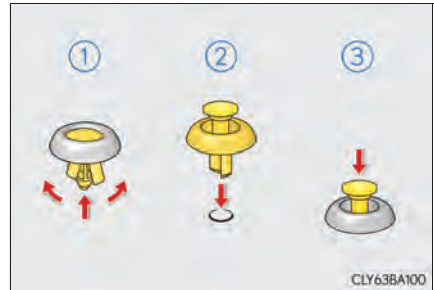

► Type B

Press

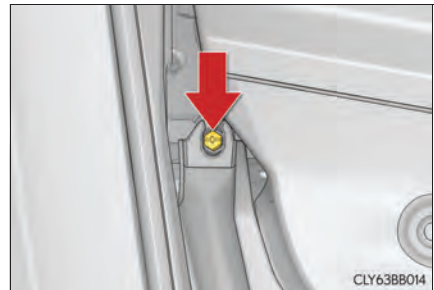

⚠ NOTICE

■ Checking the engine compartment cover after installation


Make sure that the cover is securely installed in its original position.

Engine oil

With the engine at operating temperature and turned off, check the oil level on the dipstick.


■ Checking the engine oil

- 1** Park the vehicle on level ground. After warming up the engine and turning off the hybrid system, wait more than 5 minutes for the oil to drain back into the bottom of the engine.
- 2** Holding a rag under the end, pull the dipstick out.

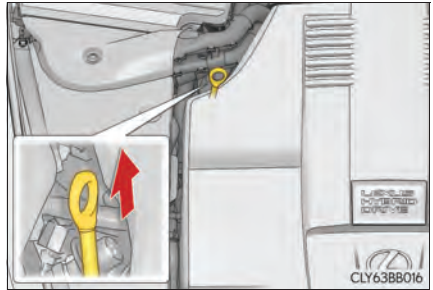

- 3** Wipe the dipstick clean.
- 4** Reinsert the dipstick fully.
- 5** Holding a rag under the end, pull the dipstick out and check the oil level.

- ① Low
- ② Normal
- ③ Excessive

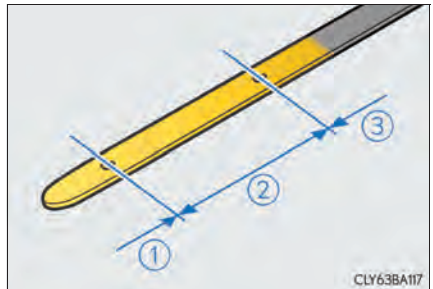


The shape of the dipstick may differ depending on the type of vehicle or engine.

- 6** Wipe the dipstick and reinsert it fully.

■ Adding engine oil

If the oil level is below or near the low level mark, add engine oil of the same type as that already in the engine.

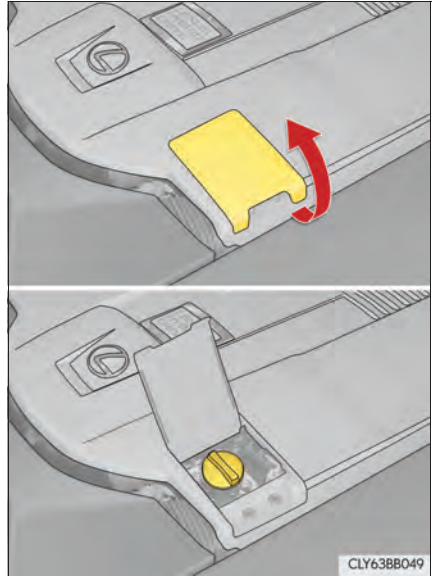

Make sure to check the oil type and prepare the items needed before adding oil.

Engine oil selection	→P. 843
Oil quantity (Low → Full)	1.6 qt. (1.5 L, 1.3 Imp. qt.)
Items	Clean funnel

- 1** Remove the oil filler cap by turning it counterclockwise.
- 2** Add engine oil slowly, checking the dipstick.
- 3** Install the oil filler cap by turning it clockwise.

■ Engine oil consumption

A certain amount of engine oil will be consumed while driving. In the following situations, oil consumption may increase, and engine oil may need to be refilled in between oil maintenance intervals.

- When the engine is new, for example directly after purchasing the vehicle or after replacing the engine
- If low quality oil or oil of an inappropriate viscosity is used
- When driving at high engine speeds or with a heavy load, or when driving while accelerating or decelerating frequently
- When leaving the engine idling for a long time, or when driving frequently through heavy traffic

CAUTION

■ Used engine oil

- Used engine oil contains potentially harmful contaminants which may cause skin disorders such as inflammation and skin cancer, so care should be taken to avoid prolonged and repeated contact. To remove used engine oil from your skin, wash thoroughly with soap and water.
- Dispose of used oil and filters only in a safe and acceptable manner. Do not dispose of used oil and filters in household trash, in sewers or onto the ground. Call your Lexus dealer, service station or auto parts store for information concerning recycling or disposal.
- Do not leave used engine oil within the reach of children.

NOTICE

■ To prevent serious engine damage

Check the oil level on a regular basis.

■ When replacing the engine oil

- Be careful not to spill engine oil on the vehicle components.
- Avoid overfilling, or the engine could be damaged.
- Check the oil level on the dipstick every time you refill the vehicle.
- Be sure the engine oil filler cap is properly tightened.


Coolant

■ Engine coolant reservoir

The coolant level is satisfactory if it is between the “FULL” and “LOW” lines on the reservoir when the hybrid system is cold.

- ① Reservoir cap
- ② “FULL” line
- ③ “LOW” line

If the level is on or below the “LOW” line, add coolant up to the “FULL” line. (→P. 832)

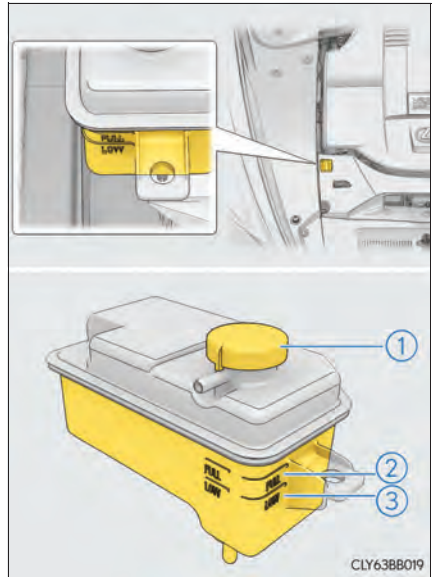


■ Power control unit coolant reservoir

The coolant level is satisfactory if it is between the “F” and “L” lines on the reservoir when the hybrid system is cold.

- ① Reservoir cap
- ② “F” line
- ③ “L” line

If the level is on or below the “L” line, add coolant up to the “F” line.
(→P. 832)

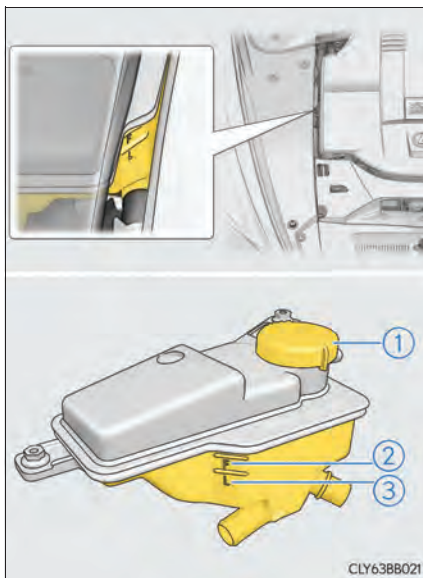

■ Coolant selection

Only use “Toyota Super Long Life Coolant” or a similar high quality ethylene glycol based non-silicate, non-amine, non-nitrite, and non-borate coolant with long-life hybrid organic acid technology.

U.S.A.:

“Toyota Super Long Life Coolant” is a mixture of 50% coolant and 50% deionized water. (Minimum temperature: -31°F [-35°C])

Canada:

“Toyota Super Long Life Coolant” is a mixture of 55% coolant and 45% deionized water. (Minimum temperature: -44°F [-42°C])

For more details about coolant, contact your Lexus dealer.

■ If the coolant level drops within a short time of replenishing

Visually check the radiator, hoses, engine/power control unit coolant reservoir caps, drain cock and water pump.

If you cannot find a leak, have your Lexus dealer test the cap and check for leaks in the cooling system.

 CAUTION **When the hybrid system is hot**

Do not remove the engine/power control unit coolant reservoir caps.(→P. 836)
The cooling system may be under pressure and may spray hot coolant if the cap is removed, causing serious injuries, such as burns.

 NOTICE **When adding coolant**

Coolant is neither plain water nor straight antifreeze. The correct mixture of water and antifreeze must be used to provide proper lubrication, corrosion protection and cooling. Be sure to read the antifreeze or coolant label.

 If you spill coolant

Be sure to wash it off with water to prevent it from damaging parts or paint.

Radiator and condenser

Check the radiator and condenser and clear away any foreign objects.
If either of the above parts is extremely dirty or you are not sure of their condition, have your vehicle inspected by your Lexus dealer.


 CAUTION **When the hybrid system is hot**

Do not touch the radiator or condenser as they may be hot and cause serious injuries, such as burns.

Brake fluid

■ Checking fluid level

The brake fluid level should be between the “MAX” and “MIN” lines on the tank.

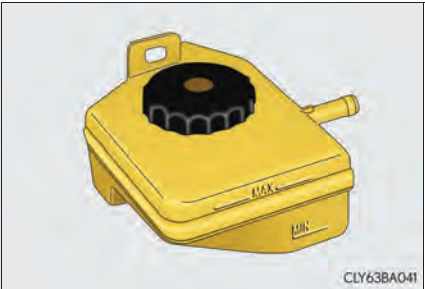

■ Adding fluid

Make sure to check the fluid type and prepare the necessary item.

Fluid type	FMVSS No.116 DOT 3 or SAE J1703 brake fluid
Items	Clean funnel

■ Brake fluid can absorb moisture from the air

Excess moisture in the brake fluid can cause a dangerous loss of braking efficiency. Use only newly opened brake fluid.

⚠ CAUTION

■ When filling the reservoir

Take care as brake fluid can harm your hands and eyes and damage painted surfaces.
If fluid gets on your hands or in your eyes, flush the affected area with clean water immediately.
If you still experience discomfort, see a doctor.


⚠ NOTICE

■ If the fluid level is low or high

It is normal for the brake fluid level to go down slightly as the brake pads wear out or when the fluid level in the accumulator is high.
If the reservoir needs frequent refilling, there may be a serious problem.

Washer fluid

If any washer does not work or the warning message appears on the multi-information display, the washer tank may be empty. Add washer fluid.

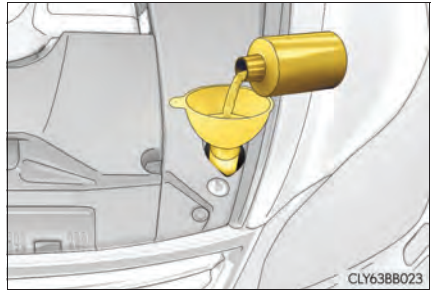

CAUTION

When adding washer fluid

Do not add washer fluid when the hybrid system is hot or operating as washer fluid contains alcohol and may catch fire if spilled on the engine etc.

NOTICE

Do not use any fluid other than washer fluid

Do not use soapy water or engine antifreeze instead of washer fluid. Doing so may cause streaking on the vehicle's painted surfaces.


Diluting washer fluid

Dilute washer fluid with water as necessary.
Refer to the freezing temperatures listed on the label of the washer fluid bottle.

12-volt battery


Location

The 12-volt battery is located on the left-hand side of trunk.

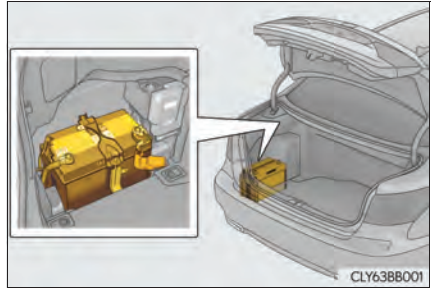

Removing the 12-volt battery cover


After removing the clip, remove the 12-volt battery cover.

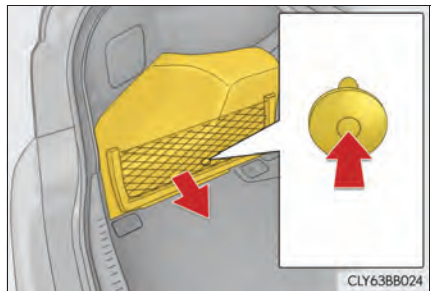

Exterior

Make sure that the 12-volt battery terminals are not corroded and that there are no loose connections, cracks, or loose clamps.


- ① Terminals
- ② Hold-down clamp

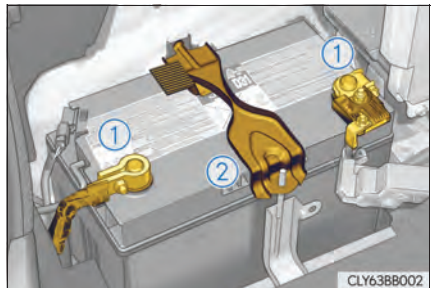

Installing the 12-volt battery cover

Install the 12-volt battery cover with the clip. Press down on the cover at position "A" to secure it.

- ① Push up center portion
- ② Insert
- ③ Press

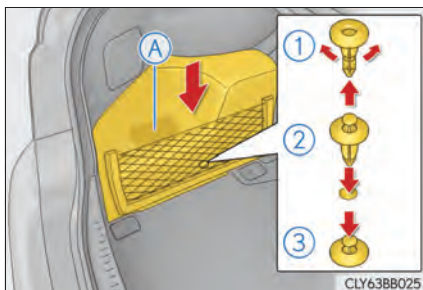

■ Before recharging

When recharging, the 12-volt battery produces hydrogen gas which is flammable and explosive. Therefore, observe the following precautions before recharging:

- If recharging with the 12-volt battery installed on the vehicle, be sure to disconnect the ground cable.
- Make sure the power switch on the charger is off when connecting and disconnecting the charger cables to the 12-volt battery.

■ After recharging/reconnecting the 12-volt battery

The hybrid system may not start. Follow one or both of the following procedures:

- After opening and closing the driver's door, wait 10 seconds and then attempt to start the hybrid system. (If the system does not start the first time, repeat the procedure.)
- With the shift lever in P and the power switch off, open and close any door and then attempt to start the hybrid system.

If the system will not start even after multiple attempts at both methods, contact your Lexus dealer.

 CAUTION**■ Chemicals in the 12-volt battery**

The 12-volt battery contains poisonous and corrosive sulfuric acid and may produce hydrogen gas which is flammable and explosive. To reduce the risk of death or serious injury, take the following precautions while working on or near the 12-volt battery:

- Do not cause sparks by touching the 12-volt battery terminals with tools.
- Do not smoke or light a match near the 12-volt battery.
- Avoid contact with eyes, skin and clothes.
- Never inhale or swallow electrolyte.
- Wear protective safety glasses when working near the 12-volt battery.
- Keep children away from the 12-volt battery.

■ Where to safely charge the 12-volt battery

Always charge the 12-volt battery in an open area. Do not charge the 12-volt battery in a garage or closed room where there is insufficient ventilation.

■ How to recharge the 12-volt battery

Only perform a slow charge (5 A or less). The 12-volt battery may explode if charged at a quicker rate.

■ Emergency measures regarding electrolyte

- If electrolyte gets in your eyes
Flush your eyes with clean water for at least 15 minutes and get immediate medical attention. If possible, continue to apply water with a sponge or cloth while traveling to the nearest medical facility.
- If electrolyte gets on your skin
Wash the affected area thoroughly. If you feel pain or burning, get medical attention immediately.
- If electrolyte gets on your clothes
It can soak through clothing on to your skin. Immediately take off the clothing and follow the procedure above if necessary.
- If you accidentally swallow electrolyte
Drink a large quantity of water or milk. Get emergency medical attention immediately.

 CAUTION**■ When replacing the 12-volt battery**

Use a 12-volt battery designed for this vehicle. Failure to do so may cause gas (hydrogen) to enter the passenger compartment, causing a fire or explosion.

For replacement of the 12-volt battery, contact your Lexus dealer.

 NOTICE**■ When recharging the 12-volt battery**

Never recharge the 12-volt battery while the hybrid system is operating. Also, be sure all accessories are turned off.

Tires


Replace or rotate tires in accordance with maintenance schedules and treadwear.

Checking tires

- ① New tread
- ② Treadwear indicator
- ③ Worn tread

The location of treadwear indicators is shown by the “TWI” or “Δ” marks, etc., molded on the sidewall of each tire.

Check spare tire condition and pressure if not rotated.

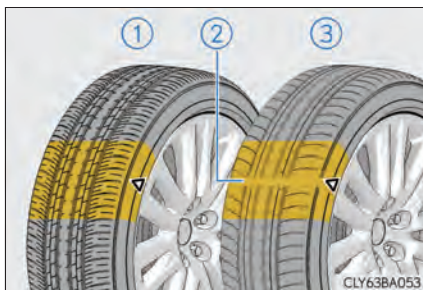


Tire rotation

Rotate the tires in the order shown.

To equalize tire wear and extend tire life, Lexus recommends that tire rotation is carried out at the same interval as tire inspection.

Do not fail to initialize the tire pressure warning system after tire rotation.

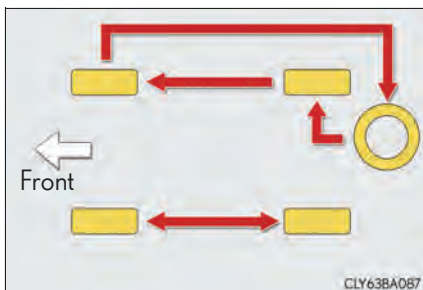

Tire pressure warning system

Your vehicle is equipped with a tire pressure warning system that uses tire pressure warning valves and transmitters to detect low tire inflation pressure before serious problems arise.

- If the tire pressure drops below a predetermined level, the driver is warned by a screen display and a warning light. (→P. 803, 809)
- The tire pressure detected by the tire pressure warning system can be displayed on the multi-information display. (→P. 110)



◆ Installing tire pressure warning valves and transmitters

When replacing tires or wheels, tire pressure warning valves and transmitters must also be installed.

When new tire pressure warning valves and transmitters are installed, new ID codes must be registered in the tire pressure warning computer and the tire pressure warning system must be initialized. Have tire pressure warning valve and transmitter ID codes registered by your Lexus dealer. (→P. 763)

◆ Initializing the tire pressure warning system

- **The tire pressure warning system must be initialized in the following circumstances:**
 - When rotating the tires.
 - When the tire inflation pressure is changed such as when changing traveling speed.
 - When changing the tire size.

When the tire pressure warning system is initialized, the current tire inflation pressure is set as the benchmark pressure.

■ How to initialize the tire pressure warning system

- 1 Park the vehicle in a safe place and turn the power switch off.


Initialization cannot be performed while the vehicle is moving.

- 2 Adjust the tire inflation pressure to the specified cold tire inflation pressure level. (→P. 848)

Make sure to adjust the tire pressure to the specified cold tire inflation pressure level. The tire pressure warning system will operate based on this pressure level.

- 3 Turn the power switch to ON mode.

- 4 Press and hold the tire pressure warning reset switch until the tire pressure warning light blinks slowly 3 times.

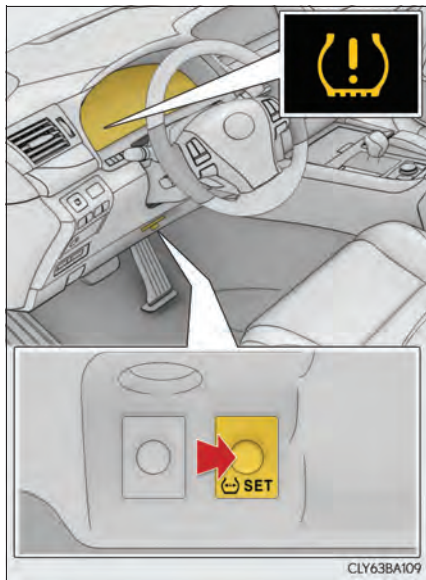

- 5 Wait for a few minutes with the power switch in ON mode and then turn the power switch off.

◆ Registering ID codes

The tire pressure warning valve and transmitter is equipped with a unique ID code. When replacing a tire pressure warning valve and transmitter, it is necessary to register the ID code. Have the ID code registered by your Lexus dealer.

■ When to replace your vehicle's tires

Tires should be replaced if:

- You have tire damage such as cuts, splits, cracks deep enough to expose the fabric, and bulges indicating internal damage
- A tire goes flat repeatedly or cannot be properly repaired due to the size or location of a cut or other damage

If you are not sure, consult with your Lexus dealer.

■ Replacing tires and wheels

If the ID code of the tire pressure warning valve and transmitter is not registered, the tire pressure warning system will not work properly. After driving for about 20 minutes, the tire pressure warning light blinks for 1 minute and stays on to indicate a system malfunction.

■ Tire life

Any tire over 6 years old must be checked by a qualified technician even if it has seldom or never been used or damage is not obvious.

■ Routine tire inflation pressure checks

The tire pressure warning system does not replace routine tire inflation pressure checks. Make sure to check tire inflation pressure as part of your routine of daily vehicle checks.

■ When rotating the tires


Make sure that the power switch is off. If the tires are rotated while the power switch is in ON mode, the tire position information will not be updated.

If this accidentally occurs, either turn the power switch to off and then to ON mode, or initialize the system after checking that the tire pressure is properly adjusted.

■ Maximum load of tire

Check that the maximum load of the replacement tire is greater than 1/2 of the Gross Axle Weight Ratings (GAWR) of either the front axle or the rear axle, whichever is greater.

For the GAWR, see the Certification Label. For the maximum load of the tire, see the load limit at maximum cold tire inflation pressure mentioned on the sidewall of the tire. (→P. 854)



■ Tire types

● Summer tires

Summer tires are high-speed performance tires best suited to highway driving under dry conditions. Since summer tires do not have the same traction performance as snow tires, summer tires are inadequate for driving on snow-covered or icy roads. For driving on snow-covered roads or icy roads, the use of snow tires is recommended. When installing snow tires, be sure to replace all four tires.

● All season tires

All season tires are designed to provide better traction in snow and to be adequate for driving in most winter conditions as well as for use year-round. All season tires, however, do not have adequate traction performance compared with snow tires in heavy or loose snow. Also, all season tires fall short in acceleration and handling performance compared with summer tires in highway driving.

● Snow tires

For driving on snow-covered roads or icy roads, we recommend using snow tires. If you need snow tires, select tires of the same size, construction and load capacity as the originally installed tires. Since your vehicle has radial tires as original equipment, make sure your snow tires also have radial construction. Do not install studded tires without first checking local regulations for possible restrictions. Snow tires should be installed on all wheels. (→P. 351)

■ If the tread on snow tires wears down below 0.16 in. (4 mm)

The effectiveness of the tires as snow tires is lost.

■ Situations in which the tire pressure warning system may not operate properly

- In the following cases, the tire pressure warning system may not operate properly.
 - If non-genuine Lexus wheels are used.
 - A tire has been replaced with a tire that is not an OE (Original Equipment) tire.
 - A tire has been replaced with a tire that is not of the specified size.
 - Tire chains etc. are equipped.
 - Lock nuts are equipped.
 - An auxiliary-supported run-flat tire is equipped.
 - If a window tint that affects the radio wave signals is installed.
 - If there is a lot of snow or ice on the vehicle, particularly around the wheels or wheel housings.
 - If the tire inflation pressure is extremely higher than the specified level.
 - If the spare tire is in a location subject to poor radio wave signal reception.
 - If a large metallic object which can interfere with signal reception is put in the trunk.
 - If tires not equipped with tire pressure warning valves and transmitters are used.
 - If the ID code on the tire pressure warning valves and transmitters is not registered in the tire pressure warning computer.

- Performance may be affected in the following situations.

- Near a TV tower, electric power plant, gas station, radio station, large display, airport or other facility that generates strong radio waves or electrical noise
- When carrying a portable radio, cellular phone, cordless phone or other wireless communication device

If tire position information is not correctly displayed due to the radio wave conditions, the display may be corrected by driving and changing the radio wave conditions.

- When the vehicle is parked, the time taken for the warning to start or go off could be extended.
- When tire inflation pressure declines rapidly for example when a tire has burst, the warning may not function.

■ The initialization operation

- Make sure to carry out initialization after adjusting the tire inflation pressure. Also, make sure the tires are cold before carrying out initialization or tire inflation pressure adjustment.
- If you have accidentally turned the power switch off during initialization, it is not necessary to press the reset switch again as initialization will restart automatically when the power switch has been turned to ON mode for the next time.
- If you accidentally press the reset switch when initialization is not necessary, adjust the tire inflation pressure to the specified level when the tires are cold, and conduct initialization again.

■ When initialization of the tire pressure warning system has failed

Initialization can be completed in a few minutes. However, in the following cases, the settings have not been recorded and the system will not operate properly. If repeated attempts to record tire inflation pressure settings are unsuccessful, have the vehicle inspected by your Lexus dealer.

- When operating the tire pressure warning reset switch, the tire pressure warning light does not blink 3 times.
- After carrying out the initialization procedure, the tire pressure warning light blinks for 1 minute then stays on after driving for 20 minutes.

■ Tire pressure warning system certification

- For vehicles sold in the U.S.A.

MODEL/FCC IDs:

Transmitter: PAXPMVC010

Receiver: HYQ13BDS

Initiator: HYQ22AAA

NOTE:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC WARNING:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- For vehicles sold in Canada

Transmitter:

NOTE:

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Initiator:

NOTE:

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

⚠ CAUTION**■ When inspecting or replacing tires**

Observe the following precautions to prevent accidents.

Failure to do so may cause damage to parts of the drive train as well as dangerous handling characteristics, which may lead to an accident resulting in death or serious injury.


- Do not mix tires of different makes, models or tread patterns.
Also, do not mix tires of remarkably different treadwear.
- Do not use tire sizes other than those recommended by Lexus.
- Do not mix differently constructed tires (radial, bias-belted or bias-ply tires).
- Do not mix summer, all season and snow tires.
- Do not use tires that have been used on another vehicle.
Do not use tires if you do not know how they were used previously.

■ When initializing the tire pressure warning system

Do not operate the tire pressure warning reset switch without first adjusting the tire inflation pressure to the specified level. Otherwise, the tire pressure warning light may not come on even if the tire inflation pressure is low, or it may come on when the tire inflation pressure is actually normal.

■ Caution regarding interference with electronic devices

- People with implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should not come within 17.7 in. (450 mm) of the tire pressure warning system initiators. The radio waves may affect the operation of such devices.



- Users of any electrical medical device other than implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should consult the manufacturer of the device for information about its operation under the influence of radio waves.
Radio waves could have unexpected effects on the operation of such medical devices.

 NOTICE**■ Repairing or replacing tires, wheels, tire pressure warning valves, transmitters and tire valve caps**

- When removing or fitting the wheels, tires or the tire pressure warning valves and transmitters, contact your Lexus dealer as the tire pressure warning valves and transmitters may be damaged if not handled correctly.
- Make sure to install the tire valve caps. If the tire valve caps are not installed, water could enter the tire pressure warning valves and the tire pressure warning valves could be bound.
- When replacing tire valve caps, do not use tire valve caps other than those specified. The cap may become stuck.

■ To avoid damage to the tire pressure warning valves and transmitters

When a tire is repaired with liquid sealants, the tire pressure warning valve and transmitter may not operate properly. If a liquid sealant is used, contact your Lexus dealer or other qualified service shop as soon as possible. Make sure to replace the tire pressure warning valve and transmitter when replacing the tire. (→P. 761)

■ Driving on rough roads

Take particular care when driving on roads with loose surfaces or potholes. These conditions may cause losses in tire inflation pressure, reducing the cushioning ability of the tires. In addition, driving on rough roads may cause damage to the tires themselves, as well as the vehicle's wheels and body.


■ If tire inflation pressure of each tire becomes low while driving

Do not continue driving, or your tires and/or wheels may be ruined.

Tire inflation pressure


Tire inflation pressure

The recommended cold tire inflation pressure and tire size are displayed on the tire and loading information label. (→P. 848)

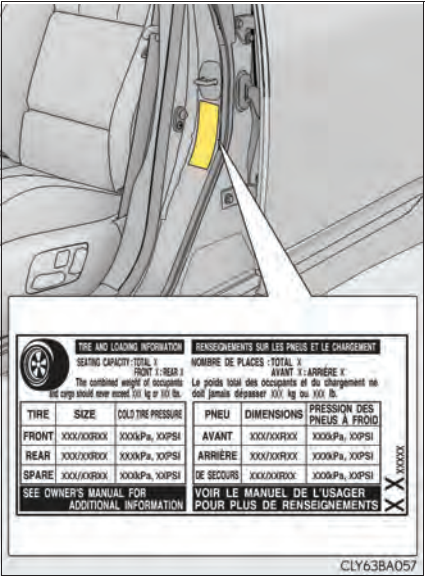

Inspection and adjustment procedure

- ① Tire valve
- ② Tire pressure gauge

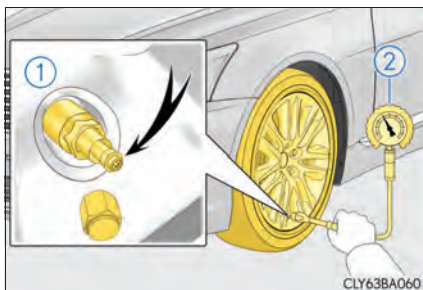

- 1 Remove the tire valve cap.
- 2 Press the tip of the tire pressure gauge onto the tire valve.
- 3 Read the pressure using the gauge gradations.
- 4 If the tire inflation pressure is not at the recommended level, adjust the pressure.
If you add too much air, press the center of the valve to deflate.
- 5 After completing the tire inflation pressure measurement and adjustment, apply soapy water to the valve and check for leakage.
- 6 Put the tire valve cap back on.

■ Tire inflation pressure check interval

You should check tire inflation pressure every two weeks, or at least once a month. Do not forget to check the spare.

■ Effects of incorrect tire inflation pressure

Driving with incorrect tire inflation pressure may result in the following:

- Reduced fuel efficiency
- Reduced driving comfort and tire life
- Reduced safety
- Damage to the drive train

If a tire needs frequent inflating, have it checked by your Lexus dealer.

■ Instructions for checking tire inflation pressure

When checking tire inflation pressure, observe the following:

- Check only when the tires are cold.
If your vehicle has been parked for at least 3 hours or has not been driven for more than 1 mile or 1.5 km, you will get an accurate cold tire inflation pressure reading.
- Always use a tire pressure gauge.
The appearance of the tire can be misleading. In addition, tire inflation pressure that is even just a few pounds off can affect ride quality and handling.
- Do not reduce tire inflation pressure after driving. It is normal for tire inflation pressure to be higher after driving.
- Never exceed the vehicle capacity weight.
Passengers and luggage weight should be placed so that the vehicle is balanced.

CAUTION

■ Proper inflation is critical to save tire performance

Keep your tires properly inflated. Otherwise, the following conditions may occur and result in an accident causing death or serious injury:

- Excessive wear
- Uneven wear
- Poor handling
- Possibility of blowouts resulting from overheated tires
- Poor sealing of the tire bead
- Wheel deformation and/or tire separation
- A greater possibility of tire damage from road hazards

NOTICE

■ When inspecting and adjusting tire inflation pressure

Be sure to put the tire valve caps back on.

Without the valve caps, dirt or moisture could get into the valve and cause air leakage, which could result in an accident. If the caps are lost, replace them as soon as possible.

Wheels

If a wheel is bent, cracked or heavily corroded, it should be replaced. Otherwise, the tire may separate from the wheel or cause a loss of handling control.

Wheel selection

When replacing wheels, care should be taken to ensure that they are equivalent to those removed in load capacity, diameter, rim width and inset*.

Replacement wheels are available at your Lexus dealer.

*: Conventionally referred to as "offset".

Lexus does not recommend using the following:

- Wheels of different sizes or types
- Used wheels
- Bent wheels that have been straightened

Aluminum wheel precautions

- Use only Lexus wheel nuts and wheel nut wrenches designed for use with your aluminum wheels.
- When rotating, repairing or changing your tires, check that the wheel nuts are still tight after driving 1000 miles (1600 km).
- Be careful not to damage the aluminum wheels when using tire chains.
- Use only Lexus genuine balance weights or equivalent and a plastic or rubber hammer when balancing your wheels.

■ When replacing wheels

The wheels of your vehicle are equipped with tire pressure warning valves and transmitters that allow the tire pressure warning system to provide advance warning in the event of a loss in tire inflation pressure. Whenever wheels are replaced, tire pressure warning valves and transmitters must be installed. (→P. 761)

CAUTION

■ When replacing wheels

- Do not use wheels that are a different size from those recommended in the Owner's Manual, as this may result in a loss of handling control.
- Never use an inner tube in a leaking wheel which is designed for a tubeless tire. Doing so may result in an accident, causing death or serious injury.

NOTICE

■ Replacing tire pressure warning valves and transmitters

- Because tire repair or replacement may affect the tire pressure warning valves and transmitters, make sure to have tires serviced by your Lexus dealer or other qualified service shop. In addition, make sure to purchase your tire pressure warning valves and transmitters at your Lexus dealer.
- Ensure that only genuine Lexus wheels are used on your vehicle. Tire pressure warning valves and transmitters may not work properly with non-genuine wheels.

Air conditioning filter

The air conditioning filter must be changed regularly to maintain air conditioning efficiency.


Removal method

■ Front air conditioning filter


- 1 Set the air conditioning system to recirculated air mode. (→P. 410)

The air conditioning filter case cannot be removed with the system in outside air mode.


- 2 Turn the power switch off.
- 3 Open the glove box. Lift and remove the partition.

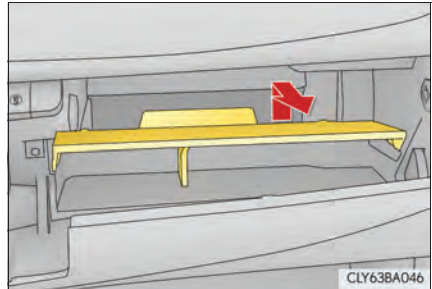

- 4 Remove the filter cover.

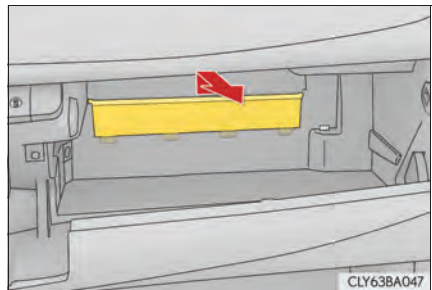


- 5** Remove the filter case.

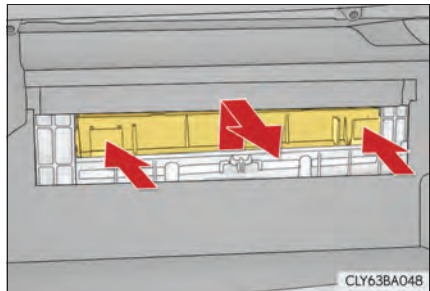

- 6** Remove the air conditioning filter from the filter case and replace it with a new one.


The "↑UP" marks shown on the filter and the filter case should be pointing up.

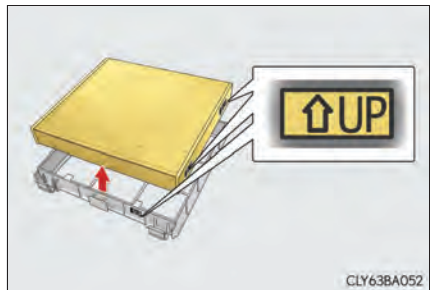

- 7** Reset the air conditioning filter maintenance data. (→P. 777)


■ Rear air conditioning filter

- 1** Turn the power switch off.
- 2** Open the trunk lid. Remove the filter cover.

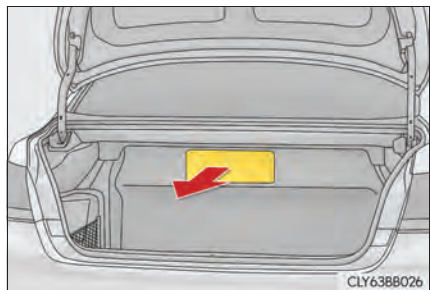

- 3** Remove the air conditioning filter and replace it with a new one.

The "↑UP" mark shown on the filter should be pointing up.

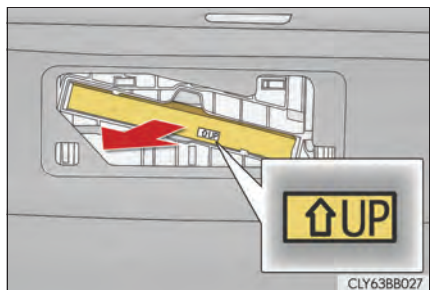

■ Checking interval

Inspect and replace the air conditioning filter when a message is appeared on the multi-information display. In dusty areas or areas with heavy traffic flow, early replacement may be required. (For scheduled maintenance information, please refer to the “Owner’s Manual Supplement” or “Scheduled Maintenance”.)

■ If air flow from the vents decreases dramatically

The filter may be clogged. Check the filter and replace if necessary.

■ After changing the air conditioning filter

The air conditioning filter maintenance data should be reset. Perform the following procedures:

- 1 Turn the power switch to ON mode.
- 2 Press and hold  (on the air conditioning panel) for 4 seconds or more.

A buzzer will sound to indicate that the maintenance data has been successfully reset.

■ Rear air conditioning filter

If it is necessary to clean or replace the filter, contact your Lexus dealer.

■ Climate control seat filter

Filters are installed in the seats. When it is necessary to clean or replace the filters, contact your Lexus dealer.

NOTICE

■ When using the air conditioning system

Make sure that a filter is always installed.

Using the air conditioning system without a filter may cause damage to the system.

Electronic key battery


Replace the battery with a new one if it is depleted.

You will need the following items:

- Flathead screwdriver
- Small flathead screwdriver
- Lithium battery CR1632


Replacing the battery

- 1 Take out the mechanical key.

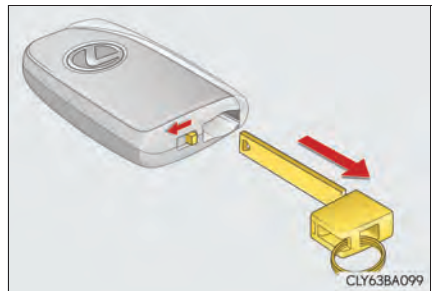


- 2 Remove the cover.

To prevent damage to the key, cover the tip of the screwdriver with a rag.

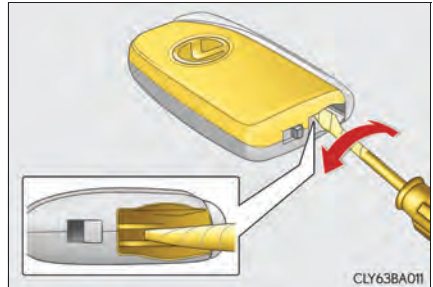

- 3 Remove the depleted battery.

Insert a new battery with the "+" terminal facing up.

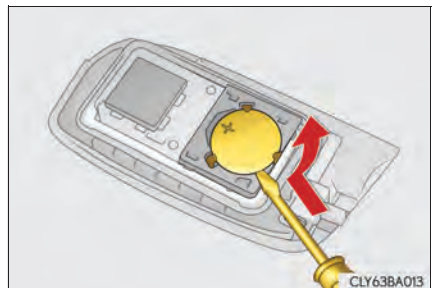

■ Use a CR1632 lithium battery

- Batteries can be purchased at your Lexus dealer, local electrical appliance shops or camera stores.
- Replace only with the same or equivalent type recommended by the manufacturer.
- Dispose of used batteries according to local laws.

■ When the card key battery needs to be replaced (if equipped)

The battery for the card key is available only at Lexus dealers. Your Lexus dealer can replace the battery for you.

■ If the electronic key battery is depleted

The following symptoms may occur:

- The smart access system with push-button start and wireless remote control will not function properly.
- The operational range will be reduced.

CAUTION

■ Removed battery and other parts

These parts are small and if swallowed by a child, they can cause choking. Keep away from children. Failure to do so could result in death or serious injury.

NOTICE

■ For normal operation after replacing the battery

Observe the following precautions to prevent accidents:


- Always work with dry hands.
Moisture may cause the battery to rust.
- Do not touch or move any other component inside the remote control.
- Do not bend either of the battery terminals.

Checking and replacing fuses

If any of the electrical components do not operate, a fuse may have blown. If this happens, check and replace the fuses as necessary.


- 1** Turn the power switch off.
- 2** Open the fuse box cover.
 - Engine compartment (type A fuse box)

Remove the engine compartment cover (→P. 746) and push the tab in and lift the lid off.

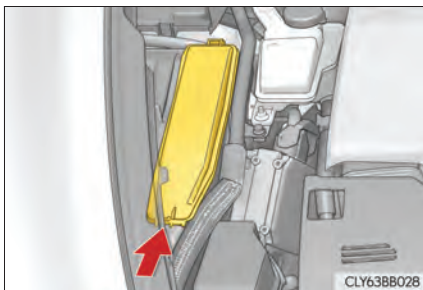


- Engine compartment (type B fuse box)

Remove the engine compartment cover (→P. 746) and push the tab in and lift the lid off.

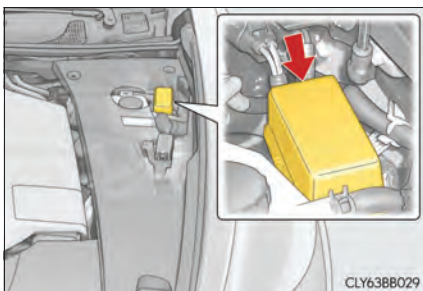


- Engine compartment (type C fuse box)

Remove the engine compartment cover (→P. 746) and push the tab in and lift the lid off.

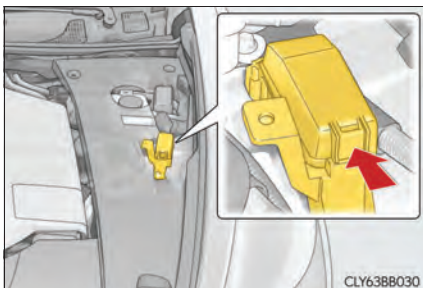


- Engine compartment (fuse box near the power control unit)

There are high voltage parts and wiring near the fuse box. For inspection and replacement of the fuses, contact your Lexus dealer.

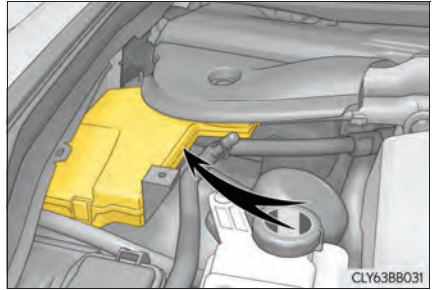


- Driver's side instrument panel

Remove the lid.

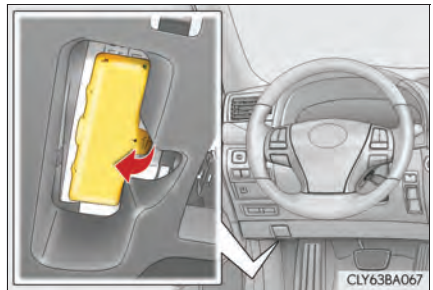


- Passenger's side instrument panel

Remove the lid.

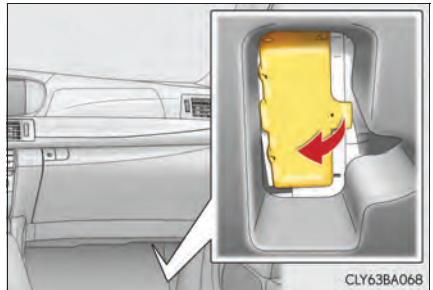


► Trunk (type A fuse box)

Remove the 12-volt battery cover (→P. 756) and then remove the lid.

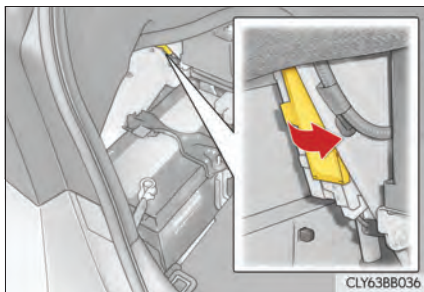


► Trunk (type B fuse box)

Remove the cover.

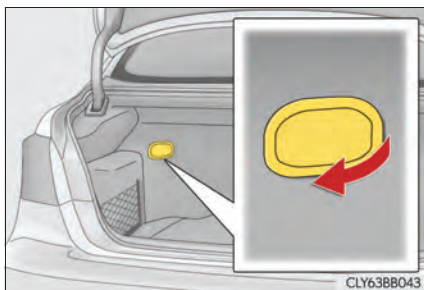


► Trunk (type C fuse box)

Remove the 12-volt battery cover (→P. 756) and then remove the terminal cover.

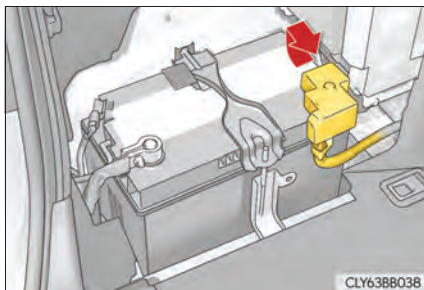

3 Remove the fuse with the pullout tool.

Only type A fuse can be removed using the pullout tool.

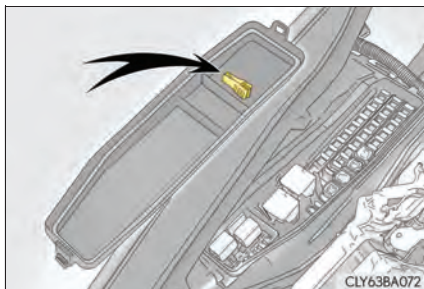

4 Check if the fuse is blown.

① Normal fuse

② Blown fuse


Type A and B:

Replace the blown fuse with a new fuse of an appropriate amperage rating. The amperage rating can be found on the fuse box lid.


Type C and D:

Contact your Lexus dealer.


► Type A

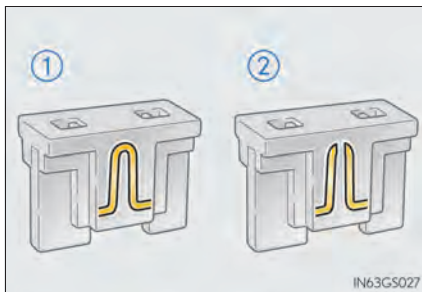


► Type B

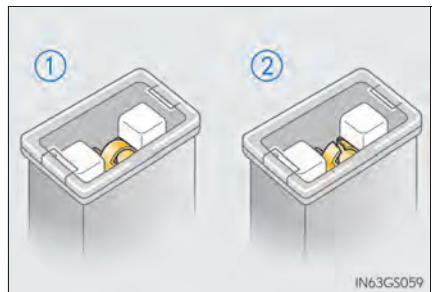

► Type C

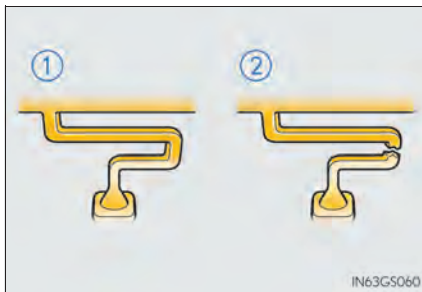

► Type D

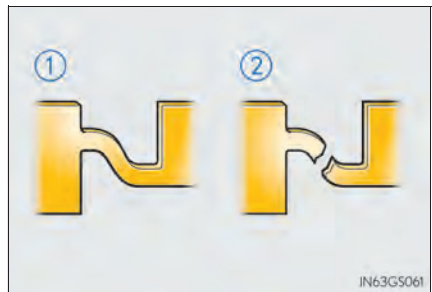

■ After a fuse is replaced

- If the lights do not turn on even after the fuse has been replaced, a bulb may need replacement. (→P. 787)
- If the replaced fuse blows again, have the vehicle inspected by your Lexus dealer.

■ If there is an overload in a circuit

The fuses are designed to blow, protecting the wiring harness from damage.

** CAUTION****■ To prevent system breakdowns and vehicle fire**

Observe the following precautions.

Failure to do so may cause damage to the vehicle, and possibly a fire or injury.

- Never use a fuse of a higher amperage rating than that indicated, or use any other object in place of a fuse.
- Always use a genuine Lexus fuse or equivalent.
Never replace a fuse with a wire, even as a temporary fix.
- Do not modify the fuses or fuse boxes.

■ Fuse box near the power control unit

Never check or replace the fuses as there are high voltage parts and wiring near the fuse box.

Doing so may cause electric shock, resulting in death or serious injury.

** NOTICE****■ Before replacing fuses**

Have the cause of electrical overload determined and repaired by your Lexus dealer as soon as possible.


Headlight aim

Removing the engine compartment cover

→P. 746

Vertical movement adjusting bolts

- ① Adjustment bolt A
- ② Adjustment bolt B

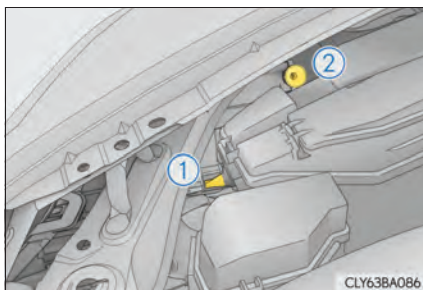


Before checking the headlight aim

- ❶ Make sure the vehicle has a full tank of gasoline and the area around the headlight is not deformed.
- ❷ Park the vehicle on level ground.
- ❸ Sit in the driver's seat.
- ❹ Bounce the vehicle several times.

Adjusting the headlight aim


- 1 Using a Phillips-head screwdriver, turn bolt A in either direction.

Remember the turning direction and the number of turns.

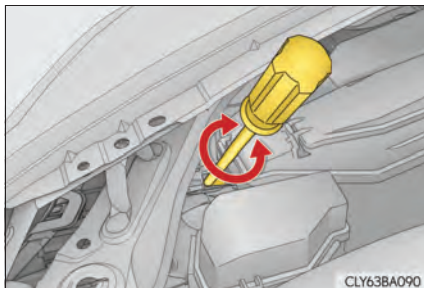

- 2 Turn bolt B the same number of turns and in the same direction as step 1.

If the headlight cannot be adjusted using this procedure, take the vehicle to your Lexus dealer to adjust the headlight aim.

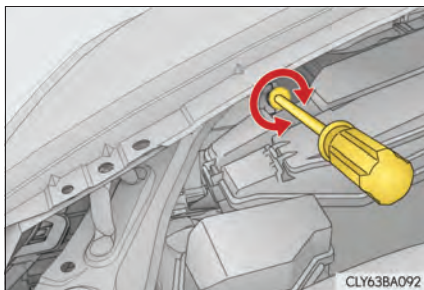

Light bulbs

If any lights burn out, have it replaced by your Lexus dealer.

■ LED Lights

The following lights consist of a number of LEDs. If any of the LEDs burn out, take your vehicle to your Lexus dealer to have the light replaced.

- Headlight low beams
- Headlight low/high beams
- Headlight high beams (vehicles without LKA [Lane-Keeping Assist])
- Parking lights and daytime running lights
- Front side marker lights
- Front turn signal lights
- Front fog lights
- Side turn signal lights
- Outer foot lights
- Tail lights
- Stop lights
- Back-up lights
- Rear side marker lights
- Rear turn signal lights
- High mounted stoplight
- License plate lights

■ Condensation build-up on the inside of the lens

Temporary condensation build-up on the inside of the headlight lens does not indicate a malfunction. Contact your Lexus dealer for more information in the following situations:

- Large drops of water have built up on the inside of the lens.
- Water has built up inside the headlight.

**CAUTION****■ Handling lights**

Do not touch the lights while they are on or immediately after they have been turned off. Doing so may result in burns.

When trouble arises

7

7-1. Essential information

Emergency flashers 790

If your vehicle has to
be stopped in an
emergency..... 791

7-2. Steps to take in an emergency

If your vehicle needs to be
towed 792

If you think something is
wrong 798

If a warning light turns on
or a warning buzzer
sounds..... 799

If a warning message is
displayed..... 809

If you have a flat tire..... 812

If the hybrid system will not
start 821

If the shift lever cannot be
shifted from P..... 823

If the parking brake cannot
be released 824

If the electronic key does
not operate properly 826

If the 12-volt battery is
discharged 829

If your vehicle overheats..... 832

If the vehicle becomes
stuck 837


Emergency flashers

The emergency flashers are used to warn other drivers when the vehicle has to be stopped in the road due to a breakdown, etc.

Press the switch.

All the turn signals will flash.

To turn them off, press the switch once again.

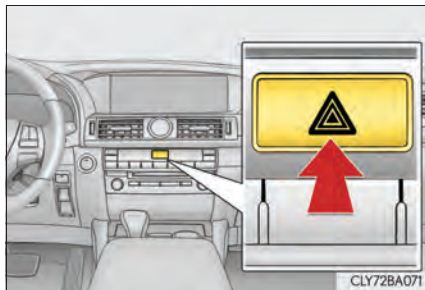

■ Emergency flashers

If the emergency flashers are used for a long time while the hybrid system is not operating (while the "READY" indicator is not illuminated), the 12-volt battery may discharge.

If your vehicle has to be stopped in an emergency

Only in an emergency, such as if it becomes impossible to stop the vehicle in the normal way, stop the vehicle using the following procedure:

- 1** Steadily step on the brake pedal with both feet and firmly depress it.
Do not pump the brake pedal repeatedly as this will increase the effort required to slow the vehicle.
 - 2** Shift the shift lever to N.
 - ▶ If the shift lever is shifted to N
 - 3** After slowing down, stop the vehicle in a safe place by the road.
 - 4** Stop the hybrid system.
 - ▶ If the shift lever cannot be shifted to N
 - 3** Keep depressing the brake pedal with both feet to reduce vehicle speed as much as possible.
 - 4** To stop the hybrid system, press and hold the power switch for 2 consecutive seconds or more, or press it briefly 3 times or more in succession.
- 

Press and hold for 2 seconds or more, or press briefly 3 times or more

CLY718B001
- 5** Stop the vehicle in a safe place by the road.

CAUTION

If the hybrid system has to be turned off while driving

Power assist for the steering wheel will be lost, making the steering wheel heavier to turn. Decelerate as much as possible before turning off the hybrid system.

If your vehicle needs to be towed

If towing is necessary, we recommend having your vehicle towed by your Lexus dealer or a commercial towing service, using a lift-type truck or flatbed truck.

Use a safety chain system for all towing, and abide by all state/provincial and local laws.

Before towing


The following may indicate a problem with your transmission. Contact your Lexus dealer before towing.

- The hybrid system is operating but the vehicle will not move.
- The vehicle makes an abnormal sound.

Emergency towing

If a tow truck is not available in an emergency, your vehicle may be temporarily towed using a cable or chain secured to the emergency towing eyelet. This should only be attempted on hard surfaced roads for short distances at under 18 mph (30 km/h).

A driver must be in the vehicle to steer and operate the brakes. The vehicle's wheels, drive train, axles, steering and brakes must be in good condition.

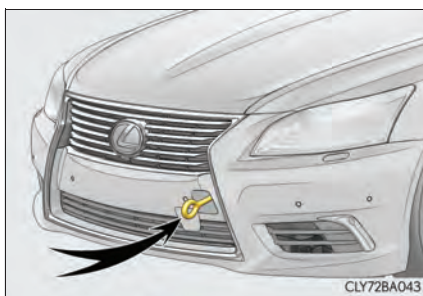


Installing towing eyelet


1 Take out the towing eyelet (→P. 813)

2 Remove the eyelet cover using a flathead screwdriver.


To protect the bodywork, place a rag between the screwdriver and the vehicle body as shown in the illustration.

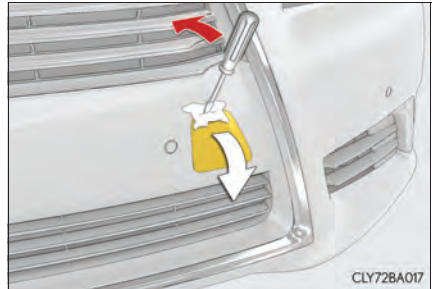

3 Insert the towing eyelet into the hole and tighten partially by hand.

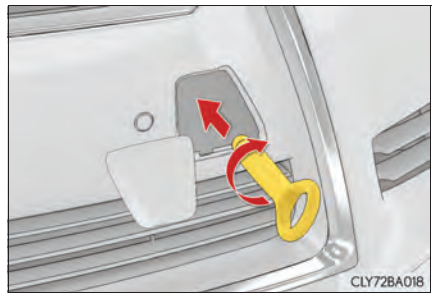

4 Tighten down the towing eyelet securely using a wheel nut wrench.

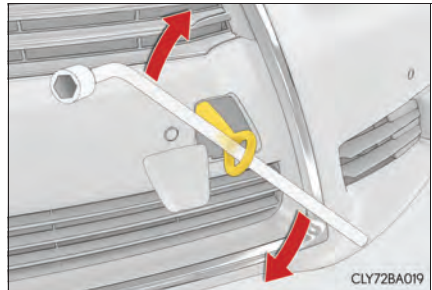

Towing with a sling-type truck


Do not tow with a sling-type truck to prevent body damage.



Towing with a wheel-lift type truck


- From the front

Use a towing dolly under the rear wheels.

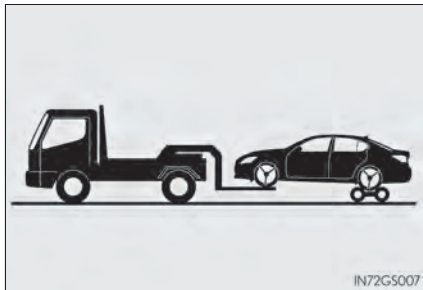


- From the rear

Use a towing dolly under the front wheels.

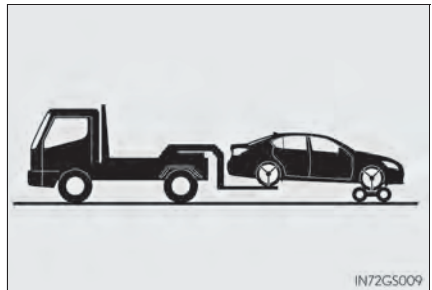


Using a flat bed truck

If your Lexus is transported by a flat bed truck, it should be tied down at the locations shown in the illustration.

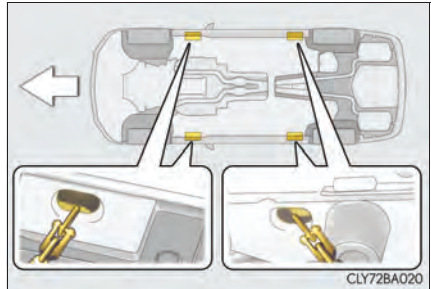

If you use chains or cables to tie down your vehicle, the angles shaded in black must be 45° .

Do not overly tighten the tie downs or the vehicle may be damaged.

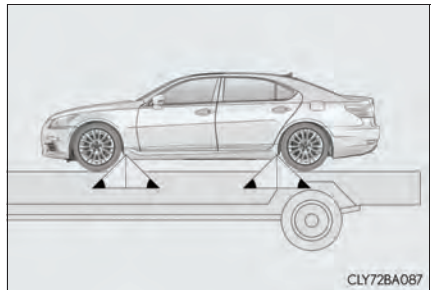

■ Before emergency towing


- 1 Release the parking brake.
- 2 Shift the shift lever to N.
- 3 Turn the power switch to ACCESSORY (hybrid system off) or ON (hybrid system operating) mode.

⚠ CAUTION

Observe the following precautions.
Failure to do so may result in death or serious injury.

■ When transporting the vehicle

Be sure to transport the vehicle with all four wheels raised off the ground. If the vehicle is towed with the wheels contacting the ground, the drivetrain and related parts may be damaged or the motor may generate electricity. If the motor generates electricity, depending on the state of the damage or malfunction, a fire may occur due to a short circuit.

**■ Caution while towing**

- Use extreme caution when towing the vehicle.
Avoid sudden starts or erratic driving maneuvers which place excessive stress on the emergency towing eyelet and the cables or chains. Always be cautious of the surroundings and other vehicles while towing.
- If the hybrid system is off, the power assist for the brakes and steering will not function, making steering and braking more difficult.

■ Installing a towing eyelet to the vehicle

Make sure that the towing eyelet is installed securely.
If not securely installed, the towing eyelet may come loose during towing.

**NOTICE****■ To prevent causing serious damage to the transmission and transfer when towing using a wheel-lift type truck**

Never tow this vehicle with any of the wheels in contact with the ground.

■ To prevent damage to the vehicle when towing using a wheel-lift type truck

When raising the vehicle, ensure adequate ground clearance for towing at the opposite end of the raised vehicle. Without adequate clearance, the vehicle could be damaged while being towed.

■ To prevent body damage when towing with a sling-type truck

Do not tow with a sling-type truck, either from the front or rear.

■ To prevent causing serious damage to the transmission and transfer in emergency towing

Never tow a vehicle from the rear with four wheels on the ground. This may cause serious damage to the transmission and transfer.

If you think something is wrong

If you notice any of the following symptoms, your vehicle probably needs adjustment or repair. Contact your Lexus dealer as soon as possible.

Visible symptoms

- Fluid leaks under the vehicle.
(Water dripping from the air conditioning after use is normal.)
- Flat-looking tires or uneven tire wear
- Engine coolant temperature gauge needle continually points higher than normal.

Audible symptoms

- Changes in exhaust sound
- Excessive tire squeal when cornering
- Strange noises related to the suspension system
- Pinging or other noises related to the hybrid system

Operational symptoms

- Engine missing, stumbling or running roughly
- Appreciable loss of power
- Vehicle pulls heavily to one side when braking
- Vehicle pulls heavily to one side when driving on a level road
- Loss of brake effectiveness, spongy feeling, pedal almost touches the floor

If a warning light turns on or a warning buzzer sounds

Calmly perform the following actions if any of the warning lights comes on or flashes. If a light comes on or flashes, but then goes off, this does not necessarily indicate a malfunction in the system. However, if this continues to occur, have the vehicle inspected by your Lexus dealer.

Stop the vehicle immediately. Continuing to drive the vehicle may be dangerous.

The following warning indicates a possible problem in the brake system. Immediately stop the vehicle in a safe place and contact your Lexus dealer.

Warning light	Warning light/Details
 (U.S.A.)  (Canada)	Brake system warning light (warning buzzer) • Low brake fluid • Malfunction in the electronically controlled brake system

Stop the vehicle immediately.

The following warning indicates the possibility of damage to the vehicle that may lead to an accident. Immediately stop the vehicle in a safe place and contact your Lexus dealer.

Warning light	Warning light/Details
	Charging system warning light Indicates a malfunction in the vehicle's charging system

Have the vehicle inspected by your Lexus dealer immediately.

Failure to investigate the cause of the following warnings may lead to the system operating abnormally and possibly cause an accident. Have the vehicle inspected by your Lexus dealer immediately.

Warning light	Warning light/Details
 (U.S.A.)  (Canada)	Malfunction indicator lamp Indicates a malfunction in: • The hybrid system; • The electronic engine control system; • The electronic throttle control system; or • The electronic hybrid transmission control system
	SRS warning light Indicates a malfunction in: • The SRS airbag system; • The front passenger occupant classification system; • The seat belt pretensioner system; or • The active head restraints system
 (U.S.A.)  (Canada)	ABS warning light Indicates a malfunction in: • The ABS; or • The brake assist system
	Electric power steering system warning light Indicates a malfunction in the EPS (Electric Power Steering) system

Warning light	Warning light/Details
 (Flashes) (If equipped)	Pre-collision system warning light Indicates a malfunction in the pre-collision system The warning light will operate as follows, even when the system is not malfunctioning: • The light will flash quickly when the system is operating. (→P. 322) • The light will turn on when the pre-collision braking is disabled. (→P. 318, 324) • The light will turn on when the system cannot temporarily be used.
	Slip indicator Indicates a malfunction in: • The VSC system; • The TRAC system; • The ABS; or • The hill-start assist control system The light will flash when the VSC, the TRAC, the ABS or the hill-start assist control system is operating. (→P. 317)
 (Flashes)	Brake hold operated indicator Indicates a malfunction in the brake hold system
 (Flashes) (U.S.A.)  (Flashes) (Canada)	Parking brake indicator Indicates a malfunction in the electric parking brake
	Brake system warning light Indicates a malfunction in: • The electronically controlled brake system; • The regenerative braking system; or • The electric parking brake

Follow the correction procedures.

After taking the specified steps to correct the suspected problem, check that the warning light goes off.

Warning light	Warning light/Details	Correction procedure
	Open door warning light (warning buzzer)*¹ Indicates that a door or the trunk is not fully closed	Check that all the doors and the trunk are closed.
 In the fuel gauge	Low fuel level warning light Indicates remaining fuel is approximately 3.4 gal. (13 L, 2.8 Imp. gal.) or less	Refuel the vehicle.
	Seat belt reminder light (warning buzzer)*² Warns the driver and/or front passenger to fasten their seat belts	Fasten the seat belt. If the front passenger's seat is occupied, the front passenger's seat belt also needs to be fastened to make the warning light (warning buzzer) turn off.
	Master warning light A buzzer sounds and the warning light comes on and flashes to indicate that the master warning system has detected a malfunction.	→P. 809

Warning light	Warning light/Details	Correction procedure
	Tire pressure warning light	
	When the light comes on: Low tire inflation pressure such as • Natural causes (→P. 805) • Flat tire (→P. 812)	Adjust the tire inflation pressure (including the spare tire) to the specified level. The light will turn off after a few minutes. In case the light does not turn off even if the tire inflation pressure is adjusted, have the system checked by your Lexus dealer.
	When the light comes on after blinking for 1 minute: Malfunction in the tire pressure warning system (→P. 805)	Have the system checked by your Lexus dealer.

*1: Open door warning buzzer:

A buzzer will sound if the vehicle reaches a speed of 3 mph (5 km/h) with any door open.

*2: Driver's and front passenger's seat belt buzzer:

The driver's and front passenger's seat belt buzzer sounds to alert the driver and front passenger that his or her seat belt is not fastened. Once the power switch is turned to ON mode, the buzzer sounds for 6 seconds. If the vehicle reaches a speed of 12 mph (20 km/h), the buzzer sounds once. If the seat belt is still unfastened after 30 seconds, the buzzer will sound intermittently for 10 seconds. Then, if the seat belt is still unfastened, the buzzer will sound in a different tone for 20 more seconds.

■ SRS warning light

This warning light system monitors the airbag sensor assembly, front impact sensors, side impact sensors (front door), side impact sensors (front), side impact sensors (rear door) side impact sensors (rear), driver's seat position sensor, driver's seat belt buckle switch, front passenger occupant classification system (ECU and sensors), "AIR BAG ON" indicator light, "AIR BAG OFF" indicator light, front passenger's seat belt buckle switch, seat belt pretensioners and force limiters, airbags, interconnecting wiring and power sources. (→P. 46)

■ Front passenger detection sensor, seat belt reminder and warning buzzer

- If luggage is placed on the front passenger seat, the front passenger detection sensor may cause the warning light to flash and the warning buzzer to sound even if a passenger is not sitting in the seat.
- If a cushion is placed on the seat, the sensor may not detect a passenger, and the warning light may not operate properly.

■ Electric power steering system warning light

When the 12-volt battery charge becomes insufficient or the voltage temporarily drops, the electric power steering system warning light may come on.

■ If the malfunction indicator lamp comes on while driving

First check the following:

- Is the fuel tank empty?
If it is, fill the fuel tank immediately.
- Is the fuel tank cap loose?
If it is, tighten it securely.

The light will go off after several driving trips.

If the light does not go off even after several trips, contact your Lexus dealer as soon as possible.

■ When the tire pressure warning light comes on

Check the tire inflation pressure and adjust it to the appropriate level. Pushing the tire pressure warning reset switch will not turn off the tire pressure warning light.

■ The tire pressure warning light may come on due to natural causes

The tire pressure warning light may come on due to natural causes such as natural air leaks and tire inflation pressure changes caused by temperature. In this case, adjusting the tire inflation pressure will turn off the warning light (after a few minutes).

■ When a tire is replaced with a spare tire

The spare tire is also equipped with a tire pressure warning valve and transmitter. The tire pressure warning light will turn on if the tire inflation pressure of the spare tire is low. If a tire goes flat, the tire pressure warning light will not turn off even though the flat tire has been replaced with the spare tire.

■ Conditions that the tire pressure warning system may not function properly

→P. 765

■ If the tire pressure warning light frequently comes on after blinking for 1 minute

If the tire pressure warning light frequently comes on after blinking for 1 minute when the power switch is turned to ON mode, have it checked by your Lexus dealer.

■ Warning buzzer

In some cases, the buzzer may not be heard due to ambient noise or sounds from the audio system.

■ Customization

The vehicle speed linked seat belt reminder buzzer can be disabled.
(Customizable features →P. 873)

 CAUTION**■ If both the ABS and the brake system warning lights remain on**

Stop your vehicle in a safe place immediately and contact your Lexus dealer. The vehicle will become extremely unstable during braking, and the ABS system may fail, which could cause an accident resulting in death or serious injury.

■ When the electric power steering system warning light comes on

The steering wheel may become extremely heavy.

If the steering wheel becomes heavier than usual when operating, hold firmly and operate using more force than usual.

■ If the tire pressure warning light comes on

Be sure to observe the following precautions. Failure to do so could cause a loss of vehicle control and result in death or serious injury.

- Stop your vehicle in a safe place as soon as possible. Adjust the tire inflation pressure immediately.
- If the tire pressure warning light comes on even after tire inflation pressure adjustment, it is probable that you have a flat tire. Check the tires. If a tire is flat, change it with the spare tire and have the flat tire repaired by the nearest Lexus dealer.
- Avoid abrupt maneuvering and braking. If the vehicle tires deteriorate, you could lose control of the steering wheel or the brakes.

■ If a blowout or sudden air leakage should occur

The tire pressure warning system may not activate immediately.

 CAUTION**■ Maintenance of the tires**

Each tire, including the spare (if provided), should be checked monthly when cold and inflated to the inflation pressure recommended by the vehicle manufacturer on the vehicle placard or tire inflation pressure label (tire and load information label). (If your vehicle has tires of a different size than the size indicated on the vehicle placard or tire inflation pressure label [tire and load information label], you should determine the proper tire inflation pressure for those tires.)

As an added safety feature, your vehicle has been equipped with a tire pressure monitoring system (TPMS-tire pressure warning system) that illuminates a low tire pressure telltale (tire pressure warning light) when one or more of your tires is significantly under-inflated. Accordingly, when the low tire pressure telltale (tire pressure warning light) illuminates, you should stop and check your tires as soon as possible, and inflate them to the proper pressure. Driving on a significantly under-inflated tire causes the tire to overheat and can lead to tire failure. Under-inflation also reduces fuel efficiency and tire tread life, and may affect the vehicle's handling and stopping ability.

Please note that the TPMS (tire pressure warning system) is not a substitute for proper tire maintenance, and it is the driver's responsibility to maintain correct tire pressure, even if under-inflation has not reached the level to trigger illumination of the TPMS low tire pressure telltale (tire pressure warning light).

Your vehicle has also been equipped with a TPMS (tire pressure warning system) malfunction indicator to indicate when the system is not operating properly. The TPMS (tire pressure warning system) malfunction indicator is combined with the low tire pressure telltale (tire pressure warning light). When the system detects a malfunction, the telltale will flash for approximately one minute and then remain continuously illuminated. This sequence will continue upon subsequent vehicle start-ups as long as the malfunction exists. When the malfunction indicator is illuminated, the system may not be able to detect or signal low tire pressure as intended.

 CAUTION

TPMS (tire pressure warning system) malfunctions may occur for a variety of reasons, including the installation of replacement or alternate tires or wheels on the vehicle that prevent the TPMS (tire pressure warning system) from functioning properly. Always check the TPMS (tire pressure warning system) malfunction tell-tale after replacing one or more tires or wheels on your vehicle to ensure that the replacement or alternate tires and wheels allow the TPMS (tire pressure warning system) to continue to function properly.

 NOTICE **Precaution when installing a different tire**

When differently constructed tires or tires of different makers, models or tread patterns are installed, the tire pressure warning system may not operate properly.

If a warning message is displayed

The multi-information display shows warnings for system malfunctions, incorrectly performed operations, and messages that indicate a need for maintenance. When a message is shown, perform the correction procedure appropriate to the message.

① Master warning light

The master warning light also comes on or flashes in order to indicate that a message is currently being displayed on the multi-information display.

② Multi-information display



If any of the warning messages is shown again after the following actions have been performed, contact your Lexus dealer.

Messages and warnings

The warning lights and warning buzzers operate as follows depending on the content of the message. If a message indicates the need for inspection by a dealer, have the vehicle inspected by your Lexus dealer immediately.

	System warning light	Warning buzzer*	Warning
Remains on	—	Sounds	Indicates an important situation such as the malfunction of the system related to driving that may result in danger
—	Remains on or flashes	Sounds	Indicates an important situation such as the malfunction of the system shown on the multi-information display
Flashes	—	Sounds	Indicates a situation such as damage to the vehicle that may result in danger
Remains on	—	Does not sound	Indicates a condition such as a malfunction of electrical components and the need for maintenance
Flashes	—	Does not sound	Indicates a situation such as the incorrect performance of an operation and how to perform the operation correctly

*: A buzzer sounds the first time a message is shown on the multi-information display.

■ Warning message in radar cruise mode (if equipped)

In the following cases, the warning message may not be displayed even if vehicle-to-vehicle distance decreases:

- When your vehicle and the vehicle ahead are traveling at the same speed or the vehicle ahead is traveling more quickly than your vehicle
- When the vehicle ahead is traveling at a very low speed
- Immediately after cruise control speed is set
- At the instant the accelerator pedal is depressed

■ The LKA (Lane-Keeping Assist) lane departure warning function (if equipped)

In the following cases, the warning message will not be displayed even if a lane line is crossed.

- When the vehicle speed deviates from the operating range of the LKA system functions
- When the lane lines cannot be recognized
- When the steering wheel is turned as far as necessary to cause the vehicle to change lanes

■ System warning lights

The master warning light does not come on or flash in the following cases. Instead, a separate system warning light will come on or flash along with the message shown on the multi-information display.

- Malfunction of the brake system
The brake system warning light (red indicator) comes on. (→P. 799)
- Malfunction of the regenerative brake system, electronically controlled brake system or electric parking brake
The brake system warning light (yellow indicator) comes on. (→P. 801)
- Malfunction of the ABS
The ABS warning light comes on. (→P. 800)
- Malfunction of the charging system
The charging system warning light comes on. (→P. 800)
- Indicates that a door or the trunk is not fully closed
The open door warning light comes on. (→P. 802)
- High engine coolant temperature
The needle of the engine coolant temperature gauge enters the red zone. (→P. 832)

■ If “Maintenance required” is shown (U.S.A. only)

Perform the necessary maintenance.

Please reset the maintenance data after the maintenance is performed. (→P. 732)

■ If “Hybrid System Overheat” is shown

Coping method: →P. 832

This message may be displayed when driving under severe operating conditions. (For example, when driving up a long steep hill.)

■ Warning buzzer

In some cases, the buzzer may not be heard due to ambient noise or sounds from the audio system.

If you have a flat tire

Remove the flat tire and replace it with the spare tire provided.

For details about tires: →P. 760

CAUTION

If you have a flat tire


Do not continue driving with a flat tire.

Driving even a short distance with a flat tire can damage the tire and the wheel beyond repair, which could result in an accident.

Before jacking up the vehicle

- Stop the vehicle on a hard, flat surface.
- Set the parking brake.
- Shift the shift lever to P.
- Stop the hybrid system.
- Turn on the emergency flashers. (→P. 790)

Location of the spare tire, jack and tools

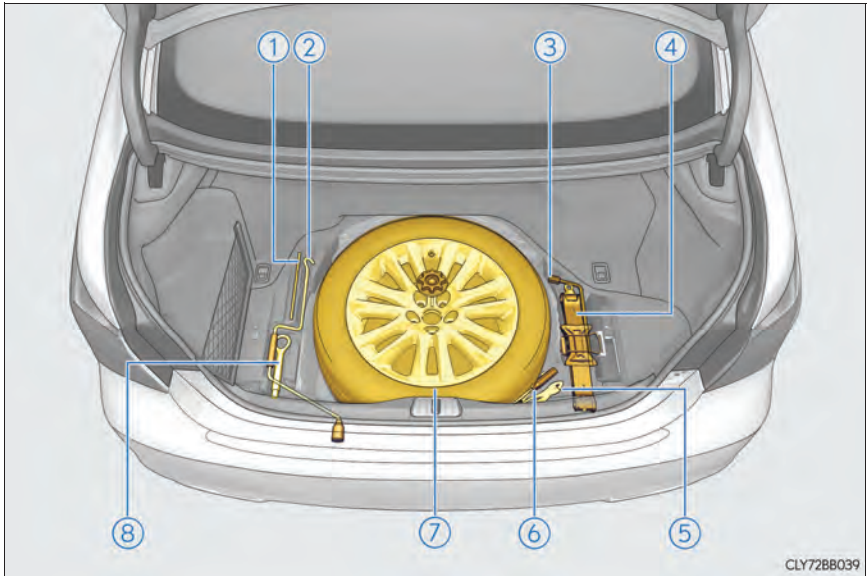

- | | |
|------------------------------|-----------------|
| ① Parking brake release tool | ⑤ Tools |
| ② Jack handle | ⑥ Screwdriver |
| ③ Wheel nut wrench | ⑦ Spare tire |
| ④ Jack | ⑧ Towing eyelet |

 CAUTION**■ Using the tire jack**

Observe the following precautions.

Improper use of the tire jack may cause the vehicle to suddenly fall off the jack, leading to death or serious injury.

- Do not use the tire jack for any purpose other than replacing tires or installing and removing tire chains.
- Only use the tire jack that comes with this vehicle for replacing a flat tire.
Do not use it on other vehicles, and do not use other tire jacks for replacing tires on this vehicle.
- Put the jack properly in its jack point.
- Do not put any part of your body under the vehicle while it is supported by the jack.
- Do not start the hybrid system or drive the vehicle while the vehicle is supported by the jack.
- Do not raise the vehicle while someone is inside.
- When raising the vehicle, do not put an object on or under the jack.
- Do not raise the vehicle to a height greater than that required to replace the tire.
- Use a jack stand if it is necessary to get under the vehicle.
- Be sure to turn off the height control and stop the hybrid system.
- When lowering the vehicle, make sure that there is no-one near the vehicle. If there are people nearby, warn them vocally before lowering.


Taking out the jack and jack handle

1 Lift up the luggage mat and secure it by using the hook provided.
(→P. 681)

2 Remove the tool tray.




3 Remove the jack after removing the hook.

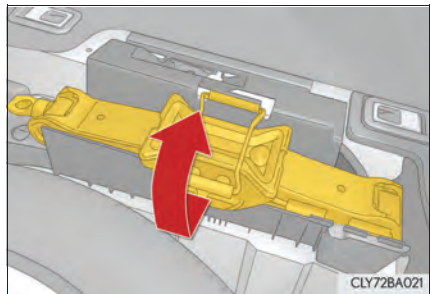

Taking out the spare tire

- 1 Lift up the luggage mat and secure it by using the hook provided. (→P.681)
- 2 Loosen the center fastener that secures the spare tire.

If the center fastener cannot be turned by hand, use the wheel nut wrench that is stored in the trunk. (To secure the tire, tighten the center fastener by hand. Do not use the wrench or other tools.)

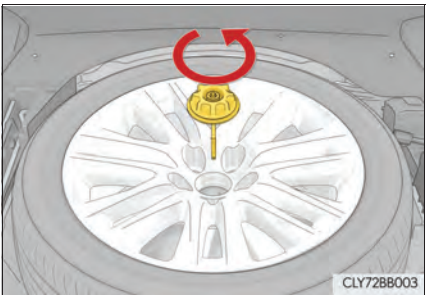


 **CAUTION**

 **When storing the spare tire**

Be careful not to catch fingers or other body parts between the spare tire and the body of the vehicle.


Replacing a flat tire

- 1 Chock the tires.

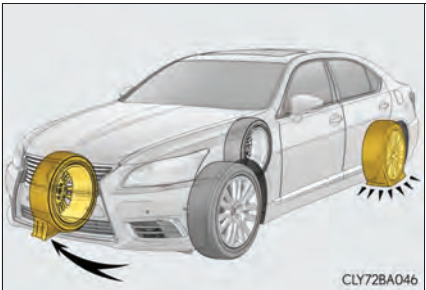


Flat tire		Wheel chock positions
Front	Left-hand side	Behind the rear right-hand side tire
	Right-hand side	Behind the rear left-hand side tire
Rear	Left-hand side	In front of the front right-hand side tire
	Right-hand side	In front of the front left-hand side tire

- 2** Slightly loosen the wheel nuts (one turn).

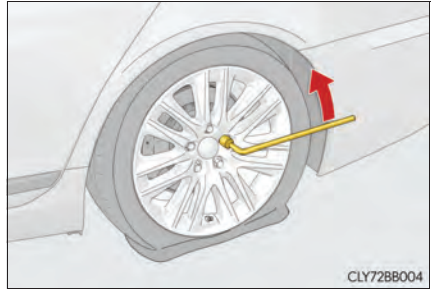


- 3** Turn the tire jack portion "A" by hand until the notch of the jack is in contact with the jack point.

The jack point guides are located under the rocker panel. They indicate the jack point positions.

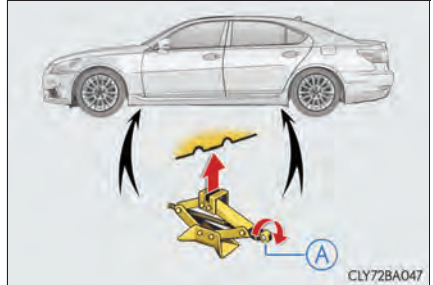


- 4** Raise the vehicle until the tire is slightly raised off the ground.

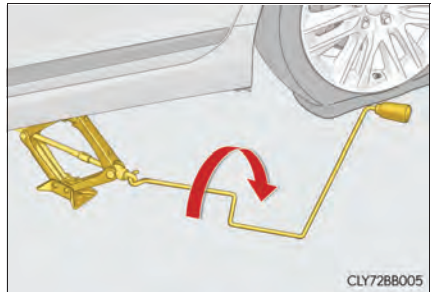


- 5** Remove all the wheel nuts and the tire.

When resting the tire on the ground, place the tire so that the wheel design faces up to avoid scratching the wheel surface.

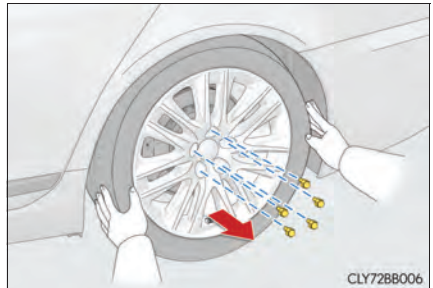

- 6** Remove the wheel ornament by pushing from the reverse side.

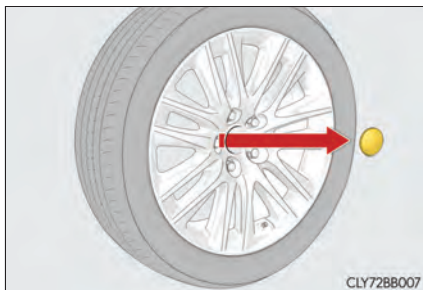

CAUTION

■ Replacing a flat tire

- Observe the following precautions.

Failure to do so may result in serious injury:

- Do not try to remove the wheel ornament by hand. Take due care in handling the ornament to avoid unexpected personal injury.
- Do not touch the disc wheels or the area around the brakes immediately after the vehicle has been driven.


After the vehicle has been driven the disc wheels and the area around the brakes will be extremely hot. Touching these areas with hands, feet or other body parts while changing a tire, etc. may result in burns.

- Failure to follow these precautions could cause the wheel nuts to loosen and the tire to fall off, resulting in death or serious injury.
- Never use oil or grease on the wheel bolts or wheel nuts.
Oil and grease may cause the wheel nuts to be excessively tightened, leading to bolt or disc wheel damage. In addition, the oil or grease can cause the wheel nuts to loosen and the wheel may fall off, causing a serious accident. Remove any oil or grease from the wheel bolts or wheel nuts.
- Have the wheel nuts tightened with a torque wrench to 103 ft•lbf (140 N•m, 14.3 kgf•m) as soon as possible after changing wheels.
- Do not attach a heavily damaged wheel ornament, as it may fly off the wheel while the vehicle is moving.
- When installing a tire, only use wheel nuts that have been specifically designed for that wheel.
- If there are any cracks or deformations in the bolt screws, nut threads or bolt holes of the wheel, have the vehicle inspected by your Lexus dealer.

Installing the spare tire


- 1 Remove any dirt or foreign matter from the wheel contact surface.

If foreign matter is on the wheel contact surface, the wheel nuts may loosen while the vehicle is in motion, causing the tire to come off.

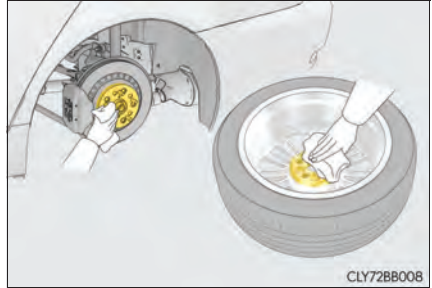


- 2 Install the spare tire and loosely tighten each wheel nut by hand by approximately the same amount.

Turn the wheel nuts until the washers come into contact with the disc wheel.

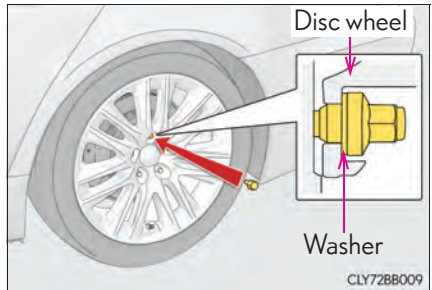


- 3 Lower the vehicle.

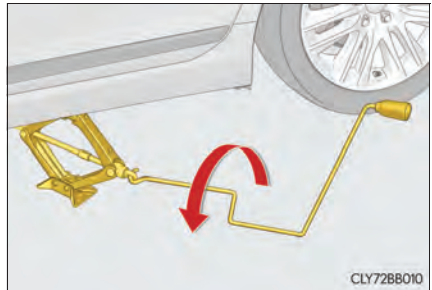


- 4 Firmly tighten each wheel nut two or three times in the order shown in the illustration.

Tightening torque:

103 ft•lbf (140 N•m, 14.3 kgf•m)

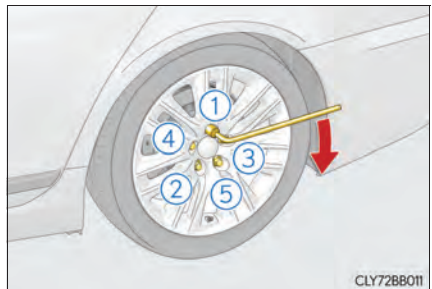

- 5** Reinstall the wheel ornament.

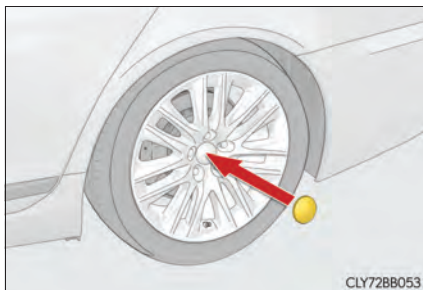

- 6** Stow the flat tire, tire jack and all tools.

⚠ CAUTION

■ After using the tools and jack

Before driving, make sure all the tools and jack are securely in place in their storage location to reduce the possibility of personal injury during a collision or sudden braking.

⚠ NOTICE

■ When replacing the tires

When removing or fitting the wheels, tires or the tire pressure warning valve and transmitter, contact your Lexus dealer as the tire pressure warning valve and transmitter may be damaged if not handled correctly.

■ To avoid damage to the tire pressure warning valves and transmitters

When a tire is repaired with liquid sealants, the tire pressure warning valve and transmitter may not operate properly. If a liquid sealant is used, contact your Lexus dealer or other qualified service shop as soon as possible. Make sure to replace the tire pressure warning valve and transmitter when replacing the tire. (→P. 761)

If the hybrid system will not start

Reasons for the hybrid system not starting vary depending on the situation. Check the following and perform the appropriate procedure:

The hybrid system will not start even though the correct starting procedure is being followed. (→P. 220)

One of the following may be the cause of the problem:

- The electronic key may not be functioning properly. (→P. 828)
- There may not be sufficient fuel in the vehicle's tank.
Refuel the vehicle.
- There may be a malfunction in the immobilizer system. (→P. 90)
- There may be a malfunction in the steering lock system.
- The hybrid system may be malfunctioning due to an electrical problem such as electronic key battery depletion or a blown fuse. However, depending on the type of malfunction, an interim measure is available to start the hybrid system. (→P. 822)

The interior lights and headlights are dim, or the horn does not sound or sounds at a low volume.

One of the following may be the cause of the problem:

- The 12-volt battery may be discharged. (→P. 829)
- The 12-volt battery terminal connections may be loose or corroded.

The interior lights and headlights do not turn on, or the horn does not sound.

One of the following may be the cause of the problem:

- One or both of the 12-volt battery terminals may be disconnected.
- The 12-volt battery may be discharged. (→P. 829)

Contact your Lexus dealer if the problem cannot be repaired, or if repair procedures are unknown.

Emergency start function

When the hybrid system does not start, the following steps can be used as an interim measure to start the hybrid system if the power switch is functioning normally:

- 1** Turn the power switch to ON mode (→P. 221) and check that the parking brake is set.
- 2** Shift the shift lever to P.
- 3** Turn the power switch to ACCESSORY mode.
- 4** Press and hold the power switch for about 15 seconds while depressing the brake pedal firmly.

Even if the hybrid system can be started using the above steps, the system may be malfunctioning. Have the vehicle inspected by your Lexus dealer.


If the shift lever cannot be shifted from P

If the shift lever cannot be shifted with your foot on the brake pedal, there may be a problem with the shift lock system (a system to prevent accidental operation of the shift lever). Have the vehicle inspected by your Lexus dealer immediately.

The following steps may be used as an emergency measure to ensure that the shift lever can be shifted:


- 1** Turn the power switch to ON mode (→P. 221) and check that the parking brake is set.
- 2** Turn the power switch to ACCESSORY mode.
- 3** Depress the brake pedal.
- 4** Pry the cover up with a flathead screwdriver or equivalent tool.

To prevent damage to the cover, cover the tip of the screwdriver with a rag.

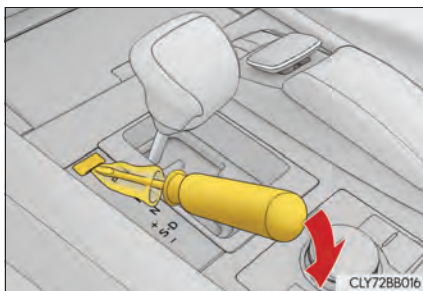

- 5** Press the shift lock override button.

The shift lever can be shifted while the button is pressed.

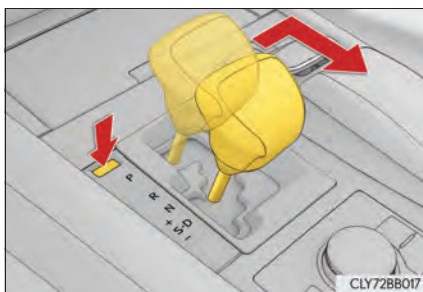

If the parking brake cannot be released

In the event that the 12-volt battery is discharged or switch operation does not release the parking brake, the parking brake can be released manually using the procedure below. This procedure should be performed only if necessary, such as in an emergency.


If the switch cannot be operated even when the 12-volt battery is normal, the parking brake system may be malfunctioning. Have the vehicle inspected by your Lexus dealer immediately.

Before releasing the parking brake manually

- Shift the shift lever to P.
- Turn the power switch off.
- Check that the parking brake indicator is off.
- Chock the tires.


Releasing the parking brake manually

- 1** Take out the parking brake release tool and the screwdriver from the trunk. (→P. 813)
- 2** Replace the screwdriver head with the parking brake release tool.

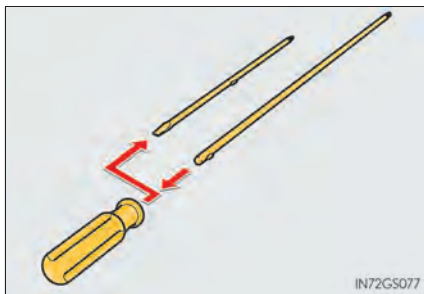


- 3** Take out the spare tire. (→P. 812)

- 4** Remove the plug.

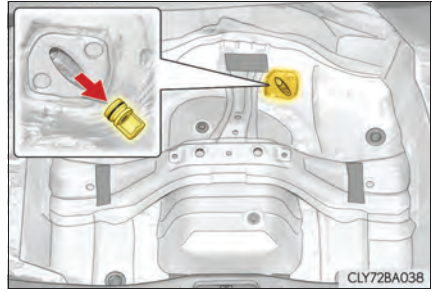

- 5** Insert the tool and press it down firmly while turning it counter-clockwise until it stops.

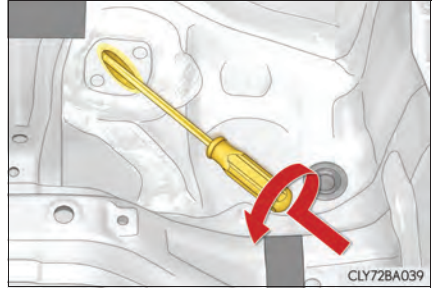

Manual operation of the parking brake

The parking brake cannot be set manually.

CAUTION

When releasing the parking brake manually

- Shift the shift lever to P, turn the power switch off and chock the tires. Failure to do so may cause the vehicle to move, resulting in an accident.
- Turn the power switch off and check that the parking brake indicator is off. Failure to do so may cause the system to operate and turn the inserted parking brake release tool, resulting in an injury.

If the electronic key does not operate properly


If communication between the electronic key and vehicle is interrupted (→P. 136) or the electronic key cannot be used because the battery is depleted, the smart access system with push-button start and wireless remote control cannot be used. In such cases, the doors and trunk can be opened and the hybrid system can be started by following the procedure below.

Locking and unlocking the doors, unlocking the trunk and key linked functions

Use the mechanical key built in to the electronic keys to operate the doors. (→P. 123)

■ Doors

- 1 Remove the cover on the driver's door handle.

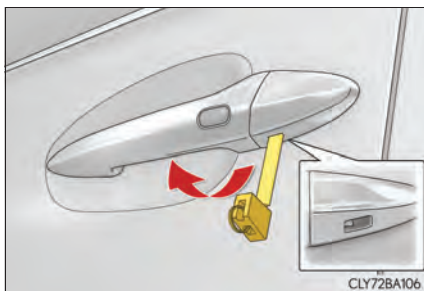


- 2 Locks and unlocks the doors

- ① Locks all the doors
- ② Closes the windows and moon roof (turn and hold)

- ③ Unlocks the door

Turning the key rearward unlocks the driver's door. Turning the key once again unlocks the other doors.


- ④ Opens the windows and moon roof (turn and hold)

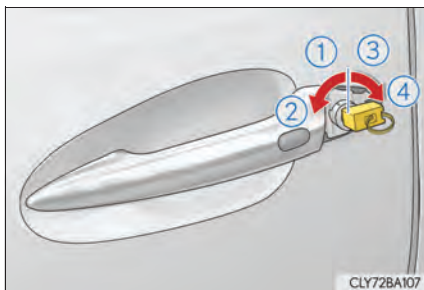

- 3** After the operation is completed, reinstall the cover.


Hook the upper claw of the cover onto the upper catch on the vehicle side, and then push on the lower side of the cover.

Make sure that the lower claw of the cover is securely fastened to the lower catch on the vehicle side. If the cover is not securely attached, it may fall off while driving.

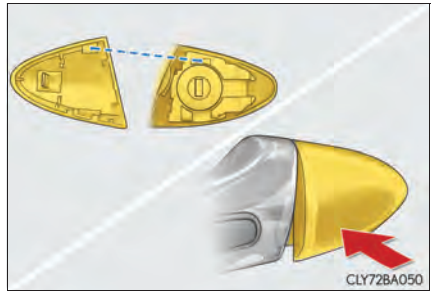

■ Trunk

Turn the mechanical key clockwise to open.

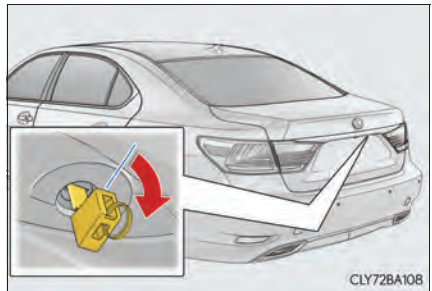

Starting the hybrid system

1 Ensure that the shift lever is in P and depress the brake pedal.

2 Touch the Lexus emblem side of the electronic key to the power switch.

If any of the doors is opened or closed after the key was touched to the switch to start the vehicle, an alarm will sound to indicate that the start function cannot detect the key.



3 Press the power switch within 10 seconds of the buzzer sounding, keeping the brake pedal depressed.

In the event that the hybrid system still cannot be started, contact your Lexus dealer.

■ Stopping the hybrid system

Shift the shift lever to P and press the power switch as you normally do when stopping the hybrid system.

■ Replacing the key battery

As the above procedure is a temporary measure, it is recommended that the electronic key battery be replaced immediately when the battery is depleted. (→P. 778)

■ Changing power switch modes

Within 10 seconds of the buzzer sounding, release the brake pedal and press the power switch.

The hybrid system does not start and modes will be changed each time the switch is pressed. (→P. 221)

If the 12-volt battery is discharged

The following procedures may be used to start the hybrid system if the 12-volt battery is discharged.

You can also call your Lexus dealer or a qualified repair shop.

If you have a set of jumper (or booster) cables and a second vehicle with a 12-volt battery, you can jump start your vehicle by following the steps below.

- 1** Open the trunk lid and remove the 12-volt battery cover. (→P. 756)

In the event that the trunk opener cannot be used, use the mechanical key to open the trunk. (→P. 826)

- 2** Connect the jumper cables according to the following procedure:



- 1** Positive (+) battery terminal on your vehicle
 - 2** Positive (+) battery terminal on the second vehicle
 - 3** Negative (-) battery terminal on the second vehicle
 - 4** Negative (-) battery terminal on your vehicle
- 3** Start the engine of the second vehicle. Increase the engine speed slightly and maintain at that level for approximately 5 minutes to recharge the 12-volt battery of your vehicle.
 - 4** Open and close any of the doors of your vehicle with the power switch off.

- 5** Maintain the engine speed of the second vehicle and start the hybrid system of your vehicle by turning the power switch to ON mode.
- 6** Make sure the “READY” indicator comes on. If the indicator does not come on, contact your Lexus dealer.
- 7** Once the hybrid system has started, remove the jumper cables in the exact reverse order from which they were connected.

Once the hybrid system starts, have the vehicle inspected at your Lexus dealer as soon as possible.

■ Starting the hybrid system when the 12-volt battery is discharged

The hybrid system cannot be started by push-starting.

■ To prevent 12-volt battery discharge

- Turn off the headlights and the audio system while the hybrid system is off.
- Turn off any unnecessary electrical components when the vehicle is running at a low speed for an extended period, such as in heavy traffic.

■ When the 12-volt battery is removed or discharged

The hybrid system may not start. (→P. 757)

■ Charging the 12-volt battery

The electricity stored in the 12-volt battery will discharge gradually even when the vehicle is not in use, due to natural discharge and the draining effects of certain electrical appliances. If the vehicle is left for a long time, the 12-volt battery may discharge, and the hybrid system may be unable to start. (The 12-volt battery recharges automatically while the hybrid system is operating.)

■ When recharging or replacing the 12-volt battery

- Make sure that the key is not inside the vehicle when recharging or replacing the 12-volt battery. The key may be locked in the vehicle if the alarm is activated. (→P. 93)
- In some cases, it may not be possible to unlock the doors using the smart access system with push-button start when the 12-volt battery is discharged. Use the wireless remote control or the mechanical key to lock or unlock the doors.

■ If the 12-volt battery is discharged

The information stored in the computer will be deleted.

If the 12-volt battery is discharged, have the vehicle inspected by your Lexus dealer.

 CAUTION**■ Avoiding 12-volt battery fires or explosions**

Observe the following precautions to prevent accidentally igniting the flammable gas that may be emitted from the 12-volt battery:

- Make sure each jumper cable is connected to the correct terminal and that it is not unintentionally in contact with any other than the intended terminal.
- Do not allow the other end of the jumper cable connected to the “+” terminal to come into contact with any other parts or metal surfaces in the area, such as brackets or unpainted metal.
- Do not allow the + and - clamps of the jumper cables to come into contact with each other.
- Do not smoke, use matches, cigarette lighters or allow open flame near the 12-volt battery.

■ 12-volt battery precautions

The 12-volt battery contains poisonous and corrosive acidic electrolyte, while related parts contain lead and lead compounds. Observe the following precautions when handling the 12-volt battery:

- When working with the 12-volt battery, always wear safety glasses and take care not to allow any 12-volt battery fluids (acid) to come into contact with skin, clothing or the vehicle body.
- Do not lean over the 12-volt battery.
- In the event that 12-volt battery fluid comes into contact with the skin or eyes, immediately wash the affected area with water and seek medical attention. Place a wet sponge or cloth over the affected area until medical attention can be received.
- Always wash your hands after handling the 12-volt battery support, terminals, and other battery-related parts.
- Do not allow children near the 12-volt battery.

■ After recharging the 12-volt battery

Have the 12-volt battery inspected at your Lexus dealer as soon as possible. If the 12-volt battery is deteriorating, continued use may cause the 12-volt battery to emit a malodorous gas, which may be detrimental to the health of passengers.

■ When replacing the 12-volt battery

→P. 759

If your vehicle overheats

The following may indicate that your vehicle is overheating.

- The needle of the engine coolant temperature gauge (→P. 101) enters the red zone or a loss of hybrid system power is experienced. (For example, the vehicle speed does not increase.)
- “Hybrid System Overheat” is shown on the multi-information display.
- Steam comes out from under the hood.

Correction procedures

■ If the needle of the engine coolant temperature gauge enters the red zone

1 Stop the vehicle in a safe place and turn off the air conditioning system, and then stop the hybrid system.

2 If you see steam:

Carefully lift the hood after the steam subsides.

If you do not see steam:


Carefully lift the hood.

3 After the hybrid system has cooled down sufficiently, inspect the hoses and radiator core (radiator) for any leaks.

① Radiator


② Cooling fans

If a large amount of coolant leaks, immediately contact your Lexus dealer.

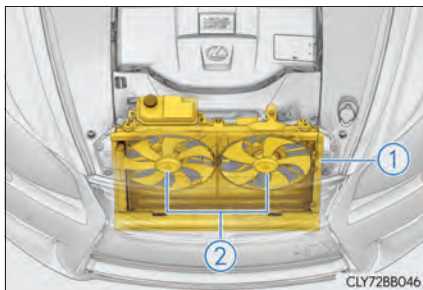


- 4** The coolant level is satisfactory if it is between the “FULL” and “LOW” lines on the reservoir.

- ① Reservoir
- ② “FULL”
- ③ “LOW”

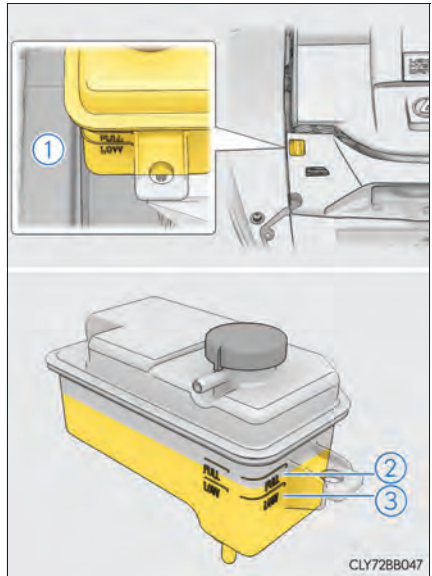

- 5** Add coolant if necessary.
(→P. 746)

Water can be used in an emergency if coolant is unavailable.

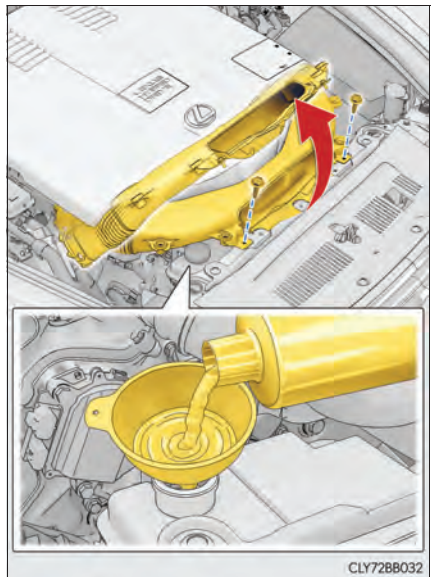

- 6** Start the hybrid system and turn the air conditioning system on to check that the radiator cooling fan operates and to check for coolant leaks from the radiator or hoses.

The fan operates when the air conditioning system is turned on immediately after a cold start. Confirm that the fan is operating by checking the fan sound and air flow. If it is difficult to check these, turn the air conditioning system on and off repeatedly.

(The fan may not operate in freezing temperatures.)

- 7** If the fan is not operating:

Stop the hybrid system immediately and contact your Lexus dealer.

If the fan is operating:


Have the vehicle inspected at the nearest Lexus dealer.

■ **If “Hybrid System Overheat” is shown on the multi-information display**

- 1** Stop the vehicle in a safe place.
- 2** Stop the hybrid system and carefully lift the hood.
- 3** After the hybrid system has cooled down, inspect the hoses and radiator core (radiator) for any leaks.


- ① Radiator
- ② Cooling fans

If a large amount of coolant leaks, immediately contact your Lexus dealer.

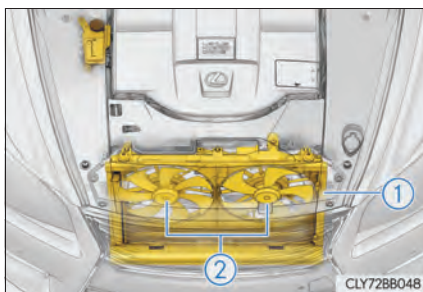


- 4** The coolant level is satisfactory if it is between the "F" and "L" lines on the reservoir.

- ① Reservoir
- ② "F"
- ③ "L"

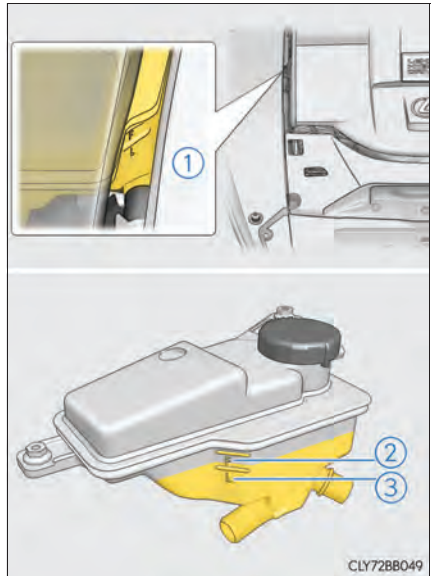

- 5** Add coolant if necessary.
(→P. 746)

Water can be used in an emergency if coolant is unavailable.

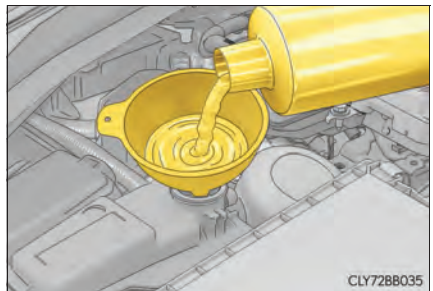

- 6** Start the hybrid system and check for the multi-information display.

If the message does not disappear:

Stop the hybrid system and contact your Lexus dealer.

If the message is not displayed:


Have the vehicle inspected at the nearest Lexus dealer.

⚠ CAUTION**■ When inspecting under the hood of your vehicle**

Observe the following precautions.

Failure to do so may result in serious injury such as burns.

- If steam is seen coming from under the hood, do not open the hood until the steam has subsided. The engine compartment may be very hot.
- After the hybrid system has been turned off, check that the indicator on the power switch and the "READY" indicator are off.
When the hybrid system is operating, the gasoline engine may automatically start, or the cooling fan may suddenly operate even if the gasoline engine stops. Do not touch or approach rotating parts such as the fan, which may lead to fingers or clothing (especially a tie, a scarf or a muffler) getting caught, resulting in serious injury.
- Do not loosen the coolant reservoir caps while the hybrid system and radiator are hot.
High temperature steam or coolant could spray out.

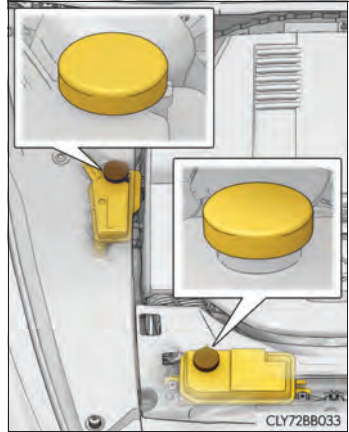**⚠ NOTICE****■ When adding engine/power control unit coolant**

Add coolant slowly after the hybrid system has cooled down sufficiently. Adding cool coolant to a hot hybrid system too quickly can cause damage to the hybrid system.

■ To prevent damage to the cooling system

Observe the following precautions:

- Avoid contaminating the coolant with foreign matter (such as sand or dust etc.).
- Do not use any coolant additive.


If the vehicle becomes stuck

Carry out the following procedures if the tires spin or the vehicle becomes stuck in mud, dirt or snow:

- 1** Stop the hybrid system. Set the parking brake and shift the shift lever to P.
- 2** Remove the mud, snow or sand from around the rear wheels.
- 3** Place wood, stones or some other material under the rear wheels to help provide traction.
- 4** Restart the hybrid system.
- 5** Shift the shift lever to D or R and release the parking brake. Then, while exercising caution, depress the accelerator pedal.

■ When it is difficult to free the vehicle

Press  to turn off TRAC.

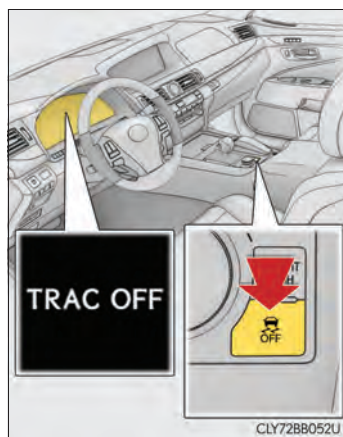

 CAUTION**■ When attempting to free a stuck vehicle**

If you choose to push the vehicle back and forth to free it, make sure the surrounding area is clear to avoid striking other vehicles, objects or people. The vehicle may also lunge forward or lunge back suddenly as it becomes free. Use extreme caution.

■ When shifting the shift lever

Be careful not to shift the shift lever with the accelerator pedal depressed. This may lead to unexpected rapid acceleration of the vehicle that may cause an accident resulting in death or serious injury.

 NOTICE**■ To avoid damaging the transmission and other components**

- Avoid spinning the rear wheels and depressing the accelerator pedal more than necessary.
- If the vehicle remains stuck even after these procedures are performed, the vehicle may require towing to be freed.

Vehicle specifications

8

8-1. Specifications

Maintenance data (fuel, oil level, etc.).....	840
Fuel information.....	851
Tire information.....	854

8-2. Customization

Customizable features	865
-----------------------------	-----

Maintenance data (fuel, oil level, etc.)

Dimensions and weight

Overall length		205.1 in. (5210 mm)
Overall width		73.8 in. (1875 mm)
Overall height ^{*1}		58.3 in. (1480 mm)
Wheelbase		121.7 in. (3090 mm)
Tread	Front	63.6 in. (1615 mm) ^{*2} 63.4 in. (1610 mm) ^{*3}
	Rear	63.6 in. (1615 mm) ^{*2} 63.4 in. (1610 mm) ^{*3}
Vehicle capacity weight (Occupants + luggage)		825 lb. (375 kg) ^{*4} 660 lb. (300 kg) ^{*5}

- *1: Unladen vehicles
- *2: Vehicles with 18-inch tires
- *3: Vehicles with 19-inch tires
- *4: 5-seat models
- *5: 4-seat models

Vehicle identification


■ Vehicle identification number

The vehicle identification number (VIN) is the legal identifier for your vehicle. This is the primary identification number for your Lexus. It is used in registering the ownership of your vehicle.

This number is stamped on the top left of the instrument panel and in the engine compartment.




This number is also on the Certification Label.

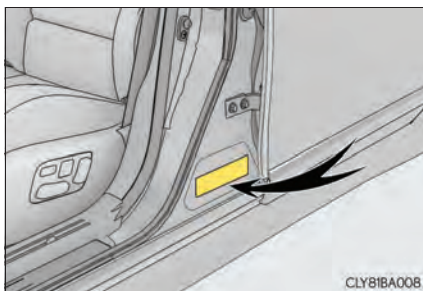

■ Engine number

The engine number is stamped on the engine block as shown.

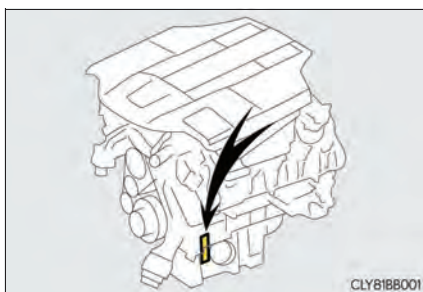

Engine

Model	5.0 L 8-cylinder (2UR-FSE)
Type	8-cylinder V type, 4-cycle, gasoline
Bore and stroke	3.70 × 3.52 in. (94.0 × 89.5 mm)
Displacement	303.2 cu.in. (4969 cm ³)
Valve clearance (engine cold)	Automatic adjustment
Drive belt tension	Automatic adjustment

Fuel

Fuel type	Premium unleaded gasoline only
Octane Rating	91 (Research Octane Number 96) or higher
Fuel tank capacity (Reference)	22.2 gal. (84 L, 18.4 Imp. gal.)

Electric motor (traction motor)

Type	Permanent magnet synchronous motor
Maximum output	165 kW
Maximum torque	221.3 ft•lbf (300 N•m, 30.6 kgf•m)

Hybrid battery (traction battery)

Type	Nickel-Metal hydride battery
Voltage	14.4 V/module
Capacity	6.5 Ah (3HR)
Quantity	20 modules
Overall voltage	288 V

Lubrication system

Oil capacity	
Drain and refill (Reference*)	
With filter	9.5 qt. (9.0 L, 7.9 Imp. qt.)
Without filter	8.9 qt. (8.4 L, 7.4 Imp. qt.)

*: The engine oil capacity is a reference quantity to be used when changing the engine oil. Warm up the engine and turn off the hybrid system, wait more than 5 minutes, and check the oil level on the dipstick.

■ Engine oil selection


“Toyota Genuine Motor Oil” is used in your Lexus vehicle. Use Lexus approved “Toyota Genuine Motor Oil” or equivalent to satisfy the following grade and viscosity.

Oil grade: ILSAC GF-5 multigrade engine oil

Recommended viscosity: SAE 0W-20

SAE 0W-20 is the best choice for good fuel economy and good starting in cold weather.

If SAE 0W-20 is not available, SAE 5W-20 oil may be used. However, it must be replaced with SAE 0W-20 at the next oil change.

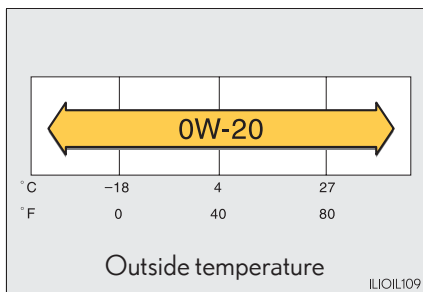

Oil viscosity (0W-20 is explained here as an example):

- The 0W in 0W-20 indicates the characteristic of the oil which allows cold startability. Oils with a lower value before the W allow for easier starting of the engine in cold weather.
- The 20 in 0W-20 indicates the viscosity characteristic of the oil when the oil is at high temperature. An oil with a higher viscosity (one with a higher value) may be better suited if the vehicle is operated at high speeds, or under extreme load conditions.

How to read oil container label:

The International Lubricant Specification Advisory Committee (ILSAC) Certification Mark is added to some oil containers to help you select the oil you should use.



Cooling system

Capacity	Gasoline engine	11.7 qt. (11.1 L, 9.8 Imp. qt.)
	Power control unit	2.7 qt. (2.6 L, 2.3 Imp. qt.)
Coolant type		Use either of the following: • “Toyota Super Long Life Coolant” • Similar high-quality ethylene glycol-based non-silicate, non-amine, non-nitrite, and non-borate coolant with long-life hybrid organic acid technology Do not use plain water alone.

Ignition system

Spark plug	
Make	DENSO FK20HBR11
Gap	0.043 in. (1.1 mm)

NOTICE

Iridium-tipped spark plugs

Use only iridium-tipped spark plugs. Do not adjust the spark plug gap.

Electrical system

12-volt battery	
Open voltage at 68°F (20°C):	12.5 V or higher Fully charged 11.0 — 12.4 V Half charged 10.9 V or lower Discharged (Voltage is checked 20 minutes after the hybrid system and all lights are turned off.)
Charging rates	5 A max.

Hybrid transmission

Fluid capacity *	5.8 qt. (5.5 L, 4.8 Imp. qt.)
Fluid type	Toyota Genuine ATF WS

*: The fluid capacity is the quantity of reference.

If replacement is necessary, contact your Lexus dealer.

NOTICE

■ Hybrid transmission fluid type

Using transmission fluid other than “Toyota Genuine ATF WS” may cause deterioration in shift quality, and ultimately damage the transmission of your vehicle.

Transfer

Oil capacity	0.74 qt. (0.7 L, 0.62 Imp. qt.)
Oil type and viscosity *	Toyota Genuine Transfer gear oil LL 80 or equivalent

*: Your Lexus vehicle is filled with Toyota genuine gear oil at the factory. Use Lexus approved Toyota genuine gear oil or an equivalent of matching quality to satisfy the above specification. Please contact your Lexus dealer for further details.

Front differential

Oil capacity	0.79 qt. (0.75 L, 0.66 Imp. qt.)
Oil type and viscosity *	Toyota Genuine Differential gear oil LT 75W-85 GL-5 or equivalent

*: Your Lexus vehicle is filled with “Toyota Genuine Differential Gear Oil” at the factory. Use Lexus approved “Toyota Genuine Differential Gear Oil” or an equivalent of matching quality to satisfy the above specification. Please contact your Lexus dealer for further details.

Rear differential

Oil capacity	1.42 qt. (1.35 L, 1.19 Imp. qt.)
Oil type and viscosity *	Toyota Genuine Differential gear oil LX 75W-85 GL-5 or equivalent

*: Your Lexus vehicle is filled with “Toyota Genuine Differential Gear Oil” at the factory. Use Lexus approved “Toyota Genuine Differential Gear Oil” or an equivalent of matching quality to satisfy the above specification. Please contact your Lexus dealer for further details.

Brakes

Pedal clearance *	5.8 in. (147 mm) Min.
Pedal free play	0.04 - 0.08 in. (1.0 - 2.0 mm)
Brake pad wear limit	0.04 in. (1.0 mm)
Parking brake lining wear limit	0.04 in. (1.0 mm)
Fluid type	SAE J1703 or FMVSS No.116 DOT 3

*: Minimum pedal clearance when depressed with a force of 112 lbf (500 N, 51 kgf) while the hybrid system is operating.

When performing the brake pedal inspection, also be sure to check that the brake system warning light is not illuminated when the hybrid system is operating (If the brake system warning light is illuminated, refer to P. 799).

Steering

Free play	Less than 1.2 in. (30 mm)
-----------	---------------------------

Tires and wheels

► 18-inch tires (type A)

Tire size	235/50R18 97W
Tire inflation pressure (Recommended cold tire inflation pressure)	Driving under normal conditions Front: 35 psi (240 kPa, 2.4 kgf/cm² or bar) Rear: 35 psi (240 kPa, 2.4 kgf/cm² or bar) Spare: 35 psi (240 kPa, 2.4 kgf/cm² or bar) Driving at high speeds (above 100 mph [160 km/h]) (in countries where such speeds are permitted by law) Add 9 psi (60 kPa, 0.6 kgf/cm² or bar) to the front tires, 10 psi (70 kPa, 0.7 kgf/cm² or bar) to the rear tires. Never exceed the maximum cold tire inflation pressure indicated on the tire sidewall.
Wheel size	18 × 7 1/2J
Wheel nut torque	103 ft•lbf (140 N•m, 14.3 kgf•m)

► 18-inch tires (type B)

Tire size	P235/50R18 97V
Tire inflation pressure (Recommended cold tire inflation pressure)	Driving under normal conditions Front: 33 psi (230 kPa, 2.3 kgf/cm² or bar) Rear: 35 psi (240 kPa, 2.4 kgf/cm² or bar) Spare: 35 psi (240 kPa, 2.4 kgf/cm² or bar) Driving at high speeds (above 100 mph [160 km/h]) (in countries where such speeds are permitted by law) Add 6 psi (40 kPa, 0.4 kgf/cm² or bar) to the front tires, 7 psi (50 kPa, 0.5 kgf/cm² or bar) to the rear tires. Never exceed the maximum cold tire inflation pressure indicated on the tire sidewall.
Wheel size	18 × 7 1/2J
Wheel nut torque	103 ft•lbf (140 N•m, 14.3 kgf•m)

► 19-inch tires (type A)

Tire size	245/45R19 98Y
Tire inflation pressure (Recommended cold tire inflation pressure)	Driving under normal conditions Front: 35 psi (240 kPa, 2.4 kgf/cm² or bar) Rear: 36 psi (250 kPa, 2.5 kgf/cm² or bar) Spare: 36 psi (250 kPa, 2.5 kgf/cm² or bar) Driving at high speeds (above 100 mph [160 km/h]) (in countries where such speeds are permitted by law) Add 9 psi (60 kPa, 0.6 kgf/cm² or bar) to the front tires, 10 psi (70 kPa, 0.7 kgf/cm² or bar) to the rear tires. Never exceed the maximum cold tire inflation pressure indicated on the tire sidewall.
Wheel size	19 × 8J
Wheel nut torque	103 ft•lbf (140 N•m, 14.3 kgf•m)

► 19-inch tires (type B)

Tire size	P245/45R19 98V
Tire inflation pressure (Recommended cold tire inflation pressure)	Driving under normal conditions Front: 35 psi (240 kPa, 2.4 kgf/cm² or bar) Rear: 36 psi (250 kPa, 2.5 kgf/cm² or bar) Spare: 36 psi (250 kPa, 2.5 kgf/cm² or bar) Driving at high speeds (above 100 mph [160 km/h]) (in countries where such speeds are permitted by law) Add 6 psi (40 kPa, 0.4 kgf/cm² or bar) to the front tires, 8 psi (50 kPa, 0.5 kgf/cm²) to the rear tires. Never exceed the maximum cold tire inflation pressure indicated on the tire sidewall.
Wheel size	19 × 8J
Wheel nut torque	103 ft•lbf (140 N•m, 14.3 kgf•m)

Light bulbs

	Light bulbs	Bulb No.	W	Type
Interior	Vanity lights			
	Front	—	8	A
	Rear	—	3	B
	Interior lights			
	Front	—	8	A
	Rear	—	8	A
	Rear personal lights (with rear seat entertainment system)	—	10	C
	Trunk lid light	—	3.8	A
	Trunk light	—	3.8	A

A: Wedge base bulbs

B: Double end bulbs

C: Single end bulbs

Fuel information

You must only use unleaded gasoline in your vehicle.

Select premium unleaded gasoline with an octane rating of 91 (Research Octane Number 96) or higher required for optimum engine performance. If 91 octane cannot be obtained, you may use unleaded gasoline with an octane rating as low as 87 (Research Octane Number 91). Use of unleaded gasoline with an octane rating lower than 91 may result in engine knocking and significantly reduced performance. Persistent knocking can lead to engine damage and should be corrected by refueling with higher octane unleaded gasoline.

At minimum, the gasoline you use should meet the specifications of ASTM D4814 in the U.S.A. and CGSB3.5-M93 in Canada.

■ Fuel tank opening for unleaded gasoline

To help prevent incorrect fueling, your vehicle has a fuel tank opening that only accommodates the special nozzle on unleaded fuel pumps.

■ Gasoline quality

In very few cases, driveability problems may be caused by the brand of gasoline you are using. If driveability problems persist, try changing the brand of gasoline. If this does not correct the problem, consult your Lexus dealer.

■ Gasoline quality standards

- Automotive manufacturers in the U.S.A., Europe and Japan have developed a specification for fuel quality called the World-Wide Fuel Charter (WWFC), which is expected to be applied worldwide.
- The WWFC consists of four categories that are based on required emission levels. In the U.S., category 4 has been adopted.
- The WWFC improves air quality by lowering emissions in vehicle fleets, and improves customer satisfaction through better performance.

■ Recommendation of the use of gasoline containing detergent additives

- Lexus recommends the use of gasoline that contains detergent additives to avoid the build-up of engine deposits.
- All gasoline sold in the U.S.A. contains minimum detergent additives to clean and/or keep clean intake systems, per EPA's lowest additives concentration program.
- Lexus strongly recommends the use of Top Tier Detergent Gasoline. For more information on Top Tier Detergent Gasoline and a list of marketers, please go to the official website www.toptiergas.com.

■ Recommendation of the use of cleaner burning gasoline


Cleaner burning gasoline, including reformulated gasoline that contains oxygenates such as ethanol or MTBE (Methyl Tertiary Butyl Ether) is available in many areas.

Lexus recommends the use of cleaner burning gasoline and appropriately blended reformulated gasoline. These types of gasoline provide excellent vehicle performance, reduce vehicle emissions and improve air quality.

■ Non-recommendation of the use of blended gasoline

- Use only gasoline containing up to 15% ethanol.

DO NOT use any flex-fuel or gasoline that could contain more than 15% ethanol, including from any pump labeled E30, E50, E85 (which are only some examples of fuel containing more than 15% ethanol).

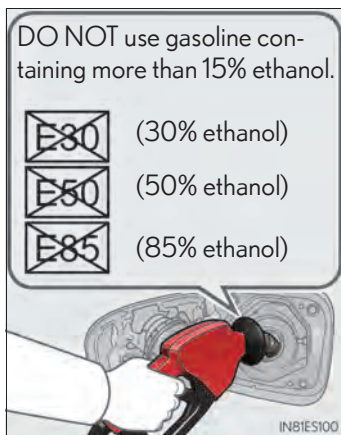

- If you use gasohol in your vehicle, be sure that it has an octane rating no lower than 87.
- Lexus does not recommend the use of gasoline containing methanol.

■ Non-recommendation of the use of gasoline containing MMT

Some gasoline contains an octane enhancing additive called MMT (Methylcyclopentadienyl Manganese Tricarbonyl).

Lexus does not recommend the use of gasoline that contains MMT. If fuel containing MMT is used, your emission control system may be adversely affected.

The malfunction indicator lamp on the instrument cluster may come on. If this happens, contact your Lexus dealer for service.

■ If your engine knocks

- Consult your Lexus dealer.
- You may occasionally notice light knocking for a short time while accelerating or driving uphill. This is normal and there is no need for concern.



NOTICE

■ Notice on fuel quality

- Do not use improper fuels. If improper fuels are used, the engine will be damaged.
- Do not use leaded gasoline.
Leaded gasoline can cause damage to your vehicle's three-way catalytic converters causing the emission control system to malfunction.
- Do not use gasohol other than the type previously stated.
Other gasohol may cause fuel system damage or vehicle performance problems.
- Using unleaded gasoline with an octane number or rating lower than the level previously stated will cause persistent heavy knocking.
At worst, this will lead to engine damage.

■ Fuel-related poor driveability


If poor driveability is encountered after using a different type of fuel (poor hot starting, vaporization, engine knocking, etc.), discontinue the use of that type of fuel.

■ When refueling with gasohol

Take care not to spill gasohol. It can damage your vehicle's paint.

Tire information

Typical tire symbols

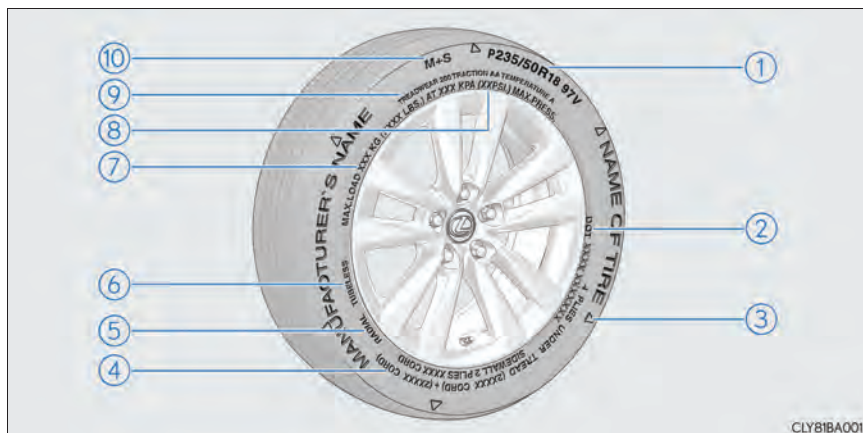

CLY81BA001

① Tire size (→P. 856)

② DOT and Tire Identification Number (TIN) (→P. 855)

③ Location of treadwear indicators (→P. 760)

④ Tire ply composition and materials

Ply is layers of rubber-coated parallel cords. Cords are the strands which form the plies in a tire.

⑤ Radial tires or bias-ply tires

A radial tire has "RADIAL" on the sidewall. A tire not marked "RADIAL" is a bias-ply tire.

⑥ TUBELESS or TUBE TYPE

A tubeless tire does not have a tube and air is directly put into the tire. A tube type tire has a tube inside the tire and the tube maintains the air pressure.

⑦ Load limit at maximum cold tire inflation pressure (→P. 860)

⑧ Maximum cold tire inflation pressure (→P. 860)

This means the pressure to which a tire may be inflated.

⑨ Uniform tire quality grading

For details, see “Uniform Tire Quality Grading” that follows.

⑩ Summer tires or all season tires

(→P. 764)

An all season tire has “M+S” on the sidewall. A tire not marked “M+S” is a summer tire.

Typical DOT and Tire Identification Number (TIN)

① DOT symbol*

② Tire Identification Number (TIN)


③ Tire manufacturer's identification mark

④ Tire size code

⑤ Manufacturer's optional tire type code (3 or 4 letters)

⑥ Manufacturing week

⑦ Manufacturing year

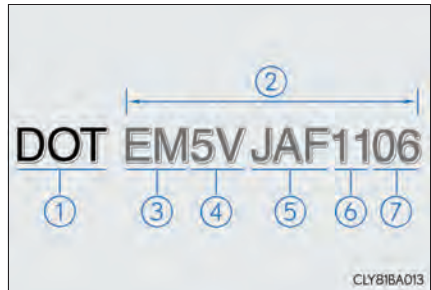


*: The DOT symbol certifies that the tire conforms to applicable Federal Motor Vehicle Safety Standards.

Tire size

■ Typical tire size information


The illustration indicates typical tire size.

- ① Tire use
(P = Passenger car,
T = Temporary use)
- ② Section width (millimeters)
- ③ Aspect ratio
(tire height to section width)
- ④ Tire construction code
(R = Radial, D = Diagonal)
- ⑤ Wheel diameter (inches)
- ⑥ Load index
(2 digits or 3 digits)
- ⑦ Speed symbol
(alphabet with one letter)

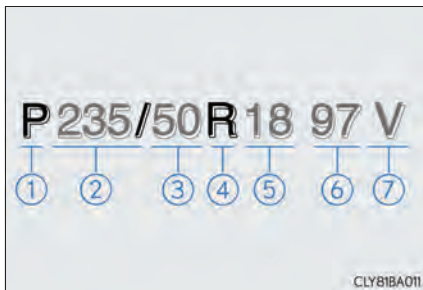


■ Tire dimensions

- ① Section width
- ② Tire height
- ③ Wheel diameter

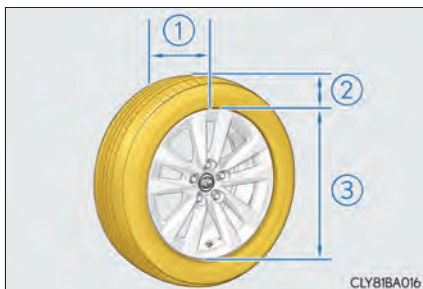

Tire section names

- ① Bead
- ② Sidewall
- ③ Shoulder
- ④ Tread
- ⑤ Belt
- ⑥ Inner liner
- ⑦ Reinforcing rubber
- ⑧ Carcass
- ⑨ Rim lines
- ⑩ Bead wires
- ⑪ Chafer

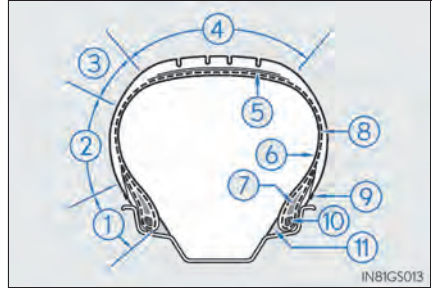

Uniform Tire Quality Grading

This information has been prepared in accordance with regulations issued by the National Highway Traffic Safety Administration of the U.S. Department of Transportation.

It provides the purchasers and/or prospective purchasers of Lexus vehicles with information on uniform tire quality grading.

Your Lexus dealer will help answer any questions you may have as you read this information.

■ DOT quality grades

All passenger vehicle tires must conform to Federal Safety Requirements in addition to these grades. Quality grades can be found where applicable on the tire sidewall between tread shoulder and maximum section width.

For example: Treadwear 200 Traction AA Temperature A

■ Treadwear

The treadwear grade is a comparative rating based on the wear rate of the tire when tested under controlled conditions on a specified government test course.

For example, a tire graded 150 would wear one and a half (1 - 1/2) times as well on the government course as a tire graded 100.

The relative performance of tires depends upon the actual conditions of their use. Performance may differ significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate.

■ Traction AA, A, B, C

The traction grades, from highest to lowest, are AA, A, B and C, and they represent the tire's ability to stop on wet pavement as measured under controlled conditions on specified government test surfaces of asphalt and concrete.

A tire marked C may have poor traction performance.

Warning: The traction grade assigned to this tire is based on braking (straight ahead) traction tests and does not include cornering (turning) traction.

■ Temperature A, B, C

The temperature grades are A (the highest), B, and C, representing the tire's resistance to the generation of heat and its ability to dissipate heat when tested under controlled conditions on a specified indoor laboratory test wheel.

Sustained high temperature can cause the material of the tire to degenerate and reduce tire life, and excessive temperature can lead to sudden tire failure.

Grade C corresponds to a level of performance which all passenger car tires must meet under the Federal Motor Vehicle Safety Standard No. 109.

Grades B and A represent higher levels of performance on the laboratory test wheel than the minimum required by law.

Warning: The temperature grades of a tire assume that it is properly inflated and not overloaded.

Excessive speed, underinflation, or excessive loading, either separately or in combination, can cause heat buildup and possible tire failure.

Glossary of tire terminology

Tire related term	Meaning
Cold tire inflation pressure	Tire pressure when the vehicle has been parked for three hours or more, or has not been driven more than 1 mile or 1.5 km under that condition
Maximum inflation pressure	The maximum cold inflated pressure to which a tire may be inflated, shown on the sidewall of the tire
Recommended inflation pressure	Cold tire inflation pressure recommended by a manufacturer
Accessory weight	The combined weight (in excess of those standard items which may be replaced) of hybrid transmission, power steering, power brakes, power windows, power seats, radio and heater, to the extent that these items are available as factory-installed equipment (whether installed or not)
Curb weight	The weight of a motor vehicle with standard equipment, including the maximum capacity of fuel, oil and coolant, and if so equipped, air conditioning and additional weight optional engine
Maximum loaded vehicle weight	The sum of: (a) Curb weight (b) Accessory weight (c) Vehicle capacity weight (d) Production options weight
Normal occupant weight	150 lb. (68 kg) times the number of occupants specified in the second column of Table 1* that follows
Occupant distribution	Distribution of occupants in a vehicle as specified in the third column of Table 1* below
Production options weight	The combined weight of installed regular production options weighing over 5 lb. (2.3 kg) in excess of the standard items which they replace, not previously considered in curb weight or accessory weight, including heavy duty brakes, ride levelers, roof rack, heavy duty 12-volt battery, and special trim
Rim	A metal support for a tire or a tire and tube assembly upon which the tire beads are seated

Tire related term	Meaning
Rim diameter (Wheel diameter)	Nominal diameter of the bead seat
Rim size designation	Rim diameter and width
Rim type designation	The industry manufacturer's designation for a rim by style or code
Rim width	Nominal distance between rim flanges
Vehicle capacity weight (Total load capacity)	The rated cargo and luggage load plus 150 lb. (68 kg) times the vehicle's designated seating capacity
Vehicle maximum load on the tire	The load on an individual tire that is determined by distributing to each axle its share of the maximum loaded vehicle weight, and dividing by two
Vehicle normal load on the tire	The load on an individual tire that is determined by distributing to each axle its share of curb weight, accessory weight, and normal occupant weight (distributed in accordance with Table 1* below), and dividing by two
Weather side	The surface area of the rim not covered by the inflated tire
Bead	The part of the tire that is made of steel wires, wrapped or reinforced by ply cords and that is shaped to fit the rim
Bead separation	A breakdown of the bond between components in the bead
Bias ply tire	A pneumatic tire in which the ply cords that extend to the beads are laid at alternate angles substantially less than 90 degrees to the centerline of the tread
Carcass	The tire structure, except tread and sidewall rubber which, when inflated, bears the load
Chunking	The breaking away of pieces of the tread or sidewall
Cord	The strands forming the plies in the tire
Cord separation	The parting of cords from adjacent rubber compounds
Cracking	Any parting within the tread, sidewall, or innerliner of the tire extending to cord material

Tire related term	Meaning
CT	A pneumatic tire with an inverted flange tire and rim system in which the rim is designed with rim flanges pointed radially inward and the tire is designed to fit on the underside of the rim in a manner that encloses the rim flanges inside the air cavity of the tire
Extra load tire	A tire designed to operate at higher loads and at higher inflation pressures than the corresponding standard tire
Groove	The space between two adjacent tread ribs
Innerliner	The layer(s) forming the inside surface of a tubeless tire that contains the inflating medium within the tire
Innerliner separation	The parting of the innerliner from cord material in the carcass
Intended outboard sidewall	(a) The sidewall that contains a whitewall, bears white lettering, or bears manufacturer, brand, and/or model name molding that is higher or deeper than the same molding on the other sidewall of the tire, or (b) The outward facing sidewall of an asymmetrical tire that has a particular side that must always face outward when mounted on a vehicle
Light truck (LT) tire	A tire designated by its manufacturer as primarily intended for use on lightweight trucks or multipurpose passenger vehicles
Load rating	The maximum load that a tire is rated to carry for a given inflation pressure
Maximum load rating	The load rating for a tire at the maximum permissible inflation pressure for that tire
Maximum permissible inflation pressure	The maximum cold inflation pressure to which a tire may be inflated
Measuring rim	The rim on which a tire is fitted for physical dimension requirements
Open splice	Any parting at any junction of tread, sidewall, or innerliner that extends to cord material
Outer diameter	The overall diameter of an inflated new tire

Tire related term	Meaning
Overall width	The linear distance between the exteriors of the side-walls of an inflated tire, including elevations due to labeling, decorations, or protective bands or ribs
Passenger car tire	A tire intended for use on passenger cars, multipurpose passenger vehicles, and trucks, that have a gross vehicle weight rating (GVWR) of 10,000 lb. or less.
Ply	A layer of rubber-coated parallel cords
Ply separation	A parting of rubber compound between adjacent plies
Pneumatic tire	A mechanical device made of rubber, chemicals, fabric and steel or other materials, that, when mounted on an automotive wheel, provides the traction and contains the gas or fluid that sustains the load
Radial ply tire	A pneumatic tire in which the ply cords that extend to the beads are laid at substantially 90 degrees to the centerline of the tread
Reinforced tire	A tire designed to operate at higher loads and at higher inflation pressures than the corresponding standard tire
Section width	The linear distance between the exteriors of the side-walls of an inflated tire, excluding elevations due to labeling, decoration, or protective bands
Sidewall	That portion of a tire between the tread and bead
Sidewall separation	The parting of the rubber compound from the cord material in the sidewall
Snow tire	A tire that attains a traction index equal to or greater than 110, compared to the ASTM E-1136 Standard Reference Test Tire, when using the snow traction test as described in ASTM F-1805-00, Standard Test Method for Single Wheel Driving Traction in a Straight Line on Snow-and Ice-Covered Surfaces, and which is marked with an Alpine Symbol () on at least one sidewall

Tire related term	Meaning
Test rim	The rim on which a tire is fitted for testing, and may be any rim listed as appropriate for use with that tire
Tread	That portion of a tire that comes into contact with the road
Tread rib	A tread section running circumferentially around a tire
Tread separation	Pulling away of the tread from the tire carcass
Treadwear indicators (TWI)	The projections within the principal grooves designed to give a visual indication of the degrees of wear of the tread
Wheel-holding fixture	The fixture used to hold the wheel and tire assembly securely during testing

*: Table 1 — Occupant loading and distribution for vehicle normal load for various designated seating capacities

Designated seating capacity, Number of occupants	Vehicle normal load, Number of occupants	Occupant distribution in a normally loaded vehicle
2 through 4	2	2 in front
5 through 10	3	2 in front, 1 in second seat
11 through 15	5	2 in front, 1 in second seat, 1 in third seat, 1 in fourth seat
16 through 20	7	2 in front, 2 in second seat, 2 in third seat, 1 in fourth seat

Customizable features


Your vehicle includes a variety of electronic features that can be personalized to your preferences. These preferences can be changed by using the “DISP” button, by using the Remote Touch, or at your Lexus dealer.

Customizing vehicle features

■ Changing by using the Remote Touch

- ▶ Vehicles without a navigation system

- 1** “Vehicle Settings” screen displayed on the Remote Touch screen.
(→P.366)
- 2** Select “Vehicle Customization” on the “Vehicle Settings” screen.
“Vehicle Customization” screen will appear.

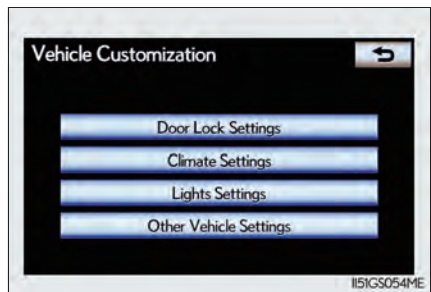

- 3** Choose a category displayed on the screen to display the settings.
 - 4** Select the setting to be changed. Change each setting.
For items that can be enabled/disabled, and for items with an operating time that can be changed, select “On” or “Off”, or select the desired operating time.
For items with sensor sensitivity that can be changed, select “+” or “-” to choose the desired level, then select “OK”.
 - 5** A message indicating that the settings are being saved will appear.
Do not perform any other operations while this message is displayed.
- ▶ Vehicles with a navigation system
→Refer to “Navigation System Owner’s Manual”.

■ Changing by using the “DISP” button

→P.111

Customizable features

Some function settings are changed simultaneously with other functions being customized. Contact your Lexus dealer for further details.

- ① Settings that can be changed using the Remote Touch
- ② Settings that can be changed using the “DISP” button
- ③ Settings that can be changed by your Lexus dealer

Definition of symbols: ○ = Available, – = Not available

Item	Function	Default setting	Custom-ized setting	①	②	③
Multi-infor-mation display (→P.107)	Language	American English	French	–	○	○
			Spanish	–	○	○
	Units *2	miles (MPG)	km (km/L)	–	○	○
			km (L/100km)	–	○	○
	ECO lamp	ON (Self-light-ing)	OFF	–	○	○
			ON (Always)	–	○	○
	Drive monitor	Cruising range	Fuel consump-tion	–	○	○
	Tachometer settings	Tachometer (Self-changing)	HV Meter (Always)	–	○	○
			Tachometer (Always)	–	○	○
	Lamp brightness	Standard	Bright	–	○	○
	SPORT lamp	ON	OFF	–	○	○
	EV Indicator	ON	OFF	–	○	○
	Background screen	ON	OFF	–	○	○
	Default settings	OFF	ON	–	○	○

Item	Function	Default setting	Customized setting	①	②	③
Door lock (→P. 146, 826)	Unlocking using a mechanical key	Driver's door unlocked in one step, all doors unlocked in two steps	All doors unlocked in one step	○	–	○
	Speed-detecting automatic door lock function	Off	On	○	–	○
	Shifting gears to position other than P locks all doors.	On	Off	○	–	○
	Shifting gears to P unlocks all doors.	On	Off	○	–	○
	Opening driver's door unlocks all doors.	Off	On	○	–	○
Smart access system with push-button start (→P. 127) and wireless remote control (→P. 142)	Operation buzzer volume	7	Off	○	–	○
			1 to 6			
	Operational signal (Emergency flashers)	On	Off	○	–	○
	Time elapsed before automatic lock function is activated if door is not opened after being unlocked	60 seconds	Off	○	–	○
			30 seconds			
			120 seconds			
Open door warning buzzer	On	Off	–	–	○	

Item	Function	Default setting	Custom-ized setting	①	②	③
Smart access system with push-button start (→P. 127)	Smart access system with push-button start	On	Off	○	–	○
	Smart door unlocking	Driver's door	All the doors	○	–	○
			Each door			
			Same side doors			
	Welcome light illumination control	On	Off	–	–	○
	Opening trunk without the electronic key when all doors are unlocked	On	Off	–	–	○
Wireless remote control (→P. 142)	Wireless remote control	On	Off	–	–	○
	Unlocking operation	Driver's door unlocked in one step, all doors unlocked in two steps	All doors unlocked in one step	○	–	○
	Trunk unlocking operation	One long press	One short press	–	–	○
			Push twice			
			Off			

Item	Function	Default setting	Customized setting	①	②	③
Front seats (→P. 157)	Driver's seat movement when exiting the vehicle	Standard	Off	○	-	○
			Partial			
	Driver's seat lumbar support movement when exiting the vehicle	On	Off	○	-	○
	Front passenger's seat lumbar support firmness adjustment when exiting the vehicle	On	Off	-	-	○
Power windows (→P. 194) and moon roof (→P. 197)	Upward movement of entire front passenger seat during stowage when the seat is stowed by using the front passenger seat operation AUTO switch on front console or the front passenger seat operation AUTO button on the rear armrest ^{*1}	On	Off	-	-	○
	One-touch close operation using the power window switches on the front passenger door and each rear door	On	Off	-	-	○
	One-touch front passenger window or rear window close operation using the power window switch on the driver's door	On	Off	-	-	○
	Mechanical key linked operation	On	Off	-	-	○
	Wireless remote control linked operation	Off	On (Open only)	-	-	○
	Linked entry function	On	Off	-	-	○

Item	Function	Default setting	Custom-ized setting	①	②	③
Turn signal lever (→P. 231)	Times of flashing of the lane change signal flashers	3	5	○	-	○
			7			
			9			
			11			
			Off			
Automatic light control system (→P. 238)	Light sensor sensitivity	Standard	-2 to 2	○	-	○
	Time elapsed before head-lights automatically turn off after doors are closed	30 seconds	Off	○	-	○
			60 seconds			
AFS (Adap-tive Front-lighting Sys-tem) (→P. 239)	Adaptive Front-lighting System	On	Off	-	-	○
Lights (→P. 238)	Daytime running light system*3	On	Off	○	-	○
Intuitive parking assist (→P. 287)	Detection distance of the front center sensor	Far	Near	○	-	○
	Detection distance of the front side sensor	Far	Near	○	-	○
	Detection distance of the rear center sensor	Far	Near	○	-	○
	Buzzer volume	3	1 to 5	○	-	○
	Display setting (when intuitive parking assist is operating)	All sensors displayed	Display off	○	-	○

Item	Function	Default setting	Customized setting	①	②	③
Automatic air conditioning system (→P. 404)	A/C Auto switch operation	On	Off	○	–	○
	Exhaust gas sensor sensitivity	Standard	-3 to 3	○	–	○
	Air conditioning control of Eco drive mode	On	Off	–	–	○
Climate control seats (→P. 694)	Front climate control seat temperature adjustment during automatic operation (individual seat adjustment available)	Level 3 (standard)	Level 1 (cool) to level 5 (warm)	○	–	○
	Rear climate control seat start-up conditions when power switch is in the ON position (individual seat adjustment available)	Off	On (AUTO)	○	–	○
	Function that warms seats faster than usual (individual seat adjustment available)	On	Off	–	–	○
	Time until function that warms seats faster than usual turns off (individual seat adjustment available)	Standard	Short	–	–	○
			Long			
Heated steering wheel (→P. 692)	Automatic steering wheel heating	On	Off	○	–	○
	Time until automatic steering wheel heating turns off	Level 3 (standard)	Level 1 (short) to level 5 (long)	○	–	○

Item	Function	Default setting	Customized setting	①	②	③
Illumination (→P. 665)	Time elapsed before the interior lights turn off	15 seconds	Off	○	-	○
			7.5 seconds			
			30 seconds			
	Operation after the power switch is turned off	On	Off	-	-	○
	Operation when the doors are unlocked	On	Off	-	-	○
	Operation when you approach the vehicle with the electronic key on your person	On	Off	-	-	○
	Footwell and inside door handle lights	On	Off	-	-	○
	Shift lever light	On	Off	-	-	○
	Seat belt buckle illumination when driver's door is opened	On	Off	-	-	○
	Seat belt buckle illumination after the power switch is turned off	On	Off	-	-	○
	Instrument panel illumination method	Choreographed illumination	Simple illumination	-	-	○
			Off	-	-	○
	Exterior light control	On	Off	-	-	○
	Time elapsed before the outer foot lights turn off	15 seconds	Off	○	-	○
			7.5 seconds			
			30 seconds			

Item	Function	Default setting	Custom-ized setting	①	②	③
Illumination (→P. 665)	Operation of the outer foot lights when you approach the vehicle with the electronic key on your person	On	Off	–	–	○
	Operation of the outer foot lights when the doors are unlocked with the power door lock switch	On	Off	–	–	○
Seat belt reminder (→P. 802)	Vehicle speed linked seat belt reminder buzzer	On	Off	–	–	○

- *1: If equipped
- *2: The default setting varies according to countries.
- *3: U.S.A. only

■ Vehicle customization

- When the speed-detecting automatic door lock and shift-linked automatic door lock are both on, the door lock operates as follows.
 - When shifting the shift lever to any position other than P, all the doors will be locked.
 - If the vehicle is started with all doors locked, the speed- detecting automatic door lock will not operate.
 - If the vehicle is started with any door unlocked, the speed- detecting automatic door lock will operate.
- When the smart access system with push-button start is off, the entry unlock function cannot be customized.
- When the doors remain closed after unlocking the doors and the timer activated automatic door lock function activates, signals will be generated in accordance with the operation buzzer volume and operational signal (Emergency flashers) function settings.

■ When customizing using the Remote Touch

Stop the vehicle in a safe place, apply the parking brake, and shift the shift lever to P. Also, to prevent 12-volt battery discharge, leave the hybrid system operating while customizing the features.

 CAUTION **During customization**

As the hybrid system needs to be operating during customization, ensure that the vehicle is parked in a place with adequate ventilation. In a closed area such as a garage, exhaust gases including harmful carbon monoxide (CO) may collect and enter the vehicle. This may lead to death or a serious health hazard.

 NOTICE **During customization**

To prevent 12-volt battery discharge, ensure that the hybrid system is operating while customizing features.

For owners

9

Reporting safety defects for U.S. owners	876
Seat belt instructions for Canadian owners (in French)	877
SRS airbag instructions for Canadian owners (in French)	879
Headlight aim instructions for Canadian owners (in French)	888

Reporting safety defects for U.S. owners

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying the Lexus Division of Toyota Motor Sales, U.S.A., Inc. (Toll-free: 1-800-25-LEXUS).

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or Lexus Division of Toyota Motor Sales, U.S.A., Inc.

To contact NHTSA, you may call the Vehicle Safety Hotline toll-free at 1-888-327-4236 (TTY: 1-800-424-9153); go to <http://www.safercar.gov>; or write to: Administrator, NHTSA, 1200 New Jersey Ave, S.E., Washington, DC 20590. You can also obtain other information about motor vehicle safety from <http://www.safercar.gov>.

Seat belt instructions for Canadian owners (in French)

The following is a French explanation of seat belt instructions extracted from the seat belt section in this manual.

See the seat belt section for more detailed seat belt instructions in English.

Utilisation correcte des ceintures de sécurité

- Déroulez la sangle diagonale de telle sorte qu'elle passe bien sur l'épaule, sans pour autant être en contact avec le cou ou glisser de l'épaule.
- Placez la sangle abdominale le plus bas possible sur les hanches.
- Réglez la position du dossier de siège. Asseyez-vous le dos le plus droit possible et calez-vous bien dans le siège.
- Ne vrillez pas la ceinture de sécurité.



Guide de confort de ceinture de sécurité (sièges arrière latéraux)

Pour les enfants en bas âge ou les personnes de petite taille, faites coulisser le guide de confort de ceinture de sécurité vers l'avant, de sorte que la sangle diagonale ne passe pas à proximité du cou de la personne.



Entretien et soin

■ Ceintures de sécurité

Nettoyez avec un chiffon ou une éponge humectée d'eau savonneuse tiède. Vérifiez régulièrement que les ceintures ne sont pas effilochées, entaillées ou exagérément usées.

ATTENTION


■ Détérioration et usure des ceintures de sécurité

Inspectez les ceintures de sécurité périodiquement. Contrôlez qu'elles ne sont pas entaillées, effilochées et que leurs ancrages ne sont pas desserrés. N'utilisez pas une ceinture de sécurité défectueuse tant qu'elle n'est pas remplacée. Une ceinture de sécurité défectueuse ne peut pas protéger l'occupant contre la mort ou de graves blessures.

SRS airbag instructions for Canadian owners (in French)

The following is a French explanation of SRS airbag instructions extracted from the SRS airbag section in this manual.

See the SRS airbag section for more detailed SRS airbag instructions in English.

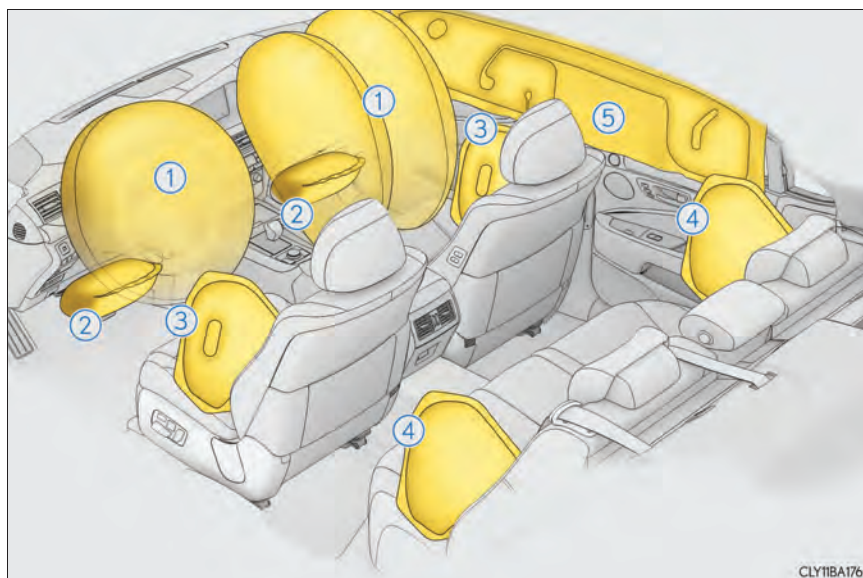


CLY11BA176

◆ Coussins gonflables avant SRS

- ① Coussin gonflable conducteur SRS/coussin gonflable passager avant
Participent à la protection de la tête et du thorax du conducteur et du passager avant contre les chocs avec les éléments de l'habitacle
- ② Coussins gonflables de genoux SRS
Participent à la protection du conducteur et du passager avant


◆ Coussins gonflables latéraux et rideaux SRS

- ③ Coussins gonflables latéraux avant SRS
Participent à la protection du haut du corps des occupants assis sur le siège avant
- ④ Coussins gonflables latéraux arrière SRS
Participent à la protection du haut du corps des occupants assis aux places arrière extérieures
- ⑤ Coussins gonflables rideaux SRS
Participent principalement à la protection de la tête des occupants assis aux places extérieures

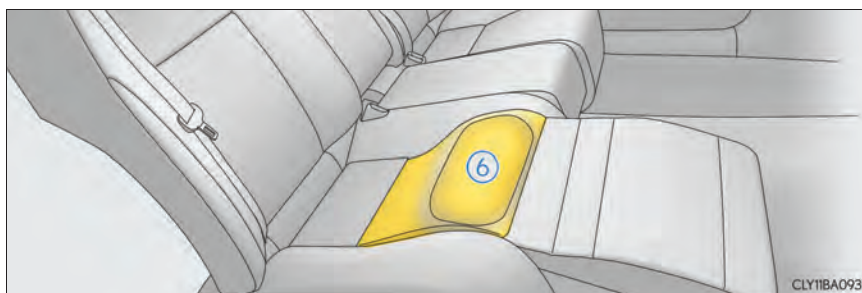

- ⑥ Coussin gonflable d'assise arrière SRS (avec siège de relaxation)
Contribue à retenir le passager assis dans le siège de relaxation

Composition du système de coussins gonflables SRS

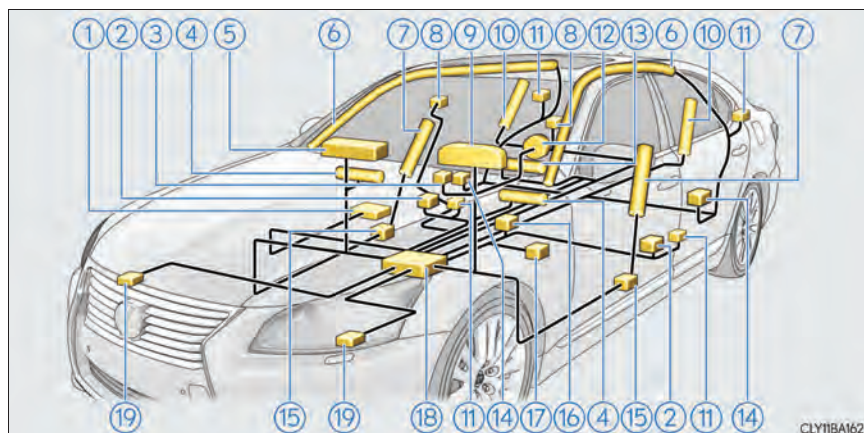

- | | |
|---|--|
| ① Système de classification de l'occupant du siège passager avant (ECU et capteurs) | ⑪ Prétensionneurs de ceintures de sécurité et limiteurs de force |
| ② Capteurs d'impact latéral (avant) | ⑫ Coussin gonflable conducteur |
| ③ Témoins indicateurs "AIR BAG ON" et "AIR BAG OFF" | ⑬ Coussin gonflable d'assise (sur modèles équipés) |
| ④ Coussins gonflables de genoux | ⑭ Capteurs d'impact latéral (arrière) |
| ⑤ Coussin gonflable passager avant | ⑮ Capteurs d'impact latéral (porte avant) |
| ⑥ Coussins gonflables rideaux | ⑯ Commutateur de boucle de ceinture de sécurité du conducteur |
| ⑦ Coussins gonflables latéraux avant | ⑰ Capteur de position du siège conducteur |
| ⑧ Appuis-tête actifs | ⑱ Boîtier électronique des coussins gonflables |
| ⑨ Témoin d'avertissement SRS | ⑲ Capteurs d'impact avant |
| ⑩ Coussins gonflables latéraux arrière | |

Votre véhicule est équipé de COUSSINS GONFLABLES INTELLIGENTS conçus selon les normes de sécurité américaines applicables aux véhicules à moteur (FMVSS208). Le boîtier électronique (ECU) des coussins gonflables régule le déploiement de ces derniers sur la base des informations qu'il reçoit des capteurs, etc., indiqués ci-dessus dans le schéma illustrant les composants du système. Parmi ces informations figurent la gravité du choc et l'occupation du véhicule par les passagers. Le déploiement rapide des coussins gonflables est obtenu au moyen d'une réaction chimique dans les dispositifs pyrotechniques, qui produit un gaz inoffensif permettant d'amortir le mouvement des occupants.

ATTENTION

■ Précautions avec les coussins gonflables SRS

Respectez les précautions suivantes avec les coussins gonflables SRS. Autrement, des blessures graves, voire mortelles, pourraient s'ensuivre.

- Le conducteur et tous les passagers à bord du véhicule doivent porter leur ceinture de sécurité correctement.

Les coussins gonflables SRS sont des dispositifs supplémentaires à utiliser avec les ceintures de sécurité.

- Le coussin gonflable conducteur SRS se déploie avec une violence considérable, qui peut être très dangereuse, voire mortelle, si le conducteur se trouve très près du coussin gonflable. La National Highway Traffic Safety Administration (NHTSA) recommande:

Sachant que la zone de danger pour le coussin gonflable conducteur se trouve dans les premiers 2 à 3 in. (50 - 75 mm) de déploiement, vous placer à 10 in. (250 mm) de votre coussin gonflable conducteur vous garantit une marge de sécurité suffisante. Cette distance est à mesurer entre l'axe du volant et le sternum. Si vous êtes assis à moins de 10 in. (250 mm), vous pouvez changer votre position de conduite de plusieurs façons:

- Reculez votre siège le plus possible, de manière à pouvoir encore atteindre confortablement les pédales.
- Inclinez légèrement le dossier du siège.

Bien que les véhicules puissent être différents les uns des autres, la plupart des conducteurs peuvent s'asseoir à une distance de 10 in. (250 mm), même avec le siège conducteur complètement avancé, simplement en inclinant un peu le dossier de siège. Si vous avez des difficultés à voir la route après avoir incliné votre siège, utilisez un coussin ferme et antidérapant pour vous rehausser ou, si votre véhicule est équipé du réglage en hauteur du siège, remontez-le.

- Si votre volant est réglable, inclinez-le vers le bas. Cela a pour effet d'orienter le coussin gonflable en direction de votre poitrine plutôt que de votre tête et de votre cou.

Régalez votre siège selon ces recommandations de la NHTSA, tout en conservant le contrôle des pédales, du volant et la vue des commandes du tableau de bord.

⚠ ATTENTION

■ Précautions avec les coussins gonflables SRS

- Si vous attachez une rallonge de ceinture de sécurité aux boucles de ceinture de sécurité avant, mais pas au pêne de la ceinture de sécurité, les coussins gonflables avant SRS détectent que le conducteur et le passager avant ont attaché leur ceinture de sécurité, alors même que ce n'est pas le cas. Dans ce cas, il se peut que les coussins gonflables avant SRS ne se déploient pas correctement en cas d'accident et vous risquez d'être tué ou grièvement blessé. Veillez à porter la ceinture de sécurité avec la rallonge de ceinture de sécurité.



- Le coussin gonflable passager avant SRS se déploie également avec une violence considérable, qui peut être très dangereuse, voire mortelle, si le passager avant se trouve très près du coussin gonflable. Éloignez le siège du passager avant au maximum du coussin gonflable et réglez le dossier de siège de façon à être assis bien droit dans le siège.
- Les nourrissons et les enfants qui ne sont pas correctement assis et/ou protégés peuvent être grièvement blessés ou tués par le déploiement d'un coussin gonflable. Installez dans un siège de sécurité enfant les enfants trop jeunes pour pouvoir utiliser la ceinture de sécurité. Lexus recommande fortement d'installer tous les nourrissons et enfants sur les sièges arrière du véhicule et de prévoir pour eux des systèmes de retenue adaptés. Les sièges arrière sont plus sûrs pour les nourrissons et les enfants que le siège du passager avant.
- N'installez jamais un siège de sécurité enfant type dos à la route sur le siège du passager avant, même si le témoin indicateur "AIR BAG OFF" est allumé. En cas d'accident, par la violence et la vitesse de son déploiement, le coussin gonflable passager avant peut blesser grièvement, voire tuer l'enfant si le siège de sécurité enfant type dos à la route est installé sur le siège du passager avant.
- Ne vous asseyez pas sur le bord du siège et ne vous appuyez pas contre la planche de bord.



⚠ ATTENTION

■ Précautions avec les coussins gonflables SRS

- Ne laissez pas un enfant rester debout devant le coussin gonflable passager avant SRS ou bien s'asseoir sur les genoux du passager avant.
- Ne laissez pas les occupants des sièges avant voyager avec un objet sur les genoux.



- Ne vous appuyez pas contre la porte, contre le rail latéral de toit ou contre les montants avant, latéraux et arrière.




- Ne laissez personne s'agenouiller sur les sièges passagers en appui contre la porte ou sortir la tête ou les mains à l'extérieur du véhicule.



- Ne fixez pas, ni ne posez aucun objet sur la planche de bord, la garniture du volant de direction et la partie inférieure du tableau de bord.

Au déploiement des coussins gonflables conducteur SRS, passager avant et genoux, tout objet risque de se transformer en projectile.



- Ne fixez rien aux portes, à la vitre de pare-brise, aux vitres latérales, aux montants avant et arrière, au rail latéral de toit et à la poignée de maintien.



 ATTENTION**■ Précautions avec les coussins gonflables SRS**

- Ne suspendez aucun cintre ni objet dur aux crochets à vêtements. En cas de déploiement des coussins gonflables rideaux SRS, tous ces objets pourraient se transformer en projectiles et causer des blessures graves, voire mortelles.
- Si un cache en vinyle recouvre la partie où le coussin gonflable de genoux SRS se déploie, veillez à l'enlever.
- N'utilisez aucun accessoire de siège qui couvrirait les zones de déploiement des coussins gonflables latéraux SRS et du coussin gonflable d'assise, car il risquerait de gêner le déploiement. De tels accessoires peuvent empêcher les coussins gonflables latéraux et le coussin gonflable d'assise de fonctionner correctement, désactiver le dispositif ou entraîner le déploiement accidentel des coussins gonflables latéraux et du coussin gonflable d'assise, entraînant la mort ou des blessures graves.
- Évitez de faire subir des chocs ou des pressions excessives aux zones renfermant les composants des coussins gonflables SRS. En effet, cela pourrait entraîner un fonctionnement anormal des coussins gonflables SRS.
- Ne touchez aucun composant du système immédiatement après le déploiement (gonflage) des coussins gonflables SRS, car ils peuvent être chauds.
- Si vous avez des difficultés à respirer après le déploiement des coussins gonflables SRS, ouvrez une porte ou une vitre pour faire entrer de l'air frais, ou bien descendez du véhicule si cela ne présente pas de danger. Essayez tout résidu dès que possible afin d'éviter d'éventuelles irritations de la peau.
- Si les parties renfermant les coussins gonflables SRS, telles que la garniture du moyeu de volant et les garnitures de montants avant et arrière, apparaissent abîmées ou craquelées, faites-les remplacer par votre concessionnaire Lexus.
- Ne placez rien sur le siège du passager avant, comme un coussin par exemple. Cela a pour conséquence de répartir le poids du passager sur toute la surface du siège, ce qui empêche le capteur de détecter correctement le poids du passager. En conséquence, le coussin gonflable passager avant SRS risque de ne pas se déployer en cas de choc.

⚠ ATTENTION**■ Modification et mise au rebut des éléments du système de coussins gonflables SRS**

Consultez impérativement votre concessionnaire Lexus si vous avez besoin d'intervenir sur votre véhicule, de vous en séparer ou de procéder à l'une des modifications suivantes. Les coussins gonflables SRS peuvent être défailants ou se déployer (se gonfler) accidentellement, provoquant la mort ou de graves blessures.


- Installation, dépose, démontage et réparation des coussins gonflables SRS
- Réparations, modifications, démontage ou remplacement du volant, du tableau de bord, de la planche de bord, des sièges ou de leur garnissage, des montants avant, latéraux et arrière ou des rails latéraux de toit
- Réparations ou modifications des ailes avant, du bouclier avant ou des flancs de l'habitacle
- Installation d'un protège-calandre (pare-buffle, pare-kangourou, etc.), de chasse-neiges, de treuils
- Modifications du système de suspension du véhicule
- Installation d'appareils électroniques, tels qu'une radio émetteur/récepteur ou un lecteur CD
- Aménagements du véhicule visant à permettre sa conduite par une personne atteinte d'un handicap physique

Headlight aim instructions for Canadian owners (in French)


The following is a French explanation of headlight aim instructions from the headlight aim section in this manual.

Dépose de l'habillage du compartiment moteur

► Extérieur

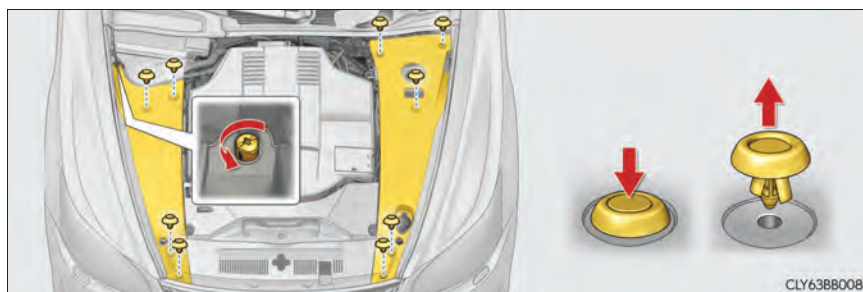


► Avant

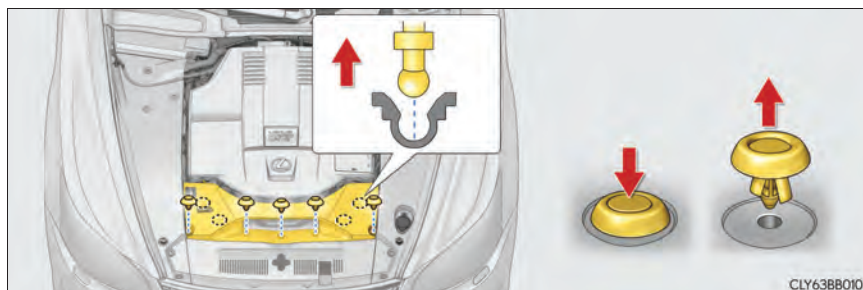

Vis de réglage dans l'axe vertical

- ① Vis de réglage A
- ② Vis de réglage B

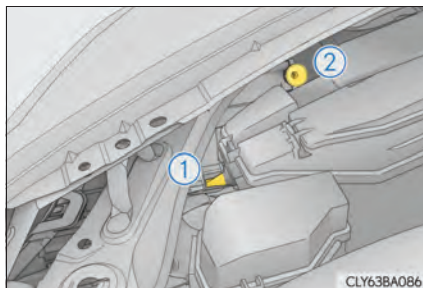


Avant de vérifier le réglage du faisceau des phares

- 1** Assurez-vous que le véhicule est doté d'un réservoir d'essence complet et que la zone située autour des feux avant n'est pas déformée.
- 2** Garez le véhicule sur un sol de niveau.
- 3** Installez-vous dans le siège conducteur.
- 4** Donnez plusieurs impulsions au véhicule.

Réglage du faisceau des phares


- 1** À l'aide d'un tournevis cruciforme, tournez la vis A dans n'importe quel sens.

Mémorisez le sens dans lequel vous avez tourné et le nombre de tours.

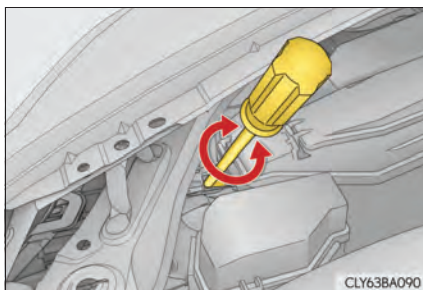

- 2** Tournez la vis B du même nombre de tours dans le même sens qu'à l'étape **1**.

Si vous n'arrivez pas à régler les feux avant en procédant de la sorte, confiez votre véhicule à votre concessionnaire Lexus pour qu'il règle le faisceau des feux avant.

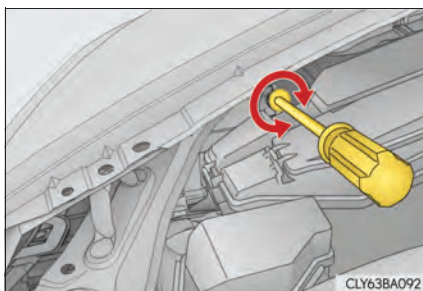

Index

What to do if...
 (Troubleshooting)..... 892
Alphabetical index..... 898

For vehicles with a navigation system, refer to the “Navigation System Owner’s Manual” for information regarding the navigation system.

What to do if... (Troubleshooting)

If you have a problem, check the following before contacting your Lexus dealer.

The doors cannot be locked, unlocked, opened or closed



You lose your keys

- If you lose your mechanical keys, new genuine mechanical keys can be made by your Lexus dealer. (→P. 124)
 - If you lose your electronic keys, the risk of vehicle theft increases significantly. Contact your Lexus dealer immediately. (→P. 126)
-



The doors cannot be locked or unlocked

- Is the electronic key battery weak or depleted? (→P. 778)
- Is the power switch in ON mode?
When locking the doors, turn the power switch off. (→P. 221)
- Is the electronic key left inside the vehicle?
When locking the doors, make sure that you have the electronic key on your person.
- The function may not operate properly due to the condition of the radio wave. (→P. 136)



The rear door cannot be opened

- Is the child-protector lock set?

The rear door cannot be opened from inside the vehicle when the lock is set. Open the rear door from outside and then unlock the child-protector lock. (→P. 147)



The trunk lid is closed with the electronic key left inside

- The function to prevent the electronic key from being left inside the trunk will operate and you can open the trunk as usual. Take the key out from the trunk. (→P. 129)

If you think something is wrong



The hybrid system does not start

- Did you press the power switch while firmly depressing the brake pedal? (→P. 220)
 - Is the shift lever in P? (→P. 220)
 - Is the electronic key anywhere detectable inside the vehicle? (→P. 131)
 - Is the steering wheel unlocked? (→P. 222)
 - Is the electronic key battery weak or depleted?
In this case, the hybrid system can be started in a temporary way. (→P. 828)
 - Is the 12-volt battery discharged? (→P. 829)
-



The shift lever cannot be shifted from P even if you depress the brake pedal

- Is the power switch in ON mode?
If you cannot release the shift lever by depressing the brake pedal with the power switch in ON mode (→P. 823)
-



The steering wheel cannot be turned after the hybrid system is stopped

- It is locked automatically to prevent theft of the vehicle. (→P. 222)



The windows do not open or close by operating the power window switches

- Is the window lock switch pressed?

The power window except for the one at the driver's seat cannot be operated if the window lock switch is pressed. (→P. 194)



The power switch is turned off automatically

- The auto power off function will be operated if the vehicle is left in ACCESSORY mode for a period of time. (→P. 222)
-



A warning buzzer sounds during driving

- The seat belt reminder light is flashing

Are the driver and the front passenger wearing the seat belts? (→P. 802)

- The parking brake indicator is on

Is the parking brake released? (→P. 232)

Depending on the situation, other types of warning buzzer may also sound. (→P. 799, 809)



An alarm is activated and the horn sounds

- Did anyone inside the vehicle open a door during setting the alarm?

The sensor detects it and the alarm sounds. (→P. 92)

Do one of the following to stop the alarms:

- Unlock the doors or open the trunk.
 - Turn the power switch to ACCESSORY or ON mode, or start the hybrid system.
-



A warning buzzer sounds when leaving the vehicle

- Is the message displayed on the multi-information display?
Check the message on the multi-information display.
(→P. 809)
-



A warning light turns on or a warning message is displayed

- When a warning light turns on or a warning message is displayed, refer to P. 799, 809.

When a problem has occurred



If you have a flat tire

- Stop the vehicle in a safe place and replace the flat tire with the spare tire. (→P. 812)
-



The vehicle becomes stuck

- Try the procedure for when the vehicle becomes stuck in mud, dirt, or snow. (→P. 837)

Alphabetical index

A

A/C

Air conditioning filter775

Front automatic air conditioning system..... 404

Rear air conditioning system..... 418

ABS (Anti-lock Brake System)..... 315

Function 315

Warning light800

Adaptive Front-lighting System (AFS)239

AFS (Adaptive Front-lighting System).....239

Air conditioning filter775

Air conditioning system

Air conditioning filter775

Front automatic air conditioning system 404

Rear air conditioning system..... 418

Airbags44

Airbag operating conditions 52

Airbag precautions for your child47

Airbag warning light 800

Correct driving posture..... 36

Curtain shield airbag operating conditions 53

Curtain shield airbag precautions47

Front passenger occupant classification system..... 57

General airbag precautions47

Locations of airbags..... 44

Modification and disposal of airbags.....51

Side airbag operating conditions53

Side airbag precautions47

Side and curtain shield airbags operating conditions 53

Side and curtain shield airbags precautions47

SRS airbags 44

Alarm

Alarm 92

Warning buzzer 799, 809

Anchor brackets.....68, 69

Antennas (smart access system with push-button start)130

Anti-lock Brake System (ABS)315

Function315

Warning light 800

Approach warning.....	268
Armrest	699
Ashtrays.....	685
Assist grips	709
Audio input.....	528
Audio system.....	427
Audio input.....	528
Audio visual input	596
AUX port/ USB port.....	510, 520, 528
A/V input port.....	596
Bluetooth® audio.....	498
CD/DVD player	467
CD/DVD player information.....	486
DVD video.....	475
iPod.....	518
MP3/WMA disc	469
Optimal use	530
Portable music player.....	528
Radio	449
Rear seat audio controls	531
Rear seat entertainment system	537
Steering wheel audio switch	534
USB memory	508
Audio visual input.....	596
Automatic headlight leveling system.....	240
Automatic High Beam	242
Automatic light control system.....	238
AUX port.....	528
Auxiliary boxes.....	677
A/V input port	596

B

Back-up lights	
Replacing light bulbs	787
Battery (12-volt battery)	756
If the 12-volt battery is discharged.....	829
Preparing and checking before winter.....	351
Warning light	800
Battery (traction battery)	83
Blind Spot Monitor (BSM)	334
Bluetooth®	
Audio system	498
Hands-free system (for cellular phone)	601
Brake	
Brake Hold	235
Fluid	754
Parking brake	232
Regenerative braking.....	80
Warning light.....	799, 801
Brake assist.....	315
Brake Hold.....	235
Break-in tips	203
Brightness control	
Instrument panel light control	103
BSM (Blind Spot Monitor)	334

C

- Card key122
- Care724, 728
 - Aluminum wheels725
 - Exterior724
 - Interior728
 - Seat belts729
- Cargo capacity217
- Cargo hooks680
- Cargo net680
- Caution label83
- CD player467
- Chains353
- Child restraint system64
 - Booster seats, definition64
 - Booster seats, installation73
 - Convertible seats, definition64
 - Convertible seats, installation71
 - Front passenger occupant
 - classification system57
 - Infant seats, definition64
 - Infant seats, installation71
 - Installing CRS
 - with LATCH anchors70
 - Installing CRS with seat belts71
 - Installing CRS
 - with top tether strap74
- Child safety63
 - 12-volt battery
 - precautions758, 831
 - Airbag precautions47
 - Child restraint system64
 - Climate control seat
 - precautions698
 - Heated steering wheel
 - precautions693
 - How your child should wear
 - the seat belt39, 40
 - Installing child restraints68
 - Moon roof precautions200
 - Power window lock switch194
 - Power window precautions196
 - Rear door child-protectors147
 - Removed electronic
 - key battery precautions779
 - Seat belt comfort guide39
 - Seat belt extender precautions43
 - Seat belt precautions67
 - Trunk precautions153
- Child-protectors147
- Cigarette lighter686
- Cleaning724, 728
 - Aluminum wheels725
 - Exterior724
 - Interior728
 - Seat belts729
- Climate control seat694
- Climate control seat filter697
- Clock684
- Clock light665
- Coat hooks708
- Coin holder672
- Condenser753

Console box	675
Consumption screen	118
Coolant.....	751
Capacity	845
Checking.....	751
Preparing and checking before winter	351
Cooling system	751
Engine overheating.....	832
Hybrid system overheating	832
Cruise control	
Cruise control.....	257
Dynamic radar cruise control with full-speed range	261
Cup holders	673
Curtain shield airbags	45
Customizable features.....	865

D

Daytime running light system	240
Defogger	
Front windshield	409
Outside rear view mirrors.....	425
Rear window	425
Differential	
Front differential.....	846
Rear differential	847
Dimensions	840
Dinghy towing.....	219

Display

Dynamic radar cruise control with full-speed range	261
LKA (Lane-Keeping Assist).....	281
Multi-information display.....	107
Remote Touch screen	360
Trip information	108
Warning message.....	809
Do-it-yourself maintenance.....	739
Door courtesy lights	665
Door lock	
Doors.....	146
Smart access system with push-button start.....	127
Wireless remote control.....	142
Door pockets.....	672
Doors	146
Automatic door locking and unlocking system	148
Door glasses.....	194
Door lock.....	146
Open door warning buzzer	132
Open door warning light	802
Outside rear view mirrors	190
Rear door child-protector	147

Driver's seat position memory	177
Driving.....	202
Break-in tips	203
Correct driving posture	36
Driving mode select switch	309
Hybrid vehicle driving tips.....	349
Procedures	202
Winter drive tips.....	351
DVD player.....	467, 475
Dynamic radar cruise control	
with full-speed range	261
Function	261

E

Eco drive mode.....	309
EDR (Event data recorder).....	11
Electric motor (traction motor).....	78
Electric Power Steering (EPS)	316
Function	316
Warning light	800
Electronic key	122
If the electronic key does not	
operate properly.....	826
Replacing the battery.....	778
Electronically modulated air	
suspension.....	313
Emergency flashers.....	790

Emergency, in case of	
If the 12-volt battery is	
discharged.....	829
If the electronic key	
does not operate properly.....	826
If the hybrid system	
will not start	821
If the parking brake	
cannot be released	824
If the shift lever	
cannot be shifted from P	823
If the warning buzzer sounds.....	799
If the warning light turns on.....	799
If the warning message	
is displayed.....	809
If you have a flat tire.....	812
If you think something	
is wrong	798
If your vehicle becomes	
stuck.....	837
If your vehicle has to be	
stopped in an emergency.....	791
If your vehicle needs	
to be towed.....	792
If your vehicle overheats.....	832

Energy monitor	115
Engine	
Accessory mode.....	221
Compartment.....	745
Engine switch.....	220
Hood.....	742
How to start the hybrid system....	220
Identification number	841
If the hybrid system	
will not start.....	821
Ignition switch	
(power switch).....	220
Overheating	832
Power switch.....	220
Engine compartment cover.....	746
Engine coolant.....	751
Capacity	845
Checking.....	751
Preparing and checking	
before winter	351
Engine coolant temperature	
gauge	101
Engine oil	748
Capacity	843
Checking.....	748
Preparing and checking	
before winter	351
Engine switch.....	220
EPS	
(Electric Power Steering).....	316
Function	316
Warning light	800
EV drive mode.....	225
Event data recorder (EDR).....	11

F

First-aid kit storage belt.....	681
Flat tire	812
Floor mats.....	34
Fluid	
Brake.....	847
Hybrid transmission	846
Washer	755
Fog lights.....	247
Replacing light bulbs	787
Switch	247
Footwell light.....	665
Front automatic air conditioning	
system.....	404
Front fog lights.....	247
Replacing light bulbs	787
Switch	247
Front passenger occupant	
classification system	57
Front seats.....	157
Adjustment.....	157
Cleaning.....	728
Climate control seats	694
Correct driving posture.....	36
Driving position memory.....	177
Head restraints	184
Power easy access system.....	160
Seat position memory.....	177
Front side marker lights.....	238
Light switch.....	238
Replacing light bulbs	787
Welcome light illumination	
control.....	128

Front turn signal lights	231
Replacing light bulbs	787
Turn signal lever	231
Fuel	253
Capacity	842
Fuel gauge	101
Information	851
Refueling	253
Type	253, 842
Warning light	802
Fuel consumption	
Average fuel consumption	109
Average fuel consumption	
after refueling	109
Current fuel consumption	109
Fuel filler door	253
If the fuel filler door	
cannot be opened	256
Refueling	253
Fuses	780

G

Garage door opener	710
Gauges	101
Glove box	671

H

Hands-free system	
(for cellular phone)	601
HD Radio™ system	454
Head restraints	184
Active head restraint	185
Adjustment	184
Headlight cleaner	252
Headlights	238
Adaptive Front-lighting	
System (AFS)	239
Automatic High Beam	
system	242
Light switch	238
Replacing light bulbs	787
Wattage	850
Headlight aim	785
Heaters	
Front automatic air	
conditioning system	404
Heated steering wheel	692
Outside rear view mirrors	425
Rear air conditioning system	418
Height control	
Electronically modulated air	
suspension	313
High-voltage components	83
Hill-start assist control	315
Hood	742
Open	742

Hooks

Cargo hooks	680
Coat hooks	708
Retaining hooks (floor mat)	34
Shopping bag hooks	680
Horn	237
Hybrid battery (traction battery)	83
Hybrid battery (traction battery) air vents	84
Hybrid system	78
Emergency shut off system	84
Energy monitor/ consumption screen	114
EV drive mode	225
High voltage components	83
Hybrid System Indicator	105
Hybrid system precautions	83
Hybrid vehicle driving tips	349
If the hybrid system will not start	821
Overheating	832
Power (ignition) switch	220
Starting the hybrid system	220
Vehicle proximity notification system	79
Hybrid System Indicator	105
Hybrid transmission	227
If the shift lever cannot be shifted from P	823
S mode	228

I

I/M test	738
Identification	841
Engine	841
Vehicle	841
Ignition switch (power switch)	220
Illuminated entry system	668
Immobilizer system	90
Indicators	99
Initialization	
Maintenance	732
Moon roof	199
Power windows	195
Tire pressure warning system	761
Initiators (tire pressure warning system)	768
Inside door handle lights	665
Inside rear view mirror	188
Instrument panel light control	103
Instrument panel ornament lights	665
Interior lights	666
Front interior light	666
Rear interior light	666
Wattage	850
Interior lights list	665
Intuitive parking assist	287
Function	287

J

Jack	
Positioning a floor jack	743
Vehicle-equipped jack	813
Jack handle	813
Jam protection function	
Moon roof	198
Power trunk opener	
and closer	152
Power windows	195
Rear door sunshade	706

K

Keyless entry	127
Smart access system	
with push-button start	127
Wireless remote control	142
Keys	122
Electronic key	122
Engine switch	220
If the electronic key	
does not operate properly	826
If you lose your keys	124, 126
Key number plate	122
Keyless entry	127, 142
Mechanical key	123
Power switch	220
Replacing the battery	778
Warning buzzer	132
Wireless remote control key	142
Knee airbags	44

L

Lane-keeping assist (LKA)	277
Operation	279
Language	
(multi-information display)	111
LATCH anchors	70
Lever	
Auxiliary catch lever	742
Hood lock release lever	742
Internal trunk release lever	152
Shift lever	227
Turn signal lever	231
Wiper lever	248
Lexus Climate Concierge	403
Lexus Enform *	
Lexus night view	344
License plate lights	238
Light switch	238
Replacing light bulbs	787
Welcome light	
illumination control	128
Light bulbs	
Replacing	787
Wattage	850

Lights

Automatic High Beam system.....	242
Fog light switch	247
Headlight switch.....	238
Illuminated entry system	668
Interior lights.....	666
Interior lights list.....	665
Personal lights	667
Replacing light bulbs.....	787
Trunk light.....	152
Turn signal lever	231
Vanity lights	682
Wattage.....	850
Welcome light illumination control.....	128
LKA (Lane-Keeping Assist).....	277
Operation.....	279
Load capacity.....	217
Lock steering column	222
Luggage security system.....	151

M

Maintenance

Do-it-yourself maintenance.....	739
General maintenance	734
Maintenance requirements.....	731
Malfunction indicator lamp	800
Master warning light	802
Meter	101
Indicators.....	99
Instrument panel light control.....	103
Meters.....	101
Multi-information display	107
Warning lights.....	97

Micro dust and pollen filter	412
------------------------------------	-----

Mirrors

Inside rear view mirror.....	188
Outside rear view mirror defoggers.....	425
Outside rear view mirrors	190
Vanity mirrors	682

Mobile Assistant.....	401
------------------------------	------------

Moon roof.....	197
-----------------------	------------

Door lock linked moon roof operation.....	198
Jam protection function.....	198
Operation.....	197

MP3 disc	469
-----------------------	------------

Multi-information display.....	107
---------------------------------------	------------

Dynamic radar cruise control with full-speed range	261
Energy monitor.....	115
Lane-Keeping Assist	281
Language.....	111
Switching the display	108
Trip information.....	108
Warning message.....	809

N

Navigation system*

Noise from under vehicle	8
--------------------------------	---

*: Refer to the "Navigation System Owner's Manual".

O

Odometer	101
Oil	
Engine oil	843
Front differential oil	846
Rear differential oil	847
Opener	
Fuel filler door	255
Hood	742
Trunk	150
Outer foot lights	
Location	665
Replacing light bulbs	787
Outside rear view mirrors	190
Adjusting and folding	190
BSM (Blind Spot Monitor)	334
Linked mirror function	
when reversing	192
Mirror position memory	177
Outside rear view	
mirror defoggers	425
Outside temperature display	101
Overheating	832

P

Parking assist sensors	
(intuitive parking assist)	287
Parking brake	232
If the parking brake	
cannot be released	824
Operation	232
Parking brake engaged	
warning buzzer	234

Parking lights	238
Light switch	238
Replacing light bulbs	787
Welcome light	
illumination control	128
PCS (Pre-Collision System)	322
Function	322
Pre-collision braking	
off switch	324
Warning light	801
Pelvic support seat with seat	
vibrator	169
Personal lights	667
Front personal light	667
Rear personal light	667
Wattage	850
Power control unit	83
Power control unit coolant	752
Capacity	845
Checking	752
Preparing and checking before	
winter	351
Power easy access system	160
Power outlets	688
Power steering (Electric Power	
Steering system)	316
Warning light	800
Power switch	220
Power trunk opener and closer	150
Power windows	194
Door lock linked	
window operation	196
Jam protection function	195
Operation	194
Window lock switch	194

Pre-Collision System (PCS).....	322
Function	322
Pre-collision braking off	
switch.....	324
Warning light	801

R

Radiator	753
Radio.....	449
RBDS (Radio Broadcast	
Data Systems).....	452
Rear air conditioning system	418
Rear Cross Traffic Alert.....	341
Rear door sunshades.....	705
Rear seat	
Adjustment.....	164
Climate control seats.....	695
Seat position memory.....	182
Rear seat entertainment system.....	537
Rear seat relaxation system	171
Rear side marker lights	238
Light switch	238
Replacing light bulbs.....	787
Welcome light	
illumination control	128
Rear sunshade	702
Operation.....	702
Reverse operation feature.....	703

Rear turn signal lights.....	231
Replacing light bulbs	787
Turn signal lever	231
Rear view mirror	
Inside rear view mirror.....	188
Outside rear view mirrors	190
Rear view monitor system.....	298
Rear window defoggers.....	425
Refueling.....	253
Capacity.....	842
Fuel types.....	253, 842
If the fuel filler door	
cannot be opened.....	256
Opening the fuel tank cap	255
Regenerative braking.....	80
Remote Touch.....	358
Remote Touch screen.....	360
Replacing	
Electronic key battery	778
Fuses	780
Light bulbs.....	787
Tires.....	812
Reporting safety defects	
for U.S. owners	876
Reset the maintenance data.....	732
Retractable table.....	700
Road accident cautions.....	87

S

Safety Connect	716
Seat belt reminder light.....	802
Seat belts.....	38
Adjusting the seat belt	39
Automatic locking retractor (ALR).....	40
Child restraint system installation.....	71
Cleaning and maintaining the seat belt	729
Emergency locking retractor (ELR).....	40
How to wear your seat belt	38
How your child should wear the seat belt	40
Pre-collision seat belts	40
Pregnant women, proper seat belt use.....	41
Reminder light and buzzer	802
Seat belt extender.....	40
Seat belt pretensioners	39
SRS warning light.....	800
Seat cushion airbag	45
Seat position memory.....	177, 182
Seating capacity.....	217

Seats.....	157, 164
Adjustment.....	157, 164
Adjustment precautions.....	162, 175
Child seats/child restraint system installation	68
Cleaning.....	728
Climate control seat.....	694
Driving position memory.....	177
Head restraints	184
Pelvic support seat with seat vibrator	169
Power easy access system.....	160
Properly sitting in the seat.....	36
Rear seat position memory	182
Rear seat relaxation system.....	171
Seat position memory	177, 182

Sensor

Automatic headlight system	240
Automatic High Beam system	246
Camera sensors	325
Driver monitor sensor.....	325
Inside rear view mirror.....	189
Intuitive parking assist.....	287
Lexus night view.....	348
LKA (Lane-Keeping Assist).....	277
Radar sensor.....	271, 324, 337
Rain-sensing windshield wipers.....	250
Service plug.....	83
Service reminder indicators	96

Shift lever	227	Spare tire	812
Hybrid transmission.....	227	Inflation pressure.....	848
If the shift lever		Storage location.....	813
cannot be shifted from P	823	Spark plug.....	845
Shift lever light	665	Specifications.....	840
Shift lock system.....	823	Speedometer	101
Shopping bag hooks	680	Sport mode	309
Side airbags	45	Steering lock	222
Side marker lights.....	238	Column lock release	222
Light switch	238	Steering wheel	187
Replacing light bulbs.....	787	Adjustment.....	187
Welcome light illumination		Audio switches	534
control.....	128	Heated steering wheel	692
Side mirrors	190	Power easy access system.....	160
Adjusting and folding.....	190	Steering wheel	
BSM (Blind spot monitor).....	334	position memory	177
Linked mirror function		Stop lights	
when reversing	192	Replacing light bulbs	787
Mirror position memory	177	Storage feature.....	669
Side turn signal lights	231	Stuck	
Replacing light bulbs.....	787	If the vehicle becomes stuck.....	837
Turn signal lever	231	Sun shade	
Smart access system		Rear	702
with push-button start	127	Rear door	705
Antenna location	130	Roof	198
Entry functions.....	127	Sun visors.....	682
Starting the hybrid system	220		
Snow mode	229		
Snow tires	354		

Switches

Audio remote control	
switches.....	534
Automatic High Beam	
switch.....	242
Brake hold switch.....	235
BSM (Blind spot monitor)	
main switch.....	334
Climate control seat switches ...	694
Cruise control switch.....	257
"DISP" button.....	108
Door lock switches.....	146
Driving mode select switch.....	309
Driving position memory	
switches.....	177
Dynamic radar cruise control	
with full-speed range.....	261
Emergency flashers switch.....	790
EV drive mode switch.....	225
Fog light switch.....	247
Garage door opener	
switches.....	710
Headlight cleaner switch.....	252
Heated steering wheel	
switch.....	692
Ignition switch.....	220
Intuitive parking assist.....	287
Lexus night view switch.....	344
Light switch.....	238
LKA (Lane-Keeping Assist)	
switch.....	279
Moon roof switches.....	197

Outside rear view mirror	
switches.....	190
Parking brake switches.....	232
Power door lock switch.....	146
Power switch.....	220
Power trunk lid.....	150
Power window switches.....	194
Pre-collision braking	
off switch.....	324
Rear door sunshade switch.....	705
Rear seat position memory.....	182
Rear sunshade switch.....	702
Rear window and outside	
rear view mirror defoggers	
switch.....	425
Snow mode switch.....	229
"SOS" button.....	716
Talk switch.....	391
Telephone switches.....	601
Tilt and telescopic	
steering control switch.....	187
Tire pressure warning reset	
switch.....	762
Trunk closer switch.....	151
Trunk opener switch.....	150
Trunk opener main switch.....	151
Vehicle-to-vehicle distance	
button.....	264
VSC OFF switch.....	317
Window lock switch.....	194
Windshield wipers	
and washer switch.....	248

T

Tachometer	101
Tail lights	238
Light switch	238
Replacing light bulbs	787
Welcome light illumination control	128
Talk switch	391
Telephone switches	601
Theft deterrent system	
Alarm	92
Immobilizer system	90
Tire inflation pressure	770
Maintenance data	848
Tire inflation pressure display function	110
Warning light	803
Tire information	854
Glossary	860
Size	856
Tire identification number	855
Uniform Tire Quality Grading	858
Tire pressure warning system	761
Function	761
Initializing	761
Installing tire pressure warning valves and transmitters	761
Registering ID codes	763
Tire pressure warning reset switch	762
Warning light	803
Tires	760
Chains	353
Checking	760
If you have a flat tire	812
Inflation pressure	848
Information	854
Replacing	812
Rotating tires	760
Size	848
Snow tires	354
Spare tire	812
Tire inflation pressure display function	110
Tire pressure warning system	761
Warning light	803
Tools	813
Top tether strap	74
Total load capacity	217
Towing	
Dinghy towing	219
Emergency towing	792
Towing eyelet	793
Trailer towing	218
TRAC (Traction Control)	315
Traction battery (hybrid battery)	83
Traction motor (electric motor)	78
Trailer towing	218
Transmission	227
Driving mode select switch	309
Hybrid transmission	227
If the shift lever cannot be shifted from P	823
S mode	228

Trip information.....	108
Trip meters	101
Trunk.....	150
Internal trunk release lever.....	152
Jam protection function.....	152
Luggage security system	151
Power trunk opener	
and closer.....	150
Smart access system	
with push-button start.....	129
Trunk closer switch.....	151
Trunk easy closer	152
Trunk features.....	680
Trunk grip	151
Trunk lid light.....	152
Trunk light.....	152
Trunk opener main switch.....	151
Trunk opener switch	150
Wireless remote control	142
Trunk light	
Trunk lid light.....	152
Trunk light.....	152
Wattage.....	850
Turn signal lights	231
Replacing light bulbs.....	787
Turn signal lever	231

U

USB port.....	510, 520
---------------	----------

V

Vanity lights	
Vanity lights	682
Wattage	850
Vanity mirrors.....	682
Variable Gear Ratio Steering	
(VGRS).....	315
Function.....	315
VDIM (Vehicle Dynamics	
Integrated Management).....	316
Vehicle data recordings.....	10
Vehicle Dynamics Integrated	
Management (VDIM).....	316
Vehicle identification number	841
Vehicle proximity notification	
system.....	79
Vehicle Stability Control	
(VSC).....	315
VGRS (Variable Gear Ratio	
Steering).....	315
Function.....	315
Voice command system.....	391
VSC	
(Vehicle Stability Control).....	315

W**Warning buzzers**

Approach warning.....	268
Brake system.....	799
Downshifting.....	230
Intuitive parking assist.....	287
Key reminder.....	132
No-handed driving warning.....	282
Open door.....	802
Open moon roof.....	200
Pre-collision braking.....	323
Seat belt reminder.....	802

Warning lights97

ABS.....	800
Brake hold operated indicator.....	801
Brake system.....	799, 801
Charging system.....	800
Electric power steering.....	800
Low fuel level.....	802
Malfunction indicator lamp.....	800
Master warning light.....	802
Open door.....	802
Parking brake indicator.....	801
Pre-collision system.....	801
Seat belt reminder light.....	802
Slip indicator.....	801
SRS.....	800
Tire pressure.....	803

Washer..... 248

Checking.....	755
Preparing and checking before winter.....	351
Switch.....	248

Washing and waxing724**Weight**

Cargo capacity.....	217
Load limits.....	217
Weight.....	840

Welcome light illumination

control.....	128
--------------	-----

Wheels773

Replacing wheels.....	773
Size.....	848

Window glasses.....194**Window lock switch.....194****Windows.....194**

Power windows.....	194
Rear window defogger.....	425

Windshield wiper de-icer426**Windshield wipers 248****Winter driving tips351****Wireless remote control key..... 142**

Locking/Unlocking.....	142
Replacing the battery.....	778

WMA disc.....469**X****XM® Satellite Radio..... 458**

GAS STATION INFORMATION

Auxiliary catch lever P. 742	Trunk opener P. 150	Fuel filler door P. 255
---------------------------------	------------------------	----------------------------

Hood lock release lever P. 742	Fuel filler door opener P. 255	Tire inflation pressure P. 848
-----------------------------------	-----------------------------------	-----------------------------------

Fuel tank capacity (Reference)	22.2 gal. (84 L, 18.4 Imp. gal.)	
Fuel type	Premium unleaded gasoline only	P. 253, 842
Cold tire inflation pressure	P. 848	
Engine oil capacity (Drain and refill – reference)	With filter	qt. (L, Imp. qt.) 9.5 (9.0, 79)
	Without filter	8.9 (8.4, 7.4)
Engine oil type	“Toyota Genuine Motor Oil” or equivalent Oil grade: ILSAC GF-5 multigrade engine oil Recommended viscosity: SAE 0W-20 P. 843	



Your Lexus dealer

Your Lexus dealer will provide quality maintenance and any other assistance you may require.

If there is not a Lexus dealer near you, please call the following number:

■ U.S. OWNERS

- In the U.S. mainland or Canada:
Lexus Roadside Assistance
1-800-25-LEXUS or **1-800-255-3987** (Toll-Free)
- In Hawaii:
Servco Automotive Roadside Assistance/Customer Services
1-800-25-LEXUS or **1-800-255-3987** (Toll-Free)

■ CANADIAN OWNERS

- In Canada or the U.S. mainland:
Lexus Roadside Assistance/Customer Service
1-800-26-LEXUS or **1-800-265-3987** (Toll-Free)

Please access our **websites** for further information.

- The U.S. mainland: www.lexus.com
- Hawaii: www.servcolexus.com
- Canada : www.lexus.ca

©2013 TOYOTA MOTOR CORPORATION

All rights reserved. This material may not be reproduced or copied, in whole or in part, without the written permission of Toyota Motor Corporation.



Owner's Manual:

Publication No. OM50D60U

Part No. 01999-50D60

Printed in Japan 01-1309-00 

LS 600h L (北米U)