NPS Form 10-900
(Rev. 10-90)

OMB No. 1024-0018

727

United States Department of the Interior
National Park Service

RECEIVED
JUN 30 1993
NATIONAL REGISTER

NATIONAL REGISTER OF HISTORIC PLACES REGISTRATION FORM

This form is for use in nominating or requesting determinations for individual properties and districts. See instructions in How to Complete the National Register of Historic Places Registration Form (National Register Bulletin 16A). Complete each item by marking "x" in the appropriate box or by entering the information requested. If any item does not apply to the property being documented, enter "N/A" for "not applicable." For functions, architectural classification, materials, and areas of significance, enter only categories and subcategories from the instructions. Place additional entries and narrative items on continuation sheets (NPS Form 10-900a). Use a typewriter, word processor, or computer, to complete all items.

1. Name of Property

historic name McConnellsburg Historic District

other names/site number N/A

2. Location

street & number Lincoln Way from First Street to Fifth Avenue, Second Street from Spruce Street to Maple Street city or town McConnellsburg N/A not for publication N/A vicinity

state Pennsylvania code PA county Fulton code 57 zip code 17233

3. State/Federal Agency Certification

As the designated authority under the National Historic Preservation Act of 1966, as amended, I hereby certify that this XX nomination ☐ request for determination of eligibility meets the documentation standards for registering properties in the National Register of Historic Places and meets the procedural and professional requirements set forth in 36 CFR Part 60. In my opinion, the property XX meets ☐ does not meet the National Register criteria. I recommend that this property be considered significant ☐ nationally ☐ statewide ☐ locally. (☐ See continuation sheet for additional comments.)

DR. BRENT D. GLASS Brent D. Glass 6/22/93

Signature of certifying official/Title Date

PA HISTORICAL & MUSEUM COMMISSION

State or Federal agency and bureau

In my opinion, the property ☐ meets ☐ does not meet the National Register criteria. (☐ See continuation sheet for additional comments.)

Signature of certifying official/Title Date

State or Federal agency and bureau

4. National Park Service Certification

I hereby certify that this property is:

☒ entered in the National Register
☐ See continuation sheet.
☐ determined eligible for the National Register
☐ See continuation sheet.
☐ determined not eligible for the National Register
☐ removed from the National Register
☐ other (explain): _____

Signature of the Keeper: Patrick W. Andrus

Date of Action: 8/9/93

McConnellsburg Historic District | N/A | Fulton County, Pennsylvania
Name of Property | site/inventory number | County and State

5. Classification

Ownership of Property
(Check as many boxes as apply)

- ☒ private
- ☒ public-local
- ☐ public-State
- ☐ public-Federal

Category of Property
(Check only one box)

- ☐ building(s)
- ☒ district
- ☐ site
- ☐ structure
- ☐ object

Number of Resources within Property
(Do not include previously listed resources in the count)

Contributing	Noncontributing	
144	13	buildings
1		sites
		structures
		objects
145	13	Total

Name of related multiple property listing
(Enter "N/A" if property is not part of a multiple listing)

N/A

Number of contributing resources previously listed in the National Register

2

6. Function or Use

Historic Functions
(Enter categories from instructions)

Commerce/Trade/specialty stores
Domestic/single dwelling
Government/courthouse
Industrial/Processing/Extraction/
manufacturing facility

Current Functions
(Enter categories from instructions)

Commerce/Trade/specialty stores
Domestic/single dwelling
Government/courthouse

7. Description

Architectural Classification
(Enter categories from instructions)

Georgian
Federal
Greek Revival
Queen Anne
Others: Foursquare

Materials
(Enter categories from instructions)

foundation Limestone
walls Brick, limestone, log
roof Metal
other Log, aluminum

Narrative Description
(Describe the historic and current condition of the property on one or more continuation sheets)

DESCRIPTION SUMMARY:

McConnellsburg, the county seat of Fulton County, is the largest town and one of only two boroughs in the county. It is situated in the eastern part of the county in a valley known as the Big Cove. McConnellsburg is the commerical, industrial and governmental center of Fulton County with most of the surrounding area occupied by farms, forest and small rural villages. McConnellsburg was laid out in a grid pattern with a central square typical of many Pennsylvania towns. This town has been made unique, however, by its development pattern with commercial activity concentrated one block south of the square along the Lincoln Highway, old U.S. Route 30, which follows the route of an early pack horse road and 19th century turnpike from Philadelphia to Pittsburgh. The majority of the district consists of properties fronting on McConnellsburg's two main streets, Lincoln Way, running east-west and U.S. Route 522 running north-south. Buildings range in age from the third quarter of the 18th century to the 1940s and portray mostly vernacular representations of styles current over a nearly 200 year span. Lining Lincoln Way are two and three story buildings, most of log, stone or brick, blending commercial and residential uses. Former inns, taverns and hotels of the 19th century and automotive garages of the early 20th century reflect the town's role as an important stopping place on the turnpike. The center square is dominated by the temple form Greek Revival style courthouse, built in 1852, set in the middle of a quiet residential area characterized by Late Victorian houses and Four Squares and Bungalows of the early 20th century. The character of the district remains intact with minimal disruption by intrusive construction. Historic integrity has been affected mostly by occasional removal or replacement of historic surface treatments rather than demolition of resources. Thirteen non-contributing elements of a total of 158 properties shows the intact quality of this district.

GENERAL DESCRIPTION:

The McConnellsburg Historic District includes approximately three and a half blocks of Lincoln Way, from 215 Lincoln Way West east to Fifth Avenue, and Second Street from North Street south to the borough limits. Although the town square with the County Courthouse as its focal point was constructed at the intersection of Second and Market Streets, the main street developed a block to the south along Lincoln Way, an important route to the west in the 18th and 19th centuries. Thus the "center square" appears off center and was developed late in

the history of the town. In typical Pennsylvania town fashion, buildings front along the edge of the sidewalks with little or no set backs except in later 19th century residential areas such as those found along West Market Street and South Second Streets.

Building stock in the district ranges in construction date from the third quarter of the 18th century to the mid 20th century, with 18th and 19th century residential and commercial buildings predominating. Log, stone, brick and frame buildings are present, with log, stone and brick construction representing the earlier (pre-1850) period of the town. Many of the log structures remain intact with their original or early sidings. Others are covered with more recent manufactured sidings. A few log buildings have had historic or non-historic sheathing removed to reveal the log structural members.

Early 20th century commercial and residential buildings were often constructed of rock-faced concrete block or cast stone, which was sometimes called "patent stone." At least two of these buildings were standing in 1910 and are shown on a Sanborn Insurance Map. Most buildings of this material date from the first quarter of the 20th century.

Several architectural styles are represented in the study area. In the 18th century, buildings were influenced by the Georgian style. Examples include the Fulton House, 112 Lincoln Way East, and the Daniel McConnell, Jr. or Stoner House, 108 Lincoln Way West. Both buildings date from the 1790s and have five bays with central entrances and massively framed openings topped with jack arches. The Fulton House is individually listed in the National Register.

A few buildings of brick construction represent the Federal (Neoclassical) style of the early 19th century. These include 205-207 Lincoln Way East and 111-113 Lincoln Way East. They are distinguished by broad elliptically arched fanlights and sidelights at the main entrance.

The next style represented, the Greek Revival of the 1840-60 period is most prevalent in the area around the Courthouse. Lincoln Way, known earlier as Water Street was nearly fully developed by that time. The Courthouse, built in 1852 is a Greek Revival style building and the former Washington Hotel diagonally opposite the Courthouse at 204 N. Second Street, also begun in 1852, was influenced by the Greek Revival style.

The Italianate style was a favorite for commercial buildings in

the late 19th century and several examples remain intact along Lincoln Way. Perhaps the most original facade belongs to the building at 110 Lincoln Way West, the former Albert Stoner Store, built in 1893. The large three story frame building on the west side of South Second Street also shows Italianate influence. This building incorporates a small log vernacular building which dates from the late 18th or early 19th century and retains early or original siding.

The Second Empire style with its hallmark Mansard roof is represented on Lincoln Way West by two buildings in the 100 block. The Queen Anne style of the last decade of the 19th century influenced a few buildings with multiple projections and a variety of surface treatments. One of the best preserved of these is the dwelling at 331 North Second Street which retains original decorative wood shingles on its tower.

The most prominent architectural type from the early 20th century in McConnellsburg is the American Four Square. These buildings, either commercial or residential may be of frame, brick or cast block ("patent stone") construction. Several of these are concentrated on the east side of South Second Street with others occurring in the outer portions of the district. Also representing the first half of the 20th century are a group of Colonial Revival style houses at South Second Street, south of Maple Street, and several Bungalows.

In addition to residential and commercial buildings, there are also significant commercial and industrial buildings of the early 20th century, several of which appear to have been automobile service garages. These garages are located along Lincoln Way, principally at the west end, and are typical of the 1920s and '30s with stepped parapet fronts and display windows with accompanying garage bays. A particularly intact example is the R.E. Fleming garage in the 200 block of Lincoln Way West. In the 18th and early 19th centuries McConnellsburg had three tanneries. One stone building, a small 18th century structure located at 308 Lincoln Way East was associated with a tannery at that location. The tannery was still operating in 1873, and in 1910 the Sanborn Insurance Map lists this building as a warehouse.

Other important elements in the district include outbuildings such as smoke houses, kitchens and stables located in back yards and along alleys. Several examples of old fencing are also present and portray the earlier appearance of McConnellsburg. Although these elements are collectively contributing to the overall appearance of the district, they are not included in the building inventory due to their small size. However, two barn/carriage house structures have been listed individually in the building inventory because of their

large size and prominent location along the edge of streets. One is located in the first block of East Market Street and the other in the first block of North First Street.

Buildings are generally in good to excellent condition. Many remain remarkably intact. The character of some buildings has been altered by the application of manufactured sidings or the removal of original surface finishes. The district includes approximately 158 buildings. Of this total, 13 buildings are considered non-contributing. These non-contributing buildings, less than 10% of the total in the district are scattered throughout the district and consist of post-1950 infill. One site is included in the district, a small cemetery of the 19th century, associated with the Methodist-Episcopal Church. It is located on North Third Street.

McConnellsburg Historic District | N/A | Fulton County, Pennsylvania
Name of Property | site/inventory number | County and State

8. Statement of Significance

Applicable National Register Criteria
(Mark "x" in one or more boxes for the criteria qualifying the property for National Register listing)

- [x] **A** Property is associated with events that have made a significant contribution to the broad patterns of our history.
- [ ] **B** Property is associated with the lives of persons significant in our past.
- [x] **C** Property embodies the distinctive characteristics of a type, period, or method of construction or represents the work of a master, or possesses high artistic values, or represents a significant and distinguishable entity whose components lack individual distinction.
- [ ] **D** Property has yielded, or is likely to yield information important in prehistory or history.

Criteria Considerations
(Mark "x" in all the boxes that apply)

Property is:

- [ ] **A** owned by a religious institution or used for religious purposes.
- [ ] **B** removed from its original location.
- [ ] **C** a birthplace or a grave.
- [ ] **D** a cemetery.
- [ ] **E** a reconstructed building, object, or structure.
- [ ] **F** a commemorative property.
- [ ] **G** less than 50 years of age or achieved significance within the past 50 years.

Areas of Significance
(Enter categories from instructions)

Architecture
Transportation
Politics/government

Period of Significance

Ca. 1762-1940

Significant Dates

N/A

Significant Person
(Complete if Criterion B is marked above)

N/A

Cultural Affiliation

N/A

Architect/Builder

Unknown

Narrative Statement of Significance
(Explain the significance of the property on one or more continuation sheets)

Meets criteria A, C

STATEMENT OF SIGNIFICANCE:

Established in 1786 on a main route to the West from Philadelphia, McConnellsburg is significant for its role as an important stopping place on the Lincoln Highway. The history of the town, its development pattern and its architecture clearly show its linkage to travel and transportation. Construction in the town reflects this pattern and the impact of the highway on the development of McConnellsburg. Resources in the district include houses, commercial and industrial structures from the late 18th century through the 1940s. Of particular significance are the large number of travel-related structures, taverns, inns and automotive service garages representing three centuries. Since 1850, McConnellsburg has been the county seat of Fulton County, and therefore a governmental center. The Greek Revival temple form courthouse is perhaps the most prominent building in the district. With a population of 1106, McConnellsburg is the largest town in Fulton County, and one of only two boroughs. McConnellsburg has since the 1780s been the local trade center and since 1850 the seat of county government. It contains the most comprehensive collection of residential, commercial, and governmental architecture in Fulton County.

Historic Setting

McConnellsburg is the county seat of Fulton County located in the south central part of the state. Previous to its establishment in 1850, Fulton County was part of Bedford County. When the new county was established, McConnellsburg, by then a well established town on the turnpike from Philadelphia to Pittsburgh, was made the county seat.

The town is situated in a fertile valley, known as "the Big Cove" between the Tuscarora Mountain and numerous ridges to the west. The rich land made the Big Cove appealing to settlers from the mid 18th century although effective settlement did not occur until the last quarter of the 18th century. The lifeline for settlements developing in the Big Cove was the wagon road leading to Philadelphia. Over this road the settlers sent their products to sell, principally flour and grain, hides, cattle and hogs. In return they received luxury goods, and such supplies that could not be produced locally. In the late 18th century when settlements in the Big Cove were developing, Philadelphia was the largest city in America and was for a time, the second largest city in the British Empire. The importance of Philadelphia as a vortex to settlements extending for miles radiating

around it cannot be overlooked. Therefore roads leading to Philadelphia took on greater significance. The Philadelphia Road that later became the Lincoln Highway or U.S. Route 30, was in the formative years of the Big Cove settlements one of the most traveled and most important roads in America. The road took on even greater significance after the American Revolution when the new government of the United States sought to encourage settlement in the western lands by adopting attractive land acquisition measures in 1785 and 1787 for the Northwest Territories. The National Pike (U.S. Route 40) was located south of the Lincoln Highway and although it became the first U.S. Highway, its construction did not begin until the early 19th century.

Resource History

As early as 1765 Daniel McConnell operated a public inn along the packhorse road from Philadelphia.[1] A small settlement grew around the inn, along a creek and the road. Eventually in 1786, McConnell laid out his town formally. His town plan included 50-foot wide streets and a perimeter around the town enclosing a common for grazing of animals. The town contained 196 lots of 220 by 50 feet, approximately ¼ acre, a fairly standard lot size for 18th century towns in the region. For reasons unknown to historians, Daniel McConnell chose to make the packer's trail to Philadelphia a secondary street in his plan. In McConnell's plan, the town was a rectangle with a central square, typical of many 18th century Pennsylvania towns. The two main streets crossed at the square, Market Street and Second Street. Water Street, later Lincoln Way, was a block south of the square. Not too surprisingly, the town never developed according to McConnell's plan. Instead, the main course of development continued along the established road and this route continues as the main street today, with the "center" square set off to the side in what is now primarily a residential area.

This alignment of the main street was reinforced by the growth of the packers' road into a wagon road and its further improvement after 1817 as the Chambersburg-Bedford Turnpike. As McConnellsburg grew, its businesses and industries clearly reflected its association with the highway. In 1814, the town was incorporated into a borough. At

---

[1] John H. Nelson, "McConnellsburg," in McConnellsburg, PA - Movements in History. McConnellsburg, PA: Fulton County Historical Society, Inc., 1986, quoting Pennsylvania Archives first series, volume 4, p. 235.

that time it had 250 residents, "with nine stores, seven taverns, four blacksmith shops, two churches (Presbyterian and Lutheran) one school house and several shoemakers."[2] Residents of McConnellsburg were subject to new tax assessments every three years. The assessments included a list of occupations, and a portion of the 1835 assessment is published in McConnellsburg, PA - Moments in History. Listed are occupations for 107 McConnellsburg residents. Forty-three percent or 46 occupations listed in 1835 were directly related to McConnellsburg's location along a major turnpike road. These 46 people who served the 19th century travel industry included nine blacksmiths, eight stage drivers, six wagon makers, six merchants, four waggoners, four tavern keepers, four saddlers, two inn keepers, two drovers and one wheelwright. Among other occupations, the most prominent was shoemaker of whom there were 16. There were also seven tailors, five labourers, five farmers, four carpenters, three cabinet makers, three tinners, and three hatters. Other less represented occupations include doctor, teacher, potter, silversmith, distiller, reverend and constable. This list illustrates McConnellsburg's importance to and reliance upon travel and travel-related services a characteristic which continued into the 20th century.

According to I. Daniel Rupp's History of Dauphin, Cumberland, Franklin, Bedford, Adams and Perry Counties, written in 1846, McConnellsburg "contains upwards of 100 dwellings, four churches, viz: a Presbyterian, German Reformed, Lutheran and Methodist; four taverns, six stores, two schools, two tanneries, two wagon makers shops, seven shoemakers, two weavers and four cabinet makers." The population in 1840 was 486 and in 1846, 575.[3]

The preponderance of taverns, blacksmith shops, wagon makers and stores is related to the town's location on a heavily traveled road. The churches, first Presbyterian and Lutheran, later joined by the German Reformed and Methodist attest to the Scotch-Irish and German heritage of the settlers.

On April 19, 1850, Fulton County was created from the eastern part of Bedford County, and McConnellsburg became its county seat. As

---

[2]Ibid, citing W. Scott Alexander, "Old McConnellsburg," Philadelphia Times, Philadelphia, Pa., December 15, 1895.

[3]I. Daniel Rupp, History of Danphin, Cumberland, Franklin, Bedford, Adams and Perry Counties. (Lancaster, PA: Gilbert Hills, 1846) p. 512.

a result of the town's becoming a governmental center for the new county, the Greek Revival style Courthouse was built by 1852 for $5,695.00. An accompanying jail was also built. The same year, a new hotel, the Washington House, was established diagonally across the square from the Courthouse. All of these buildings, associated with the creation of the new county seat were situated on or near the square. Whether this was an attempt to pull development away from the Chambersburg-Bedford turnpike or, whether the prime lots along the pike had already been taken is not known from present information. Establishment of the county seat also led to the opening of newspaper and law offices.

Throughout the 19th and early 20th century, the town's main prosperity was related to the turnpike. In 1904, John Stoner, cabinet maker, wrote his recollections of growing up in McConnellsburg. He relates several stories of the 1830s about droves of cattle, horses, hogs and sheep passing through McConnellsburg along with freight wagons, stages and smaller conveyances. He says, "the drivers didn't like the railroads. The railroad broke up the stage and wagon lines. The hotel yards in the those days [1830s] would be full of wagons over night. In those days, McConnellsburg was a lively little town; all kinds of business was good. The farmers had a sale for their hay, corn and oats. There was at that time hotels all along the pike from McConnellsburg to Pittsburgh. They are all gone."[4]

By the mid 19th century, the privately run Philadelphia to Pittsburgh Turnpike began to decline. The local portion of this route was operated by the Chambersburg-Bedford Turnpike Company. Competition from railroads and canals that attracted long distance freight and passenger traffic reduced revenue for most private turnpikes, including the one that passed through McConnellsburg. As income from tolls dropped, the condition of the road deteriorated resulting in numerous complaints. The development of the automobile in the early 20th century hastened the demise of private turnpike companies, because of the need for smooth, well-maintained roads, and the nuisance of frequent stops at toll gates.

In 1911, the Sproul Act was passed in Pennsylvania which allowed the development of a state highway system, with roads being maintained at state expense. Through the Sproul Act, the Franklin and Fulton County portions of the turnpike were condemned and made part of the

---

[4]Glenn R. Cordell, Comp. "Recollections of 19th Century Life in McConnellsburg," McConnellsburg - Moments, op. cit. p. 66.

new state highway system.[5] The old turnpike became a state route and was named the Lincoln Highway. The old stage stops, inns and toll houses were replaced by automobile service and gas stations, motels and restaurants. In McConnellsburg this process is evident in the several 1920s era automobile service garages and housing construction from the post-1910 period. The consolidation of the old turnpike into one of the first state-maintained highways promoted business and tourist traffic through McConnellsburg, increasing the town's prosperity in the first half of the 20th century.

Another prominent industry in town was tanning. Three tanneries operated during much of the late 18th and early 19th centuries in McConnellsburg. Two of them were located along the north side of Lincoln Way East between Second and Sixth Streets along the run that passes through town.

Resource Analysis

McConnellsburg's historic district contains the most comprehensive collection of residential, commercial and governmental buildings in Fulton County. In fact, it is the only commercial and governmental center in the county, and the only town of any size. The district represents the most "urban" collection in the county, where all other communities are small rural villages or crossroad's hamlets. Therefore McConnellsburg stands alone among Fulton County's towns. Its association with the prominent highway has given its architectural expression an air of sophistication that belies the borough's small size relative to other nearby county seats (i.e. Chambersburg and Bedford in Pennsylvania and Hagerstown and Cumberland in Maryland). Noteworthy are particularly fine examples of Georgian and Federal style buildings of the late 18th and early 19th centuries and highly embellished Italianate storefronts of the late 19th century. In general, the district maintains a high level of integrity with few non-contributing elements. While there has been some unsympathetic alteration to some buildings, the overall integrity of the district remains intact.

Although a few buildings remain from McConnellsburg's initial settlement period during the third quarter of the 18th century, the general character of the town reflects the period from approximately

---

[5] John Nelson. Down the Pike, A History of the Chambersburg-Bedford Turnpike Company, McConnellsburg, PA: Fulton County Historical Society, 1989.

1790 to 1940 when the town was a prosperous center in the agriculturally productive Big Cove and a stopping place on the great road from Philadelphia to Pittsburgh. The highway and the agricultural community around McConnellsburg supported one another in a symbiotic relationship. Drovers and wagoners relied on local farm produce to feed their teams and the animals they were herding. The farmers depended on the highway to provide access to eastern markets for livestock and grains. This situation caused the town to flourish in the 19th century.

At least three buildings once used as inns or hotels remain today. The oldest is the Fulton House dating from 1793. Individually listed in the National Register, it is a stone structure influenced by the Georgian style. It also represents the importance of hostelries to the highway and development of the town. The Fulton House has hosted such visitors as presidents John Quincy Adams, Zachary Taylor, William Henry Harrison and James Buchanan. It represents the bustle of drovers, teamsters, stages and independent travelers passing through the town, day and night.

The former Washington Hotel opposite the Courthouse was built the same year as the Courthouse, 1852. It reflects the town's role as a governmental center which caused this hotel to be built a block away from the highway and close to the Courthouse.

Another former hotel the three story City Hotel (1893) although greatly altered represents the significance of the highway in the late 19th century.

The Courthouse itself provides a dual focus for the significance of the town. A stately brick temple-form Greek Revival building built in 1852 it represents the town's movement into the role of governmental center.

Residential architecture ranges from vernacular buildings of log, stone or brick construction which portray regional developments and interpretations of current styles. Other buildings exhibit more sophisticated representations of their styles. Among the more noteworthy houses is the brick McConnell house (1790), at 108 Lincoln Way West, said to be the oldest brick house in Fulton County.

The tanning industry which seems to have been prominent in the town is now represented only by a small stone building at 308 Lincoln Way East which was once part of a tannery complex. There is certainly archeological potential at the three tannery sites, two of which were

located north of Lincoln Way East in the 300 and 400 blocks. Both were operating in the late 19th century.

In the late 19th century a number of stores were built or commercial storefronts were inserted into older buildings. These represent the growth of commercial development in the later 19th century and the introduction of commercial fronts for buildings that distinguished them from neighboring residential buildings.

By the early 20th century the town had settled into quiet prosperity. A number of newer buildings were constructed of concrete block or brick from about 1910 to 1940 including a few automobile garages and repair shops. These are located at 208 Lincoln Way West, 106 Lincoln Way West, 112 South Second Street, and in the first block of North First Street. Development spread west on Market Street and north and south on Second Street where Four Square, Bungalow and Colonial Revival houses abound.

Thus McConnellsburg's present appearance reflects many facets of its past as a stopping place on a major 18th and 19th century highway, as a county seat and as an example of the evolution of architecture in Fulton County.

McConnellsburg Historic District | N/A | Fulton County, Pennsylvania

Name of Property | site/inventory number | County and State

9. Major Bibliographical References

Bibliography
(Cite the books, articles, and other sources used in preparing this form on one or more continuation sheets)

Previous documentation on file (NPS):

- ☐ preliminary determination of individual listing (36 CFR 67) has been requested.
- ☐ previously listed in the National Register
- ☐ previously determined eligible by the National Register
- ☐ designated a National Historic Landmark
- ☐ recorded by Historic American Buildings Survey # _____
- ☐ recorded by Historic American Engineering Record # _____

Primary location of additional data:

- ☒ State Historic Preservation Office
- ☐ Other State agency
- ☐ Federal agency
- ☐ Local government
- ☐ University
- ☐ Other

Name of repository: _____

10. Geographical Data

Acreage of Property approximately 25

UTM References
(Place additional UTM references on a continuation sheet)

	Zone	Easting	Northing
A	18	243880	4434880
B	18	244000	4424220
C	18	256240	4422920
C	18	756180	4424420

☐ See continuation sheet.

Verbal Boundary Description
(Describe the boundaries of the property on a continuation sheet)

Boundary Justification
(Explain why the boundaries were selected on a continuation sheet)

11. Form Prepared By

name/title Paula S. Reed, PhD, Architectural Historian

organization Preservation Associates, Inc. date 09/22/92

street & number 19942 Lehmans Mill Road telephone 301-791-7880

city or town Hagerstown state Maryland zip code 21742

MAJOR BIBLIOGRAPHICAL REFERENCES:

Fulton County Historical Society. McConnellsburg, PA - Moments in History, 1786-1986. McConnellsburg, PA: Fulton County Historical Society, Inc., 1986.

Rupp, I. Daniel. History and Topography of Dauphin, Cumberland, Franklin, Bedford, Adams and Perry Counties. Lancaster, PA: Gilbert Hills, 1846.

VERBAL BOUNDARY DESCRIPTION:

The McConnellsburg Historic District's boundaries are shown on the accompanying map and includes properties facing onto Lincoln Way from South Fifth Avenue (alley) on the south side and North Fourth Avenue (alley) on the north side, west to and including 215 Lincoln Way West on the south side and to and including the R.E. Fleming garage at 208 Lincoln Way West on the north side; and properties facing onto Second Sreet from 401 North Second Street on the west side and 328 North Second Street on the east side south to and including 323 South Second Street on the west side and 334 South Second Street on the east side; and properties facing onto Market Street from North First Street on the west to and including 206 East Market Street on the north side and continuing to North Third Street on the south side; and properties facing onto North Third Street from East Market Street south to Lincoln Way East.

BOUNDARY JUSTIFICATION:

The boundaries selected include most of the historic area of McConnellsburg while excluding concentrations of non-contributing property. The southern end of the district is bordered by a post-1940 hospital and high school. The few buildings outside the north end of the district are post-1940 houses. The area excluded to the west includes a car dealership and post-1940 buildings. To the east of the district are numerous post-1940 buildings interspersed with earlier edifices.

McConnellsburg Historic District	N/A	Fulton County, Pennsylvania
Name of Property	site/inventory number	County and State

Additional Documentation

Submit the following items with the completed form:

Continuation Sheets

Maps

A **USGS map** (7.5 or 15 minute series) indicating the property's location.

A **Sketch map** for historic districts and properties having large acreage or numerous resources.

Photographs

Representative **black and white photographs** of the property.

Additional items
(Check with the SHPO or FPO for any additional items)

Property Owner

(Complete this item at the request of the SHPO or FPO)

name multiple owners

street & number _____ telephone _____

city or town _____ state _____ zip code _____

Paperwork Reduction Act Statement: This information is being collected for applications to the National Register of Historic Places to nominate properties for listing or determine eligibility for listing, to list properties, and to amend existing listings. Response to this request is required to obtain a benefit in accordance with the National Historic Preservation Act, as amended (16 U.S.C. 470 et seq.).

Estimated Burden Statement: Public reporting burden for this form is estimated to average 18.1 hours per response including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding this burden estimate or any aspect of this form to the Chief, Administrative Services Division, National Park Service, P.O. Box 37127, Washington, DC 20013-7127; and the Office of Management and Budget, Paperwork Reductions Project (1024-0018), Washington, DC 20503.

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
423 Lincoln Way East		Dwell.	Dwell.	American Four Square	cast stone block or "patent stone"	2	hip	1911	C	Oct. 1910 Sanborn Insurance Map shows this "patent stone" house under construction.
421 Lincoln Way East	"Sterrett House"	School Dwell./ tavern	Dwell.	Georgian influenced	stone	2	side gable	ca. 1800	C	Served as Fosnaught's Tavern ca. 1820-1836. Mrs. Sterrett's school, 1847-1881.
419 Lincoln Way East		Comm./ Dwell.	Dwell.	Vernacular	aluminum siding	2	side gable	mid 19th century	C	
417 Lincoln Way East		Comm./ Dwell.	Dwell.	Vernacular	aluminum siding	2	front gable	ca. 1920	C	
415 Lincoln Way East		Dwell.	Dwell.	Vernacular	aluminum siding	2	side gable	ca. 1800	C	Probably of log construction.
409 Lincoln Way East		Dwell.	Dwell.	Vernacular	aluminum siding	2	side gable	late 19th century	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
407 Lincoln Way East		Comm. ?	Dwell.	Italianate	aluminum siding	2½	flat	ca. 1880	C	1880s porch intact.
405 Lincoln Way East		Dwell.	Dwell.	Vernacular	log	2½	side gable	ca. 1790	C	Siding has been removed to expose log structure. Possible site of John Rudabaugh's Tavern.
403 Lincoln Way East		Dwell. Comm. ?	Dwell.	Four Square	wood siding	2½	hip	1920s	C	
315 Lincoln Way East	"Shimer House"	Comm./ Dwell.	Dwell.	Georgian influenced	stone	2	side gable	ca. 1790s	C	Once housed Samuel Rudabaugh's tin shop.
Lincoln Way East (between 303 and 315)	St. Stephen Catholic Church	--	church	Contemporary				ca. 1970	NC	
303 Lincoln Way East		Dwell.	Rectory	Queen Anne	brick	2	gable/ hip	ca. 1910	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
215 Lincoln Way East		City Hotel	Comm./ Dwell.	Commercial Vernacular	brick	3	flat	1893 reno-vated 1920s	C	Brick veneer of Italianate frame hotel built in 1893. Modified 1920-40 period.
211 Lincoln Way East	Dollarland	Hotel	Comm.	Commercial Vernacular	brick	2	flat	1920s	C	
209 Lincoln Way East		Comm.	Comm.	Italianate	German siding	2	flat	1890s	C	
205-207 Lincoln Way East		Comm./ Dwell.	Comm./ Dwell.	Federal	brick	2	side gable	1820s	C	
201-203 Lincoln Way East		Comm./ Dwell.	Comm./ Dwell.	Georgian influenced	brick	2	side gable	ca. 1790	C	
117 Lincoln Way East		Comm./ Dwell.	Comm./ Dwell.	Vernacular	aluminum siding	2	side gable	ca. 1820	C	Probable log construction.

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
115 Lincoln Way East		Comm./ Dwell.	Comm./ Dwell.	Commercial Vernacular	concrete block	2		ca. 1920	C	
111-113 Lincoln Way East	"Dickson House"	Office/ Dwell.	Comm./ Dwell.	Federal	brick/ aluminum	2	side gable	ca. 1816	C	Said to have been office of several doctors in the 19th century; telegraph office 1870s.
109 Lincoln Way East		--	Comm.	--	--	--	--	--	NC	
107 Lincoln Way East		Dwell.	Comm.	Vernacular	brick veneer	2	side gable	ca. 1820	C	Probable log construction.
101-103-105 Lincoln Way East		Dwell.	Comm.	Federal	brick	2	side gable	ca. 1820	C	
101 Lincoln Way West	First National Bank	--	Comm.	Contemporary Colonial	--	--	--	ca. 1970	NC	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
113 Lincoln Way West	VFW	Comm.	Comm.	Second Empire	brick veneer/ aluminum siding	3	mansard	ca. 1890	C	
117-119 Lincoln Way West		Dwell.	Comm.	Vernacular	brick	2	side gable	ca. 1820	C	Was "Harris Garage," early 20th century.
121 Lincoln Way West		Dwell./ Comm.	Dwell.	Second Empire	aluminum siding	2	mansard	ca. 1880	C	Original cornice trim intact.
123 Lincoln Way West		Dwell.	Dwell.	Vernacular	aluminum siding	2	side gable	ca. 1800	C	Probable log construction.
127 Lincoln Way West		Shop/ Dwell.	Comm.	Vernacular	brick	2	side gable	ca. 1840	C	Location of Albert Stoner's tin shop, late 19th century.
129 Lincoln Way West		Dwell.	Dwell.	Vernacular	aluminum siding	2	side gable	ca. 1810	C	Probable log construction.

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
302-304-306 Lincoln Way East		Store/ Dwell.	Comm./ Dwell.	Vernacular	aluminum siding	2	side gable	ca. 1850	C	Probable log construction. Site of Ford's Tavern, 1813.
308 Lincoln Way East		Tannery bldg.	not in use	Vernacular	stone	1	front gable	ca. 1800	C	Part of former tannery complex.
310 Lincoln Way East		Dwell.	Dwell.	Four Square	rusticated cast block	2	hip	ca. 1915	C	
312 Lincoln Way East		Comm./ Dwell.	Comm./ Dwell.	Commercial Vernacular	cast stone block	3½	flat	ca. 1915	C	
314-316 Lincoln Way East		Comm./ Dwell.	Comm./ Dwell.	Italianate	brick veneer	2½	flat	ca. 1880	C	Mid 20th century modifications.
406 Lincoln Way East		Dwell.	Dwell.	Dutch Colonial	brick	2	gambrel	ca. 1925	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
408 Lincoln Way East		Dwell.	Dwell.	Four Square	wood siding	2	hip	ca. 1910	C	
410-412 Lincoln Way East		Store/ Dwell.	Store	Commercial Vernacular	aluminum siding Insul-brick	2½	front gable	ca. 1920	C	
416 Lincoln Way East		Comm.	Senior Citizen Center	Commercial Vernacular	brick	1	front parapet gable	ca. 1920	C	Site of Flickinger's Tavern 1796-1813. A tannery was located northeast of this property. It operated in 1910 as Paul Wagner's Tannery.
216 Lincoln Way East		Dwell./ Comm.	Office/ Dwell.	Georgian influenced	stone	2	side gable	1793	C	Built by Col. James Agnew. Second store in McConnellsburg.
214 Lincoln Way East		Dwell./ Comm.	Dwell./ Comm.	Vernacular	stone	2	side gable	1790s	C	Built as an extension of 216 LWE. Ca. 1910 storefront.
212 Lincoln Way East			Dwell./ Comm.	--	vinyl siding stone veneer	2	side gable	ca. 1980	NC	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
208-210 Lincoln Way East		Comm./ Dwell.	Comm./ Dwell.	Italianate	aluminum siding	3	flat	ca. 1890	C	Original cornice trim remains intact.
206 Lincoln Way East		Comm.	Comm.	Commercial Vernacular	yellow brick	2½	flat	ca. 1930	C	
204 Lincoln Way East		Dwell.	Dwell.	Georgian influenced	stone	2	side gable	ca. 1800	C	"Mansion House" to tannery complex operated by Thos. Douglas ca. 1813 and Elias Davidson after 1825.
202 Lincoln Way East	Dollar General Store	Comm.	Comm.	Commercial Vernacular	German siding	2	front gable	ca. 1920	C	Site of tannery operated by Thomas Douglas and Elias Davidson.
200 Lincoln Way East	Dollar General Store	Comm.	Comm.	Commercial Vernacular	yellow brick	2½	flat	ca. 1930	C	Matches 206 LWE.
112 Lincoln Way East	Fulton House	Tavern	Museum Town Hall	Georgian influenced	stone	2½	side gable	1793	C	Individually listed in N.R.H.P. Visited by presidents Adams, Harrison, Taylor, Buchanan. Addition built 1820.

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
102 Lincoln Way East	Fulton Co. National Bank	Comm./ Dwell.	Bank	Commercial Vernacular	brick veneer/ stone	2	flat	1950s-60s	NC	Visible east gable wall of ca. 1790 stone structure now encased by bank, Andrew Work's store.
102-104 Lincoln Way West		Comm./ Dwell.	Comm./ Dwell.	Georgian influenced & Italianate storefront	aluminum siding	2	side gable	ca. 1790	C	
106 Lincoln Way West		Comm.	Comm.	Commercial Vernacular	brick	2	flat	ca. 1920	C	Possibly originally a car dealership.
108 Lincoln Way West	"Stoner House"	Dwell.	Dwell.	Georgian	brick	2	side gable	1790	C	Oldest brick house in Fulton Co. Built by Daniel McConnell, Jr.
110 Lincoln Way West	Albert Stoner store	Comm.	Comm.	Italianate influenced	German siding	2	flat	1893	C	Very elaborate commercial facade.
112 Lincoln Way West		Dwell./ Comm.	Dwell.	Vernacular	stone	3	flat	1834 datestone	C	Third story added, 1930s. Saddler's shop here in 19th century.

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
114 Lincoln Way West	McConnell House	Dwell.	Dwell.	Vernacular	log	2½	side gable	1762	C	Siding removed to expose log structure. Local tradition places construction date at 1762, as first McConnell House and Tavern. Listed in N.R.H.P.
116 Lincoln Way West		Dwell.	Dwell.	Vernacular	German siding	2½			C	
124 Lincoln Way West		Comm./ Dwell.	Dwell.	Italianate	aluminum siding	2	flat	1880s	C	Elaborate Italianate storefront now fully covered with aluminum siding.
126 Lincoln Way West		Dwell.	Dwell.	Dutch Colonial	brick	1½	gambrel	1920s	C	
202 Lincoln Way West	McConnell House	Dwell.	Dwell./ Comm.	Vernacular	sided log, frame	2	side gable	ca. 1800	C	Believed to be an early McConnell house.
110 S. Third Street		Dwell.	Church office	Vernacular	asbestos siding	2	gable front	ca. 1920s	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
108 N. Third Street		Dwell.	Dwell.	Victorian Gothic influenced	pressed metal	2	side gable	1890s	C	Central front cross gable.
110-112 N. Third Street		Comm./ Dwell.	Dwell.	Four Square	cast block or "patent stone"	2	hip	ca. 1910	C	Shown as a "patent stone" structure on Oct. 1910 Sanborn Insurance Map.
114 N. Third Street		Dwell.	Dwell.	Four Square	brick	2	hip	ca. 1920	C	
209 Poplar Street (in alley off Third Street, west side)		Dwell.	Dwell.	Vernacular	wood siding	2	front gable	ca. 1920	C	Apartment building.
112 N. Second Street	Fulton Theater	Theater	Antique Shop	Commercial Vernacular	brick	1	side gable	ca. 1920	C	
118 N. Second Street		Dwell.	Dwell.	Vernacular	aluminum siding	2	side gable	ca. 1890	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
N. Second Street (between 118 and 124)		--	Dwell.		aluminum brick	2	gable front	--	NC	
124 N. Second Street	Washington House	Hotel	Dwell.	Greek Revival influenced	brick	2	side gable	1850	C	Said to be oldest building on court house square. Porches changed.
125 N. Second Street	United Methodist Church	Church	Church	Gothic influenced	yellow brick	1	side gable	1925	C	
121 N. Second Street		Dwell.	Parson-age	Four Square	yellow brick	2	hip	ca. 1920	C	
126-128-130 N. Second Street (square area)		Office/ Dwell.	Office/ Dwell.	Victorian Gothic influenced	German siding	2	side gable	ca. 1880s	C	
200 N. Second Street		Dwell.	Law Office	Queen Anne influenced	German siding	2	side gable	ca. 1890	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
202 N. Second Street		Office	Law Library	Queen Anne influenced	German siding	1	front gable	ca. 1890	C	
204 N. Second Street		Dwell.	Dwell.	Greek Revival influenced	brick	2	side gable	1852-55	C	Said to have been built by Jacob Reed 1852-1855.
208 N. Second Street		Office/ Dwell.	Office/ Dwell.	Greek Revival and Gothic influenced	wood siding	2	side gable	1870s	C	
214 N. Second Street	Court House Annex	Office	Ct. Hse Annex	Four Square	brick	2	hip	ca. 1915	C	
N. Second Street (behind Courthouse)		Dwell.	Office, Jail	Georgian and Greek Revival influenced	stucco	2	side gable	ca. 1840	C	
201 N. Second Street	Fulton County Court House	Gov't	Gov't	Greek Revival	brick	2	front gable	1852	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
111 W. Market Street			Dwell.	"Colonial"	brick, aluminum	2		ca. 1960	NC	
113 W. Market Street		Dwell.	Dwell.	Queen Anne	aluminum siding	2	side gable	ca. 1900	C	
110 S. Second Street		Out-bldg.	Dwell.	Vernacular	brick	1	side gable	ca. 1810	C	
112 S. Second Street		Garage/ Dwell.	Dwell.	Four Square (commercial)	aluminum siding	2	hipped	ca. 1920	C	
116 S. Second Street		Dwell.	Church office	Four Square	brick	2	hipped	ca. 1920	C	
118-120-122 S. Second Street		--	Dwell.	--	brick vinyl	2		ca. 1980	NC	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
124 S. Second Street		Dwell.	Dwell.	Four Square	wood siding	2	hipped	ca. 1920	C	
128 S. Second Street		Dwell.	Dwell.	Four Square	aluminum siding	2	hipped	ca. 1920	C	
S. Second Street and W. Maple Street, northwest corner	Presbyterian Church	Church	Church	Gothic Revival	brick veneer	1½	gable front	1868	C	Original brick walls were covered with brick veneer in 1981.
125 S. Second Street	Presbyterian Church Hall	Church hall	Church hall	Gothic influenced	brick	1	gable front	ca. 1960	NC	
117-123 S. Second Street		Comm.	Dwell.	Italianate	German siding	3	flat	ca. 1880s part ca. 1800	C	Tom Conerer's hardware store was operated here. A small log house (ca. 1800) with original siding incorporated into south end of building.
113-115 S. Second Street		Comm./ Dwell.	Office/ Dwell.	Commercial Vernacular	rock faced block and brick	2	flat	ca. 1920	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
204 E. Market Street		Dwell.	Dwell.	Vernacular	insul siding	2	gable	Ca. 1870	C	Possibly log construction.
206 E. Market Street		Dwell.	Dwell.	Victorian Gothic	German siding	2	gable	Ca. 1890	C	Original elaborate gingerbread trim on porch and cross gables.
E. Market and 129 N. Third Street		Dwell.	Dwell.	Vernacular	German siding	2	gable	Ca. 1830	C	Log construction? and frame.
Stable/Carriage House		Stable	Garage	Vernacular	bevel top siding	2	gable	Ca. 1890	C	Original siding and trim.
130 W. Market Street		Dwell.	Dwell.	Bungalow	brick	1½	gable	Ca. 1925	C	Shed dormer.
124 W. Market Street		Dwell.	Dwell.	Four Square	frame aluminum	2	hip	Ca. 1915	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
122 W. Market Street		Dwell.	Dwell.	Four Square	vinyl	2	hip	Ca. 1915	C	
116 W. Market Street	Huntingdon, Bedford Fulton Area Agency on Aging	---	Office					Ca. 1980	NC	
131 W. Market Street	Taylor's Market Street Inn	Dwell.	B & B	Four Square	brick	2	hip	Ca. 1920	C	
121 W. Market Street		Dwell.	Dwell	Four Square	frame aluminum	2	hip	Ca. 1920	C	
119 W. Market Street		Dwell.	Vacant	Vernacular	frame asbestos siding	2	gable	Ca. 1850	C	Recessed double porch along front elevation.
N. First Street		Barn	Barn Garage	Vernacular	German siding	2	gable slate	Ca. 1900	C	Rear of #131 W. Market

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
N. First Street		Garage/ Dwell.	Garage/ Dwell.	Four Square	brick/ asbestos	2	hip	Ca. 1920	C	
215 Lincoln Way West		Dwell.	Dwell.	Greek Revival influence	brick	2	gable	Ca. 1860	C	Gable front.
201 Lincoln Way West	Favor-Eats	Garage	Factory	Commercial Vernacular	concrete block	2	gable	Ca. 1920	C	Stepped parapet front.
204 Lincoln Way West		Dwell.	Dwell.	Vernacular	frame aluminum	2	gable	Ca. 1870	C	Gable front.
206 Lincoln Way West		Dwell.	Dwell.	Vernacular	frame German siding	2	gable	Ca. 1900	C	
210 Lincoln Way West	R.E. Fleming Garage	Garage	Vacant	Commercial Vernacular	concrete block	1	gable	Ca. 1925	C	Rusticated concrete block. Most original exterior features remain.

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
201 S. Second Street	Dr. James Shultz Optometrist	Dwell.	Office	Four Square	frame aluminum	2	hip	Ca. 1920	C	
205 S. Second Street		Dwell.	Dwell.	Cottage	brick	1	gable	Ca. 1950	NC	
211 S. Second Street		Dwell.	Dwell.	Vernacular	frame/ asbestos	2	gable	Ca. 1930	C	
213 S. Second Street		Dwell.	Dwell.	Vernacular with Queen Anne influence	frame vinyl	2	gable	Ca. 1900	C	
217 S. Second Street		Dwell.	Dwell.	Vernacular	frame asbestos	2	gable	Ca. 1920	C	
221 S. Second Street		Dwell.	Dwell.	Vernacular with Queen Anne influence	frame aluminum	2	gable	Ca. 1910	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
202 S. Second Street		Dwell.	Dwell.	Queen Anne influence	frame vinyl	2	gable	Ca. 1900	C	
212 S. Second Street		Dwell.	Dwell.	Colonial Revival	brick	2	gable	Ca. 1930	C	
216 S. Second Street		Dwell.	Dwell.	Four Square with Prairie influence	stone/ shingle	2	hip	Ca. 1925	C	Good example of its type.
301 S. Second Street		Dwell.	Dwell.	Four Square with Queen Anne influence	frame aluminum	2	hip	Ca. 1920	C	
309 S. Second Street		Dwell.	Dwell.	Four Square with Queen Anne influence	frame aluminum	2	hip	Ca. 1920	C	
317 S. Second Street		Dwell.	Dwell.	Bungalow	brick shingle	2	gable	Ca. 1930	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
321 S. Second Street		Dwell.	Dwell.	Four Square	asbestos shingle	2	hip	Ca. 1925	C	
323 S. Second Street		Dwell.	Dwell.	Colonial Revival influence	brick	2	gable	Ca. 1930	C	
300 S. Second Street		Dwell.	Dwell.	Colonial Revival	brick	2	gable	Ca. 1930	C	Stone retaining wall in front is original.
306 S. Second Street		Dwell.	Dwell.	Colonial Revival	brick	2	gable	Ca. 1930	C	
310 S. Second Street		Dwell.	Dwell.	Tudor Cottage	brick	2	gable/ hip	Ca. 1935	C	
314 S. Second Street		Dwell.	Dwell.	Colonial Revival	brick	2	gable	Ca. 1930	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
320 S. Second Street		Dwell.	Dwell.	Cottage	brick/ stone	1½	gable	Ca. 1940	C	
332 S. Second Street		Dwell.	Dwell.	"Cape Code" Cottage	brick	1½	gable	Ca. 1940	C	
334 S. Second Street		Dwell.	Dwell.	Four Square	brick	2	hip	Ca. 1920	C	
129 N. Third Street		School? or Office	Vacant	Greek Revival influence	frame lap siding	1	gable	Ca. 1890	C	Small office, shop or school.
128 N. Third Street		Dwell.	Dwell.	Greek Revival	frame or log aluminum siding	2	gable	Ca. 1850	C	
N. Third Street, east side		Cemetery	Cemetery	N/A	N/A	N/A	N/A	mid-late 19th century	C	1873 Atlas indicates that the property belonged to the Methodist-Episcopal Church.

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
120 N. Third Street		Dwell.	Dwell.	Vernacular	log insul siding	2	gable	Ca. 1840	C	
116 N. Third Street		Dwell.	Dwell.	Greek Revival influence	log German & lap siding	2	gable	Ca. 1840	C	
218 N. Second Street		IGA Store	Apts. Offices		brick aluminum	2		Ca. 1960	NC	
222 N. Second Street	"G&S Surveyors"	Dwell.	Office	Italianate influence	aluminum	2	flat	Ca. 1890	C	Substantially altered.
224-226 N. Second Street	DeShong's Carpet Store	Store?	Store	Vernacular	aluminum	2	gable front	Ca. 1920	C	Substantially altered.
N. Second Street and E. Walnut Street	St. Paul's United Church of Christ	Church	Church	Gothic Revival	aluminum	2	asphalt	Ca. 1894	C	Substantially altered.

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
302 N. Second Street		Dwell.	Dwell.	Greek Revival	aluminum	2	corrug. gable with metal	Ca. 1850	C	
304 N. Second Street		Dwell.	Dwell.	Vernacular	T-111 siding	2	corrug.	Ca. 1850?	C	Very altered.
306 N. Second Street		Dwell.	Dwell.	Vernacular	vinyl	2	asphalt	Ca. 1860	C	
308 N. Second Street		Dwell.	Dwell.	Vernacular	aluminum	2	gable front asphalt	Ca. 1920	C	
314 N. Second Street		Dwell.	Dwell.	Four Square	brick	2	asbest.	Ca. 1920	C	
316 N. Second Street		Dwell.	Dwell.	Vernacular	original wood siding	2	corrug.	Ca. 1800	C	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
322 N. Second Street	Kelso-Cornelius Funeral Home	Dwell.	Funeral Home	Four Square	brick	2	asbest.	Ca. 1920	C	
324 N. Second Street		Dwell.	Dwell.	Four Square Queen Anne influence	vinyl	2	asphalt hip	Ca. 1915	C	
328 N. Second Street		Dwell.	Dwell.	Late Queen Anne	aluminum	2	asphalt	Ca. 1910	C	
401 N. Second Street		Dwell.	Dwell.	Queen Anne	aluminum	2	asbest. wood	Ca. 1900	C	Original windows. Shingles on tower original.
331 N. Second Street		Dwell.	Dwell.	Queen Anne	brick	2	wood asphalt	Ca. 1900	C	Original shingles on tower.
N. Second Street (south of 331 N. Second Street)		---	Dwell.		brick			Ca. 1960	NC	

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
N. Second Street (north of 313 N. Second Street)		Dwell.	Dwell.	Four Square	brick	2	asphalt	Ca. 1920	C	
313 N. Second Street		Dwell.	Dwell.	Colonial Revival	brick	2	asphalt	Ca. 1930	C	
309 N. Second Street	Mt. Zion Lodge	Church	Masonic lodge		brick	1	asphalt gable front	1937	C	Former United Presbyterian Church built 1937.
307 N. Second Street		Dwell.	Dwell	Queen Anne (late)	frame vinyl	2	corrug.	Ca. 1900	C	Identical to #301.
301 N. Second Street		Dwell.	Dwell.	Queen Anne (late)	vinyl	2	asphalt	Ca. 1900	C	Identical to #307.
229 N. Second Street		Dwell.	Dwell.	Vernacular	asbestos over log	2	slate	Ca. 1860	C	Ca. 1920 storefront addition.

BUILDING INVENTORY FORM -

BUREAU FOR HISTORIC PRESERVATION
PA HISTORICAL AND MUSEUM COMMISSION

COUNTY Fulton

MUNICIPALITY McConnellsburg

ADDRESS	NAME OF PROPERTY	HIST FUNC	PRES FUNC	STYLE	MATERIALS	STORIES	ROOF	DATE	C/NC	COMMENTS
225 N. Second Street		Dwell.	Dwell.	Vernacular	German siding	2	gable front	Ca. 1920	C	Nice early 20th century storefront.
219 N. Second Street		Dwell.	Office	Bungalow	brick	1½	asphalt	Ca. 1930	C	Original porch lights, porch detailing.

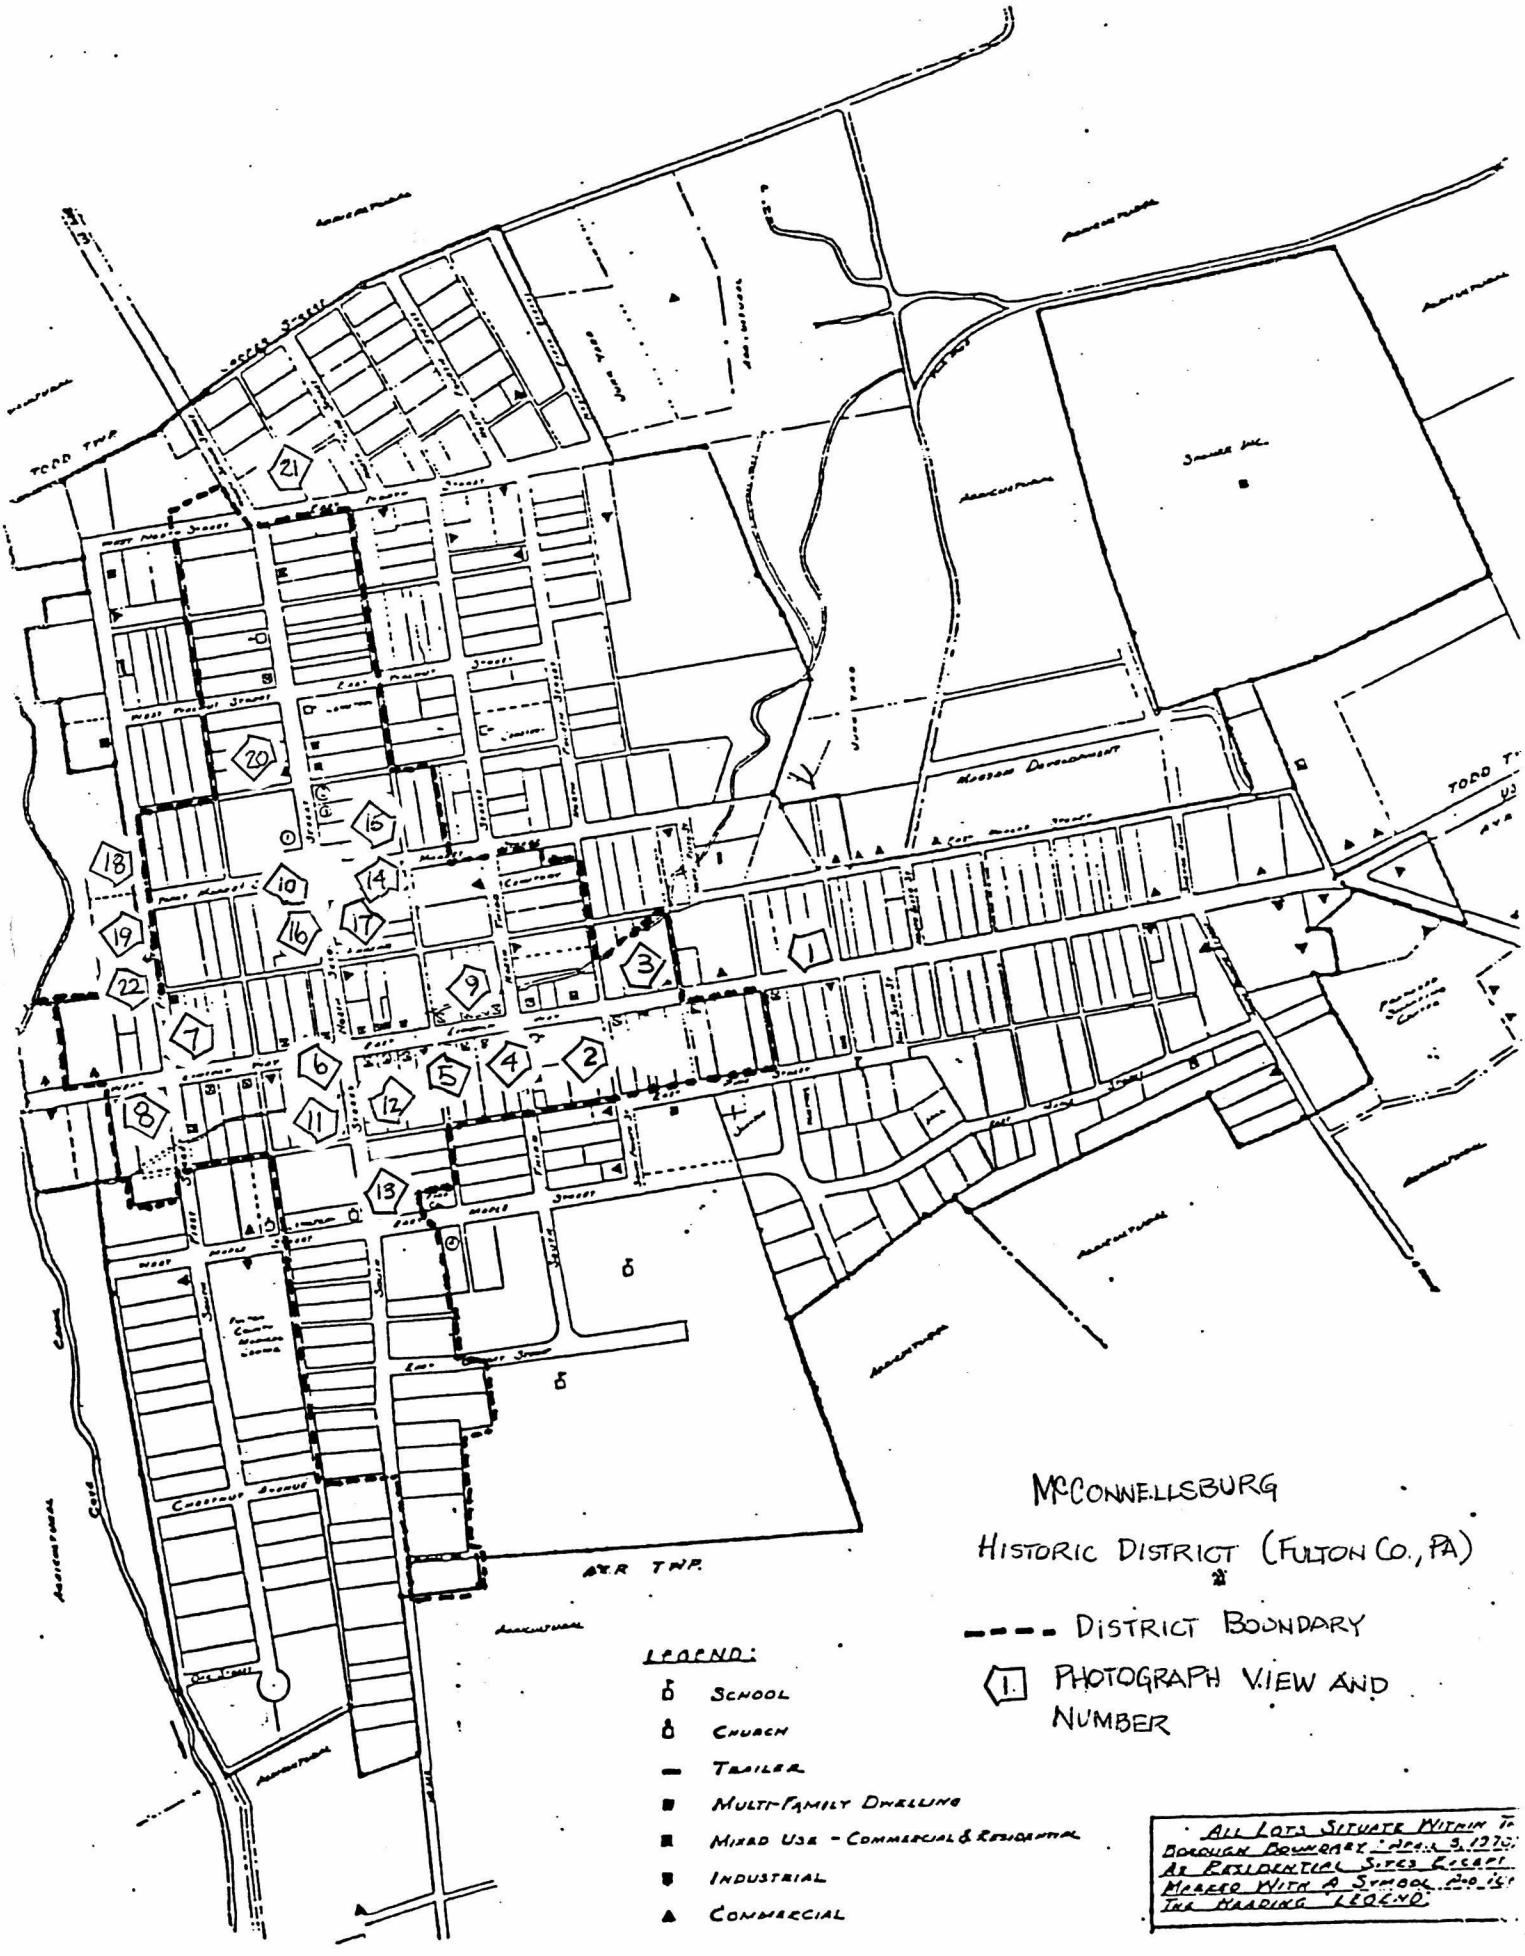
McCONNELLSBURG
HISTORIC DISTRICT (FULTON CO., PA)
DISTRICT BOUNDARY
1. PHOTOGRAPH VIEW AND NUMBER
LEGEND:
SCHOOL
CHURCH
TRAILER
MULTI-FAMILY DWELLING
MIXED USE - COMMERCIAL & RESIDENTIAL
INDUSTRIAL
COMMERCIAL
ALL LOTS SITUATE WITHIN THE BOROUGH BOUNDARY AS OF JULY 3, 1970 AS RESIDENTIAL SITES EXCEPT MARKED WITH A SYMBOL AS SET FORTH UNDER THE HEADING LEGEND.

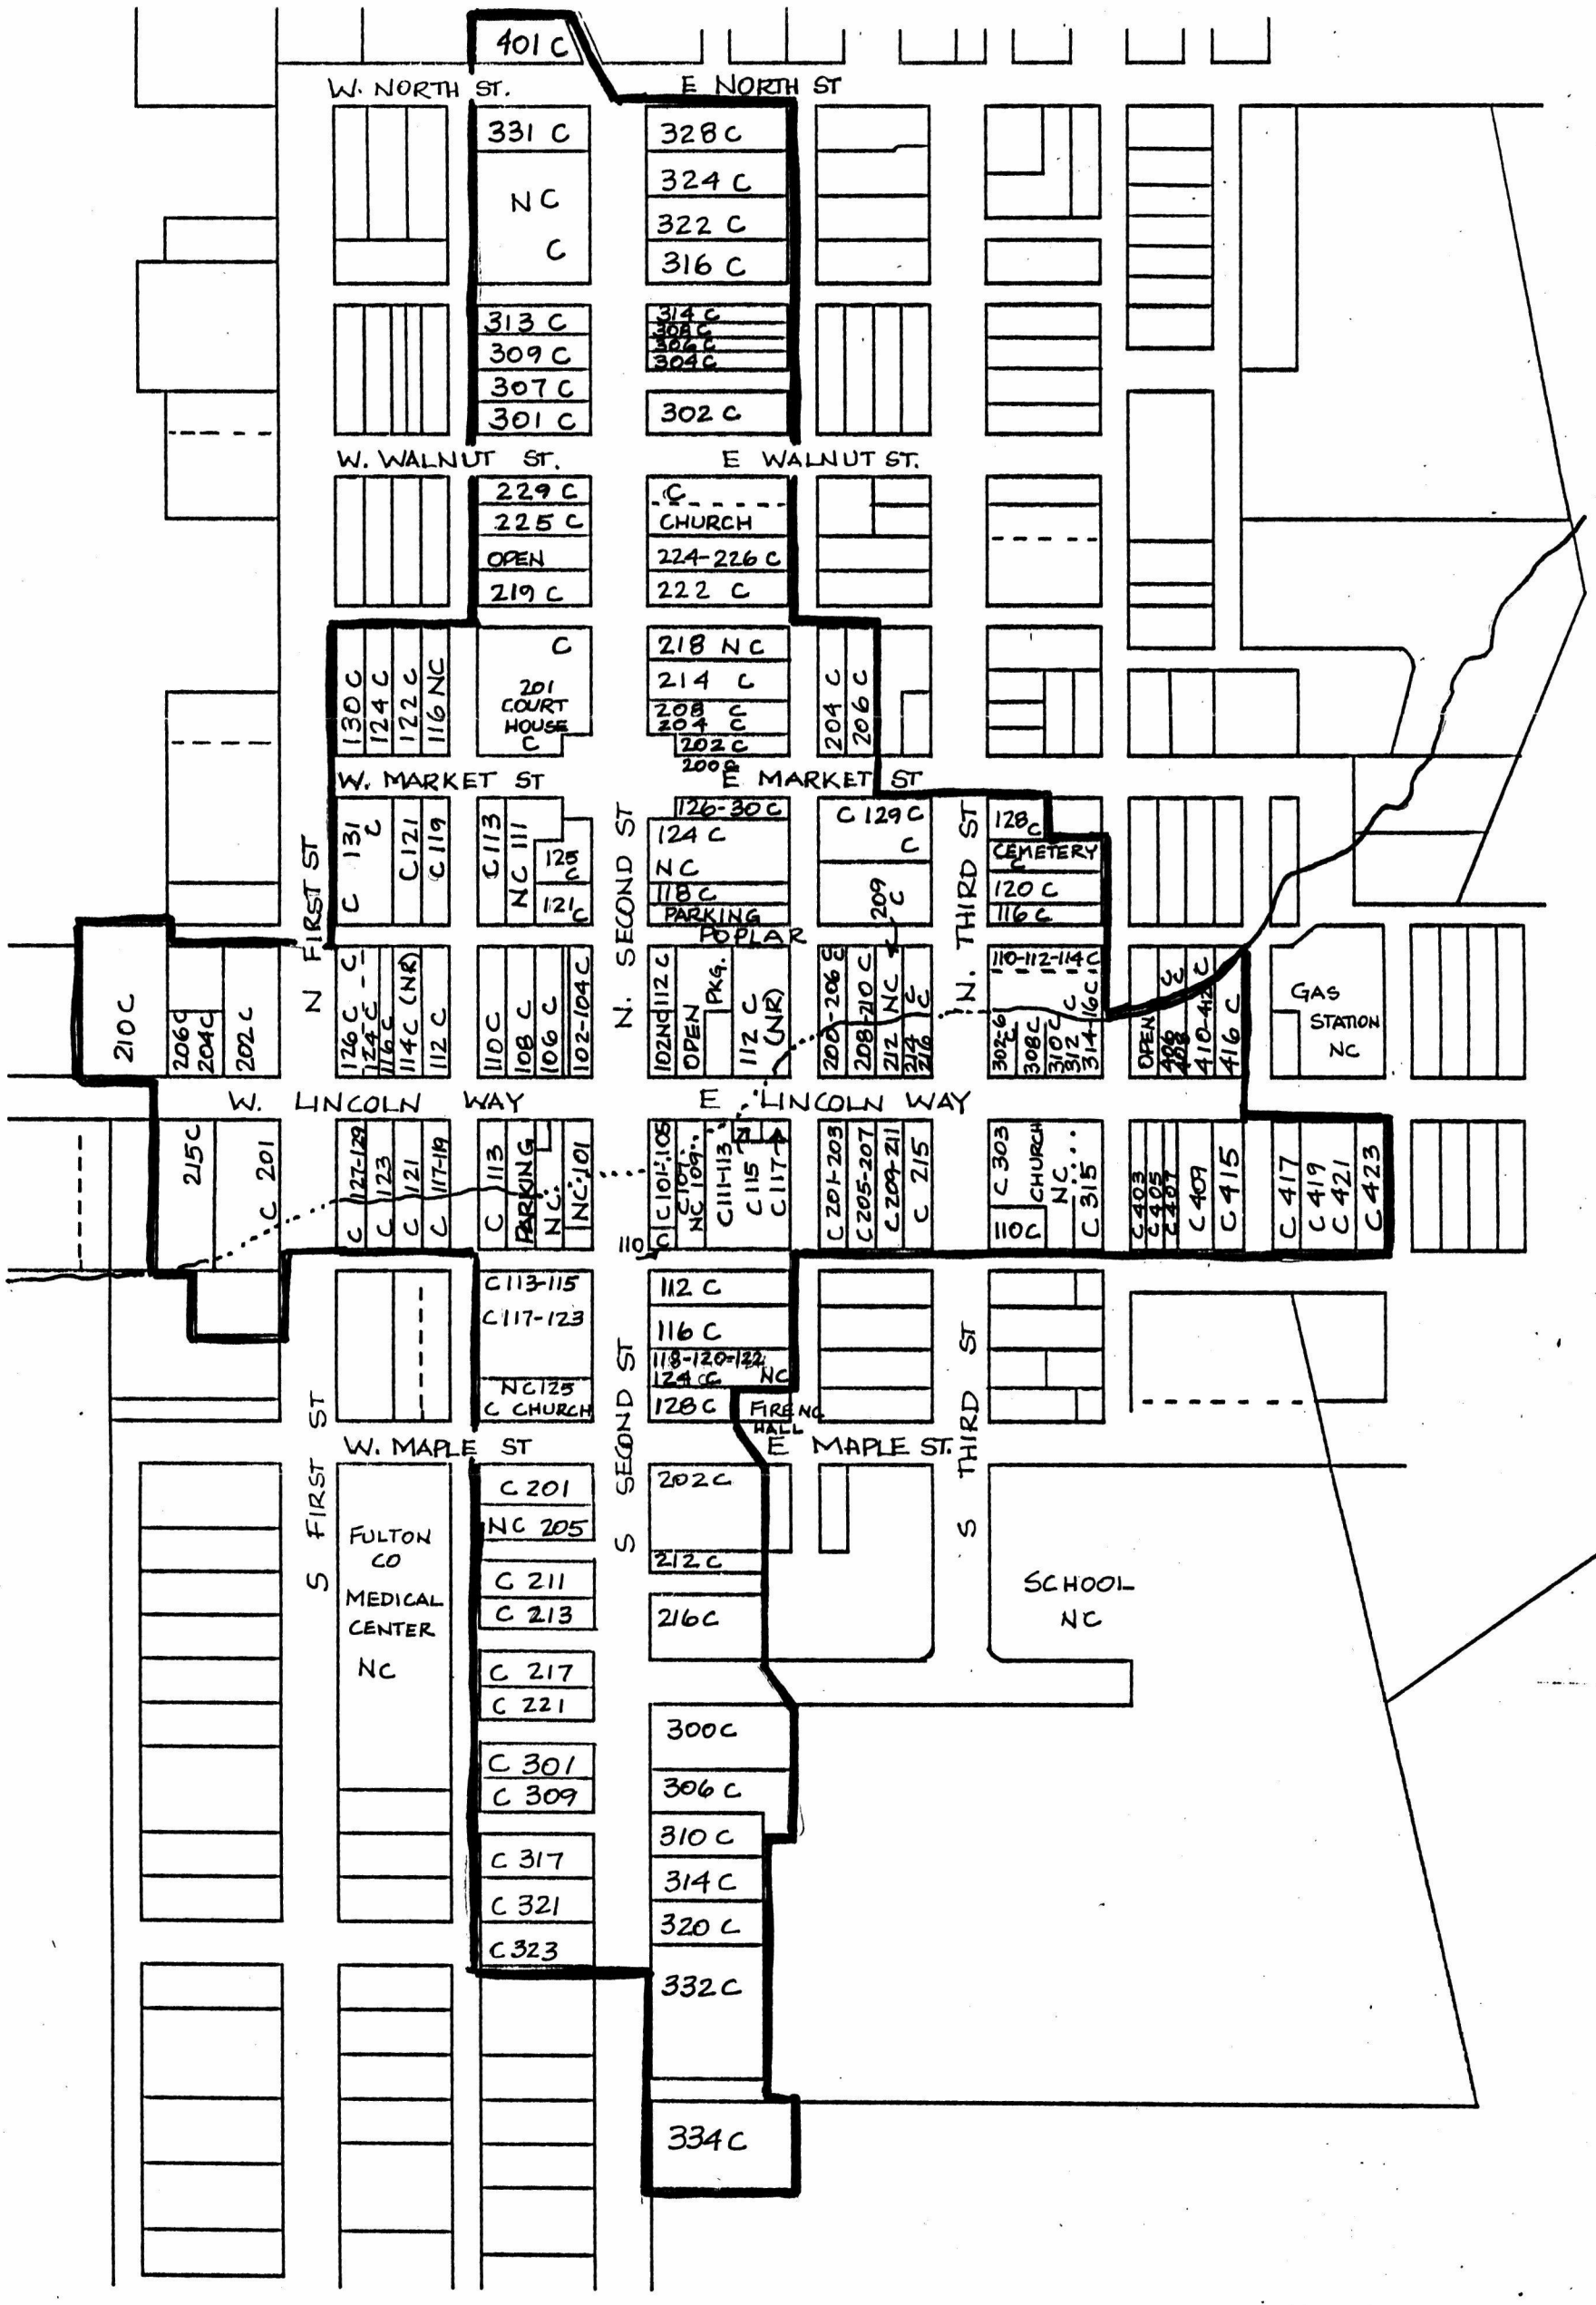

SKETCH MAP (Not to Scale)
MCCONNELLSBURG HISTORIC DISTRICT
FULTON COUNTY, PENNSYLVANIA

Key:

▬▬	District Boundary
C	Contributing Property
NC	Non-contributing Property
301	Street Address

N

NPS Form 10-900-a
(8-86)

OMB Approval No. 1024-0018

United States Department of the Interior
National Park Service

National Register of Historic Places Continuation Sheet

Section number _____ Page _____

SUPPLEMENTARY LISTING RECORD

NRIS Reference Number: 93000727 Date Listed: 8/9/93

McConnelsburg Historic District Fulton PA
Property Name: County: State:

Multiple Name

This property is listed in the National Register of Historic Places in accordance with the attached nomination documentation subject to the following exceptions, exclusions, or amendments, notwithstanding the National Park Service certification included in the nomination documentation.

for Patrick Andrus 8/9/93
Signature of the Keeper Date of Action

==========

Amended Items in Nomination:

Minor technical oversight was corrected by a phone call to the Pennsylvania SHPO. The McConnelsburg Historic District is locally significant. The nomination is officially amended to include this information.

DISTRIBUTION:
National Register property file
Nominating Authority (without nomination attachment)

UNITED STATES DEPARTMENT OF THE INTERIOR
NATIONAL PARK SERVICE

NATIONAL REGISTER OF HISTORIC PLACES
EVALUATION/RETURN SHEET

REQUESTED ACTION: NOMINATION

PROPERTY NAME: McConnellsburg Historic District

MULTIPLE NAME:

STATE & COUNTY: PENNSYLVANIA, Fulton

DATE RECEIVED: 6/30/93 DATE OF PENDING LIST: 7/14/93
DATE OF 16TH DAY: 7/30/93 DATE OF 45TH DAY: 8/14/93
DATE OF WEEKLY LIST:

REFERENCE NUMBER: 93000727

NOMINATOR: STATE

REASONS FOR REVIEW:

APPEAL:	N	DATA PROBLEM:	N	LANDSCAPE:	N	LESS THAN 50 YEARS:	N
OTHER:	N	PDIL:	N	PERIOD:	N	PROGRAM UNAPPROVED:	N
REQUEST:	N	SAMPLE:	N	SLR DRAFT:	Y	NATIONAL:	N

COMMENT WAIVER: N

✓ ACCEPT ___ RETURN ___ REJECT 8/9/93 DATE

ABSTRACT/SUMMARY COMMENTS:

The McConnellsburg Historic District is locally significant under Criteria A and C in the areas of Transportation, Politics / Government and Architecture. Buildings in the district represent the growth and development of a community along a major transportation route — now the Lincoln Hwy. The period of significance c. ca. 1762 - 1940.

RECOM./CRITERIA Accept A & C
REVIEWER Patty S. Cramma
DISCIPLINE Historian
DATE Aug. 9, 1993

DOCUMENTATION see attached comments Y/N see attached SLR Y/N

CLASSIFICATION

___count ___resource type

STATE/FEDERAL AGENCY CERTIFICATION

FUNCTION

___historic ___current

DESCRIPTION

___architectural classification
___materials
___descriptive text

SIGNIFICANCE

Period Areas of Significance--Check and justify below

Specific dates Builder/Architect
Statement of Significance (in one paragraph)

___summary paragraph
___completeness
___clarity
___applicable criteria
___justification of areas checked
___relating significance to the resource
___context
___relationship of integrity to significance
___justification of exception
___other

BIBLIOGRAPHY

GEOGRAPHICAL DATA

___acreage ___verbal boundary description
___UTMs ___boundary justification

ACCOMPANYING DOCUMENTATION/PRESENTATION

___sketch maps ___USGS maps ___photographs ___presentation

OTHER COMMENTS

Questions concerning this nomination may be directed to

_____ Phone _____

Signed _____ Date _____


AMOCO
107
122

Lincoln Way east, McConnellsburg Historic District
McConnellsburg, Fulton County, PA
Photo by Paula Reed
1/92
Neg. Loc. Preservation Assoc. Inc., Hagerstown, MD

Southwest view, 400 block, South side
#1



Lincoln Way East, McConnellsburg, Historic District
McConnellsburg, Fulton Co., PA
Photo by Paula Reed
1/92
Neg. Loc. Preservation Assoc. Inc., Hagerstown, MD
Northeast view, 400 block, north side
#2


NO
PARKING
DOCTORS
OFFICE

Lincoln Way East, McConnellsburg Historic District
McConnellsburg, Fulton Co, PA
Photo by Paula Reed
1/92
Neg. Loc. Preservation Assoc. Inc., Hagerstown, MD
Southwest view, 300-400 block, South side
#3



Lincoln Way East, McConnellsburg Historic District
McConnellsburg, Fulton Co, PA.
Photo by Paula Reed
1/92
Neg. Loc. Preservation Assoc. Inc., Hagerstown, MD
Northeast view, 300 block, north side
#4


DOLLAR GENERAL STORES
Alleine's
Fashion Shop
SALE
SALE

Lincoln Way East, McConnellsburg Historic District
McConnellsburg, Fulton Co, PA
Photo by Paula Reed
1/92
Neg. Loc. Preservation Assoc. Inc., Hagerstown, MD
Northwest view, 200 block, north side
#5


LIQUOR STORE
ONE HOUR CLEANER'S
SPEED LIMIT 25
CHEVROLET

Lincoln Way West, McConnellsburg Historic District
McConnellsburg, Fulton Co, PA
Photo by Paula Reed
1/92
Neg. Loc. Preservation Assoc. Hagerstown MD
Northwest view, 100 block, north side
#6


BISHOP-BAKER
V.F.W.

Lincoln Way West, McConnellsburg Historic District
McConnellsburg, Fulton Co, PA
Photo by Maureen Ireland
1/92
neg. Loc. Preservation Assoc. Inc. Hagerstown, MD
southeast view, 100 block, south side
#7



Lincoln Way West, McConnellsburg Historic District
McConnellsburg, Fulton Co, PA
Photo by Paula Reed
9/92
neg. Loc. Preservation Assoc. Inc., Hagerstown, MD
northwest view, 200 block, north side
#8


Jenny's
Sweet Connection

North Third St., McConnellsburg Historic District
McConnellsburg, Fulton Co., PA
photo by Paula Reed
1/92
neg. Loc. Preservation Assoc., Hagerstown, MD
northeast view, 100 block, east side
#9


MARKET
SECOND
ANTIQUES

North Second St., McConnellsburg Historic District
McConnellsburg, Fulton Co, PA
photo by Paula Reed
1/92
neg. loc. Preservation Assoc. Inc. Hagerstown, MD
southeast view, 100 block, East side
#10



South Second St., McConnellsburg Historic District
McConnellsburg, Fulton Co, PA
photo by Maureen Ireland.
1/92
neg. loc. Preservation Assoc. Inc., Hagerstown, MD
Southeast view, 100 block, east side
#11


SOUTH
522

South Second St., McConnellsburg Historic District
McConnellsburg, Fulton Co. PA
1/93
photo by Maureen Ireland
neg. loc. Preservation Assoc. Inc. Hagerstown, MD
Southwest view, 100 block, west side
#12


DO NOT PASS
Dr. James H. Shultz
OPTOMETRIST
FAMILY EYE CARE

South Second St., McConnellsburg Historic District
McConnellsburg, Fulton Co., PA
photo by Paula Reed
8/92
neg. Loc., Preservation Assoc. Inc, Hagerstown, MD
Southwest view, 100 block, West side
#13



East Market St., McConnellsburg Historic District
McConnellsburg, Fulton Co., PA
photo by Paula Reed
8/92
neg. loc., Preservation Assoc. Inc., Hagerstown, MD
northeast view 200 block, north side
#14



East Market St., McConnellsburg Historic District
McConnellsburg, Fulton Co., PA
photo by Paula Reed
8/92
neg. Lee, Preservation Assoc. Inc., Hagerstown, MD
Southeast view, 200 block, south side
#15


NORTH
522

Court House Square, McConnellsburg Historic District
McConnellsburg, Fulton Co, PA
photo by Paula Reed
1/92
neg. loc. Preservation Assoc. Inc., Hagerstown, MD
northeast view, northeast corner
#16


NORTH
522

Fulton Co. Courthouse, McConnellsburg Historic District.
McConnellsburg, Fulton Co, PA
photo by Paula Reed
1/92
Neg. Loc. Preservation Assoc. Inc., Hagerstown, MD
northwest view, northwest corner of square
#17


MARKET
FIRST

West Market St., McConnellsburg Historic District
McConnellsburg, Fulton Co., PA
photo by Paula Reed
8/92
neg Location: Preservation Assoc. Inc., Hagerstown, MD
Southeast view, 100 block, south side
#18



West Market St., McConnellsburg Historic District

McConnellsburg, Fulton Co, PA

photo by Paula Reed

8/92

neg. loc. Preservation Assoc. Inc., Hagerstown, MD

northeast view, 100 block, north side

#19


DE SHONG'S

North Second Street, McConnellsburg Historic District
McConnellsburg, Fulton Co, PA
photo by Paula Reed
9/92
neg. Loc. Preservation Assoc. Inc., Hagerstown, MD
northeast view, 200 block, east side
#20



North Second St, McConnellsburg Historic District
McConnellsburg, Fulton Co., PA.
Photo by Paula Reed
9/92
neg. loc. Preservation Assoc. Inc. Hagerstown, MD
Southwest view, 300 block, west side
#21



North and South First. St., McConnellsburg Historic Dist.
McConnellsburg, PA, Fulton Co.
photo by Paula Reed
8/92
neg. loc. Preservation Assoc. Inc., Hagerstown, MD
Southeast view, east side from Market St.
#22

5364 II SE (HUSTONTOWN)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

MC CONNELLSBURG QUADRANGLE
PENNSYLVANIA
7.5 MINUTE SERIES (TOPOGRAPHIC)

5464 III SE (FANNETTSBURG)

78°00′ — 40°00′ — 77°52′30″ — 40°00′

245000m.E. — 1 960 000 FEET — 253000m.E.

4431000m.N. — 240 000 FEET — 4418000m.N.

FORT LITTLETON 4.8 MI.
KNOBSVILLE 0.5 MI.

5464 III SW (BURNT CABINS)

FANNETTSBURG 5.8 MI.
METAL 1.3 MI.

57′30″ — 55′

LICKING CREEK — Patterson Run — LITTLE SCRUB RIDGE — TODD MOUNTAIN — Little Aughwick Creek Valley — Aughwick Creek — Oak Spring — Fritz Spring — Gum Spring — House Spring — Forest Hdrs — Cowans Gap Lake — Cowans Gap — Cowans Village — STATE GAME REFUGE — METAL PATH VALLEY — Conococheague Creek — Bricker Run — McKeldey Run — Pump Run — Richmond Furnace — Fannett Branch — BUCHANAN — FULTON CO. FRANKLIN CO. — Sand Spring — Little Cove Creek — Richmond Spring — Spring Run — Big Cove Run — McGovern Sch — STATE FOREST — TUSCARORA MOUNTAIN — Hogback Mtn — Big Mtn 2458 — Lookout Tower — PENN CENTRAL — West Branch — Horse Valley — Conodoguinet Cr — ST THOMAS — KITTATINNY MOUNTAIN — Jordans Knob — Cold Spring Run — Beaver Run Valley — Broad Run — Fish Hatchery — Conococheague Creek — Dutchtown — Bear Lick Creek — Rattlesnake Ridge — Mercersburg Reservoir — Buck Run — Cape Horn — Buchanan Summit — Tuscarora Summit — Rocky Hollow Run — Fort Loudon — Jugtown Sch — Kendall Run — Spring Run — Golf Course — Cito — MC CONNELLSBURG (BM 890)

PA. TURNPIKE I.8 MI.

NEEDMORE 14 MI.
6.6 MI. TO PA. 928

NEEDMORE 11 MI.
1.2 MI. TO U.S. 522

0.5 MI. TO PA. 456
MERCERSBURG 5.5 MI.

(MERCERSBURG) 5463 IV SW

0.9 MI. TO PA. 16

MERCERSBURG 3.5 MI.

ST. THOMAS 4.5 MI.

5363 I NE (MEADOW GROUNDS)

(ST. THOMAS) 5463 IV NE

(BIG COVE TANNERY) 5363 I SE

(WILLIAMSON) 5463 IV SE

39°52′30″ — 78°00′ — 77°52′30″ — 39°52′30″

INTERIOR—GEOLOGICAL SURVEY, RESTON, VIRGINIA—1977

Mapped by the Army Map Service
Published for civil use by the Geological Survey

Control by USGS, USC&GS, and USFS

Topography from aerial photographs by photogrammetric methods
Aerial photographs taken 1943. Field check 1944

Polyconic projection. 1927 North American datum
10,000-foot grid based on Pennsylvania coordinate system, south zone
1000-meter Universal Transverse Mercator grid ticks,
zone 18, shown in blue

Revisions shown in purple compiled by the Geological Survey in cooperation with State of Pennsylvania agencies, from aerial photographs taken 1968 and 1973. This information not field checked

MN — GN
7½° 133 MILS — 1°53′ 33 MILS
UTM GRID AND 1973 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

SCALE 1:24000
1 MILE
7000 FEET
1 KILOMETER
CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

PENNSYLVANIA
QUADRANGLE LOCATION

ROAD CLASSIFICATION
Heavy-duty — Light-duty
Medium-duty — Unimproved dirt
U. S. Route — State Route

MC CONNELLSBURG, PA.

N3952.5—W7752.5/7.5
1944
PHOTOREVISED 1968 AND 1973
AMS 5463 IV NW—SERIES V831

McConnellsburg Historical Society
Fulton Co - PA
Donated by Accomodation Road
Engineering Assoc
Zone 18
4 E 2436800 N 4418000

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF ENVIRONMENTAL RESOURCES
TOPOGRAPHIC AND GEOLOGIC SURVEY

MEADOW GROUNDS QUADRANGLE
PENNSYLVANIA—FULTON CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)

5364 II SW (WELLS TANNERY)
5364 II SE (HUSTONTOWN)
5464 III SW (BURNT CABINS)
5363 I NW (BREEZEWOOD)
5363 I SE (BIG COVE TANNERY)
5463 IV NW (MC CONNELLSBURG)
5363 I SW (NEEDMORE)
5463 IV SW (MERCERSBURG)

BEDFORD (U.S. 220) 27 MI. 10 MI. TO PA. TURNPIKE
SALTILLO 19 MI. HUSTONTOWN 4.5 MI.
FORT LOUDON (PA. 75) 7 MI. CHAMBERSBURG (U.S. 11) 22 MI.
1 MI. TO U.S. 30 KNOBSVILLE 5 MI.
4 MI. TO U.S. 522
WEBSTERS MILL 2 MI. 17 MI. TO INT. 70

78°07'30" 40°00' 5' 2'30" 78°00' 39°52'30"
1 920 000 FEET
240 000 FEET
200 000 FEET
1 900 000 FEET
4431 000m N.
4419 000m N.
746 000m E.
756 000m E.

L I C K I N G C R E E K
T O D D R I D G E
M O U N T A I N
S T A T E G A M E L A N D S
N O 53
M E A D O W G R O U N D S
M E A D O W G R O U N D S
P L E A S A N T R I D G E
T I M B E R R I D G E
S C R U B R I D G E
B E L F A S T
M E A D O W
A Y R

Green Hill
Asbury Ch
Harrisonville
Breezy Point
Summit
Bethlehem Ch
Cem
Sloam Ch
The Supreme Council of the House of Jacob
Andover
Pleasant Ridge
Pleasant Ridge Ch
Wink Cem
Gate
Rock Hill Ch
Union Ch
Big Spring Cem
McConnellsburg
Meadow Grounds Lake
RESTRICTED
Chestnut Flat
Strawberry Ridge

Sindledecker Br
Sindledecker Creek
Branch
Owl Creek
Licking Creek
Bobby Run
Lick Hollow
Owl Run
Sloam Run
Patterson Creek
Foster Cr
Ford
Creek
Roaring Run
Back Run
Jones Run
Kendall Run
Big Spring Run
Spring Run
Spring
Big Cove Run
Cove Creek
PIPELINE
TRAIL
JEEP TRAIL

BM 923
BM 908
BM 1095
BM 1083
BM 849
BM 1094
BM 784
BM 851
BM 988
BM 1469
BM 752
BM 802
BM 992
BM 964
BM 932
BM 969
BM 886
BM 874
BM 1266
BM 869
BM 854
BM 831
BM 868

Mapped, edited, and published by the Geological Survey

Control by USGS and USC&GS

Topography by photogrammetric methods from aerial photographs taken 1966. Field checked 1967

Polyconic projection. 1927 North American datum
10,000-foot grid based on Pennsylvania coordinate system, south zone
1000-meter Universal Transverse Mercator grid ticks, zone 17, shown in blue

Fine red dashed lines indicate selected fence and field lines where generally visible on aerial photographs. This information is unchecked

Revisions shown in purple compiled in cooperation with State of Pennsylvania agencies from aerial photographs taken 1973. This information not field checked

MN GN
7½° 133 MILS
1°53′ 33 MILS
UTM GRID AND 1973 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

SCALE 1:24 000
1 MILE
1000 FEET
1 KILOMETER
CONTOUR INTERVAL 20 FEET
DATUM IS MEAN SEA LEVEL

PENNSYLVANIA
QUADRANGLE LOCATION

ROAD CLASSIFICATION
Primary highway, all weather, hard surface
Secondary highway, all weather, hard surface
Light-duty road, all weather, improved surface
Unimproved road, fair or dry weather
U. S. Route
State Route

MEADOW GROUNDS, PA.

N3952.5—W7800/7.5

1967
PHOTOREVISED 1973
AMS 5363 I NE—SERIES V831

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON, D. C. 20242
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

INTERIOR—GEOLOGICAL SURVEY, WASHINGTON, D. C.—1973

McConnellsburg Historical Society
Fulton Co. Penna
Meadow Grounds Quad
7.5 Min Series
N3952.5—W7800/7.5
24 3434 85
24 3570
80

Commonwealth of Pennsylvania
Pennsylvania Historical and Museum Commission
Bureau for Historic Preservation
Post Office Box 1026
Harrisburg, Pennsylvania 17108-1026

June 22, 1993

RECEIVED
JUN 30 1993
NATIONAL
REGISTER

Carol Shull, Chief of Registration
National Register of Historic Places
U.S. Department of the Interior
800 North Capitol Street, Suite 250
Washington, DC 22002

Re: NR Nomination Form

Dear Ms. Shull:

The following National Register nomination forms are being submitted for your review and response.

McConnellsburg Historic District, Fulton County

The proposed action is:

__x__ listing in the National Register

_____ determination of eligibility (owner objection)

If you have any questions regarding the nomination please call us at (717) 783-8947.

Sincerely,

for Dan G. Deibler, Chief
Division of Preservation
Services

Enclosures
DGD/dlc

H32(2280)

OCT 17 2006

Mr. Arnie Miller
209 Lincoln Way East
McConnellsburg, Pennsylvania 17233

Dear Mr. Miller:

Thank you for your recent inquiry concerning the building located at 209 Lincoln Way East in McConnellsburg, Pennsylvania. We are pleased to inform you that the building at 209 Lincoln Way East is listed in the National Register of Historic Places as a contributing building in the McConnellsburg Historic District. The McConnellsburg Historic District was listed in the National Register of Historic Places for its historic and architectural importance on August 9, 1993.

The National Register of Historic Places, administered by the National Park Service, is the official list of the Nation's historic places worthy of preservation and includes districts, sites, buildings, structures, and objects that are significant in American history, architecture, archeology, engineering, and culture. Listing in the National Register has the following results which assist in preserving historic properties: recognition that a property is significant to the Nation, the State, or the community; consideration in the planning for Federal or federally assisted projects; eligibility for Federal tax benefits; and qualification for Federal assistance for historic preservation, when funds are available. The listing of a property in the National Register often changes the way communities perceive their historic places and gives credibility to efforts of private citizens and public officials to preserve these resources as living parts of our communities.

We appreciate your interest in the historic preservation programs of the National Park Service. Please let us know if we may provide further information or assistance.

Sincerely,

(Sgd) Patrick Andrus

Patrick W. Andrus, Historian
National Register of Historic Places

bcc: 2285
2201
Basic File Retained In 2280
FNP:PAndrus:OP:10-17-06:s\nr\amiller