

EBEY'S LANDING **PNRO** NATIONAL INVENTORY HISTORICAL RESERVE


National Park Service
Pacific Northwest Region
Cultural Resources Division

Westin Building, Room 1920
2001 Sixth Avenue
Seattle, Washington 98121

NAME(S) OF STRUCTURE Liberal League Hall/San de Fuca Community Chapel		DATE OF CONSTRUCTION 1906	SITE ID. NO.				
SITE ADDRESS (STREET & NO.) North Highway 20 near San de Fuca			SCALE 1:24000	QUAD NAME Coupeville			
CITY/VICINITY San de Fuca		COUNTY Island	STATE Washington	UTM ZONE 10	EASTING 5207805342390	NORTHING	
OWNER/ADMIN ADDRESS San de Fuca Chapel Sunday School Society P.O. Box 991 Coupeville, WA 98239 parcel #S8060-00-09034		☒ CONTRIBUTING ☐ NON-CONTRIBUTING		DANGER OF DEMOLITION? (SPECIFY THREAT)		☐ YES ☒ NO ☐ UNKNOWN	
DESCRIPTION AND BACKGROUND HISTORY INCLUDING CONSTRUCTION DATE(S), PHYSICAL DIMENSIONS, MATERIALS, MAJOR ALTERATIONS, IMPORTANT BUILDERS, ARCHITECTS, ENGINEERS, ETC. False Front Commercial Building. Wood frame set on post and block foundation; rectangle (22' x 56') with 1-story gable roof addition on southeast corner; 3 bays wide; 1-story; shiplap siding; wood-shingled gable roof; recessed center entrance on west facade; off-center interior chimney. Exterior features include aluminum sliding sash; boxed cornice; plain frieze board; corner boards; center stairs with iron railing on west facade; shed roof enclosed porch on east facade; 1-story, enclosed, hip roof addition connected to false front; wood sill; vertical wood panel skirting. In 1905, the Dorcas Society was formed to raise funds to build a community hall at San de Fuca. The hall was constructed in 1906 with volunteer labor. The Hall served as a site for dances, plays, and community gatherings for many years. An itinerant painter designed and painted the existing backdrop for the stage. The kitchen was added during the 1930's and an enclosed front porch constructed on the west facade. The stairs to the second story stage entrance have been removed. Since 1948, the Community Chapel has used the building for church services. 1995: One contributing structure.		CURRENT USE Meeting Hall		ORIGINAL USE Meeting Hall			
PUBLIC ACCESSIBILITY ☒ YES, LIMITED ☐ NO		EXISTING SURVEYS ☐ NR ☐ HABS ☐ NHL		☐ LCS ☐ NPS		☐ STATE ☐ COUNTY	☐ LOCAL ☐ OTHER
LOCATED IN AN HISTORIC DISTRICT? ☒ YES ☐ NAME Cent. Whid. Isl. Hist. Dist.		CONDITION ☐ EXCELLENT ☒ GOOD		☐ FAIR ☐ DETERIORATED		☐ RUINS	
SIGNIFICANCE This property is significant under National Register criterion C, because it embodies the distinctive characteristics of architectural expressions and methods of construction that represent the period of community development in the Reserve, from 1871 until 1910. It retains integrity of location, setting, materials, design, workmanship, feeling and association.							



FROM W

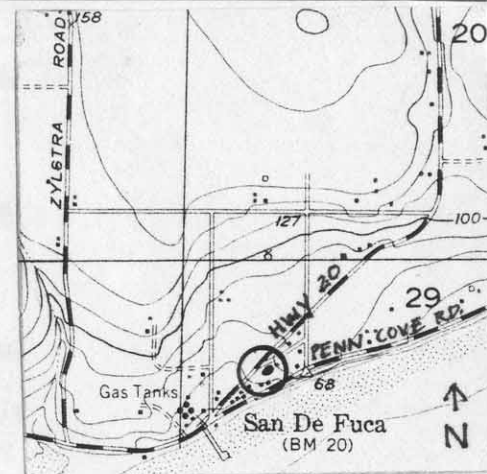

FROM NE



FROM NW

NEGATIVE NO. L20-34; L16-10-12

HABS/HAER QUALITY

☐ YES

☒ NO

REFERENCES Whidbey News Times. 16 December 1965.

Armstrong, Susie. "A Short History of San de Fuca, Wn. and Vicinity." p. 2.

Bryant, Marilyn. Personal Interview. 6 September 1983.

INVENTORIED BY

Luxenberg/Castellano/Lein

AFFILIATION

National Park Service

DATE

Summer, 1983