



Model 3210HD

Super Bright 32" LCD HDTV Screen

All-weather enclosure protects internal components from rain, dirt, insects and scratches

Dual airflow system keeps unit cool and dry in temperatures up to 122 degrees F.

Internal thermostatically-controlled heater protects TV in temperatures as low as -24 degrees F.

Innovative watertight cable entry system with pass-through design keeps cables dry and allows for easy hook-ups

Optional wall mounts and deck planter poles are weatherized and include stainless steel hardware


Model 3210HD

Specifications

LCD Screen	32-inch diagonal TFT Active Matrix
Resolution	1366 x 768 WXGA
Aspect Ratio	16:9
Active Area	697.7 x 392.3 mm
Contrast Ratio	1600:1
Response Time	8 milliseconds
H/V Viewing Angle	178° by 178°
Display Colors	16.7 million
Input Connectors:	
RF	Antenna/CATV (NTSC/ATSC)
HDMI	HDMI Input x1
Video Composite	Dual S-Video x1 and Composite Video x1 L/R Audio Inputs x2
Video Component	YCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 720P and 1080i) and audio L/R channels x1
PC	15-pin D-sub VGA
RS232 Serial	1/8" stereo jack (discreet on/off and input-select)
Input Power	100-240 VAC, 50-60 Hz 170W
Audio	10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear cover
Operating Temp.	-24° to 122° F. (-31° to 50° C.)
Non-op. Temp. (Off-mode with power applied)	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Universal water-resistant remote control with lithium battery Removable table stand
TV Dimensions	32.00 in. W x 22.07 in. H x 6.81 in. D
Weight	49.0 lbs.
Shipping Dimensions	37.0 in. W x 31.0 in. H x 11.7"D
Shipping Weight	57 lbs.
Warranty	One-year, in-factory, parts and labor

SunBriteTV Model 3210HD

(All dimensions are in inches)

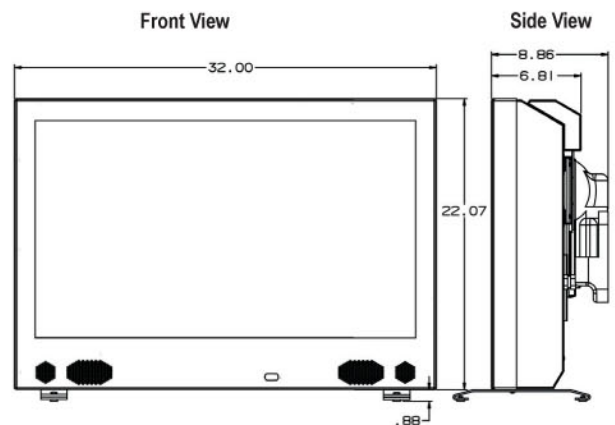

TV Dimensions are:

32.00 in. W x 22.07 in. H x 6.81 in. D

Height dimension with table stand is 22.95 in.

TV with optional wall mount measures 8.86 in. when folded flush against the wall.

Optional Accessories

SB-CM32A12	Ceiling mount with tilt and swivel. Includes adjustable extension column provides 3"-9" above unit to ceiling in 1" increments without disassembly, and 4" x 4" designer ceiling plate. Meets VESA standards.
SB-WM32	Articulating wall mount with tilt and swivel, and extends up to 11-7/8" from the wall. Meets VESA standards.
SB-DP32X	Deck/Planter pole (requires purchase of wall mount). Special order item.
SB-FMT32	RadioFM™ transmits audio from TV to FM radio
SB-DC321	Outdoor TV dust cover