



REV.	DESCRIPTION	ENG.	APPROVAL
C	Add the "M" logo		

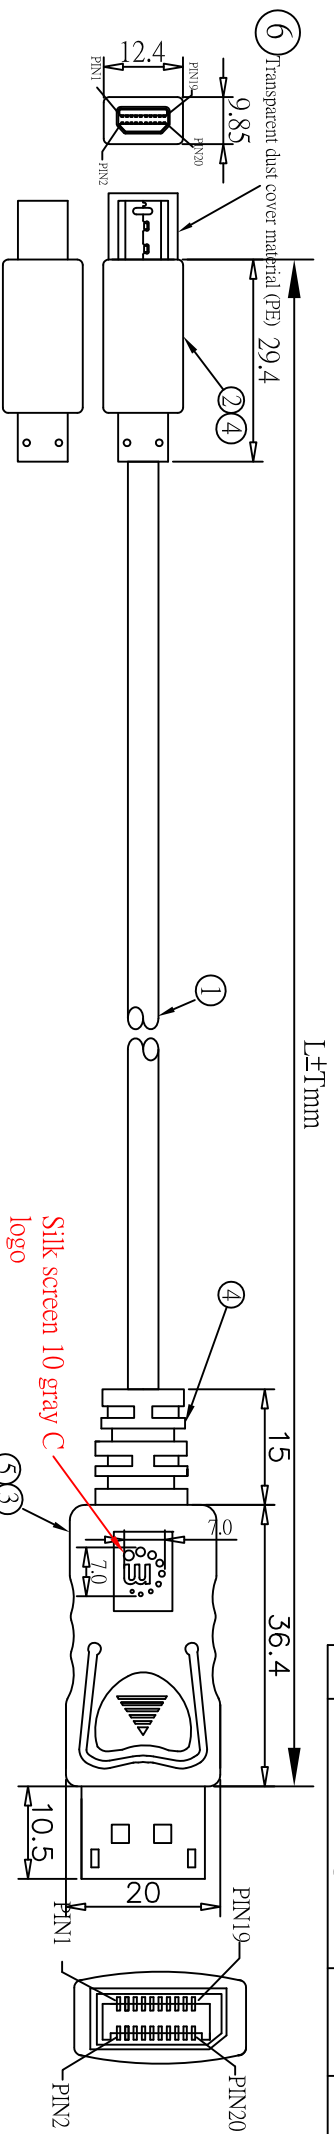

TEM.	Bar code content	L	T
324724	MH Mini DP Cbl mini DPM-DPM Wh3.3ft/1m	L=1M ±20mm	
324748	MH Mini DP Cbl mini DPM-DPM Wh6.6ft/2m	L=2M ±30mm	

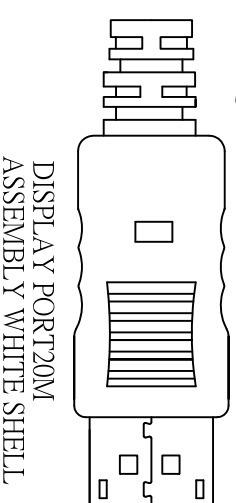

TOL:±0.5mm

PIN ASSIGNMENT:

DP 20M	1	3	2	4	6	5	7	9	8	10	12	11	15	17	16	14	13	14	18	19	20	64
MINI DP 20M	12	10	8	17	15	13	11	9	7	5	3	1	16	18	14	4	6	2	19	20	64	BRAID
	TP		GND		TP		GND		TP		GND		TP		GND		TP		GND		TP	

OPENS/HOTR TEST: 100% TEST.
INSULATION:5M

⑥	Transparent dust cover material (PE)	20G	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INTRACOM Asia Co., Ltd. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INTRACOM Asia Co., Ltd.																			
⑤	WHITE ABS	20G																				
④	PVC 45 P (WHITE)	15G	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1°																			
③	DISP_LAY PORT20M(Black Insulator · Gold PLATED)	IPCS	TOLERANCE (MM)																			
②	MINI DISPLAY PORT20M(GRAY/White Insulator · Gold PLATED)	IPCS	X ±0.5mm																			
①	UI.20276(132AWG/7/0.08TC)*1PR+EAM)*5+32AWG(7/0.08TC)*5C +ABR85%(16/7/0.12AL) OD=5.5MM WHITE PVC	IPCS	X.X ±0.20mm																			
			X.XX ±0.15mm																			
			X.XXX ±0.10mm																			
No.	Description	Qty																				

INTRACOM 安達康股份有限公司
INTRACOM Asia Co., LTD.

TITLE:

APPD

VID 100480

Check

XIE

CUSTOMER:

Drawer

QM Q

Date 2015.06.19

CUSTOMER P/N:

Unit

mm

Projection

ICT P/N:

Scale

1:1

Size A4

DWG.NO:

Sheet

1 of

REV. C