



SVGA Extension Cable

HD15 Male / HD15 Female, Black

Reliable connections for superior signal quality.

MANHATTAN® SVGA Cables easily extend connections between a monitor and desktop or notebook computer. Ideal for use with video splitters, KVM switches and any HD15-equipped display, computer or device, MANHATTAN SVGA Cables are engineered and constructed of quality materials to deliver dependable transmissions in video applications. Full foil and braided shielding, molded boots with strain relief and mini-coax (RGB) and paired video wire construction help provide maximum conductivity and clear, crisp images with reduced EMI interference and distortion over extended distances.

Model	Length
313599	3.0 m (10 ft.)
327015	7.5 m (25 ft.)
313605	10 m (33 ft.)
313612	15 m (50 ft.)
328746	30 m (100 ft.)

Lifetime Warranty


Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
313599
313605
313612
327015
328746



Technical Drawing

REV.	DESCRIPTION	ENCL.	APPROVAL
B			

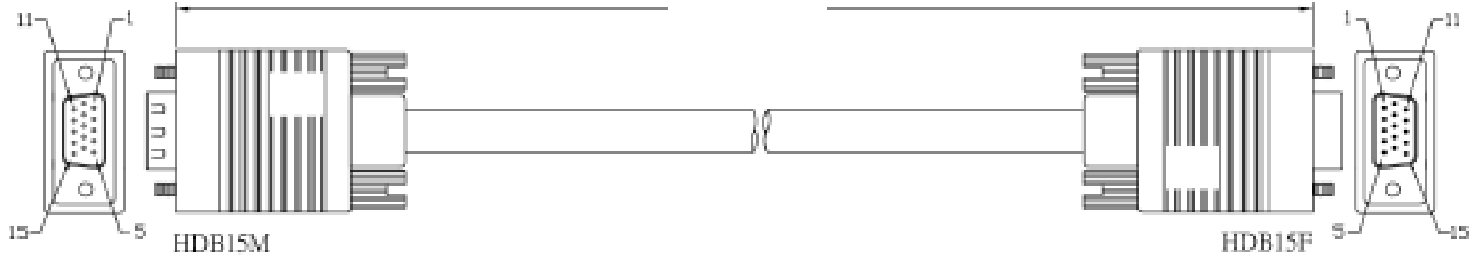

NOTE:

1. CABLE:28AWG,UL2019,AL+8,3COAX+6C,BLACK COLOR,OD=8.0mm PVC JACKET.
2. LENGTH:3000mm
3. CONNECTOR:HD15F*(FULL PIN),HD15F*,BLACK INSULATOR
4. SCREW :HD37.7 SCREW*4PCS.

5. CONTACTS:



6. MOLD:SQUARE
7. OPEN/SHORT TEST: 100% TEST.
INSULATIONS: 5M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED-DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE:

TOLERANCE (INCH)	TOLERANCE (MM)
0.001	±0.025
0.002	±0.050
0.003	±0.075
0.004	±0.100



TITLE:	APPD:			
	Check:	XIE		
CUSTOMER:	Drawn:	zhang	Rev 001/015	
CUSTOMER P/N:	Unit	mm	Projection	1st
ICT P/N:	Scale	1:1	Size	A4
DWG. NO:	Sheet	1 of 1	REV.	A

Features

- HD15 male to HD15 female
- Extends any monitor cable
- Fully shielded to reduce EMI and other interference sources
- Molded PVC boot with strain relief
- Lifetime Warranty

Specifications

STANDARDS/CERTIFICATIONS

- UL 2919

CONTACTS

- (1) 15-pin HD male connection
- (1) 15-pin HD female connection
- Nickel plated
- Molded PVC boot
- Built-in strain relief
- Mini-coax (RGB) and paired video wire

CABLE

- 28 AWG cable
- Withstanding voltage: 300 V DC
- Thermal plastic casing
- Foil and braided shielding
- Overall diameter: 8.0 mm (0.31 in.)

PACKAGE CONTENTS

- SVGA Extension Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

