





Hyundai Palisade

SUV, 5 doors
From Sep. 2020

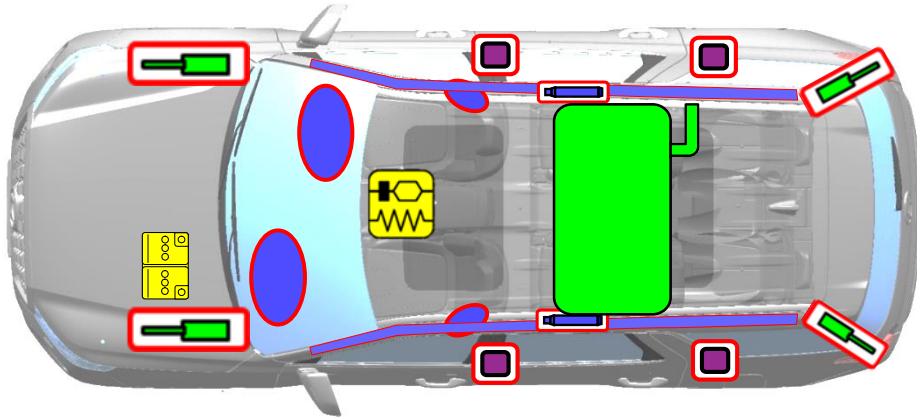

Note: The Rescue Sheet depicts a LHD vehicle (as allowed under the ISO 17840-1). All components (other than steering wheel and passenger airbag) are located in the same position in the Aust/NZ RHD model.

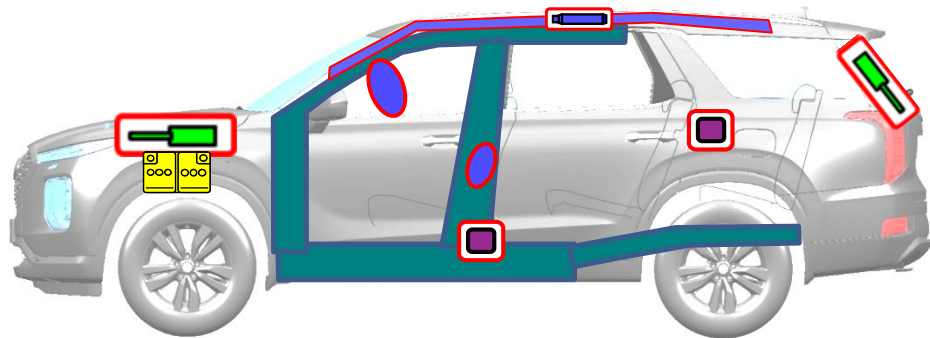

Reserved for holes (paper version)

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut/Preloaded spring		High strength zone		Zone requiring special attention		High voltage component
	Battery low voltage		Ultra capacitor, low voltage		Fuel tank		Gas tank		Safety valve
	High voltage battery pack		High voltage power cable/component		High voltage disconnect		Fuse box disabling high voltage system		Ultra capacitor, high voltage

ID No.

Version No.

Version date


Page

01

03/2022

1 of 4

1. Identification / recognition

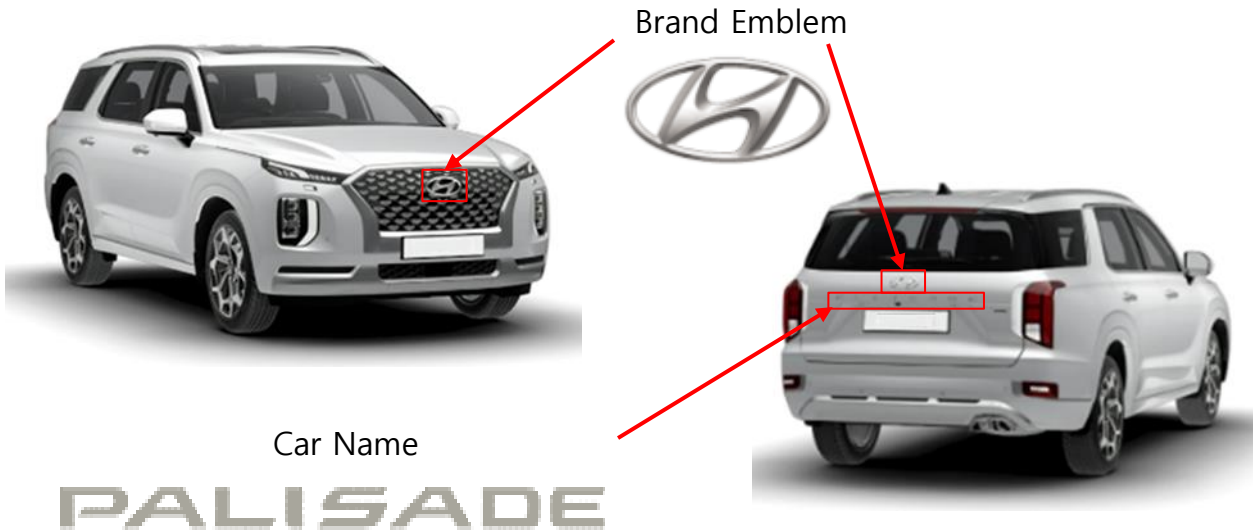

2. Immobilisation / stabilisation / lifting

■ Immobilisation





1. Chock the wheels and pull the switch to set the parking brake.



2. For automatic vehicles the shift lever or shift button to the park(P) position



■ Lifting positions at car underbody: ●

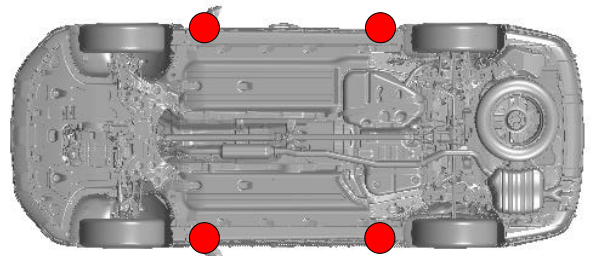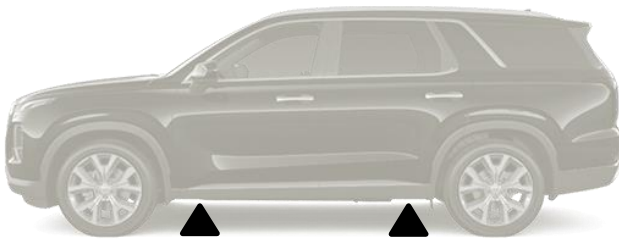


	ID No.	Version No.	Version date	Page
		01	03/2022	2 of 4

3. Disable direct hazards / safety regulations


■ Access to 12V battery

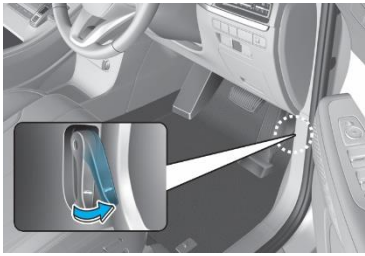

1. Pull the release lever

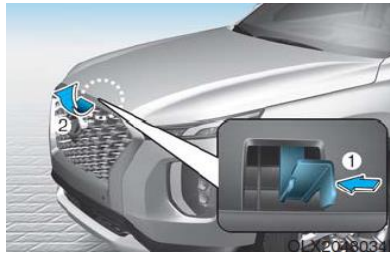

2. Raise the hood

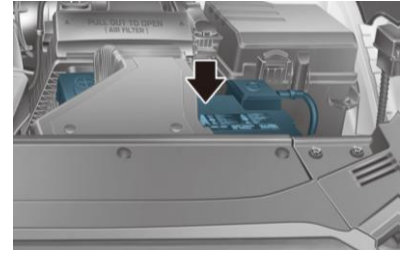

3. Battery in the engine compartment

■ Disabling procedure



① Turn the ignition switch off

② Disconnect the negative(-) terminal

③ Disconnect the positive(+) terminal

4. Access to the occupants


■ Glass



- 1 : Laminated
- 2 : Tempered, Laminated(OPT)
- 3 : Tempered
- 4, 5 : Tempered

■ Vehicle body

Hardened Steel(100K ↑)

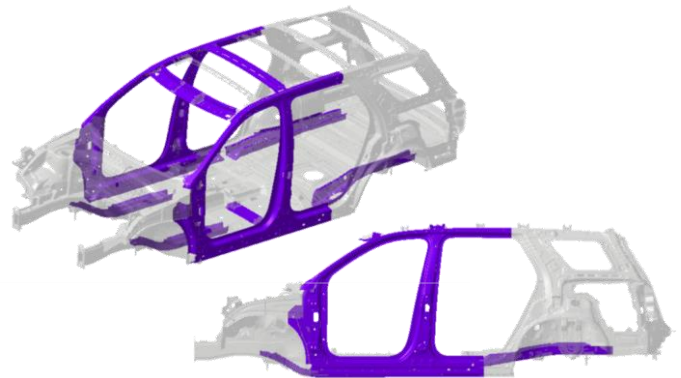

5. Stored energy / liquids / gases / solids


		<p>Max. 71 L</p>
		<p>12 V</p>

	ID No.	Version No.	Version date	Page
		01	03/2022	3 of 4

6. In case of fire




■ Gas Strut/ Preloaded spring

Risk of missile effect of hood and tailgate

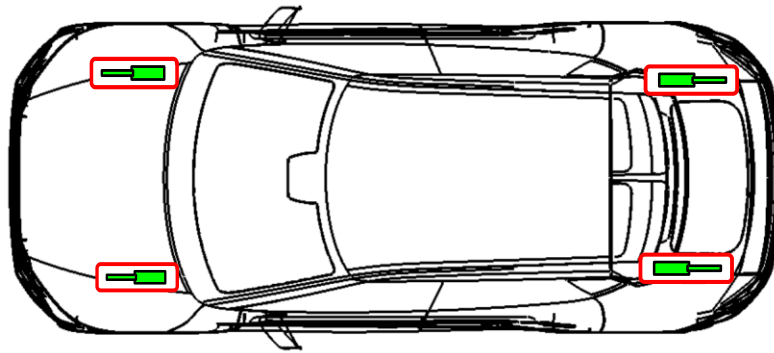

8. Towing / transportation / storage

OK :

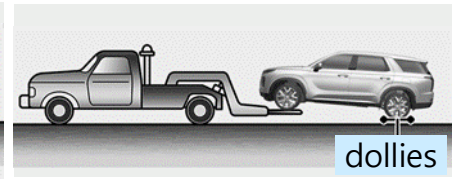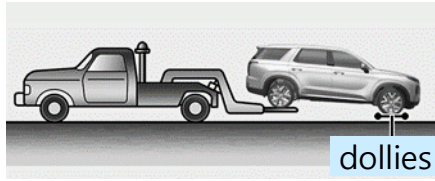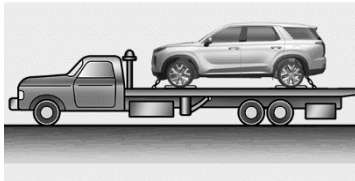







Notice : AWD (All Wheel Drive) vehicle must be towed with all wheels off the ground, either on a flatbed tow truck or using dollys.

Not OK :



10. Explanation of pictograms used

	Petrol vehicle		Diesel vehicle
	Risk of flammability		Risk of damaging human health
	Risk of corrosive material/substances		Bonnet

ID No.

Version No.

Version date

Page

01

03/2022

4 of 4