#### WARNING

- \*\* WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN \*\*
- \* Switch off the main electrical supply from the main fuse box / circuit.
- \* Breaker before installation.
- \* Inspect item carefully before attempting to install.
- \* If there is any damages or obvious defects, do not install.
- \* Item may not be returned once it has been installed.

### CARE AND MAINTENANCE

- \* To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- \* To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- \* Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

### **NOTICE& IMPORTANT SAFETY INSTRUCTIONS**

- \* Please make sure that you have all parts indicated before you begin assembly of this item
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
- \* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- \*The external flexible cable or cord of this lamp cannot be replaced If the cord is damaged, the lamp shall be destroyed

# **Part List and Hardware List**

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
А	Mounting bar		1X	G1	Fixture loop	Q	1X
A1	Outlet box screw	анта)	2X	G2	Metal plate	0 0 0	1X
В	Canopy		1X	Т	Metal frame		1X
С	Collar loop		1X				
D	Canopy ring		1X	I	Light bulbs		4X
Е	Chain		1X	٦	Crystal strands	ræ	144X
E1	Lock link		2X	К	Wire nut	(2)	3X
F	Hook		4X				
G	Fixture body		1X				



Model#: CTL1017A


Product Dimensions: 23.25"Lx23.25"Wx30.75"-77"H




### **PREPARATION**

- \* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- \* If any part is missing or damaged, do not attempt to assemble the product.
- \* Estimated Assembly Time: 20 minutes.
- \* If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

# NOTE: PLEASE USE TYPE"B" BULB MAX 40-WATT OR LED BULB MAX 9-WATT, THERE ARE 4PCS LED 4-WATT BULB IN THE BOX

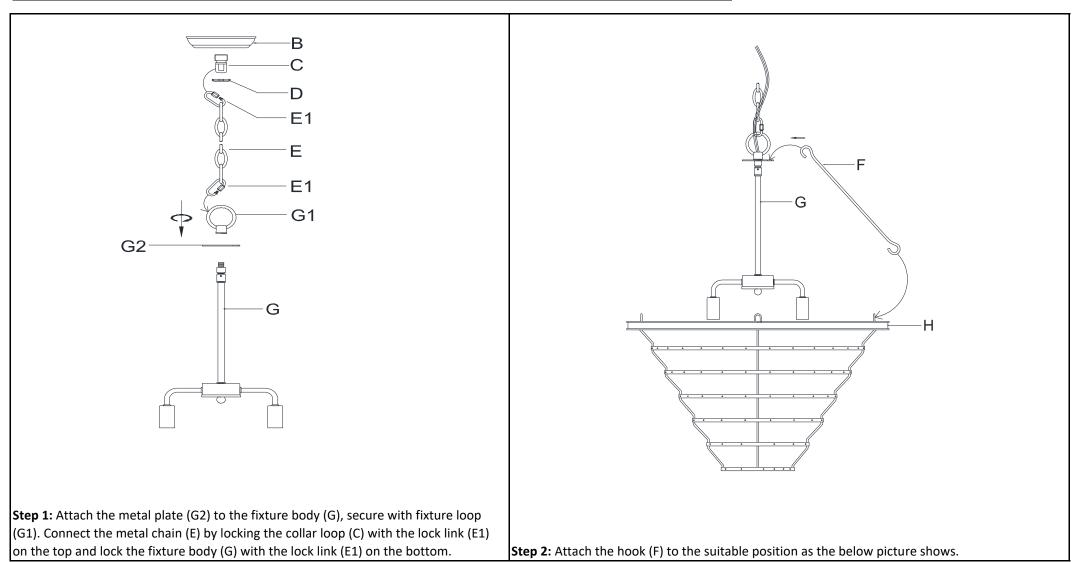






Step 3: Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.


CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:


Wrap ground wire from outlet box around green ground screw(B) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.



**Step 4:** Attach the mounting bar(A) to the junction box with outlet box screw (A1). Attach the canopy (B) to the mounting bar (A), secure with the collar loop (C) and canopy ring(D).



**Step 5:** Install the light bulb (I) to the socket.



**Step 6:** Finally attach the crystal strands (J) to the fixture frame (H) from bottom to top.