

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.



CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced
If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Hex nut		3X	F	Mounting bracket		1X
B	Metal washer		1X	G	Plain washer		2X
C	Threaded rod		1X	H	Outlet box screw		2X
D	Teeth washer		1X	I	Canopy Loop		1X
E	Wire Nut		3X	J	Loop Ring		1X





SAFAVIEH

COUTURE

Model#: CTL1055

**Product Dimensions: 24"Dx30"-
78"H**

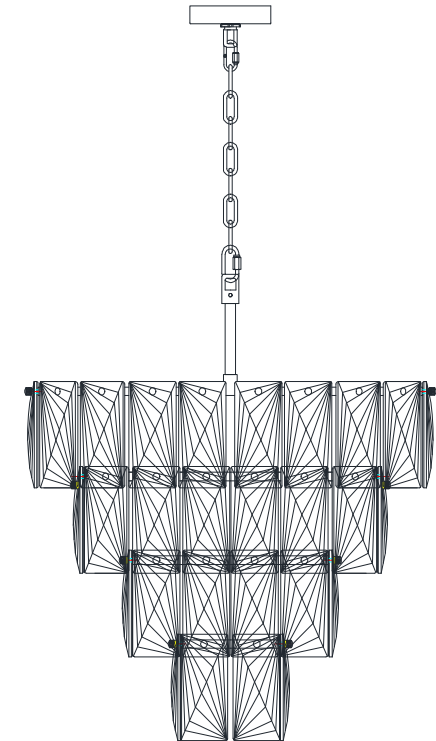


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
K	Steel cable buckle		1X	P	Center rod		1X	Q1	Part		60X
L	Steel cable buckle		1X	Q	Fixture body		1X	Q2	Rubber pad		60X
M	Cluster		1X					R	Crystal		60X
N	Canopy		1X					S	Bulb		10X
O	Chain		1X					T	Wrench		1X


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

NOTE:PLEASE USE TYPE"B" BULB MAX 25-WATT OR LED BULB MAX 5-WATT, THERE ARE 10PCS LED 4-WATT BULB IN THE BOX

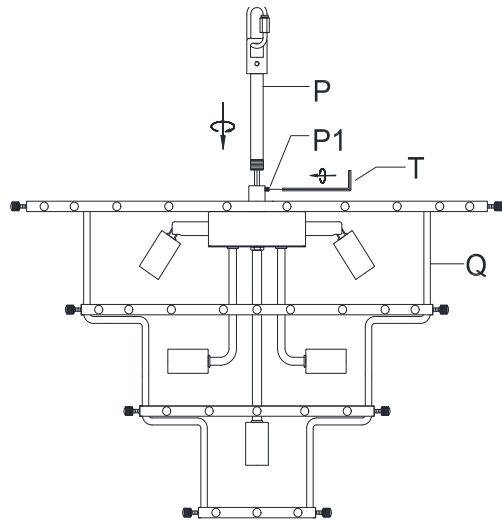


Step 1: Tighten Center rod(P) to Fixture body(Q), Fix set screw(P1) by Wrench(T).

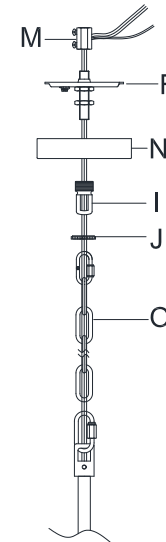


Step 2: Pass wire and cable through Chain (O), Loop Ring(J), Canopy Loop(I), Canopy(N), Mounting bracket(F) and out from side hole of Cluster (M).

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

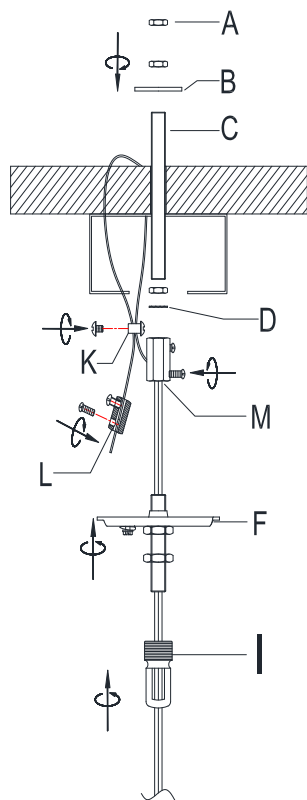

Step 3: Raise the threaded rod (C) thread to the cluster (M), then attach to the ceiling, secure with metal washer (B) and hex nut (A). Wrap the steel wire rope around the beam and lock it with the steel cable buckle(K) and (L). Tighten Mounting bracket(F) to Cluster (M), then fix Canopy Loop(I) to Mounting bracket(F).

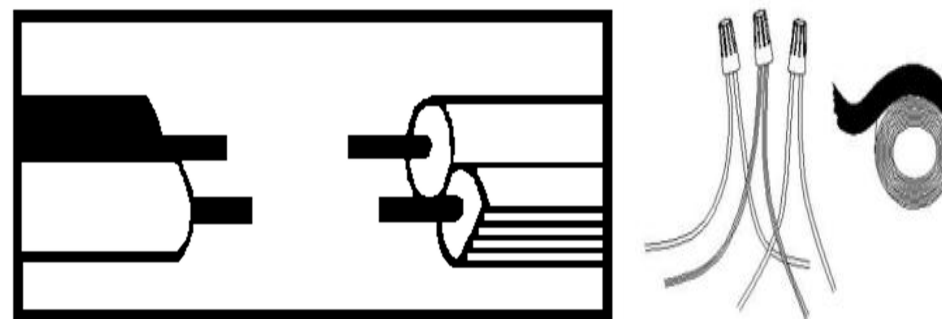

Step 4: Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.


CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:


Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

PREPARATION


- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

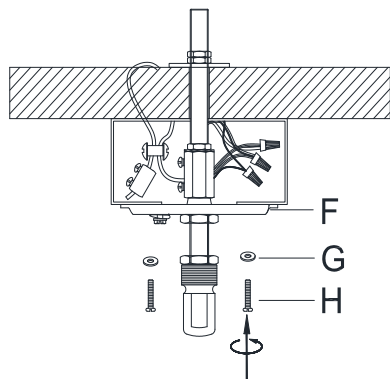

Step 5: Install the mounting bracket (F) to the junction box with plain washer (G) and outlet box screw (H)



Step 6: Attach the canopy (N) to the ceiling with Loop ring (J), Attach two ends of Chain (O) to Canopy Loop(I) and Center rod (P).

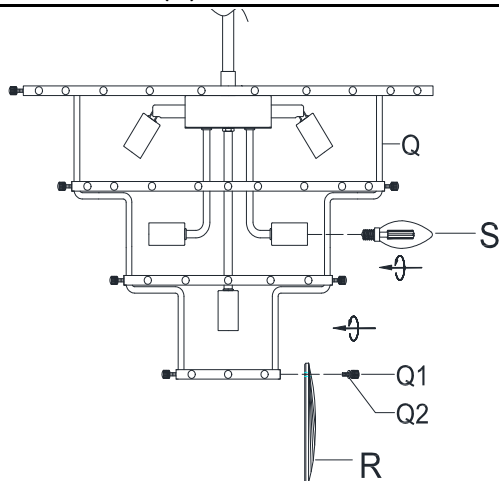

Step 7: Install the light bulb (S) to the socket. Then take off parts (Q1) from Fixture body (Q), Pass through Crystal (R) and fix to fixture body, Install Crystal (R) from bottom.