

## WARNING

**\*\* WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN \*\***

- \* Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- \* Inspect item carefully before attempting to install.
- \* If there is any damages or obvious defects, do not install.
- \* Item may not be returned once it has been installed

## CARE AND MAINTENANCE

- \* To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- \* To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- \* Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

## NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- \* Please make sure that you have all parts indicated before you begin assembly of this item
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
- \* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- \*The external flexible cable or cord of this luminaire cannot be replaced  
If the cord is damaged, the luminaire shall be destroyed


### Part List and Hardware List

| PIECE | DESCRIPTION      | PICTURE                                                                             | QUANTITY | PIECE | DESCRIPTION | PICTURE                                                                               | QUANTITY |
|-------|------------------|-------------------------------------------------------------------------------------|----------|-------|-------------|---------------------------------------------------------------------------------------|----------|
| A     | machine screw    |  | 2X       | G     | canopy      |  | 1X       |
| B     | mounting screw   |  | 2X       | H     | Light body  |  | 1X       |
| C     | mounting bracket |  | 1X       | I     | Lamp cup    |  | 1X       |
| D     | ground screw     |  | 1X       | J     | Glass       |  | 1X       |
| E     | wire connector   |  | 3X       | K     | Bulb        |  | 1X       |
| F     | canopy nut       |  | 2X       | L     | Iron piece  |  | 2X       |

 **SAFAVIEH**  
LIGHTING

Model#: **PND4141A-SET3**


Product Dimensions: 6"D X 16.5-75.5"H

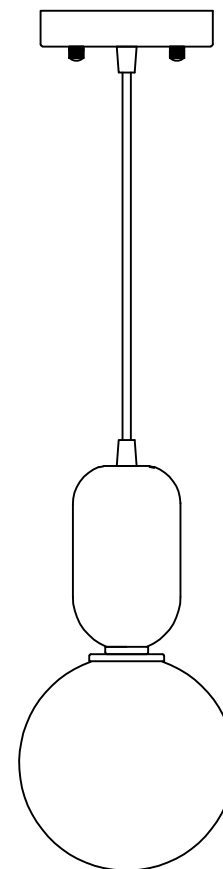


## PREPARATION

- \* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- \* If any part is missing or damaged, do not attempt to assemble the product.
- \* Estimated Assembly Time: 30 minutes.
- \* If you are having difficulty, our friendly Customer Care team is always here to help. Please email [customersupport@safavieh.com](mailto:customersupport@safavieh.com)



**NOTE: PLEASE USE ON/OFF TYPE "B" BULB MAX 40-WATT OR LED BULB MAX 9-WATT THERE IS LED 13-WATT BULB IN THE BOX**

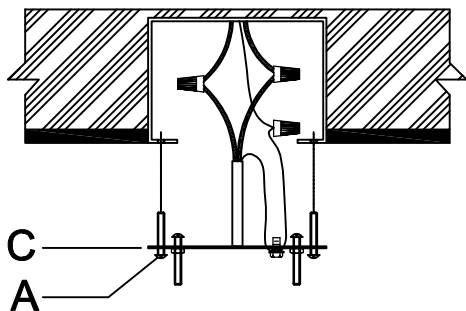

**Step 1:** Unpack all parts from cartons carefully.  
Fix the Mounting plate (C) to the junction box with machine screw (A)

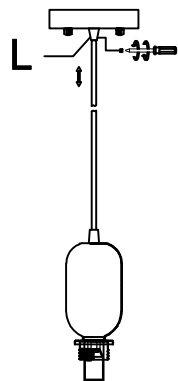

**Step 2:** After loosening the screw in the iron piece (L), you can adjust the wire up and down to a proper position, and then tighten the screw in the iron piece (L)

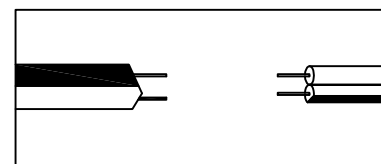

### Step 3: Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire connector.


Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire connector.

**CAUTION:** Do not reverse the hot and neutral connections


**Grounding Instructions:**

Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2"

from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

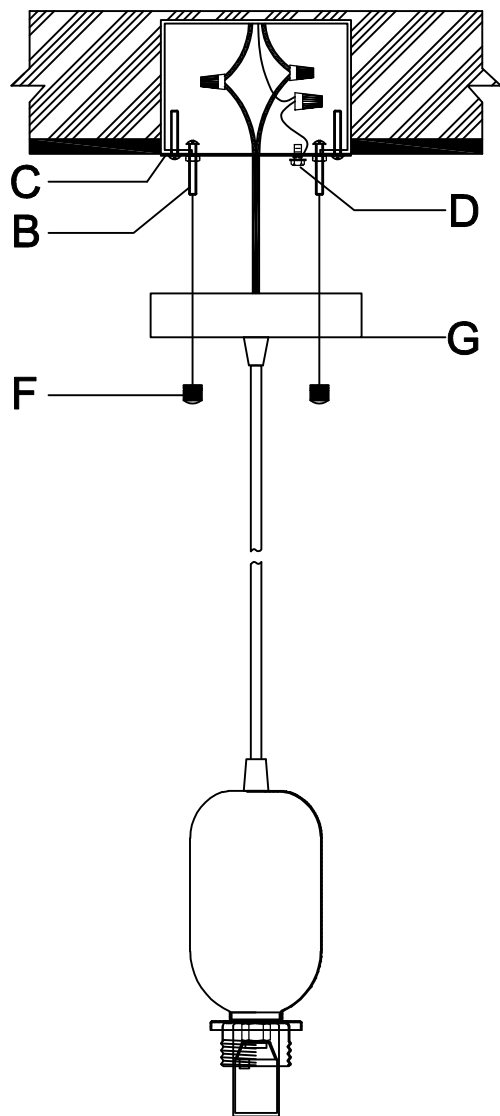

**Step 4: Attach the canopy (G) to the Mounting Plate (C), and fix it by turning the canopy nut (F) anti clockwise**

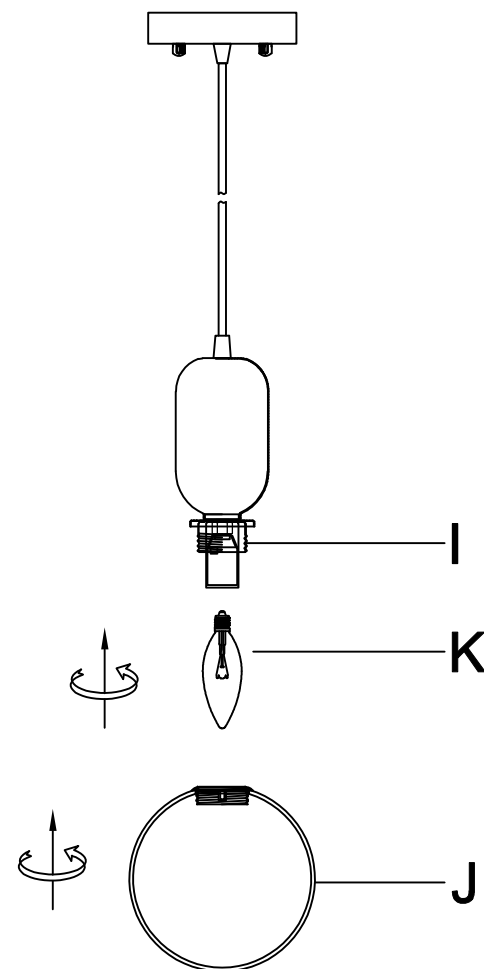

**Step 5: Insert the bulb (K) into the socket, and then rotate and fix the glass (J) on the lamp cup (I)**