

KEY PLAN
NO SCALE


WALL LEGEND

ALSO REFER TO ENLARGED FLOOR PLANS & INTERIOR ELEVATION SHEETS FOR WALL SIZES & SECTION TAGS

	EXISTING WALLS TO REMAIN
	NEW GYPSUM BOARD & METAL STUD WALL CONSTRUCTION (REFER TO ENLARGED FLOOR PLANS FOR NOMINAL WALL THICKNESS)
	NEW (1) 1/2" HR RATED (UL 144) - GYPSUM BOARD & METAL STUD WALL CONSTRUCTION (REFER TO ENLARGED FLOOR PLANS FOR NOMINAL WALL THICKNESS)
	EXISTING WALLS (1) TO BE CONVERTED TO A (1) HR RATED (UL 144) - NEW (2) LAYERS OF GYPSUM BOARD OVER EXISTING METAL STUD WALL CONSTRUCTION (REFER TO ENLARGED FLOOR PLANS FOR NOMINAL WALL THICKNESS) REQUIRES DEMOLITION OF SOME EXISTING GYP. BD.
	NEW WALL (1) TO BE A NEW 6" STUD W/ (2) LAYERS OF GYPSUM BOARD - (1) HR RATED (UL 144)
	REFER TO SHEET A1.0 FOR WALL TYPE INFORMATION AS NOTED

GENERAL NOTES


- FOR MOOD BLOCKING REQUIREMENTS, S.C. SHALL REFER TO SPECIFICATIONS
- DIMENSIONS OF WALLS ARE FROM FINISHED FACE TO FINISHED FACE UNLESS NOTED OTHERWISE.
- PROVIDE SOUND BATT INSULATION IN ALL WALLS AND CEILINGS OF EACH OF THE FOLLOWING ROOMS: MEN'S KITCHEN, LUNCH ROOM, STORE MANAGER'S OFFICE, CASH ROOM, COAT ROOM, DEPARTMENT MANAGER'S OFFICE, JANITOR'S ROOM, AND LOSS PREVENTION.
- ALL PLUMBING ACCESS PANEL LOCATIONS REQUIRED SHALL BE COORDINATED WITH PLUMBING DRAWINGS, MANUFACTURER'S SHOP DRAWINGS, AND DSA PROJECT MANAGER.
- S.C. SHALL INSTALL FIRE BLOCKING AND DRAFT STOPPING IN COMBUSTIBLE CONCEALED WALL LOCATIONS EVERY 10'-0" & 24" BOTH HORIZONTALLY & VERTICALLY AS REQUIRED BY CODE.
- ALSO REFER TO SHEETS A1.0 THRU A1.4 FOR ADDITIONAL REFERENCES TO WALL SECTIONS

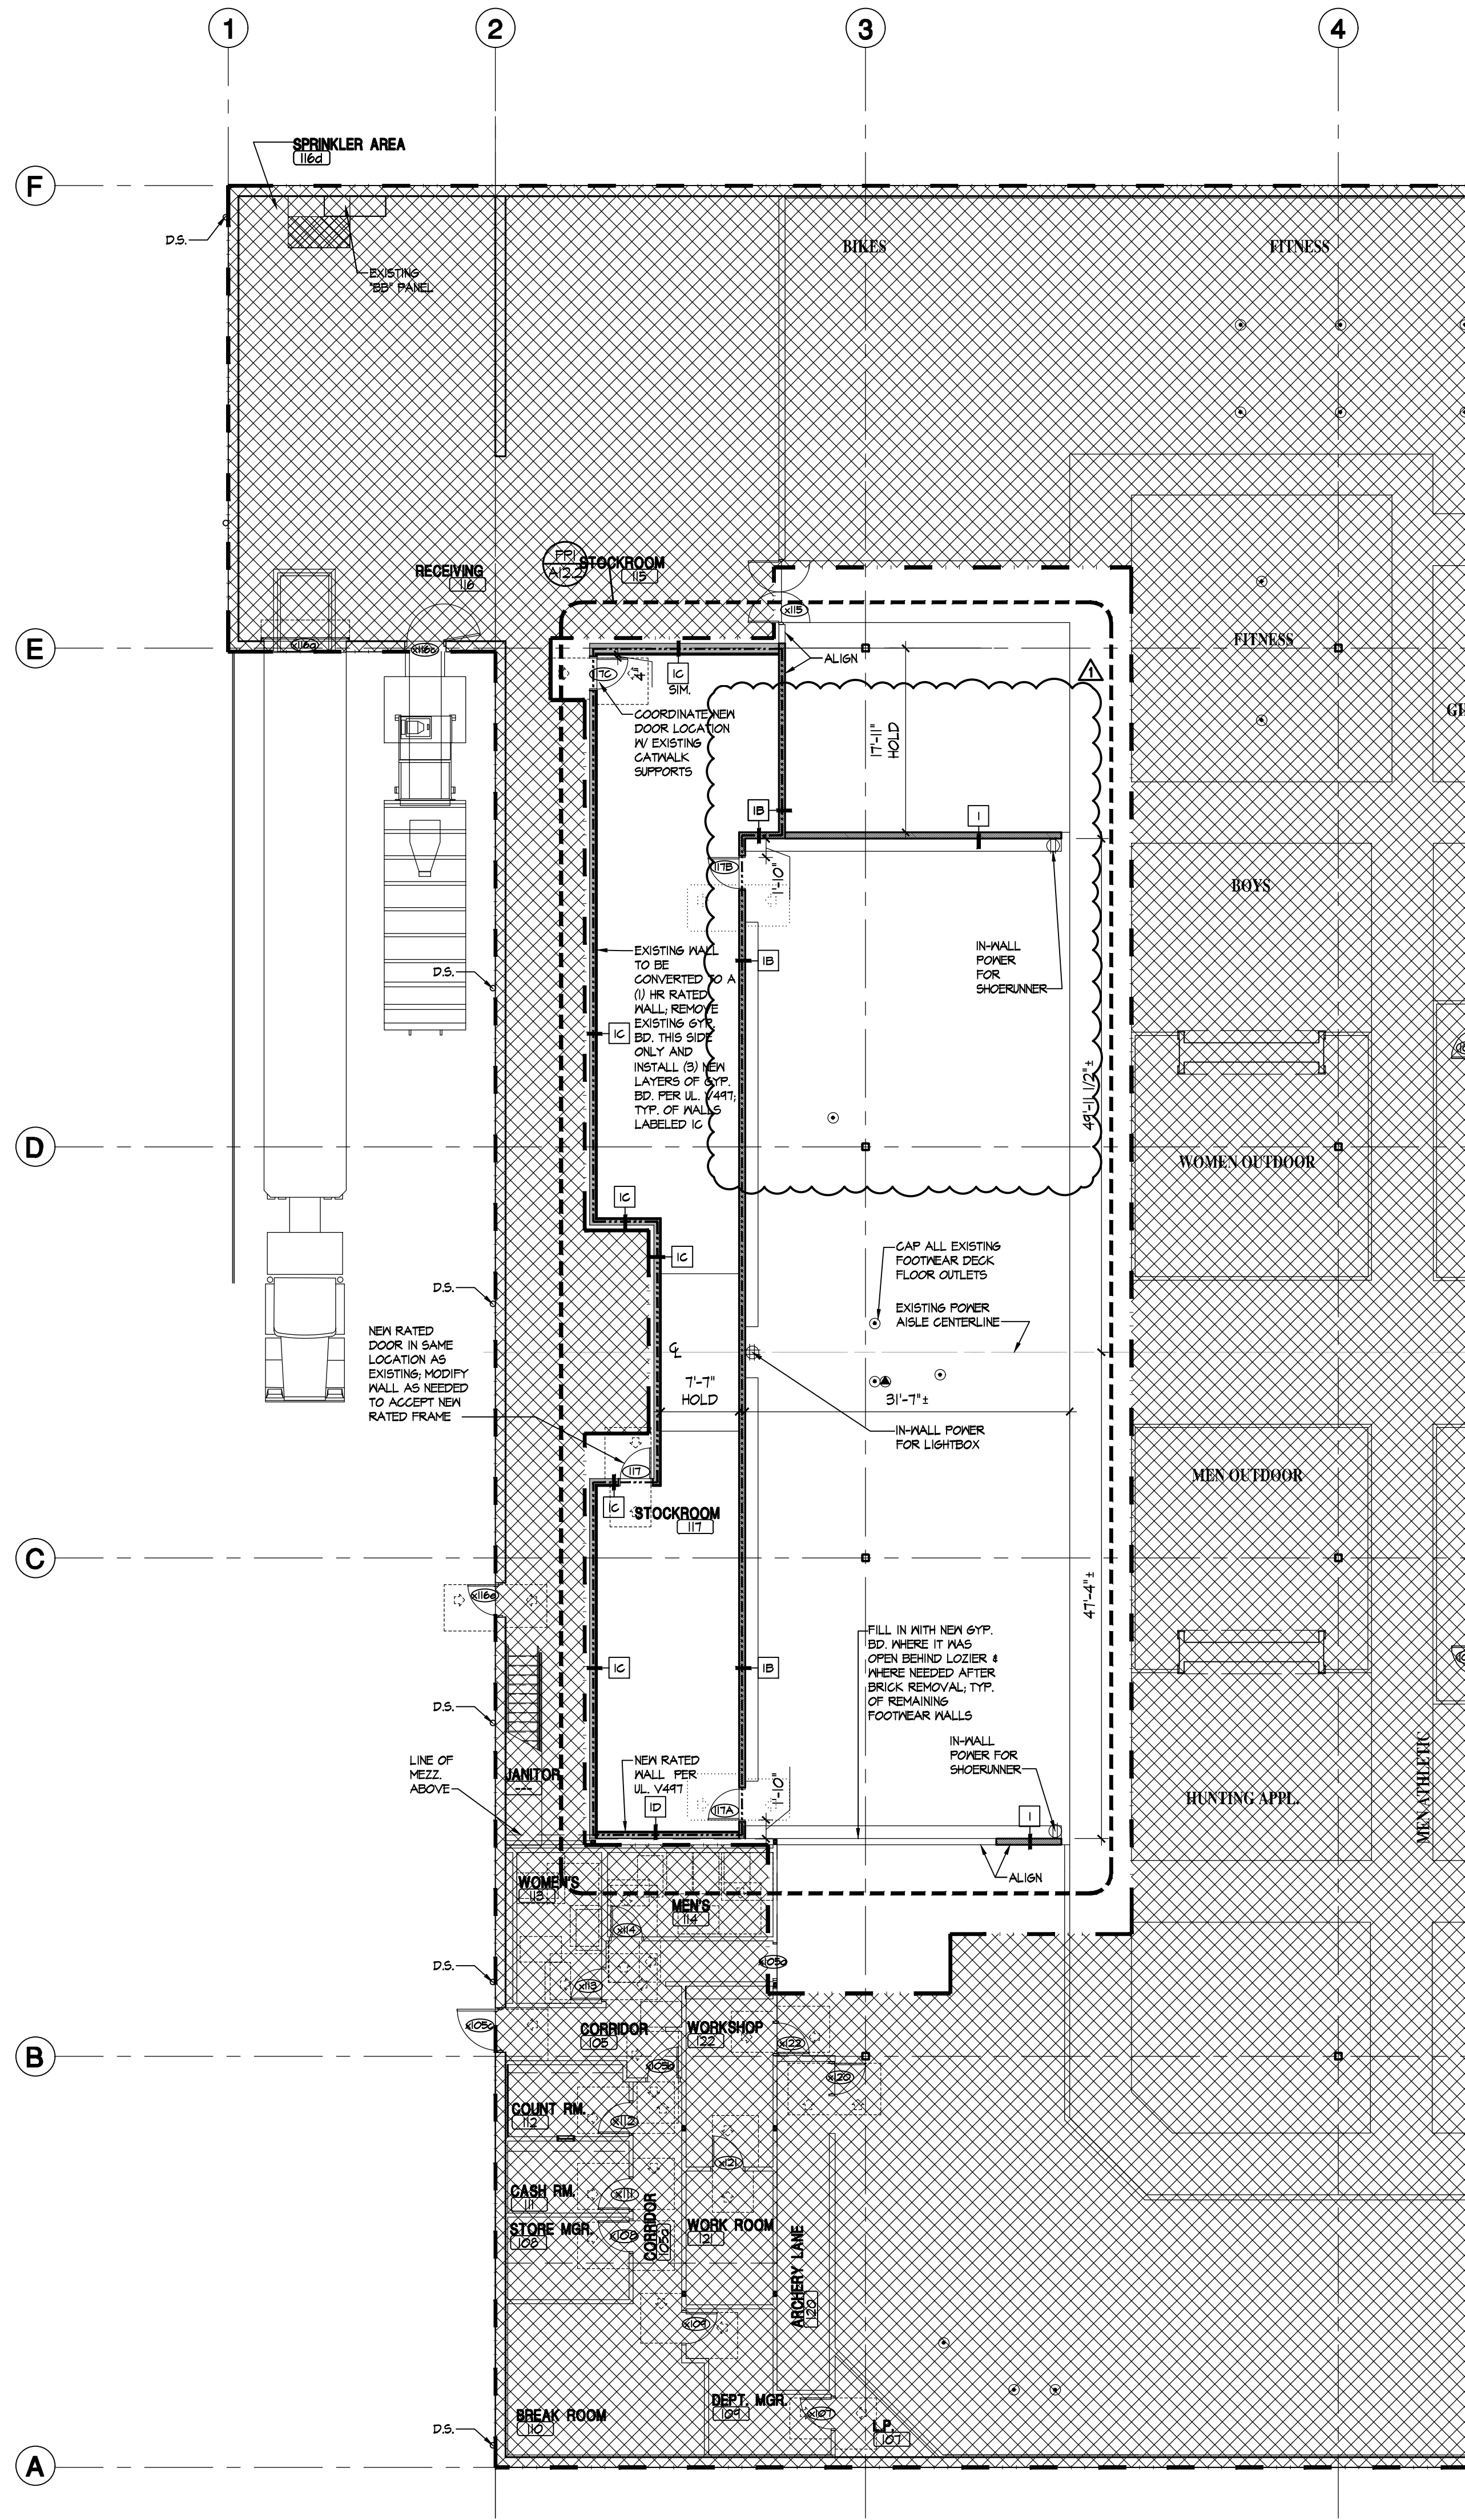

A1 ARCHITECTURAL FLOOR PLAN

SCALE 3/32" = 1'-0"

LEGEND

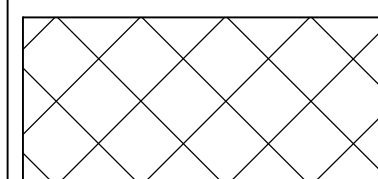

NO WORK IN THIS AREA