


General Duty Safety Switches

Selection

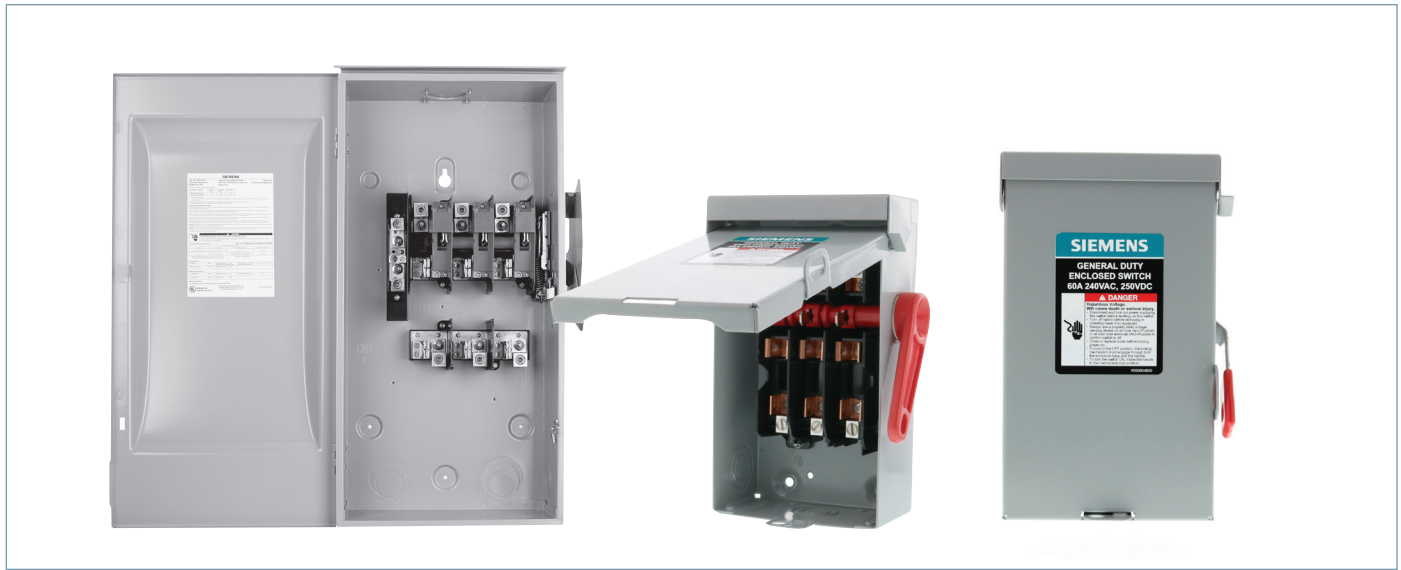

4 SAFETY SWITCHES

| System | Ampere Rating | Indoor — Type 1 | | Outdoor — Type 3R | | Horsepower Rating ^① | | | | | | |
|--------|---------------|-----------------|--------------------------|-------------------|--------------------------|--------------------------------|-----------------|-----------------|------|------|------|------|
| | | Catalog Number | Ship Wt. (lbs.) Std. Pkg | Catalog Number | Ship Wt. (lbs.) Std. Pkg | 240V AC | | 250 Volt DC | | | | |
| | | | | | | 1-Phase, 2-Wire | 2-Phase, 4-Wire | 3-Phase, 3-Wire | Std. | Max. | Std. | Max. |

240 Volt Fusible^①

2-Pole, 2-Fuse, and Solid Neutral^{②③④}

240 Volt AC/250 Volt DC

| | | | | | | | | | | | | |
|--|-----|---------|-----------------|-----------------------|-----------------|----|----|---|---|----|----|----|
| | 30 | GF221NA | 30 ^⑦ | GF221NRA ^⑤ | 30 ^⑦ | 1½ | 3 | — | — | 3 | 7½ | 5 |
| | 60 | GF222NA | 20 ^⑥ | GF222NRA ^⑤ | 20 ^⑥ | 3 | 10 | — | — | 7½ | 15 | 10 |
| | 100 | GF223N | 23 | GF223NR | 23 | 7½ | 15 | — | — | 15 | 30 | 20 |
| | 200 | GF224N | 47 | GF224NR | 48 | 15 | — | — | — | 25 | 60 | 40 |

3-Pole, 3-Fuse, and Solid Neutral^④

240 Volt AC/250 Volt DC

| | | | | | | | | | | | | |
|--|-----|---------|-----------------|-----------------------|-----------------|----|----|---|---|----|-----|----|
| | 30 | GF321NA | 30 ^⑦ | GF321NRA ^⑤ | 30 ^⑦ | 1½ | 3 | — | — | 3 | 7½ | 5 |
| | 60 | GF322NA | 20 ^⑥ | GF322NRA ^⑤ | 20 ^⑥ | 3 | 10 | — | — | 7½ | 15 | 10 |
| | 100 | GF323N | 25 | GF323NR | 25 | 7½ | 15 | — | — | 15 | 30 | 20 |
| | 200 | GF324N | 49 | GF324NR | 50 | 15 | — | — | — | 25 | 60 | 40 |
| | 400 | GF325NA | 94.6 | GF325NRA | 94.6 | 15 | — | — | — | 50 | 125 | 50 |
| | 600 | GF326NA | 95.6 | GF326NRA | 95.6 | 15 | — | — | — | 75 | 200 | — |

240 Volt Non-Fusible^{③④⑪}

2-Pole or 3-Pole

240 Volt AC/250 Volt DC

| | | | | | | | | | | | | |
|--|-----|-----------------------|-----------------|----------------------------|-----------------|---|----|---|---|-----|---|----|
| | 30 | GNF221A | 20 ^⑦ | GNF221RA ^⑤ | 20 ^⑦ | — | 3 | — | — | — | — | 5 |
| | 30 | GNF321A ^⑨ | 20 ^⑦ | GNF321RA ^{⑤⑩} | 20 ^⑦ | — | 3 | — | — | 7½ | — | 5 |
| | 30 | GNF321LA ^⑩ | 30 ^⑦ | GNF321RLA ^{⑤⑩} | 30 ^⑦ | — | 3 | — | — | 7½ | — | 5 |
| | 60 | GNF222A | 30 ^⑦ | GNF222RA ^⑤ | 30 ^⑦ | — | 10 | — | — | 15 | — | 10 |
| | 60 | GNF322A | 30 ^⑦ | GNF322RA ^⑤ | 30 ^⑦ | — | 10 | — | — | 15 | — | 10 |
| | 100 | GNF323 | 23 | GNF323R | 24 | — | 15 | — | — | 30 | — | 20 |
| | 200 | GNF324 | 46 | GNF324R | 47 | — | 15 | — | — | 60 | — | 40 |
| | 400 | GNF325A | 114 | Use 600V Switch — HNF365RA | — | — | 15 | — | — | 125 | — | 50 |
| | 600 | GNF326A | 116 | Use 600V Switch — HNF366RA | — | — | 15 | — | — | 200 | — | — |

① Dual horsepower ratings: Std.- applies when non-time delay fuses are installed. Max.- applies when time-delay fuses are installed.
 ② These switches are UL-listed for application on grounded B-phase systems.
 ③ Suitable for use on 3-phase motor loads.

④ Service entrance labeled.
 ⑤ Has provision for ECHA type hub.
 ⑥ 5 switches per standard package.
 ⑦ 10 switches per standard package.
 ⑧ Height reduced switch (45.25 rather than 56 inches in height) for use with 500MCM or smaller conductors.

⑨ Not suitable for service entrance.
 ⑩ Indicates oversized enclosure.
 ⑪ Internal shields for 30A to 200A switches to meet 2020 NEC 230.62 touch safe requirements for service entrance equipment can be purchased separately. See accessory section for catalog numbers.