

# MITSUBISHI ELECTRIC TRANE HVAC US

SPLIT-TYPE AIR CONDITIONERS

May 2022

**No. OCHT754**  
REVISED EDITION-D

## SERVICE MANUAL **R410A**

[Model Name]

**NTXSKH24A112AA**

**NTXSKH30A112AA**

**NTXSKH36A112AA**


Revision:

- Note has been added in "3. FEATURES" in REVISED EDITION-D.


OCHT754C is void.

Note:

- This manual describes service data of the outdoor units only.



**NTXSKH24A112AA**

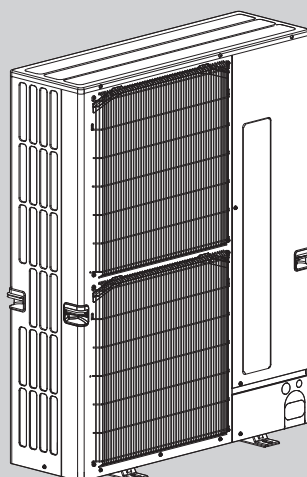

**NTXSKH30A112AA**  
**NTXSKH36A112AA**

### CONTENTS

|                                                                     |     |
|---------------------------------------------------------------------|-----|
| 1. REFERENCE MANUAL .....                                           | 2   |
| 2. SAFETY PRECAUTION .....                                          | 2   |
| 3. FEATURES .....                                                   | 6   |
| 4. SPECIFICATIONS .....                                             | 7   |
| 5. DATA .....                                                       | 9   |
| 6. OUTLINES AND DIMENSIONS .....                                    | 13  |
| 7. WIRING DIAGRAM .....                                             | 15  |
| 8. WIRING SPECIFICATIONS .....                                      | 17  |
| 9. REFRIGERANT SYSTEM DIAGRAM ..                                    | 20  |
| 10. TROUBLESHOOTING .....                                           | 23  |
| 11. EASY MAINTENANCE FUNCTION .....                                 | 74  |
| 12. FUNCTION SETTING .....                                          | 76  |
| 13. MONITORING THE OPERATION DATA<br>BY THE REMOTE CONTROLLER ..... | 78  |
| 14. DISASSEMBLY PROCEDURE .....                                     | 87  |
| 15. REMOTE CONTROLLER .....                                         | 100 |

**PARTS CATALOG (OCBT754)**

## INDOOR UNIT SERVICE MANUAL

| Model Name              | Service Ref.            | Service Manual No.<br>Parts Catalog No. |
|-------------------------|-------------------------|-----------------------------------------|
| TPEADA024/030/0361AA70A | TPEADA024/030/0361AA70A | HWE19030<br>BWE019190                   |
| NTXAMT24/30/36A112AA    | NTXAMT24/30/36A112AA    | —                                       |
| NAXAMT24/30/36A112AA    | NAXAMT24/30/36A112AA    | —                                       |

## 2-1. ALWAYS OBSERVE FOR SAFETY

**Before obtaining access to terminal, all supply circuits must be disconnected.**

**Preparation before the repair service.**

- Prepare the proper tools.
- Prepare the proper protectors.
- Provide adequate ventilation.
- After stopping the operation of the air conditioner, turn off the power-supply breaker.
- Discharge the condenser before the work involving the electric parts.

**Precautions during the repair service.**

- Do not perform the work involving the electric parts with wet hands.
- Do not pour water into the electric parts.
- Do not touch the refrigerant.
- Do not touch the hot or cold areas in the refrigerating cycle.
- When the repair or the inspection of the circuit needs to be done without turning off the power, exercise great caution not to touch the live parts.
- When opening or closing the valve below freezing temperatures, refrigerant may spurt out from the gap between the valve stem and the valve body, resulting in injuries.

## 2-2. CAUTIONS RELATED TO NEW REFRIGERANT

### Cautions for units utilizing refrigerant R410A

#### Use new refrigerant pipes.

In the case of using the existing pipes for R22, be careful with the following:

- Be sure to clean the pipes and make sure that the insides of the pipes are clean.
- Change flare nut to the one provided with this product. Use a newly flared pipe.
- Avoid using thin pipes.

**Make sure that the inside and outside of refrigerant piping is clean and it has no contaminants such as sulfur, oxides, dirt, shaving particles, etc, which are hazard to refrigerant cycle. In addition, use pipes with specified thickness.**

Contamination inside refrigerant piping can cause deterioration of refrigerant oil, etc.

**Store the piping indoors, and both ends of the piping sealed until just before brazing. (Leave elbow joints, etc. in their packaging.)**

If dirt, dust or moisture enters into refrigerant cycle, that can cause deterioration of refrigerant oil or malfunction of compressor.

**The refrigerant oil applied to flare and flange connections must be ester oil, ether oil or alkylbenzene oil in a small amount.**

If large amount of mineral oil enters, that can cause deterioration of refrigerant oil, etc.

**Charge refrigerant from liquid phase of gas cylinder.**

If the refrigerant is charged from gas phase, composition change may occur in refrigerant and the efficiency will be lowered.

**Do not use refrigerant other than R410A.**

If other refrigerant (R22, etc.) is used, chlorine in refrigerant can cause deterioration of refrigerant oil, etc.

**Use a vacuum pump with a reverse flow check valve.**

Vacuum pump oil may flow back into refrigerant cycle and that can cause deterioration of refrigerant oil, etc.

**Use the following tools specifically designed for use with R410A refrigerant.**

The following tools are necessary to use R410A refrigerant.

| Tools for R410A   |                                       |
|-------------------|---------------------------------------|
| Gauge manifold    | Flare tool                            |
| Charge hose       | Size adjustment gauge                 |
| Gas leak detector | Vacuum pump adaptor                   |
| Torque wrench     | Electronic refrigerant charging scale |

**Handle tools with care.**

If dirt, dust or moisture enters into refrigerant cycle, that can cause deterioration of refrigerant oil or malfunction of compressor.

**Do not use a charging cylinder.**

If a charging cylinder is used, the composition of refrigerant will change and the efficiency will be lowered.

**Use the specified refrigerant only.**

**Never use any refrigerant other than that specified.**

Doing so may cause a burst, an explosion, or fire when the unit is being used, serviced, or disposed of.

Correct refrigerant is specified in the manuals and on the spec labels provided with our products.

We will not be held responsible for mechanical failure, system malfunction, unit breakdown or accidents caused by failure to follow the instructions.

**Ventilate the room if refrigerant leaks during operation. If refrigerant comes into contact with a flame, poisonous gases will be released.**


## [1] Cautions for service

- (1) Perform service after recovering the refrigerant left in unit completely.
- (2) Do not release refrigerant in the air.
- (3) After completing service, charge the cycle with specified amount of refrigerant.
- (4) When performing service, install a filter drier simultaneously.  
Be sure to use a filter drier for new refrigerant.

## [2] Additional refrigerant charge

### When charging directly from cylinder

- Check that cylinder for R410A on the market is a syphon type.
- Charging should be performed with the cylinder of syphon stood vertically. (Refrigerant is charged from liquid phase.)

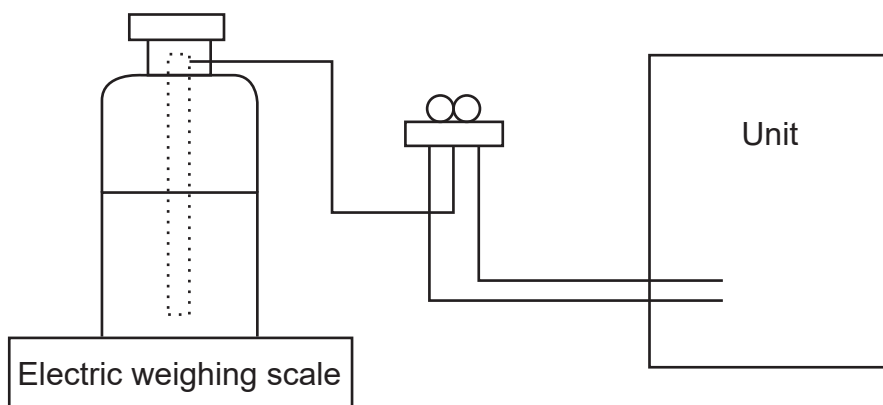

## [3] Service tools

Use the below service tools as exclusive tools for R410A refrigerant.

| No. | Tool name                      | Specifications                                         |
|-----|--------------------------------|--------------------------------------------------------|
| 1   | Gauge manifold                 | · Only for R410A                                       |
|     |                                | · Use the existing fitting specifications.             |
|     |                                | · Use high-tension side pressure of 5.3 MPa·G or over. |
| 2   | Charge hose                    | · Only for R410A                                       |
|     |                                | · Use pressure performance of 5.09 MPa·G or over.      |
| 3   | Electronic weighing scale      | —                                                      |
| 4   | Gas leak detector              | · Use the detector for R134a, R407C or R410A.          |
| 5   | Adaptor for reverse flow check | · Attach on vacuum pump.                               |
| 6   | Refrigerant charge base        | —                                                      |
| 7   | Refrigerant cylinder           | · Only for R410A                                       |
|     |                                | · Top of cylinder (Pink)                               |
| 8   | Refrigerant recovery equipment | · Cylinder with syphon                                 |
|     |                                | —                                                      |

## 2-3. CAUTIONS FOR REFRIGERANT PIPING WORK

New refrigerant R410A is adopted for replacement inverter series. Although the refrigerant piping work for R410A is same as for R22, exclusive tools are necessary so as not to mix with different kind of refrigerant. Furthermore as the working pressure of R410A is 1.6 time higher than that of R22, their sizes of flared sections and flare nuts are different.

### ① Thickness of pipes

Because the working pressure of R410A is higher compared to R22, be sure to use refrigerant piping with thickness shown below. (Never use pipes of 7/256 inch [0.7mm] or below.)

| Nominal dimensions (in) | Outside diameter (mm) | Thickness: in (mm) |             |
|-------------------------|-----------------------|--------------------|-------------|
|                         |                       | R410A              | R22         |
| 1/4                     | 6.35                  | 1/32 (0.8)         | 1/32 (0.8)  |
| 3/8                     | 9.52                  | 1/32 (0.8)         | 1/32 (0.8)  |
| 1/2                     | 12.70                 | 1/32 (0.8)         | 1/32 (0.8)  |
| 5/8                     | 15.88                 | 5/128 (1.0)        | 5/128 (1.0) |
| 3/4                     | 19.05                 | —                  | 5/128 (1.0) |

### ② Dimensions of flare cutting and flare nut

The component molecules in HFC refrigerant are smaller compared to conventional refrigerants. In addition to that, R410A is a refrigerant, which has higher risk of leakage because its working pressure is higher than that of other refrigerants. Therefore, to enhance air tightness and intensity, flare cutting dimension of copper pipe for R410A has been specified separately from the dimensions for other refrigerants as shown below. The dimension B of flare nut for R410A also has partly been changed to increase strength as shown below. Set copper pipe correctly referring to copper pipe flaring dimensions for R410A below. For 1/2 and 5/8 inch pipes, the dimension B changes. Use torque wrench corresponding to each dimension.





Diagram below: Piping diameter and thickness

| Nominal dimensions (in) | Outside diameter (mm) | Thickness: in (mm) |             |
|-------------------------|-----------------------|--------------------|-------------|
|                         |                       | R410A              | R22         |
| 1/4                     | 6.35                  | 1/32 (0.8)         | 1/32 (0.8)  |
| 3/8                     | 9.52                  | 1/32 (0.8)         | 1/32 (0.8)  |
| 1/2                     | 12.70                 | 1/32 (0.8)         | 1/32 (0.8)  |
| 5/8                     | 15.88                 | 5/128 (1.0)        | 5/128 (1.0) |
| 3/4                     | 19.05                 | —                  | 5/128 (1.0) |

Flare nut dimensions

| Nominal dimensions (in) | Outside diameter (mm) | Dimension B: in (mm) |      |
|-------------------------|-----------------------|----------------------|------|
|                         |                       | R410A                | R22  |
| 1/4                     | 6.35                  | 43/64 (17.0)         | 17.0 |
| 3/8                     | 9.52                  | 7/8 (22.0)           | 22.0 |
| 1/2                     | 12.70                 | 1-3/64 (26.0)        | 24.0 |
| 5/8                     | 15.88                 | 1-9/64 (29.0)        | 27.0 |
| 3/4                     | 19.05                 | —                    | 36.0 |



### ③ Tools for R410A (The following table shows whether conventional tools can be used or not.)

| Tools and materials                                      | Use                                                                                                             | R410A tools                                                                              | Can R22 tools be used?                              |
|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------|
| Gauge manifold                                           | Air purge, refrigerant charge and operation check                                                               | Tool exclusive for R410A                                                                 | ×                                                   |
| Charge hose                                              |                                                                                                                 | Tool exclusive for R410A                                                                 | ×                                                   |
| Gas leak detector                                        | Gas leak check                                                                                                  | Tool for HFC refrigerant                                                                 | ×                                                   |
| Refrigerant recovery equipment                           | Refrigerant recovery                                                                                            | Tool exclusive for R410A                                                                 | ×                                                   |
| Refrigerant cylinder                                     | Refrigerant charge                                                                                              | Tool exclusive for R410A                                                                 | ×                                                   |
| Applied oil                                              | Apply to flared section                                                                                         | Ester oil and alkylbenzene oil (minimum amount)                                          | ×                                                   |
| Safety charger                                           | Prevent compressor malfunction when charging refrigerant by spraying liquid refrigerant                         | Tool exclusive for R410A                                                                 | ×                                                   |
| Charge valve                                             | Prevent gas from blowing out when detaching charge hose                                                         | Tool exclusive for R410A                                                                 | ×                                                   |
| Vacuum pump                                              | Vacuum drying and air purge                                                                                     | Tools for other refrigerants can be used if equipped with adopter for reverse flow check | △(Usable if equipped with adopter for reverse flow) |
| Flare tool                                               | Flaring work of piping                                                                                          | Tools for other refrigerants can be used by adjusting flaring dimension                  | △(Usable by adjusting flaring dimension)            |
| Bender                                                   | Bend the pipes                                                                                                  | Tools for other refrigerants can be used                                                 | ○                                                   |
| Pipe cutter                                              | Cut the pipes                                                                                                   | Tools for other refrigerants can be used                                                 | ○                                                   |
| Welder and nitrogen gas cylinder                         | Weld the pipes                                                                                                  | Tools for other refrigerants can be used                                                 | ○                                                   |
| Refrigerant charging scale                               | Recover refrigerant                                                                                             | Tools for other refrigerants can be used                                                 | ○                                                   |
| Vacuum gauge or thermistor vacuum gauge and vacuum valve | Check the degree of vacuum. (Vacuum valve prevents back flow of oil and refrigerant to thermistor vacuum gauge) | Tools can be used for other refrigerants.                                                | ○                                                   |
| Charging cylinder                                        | Recover refrigerant                                                                                             | Tool exclusive for R410A                                                                 | ×                                                   |

× : Prepare a new tool. (Use the new tool as the tool exclusive for R410A.)

△ : Tools for other refrigerants can be used under certain conditions.

○ : Tools for other refrigerants can be used.

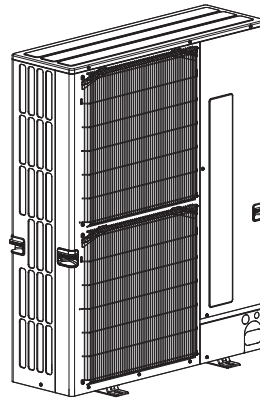**NTXSKH24A112AA****NTXSKH30A112AA  
NTXSKH36A112AA****CHARGELESS SYSTEM****PRE-CHARGED REFRIGERANT IS SUPPLIED FOR PIPING LENGTH AT SHIPMENT.****Maximum 100 ft, 30 m (NTXSKH30/36), 70ft, 21m (NTXSKH24)**

The refrigerant circuit with LEV(Linear Expansion Valve) and power receiver always control the optimal refrigerant level regardless of the length (maximum: 100 ft [30 m] (NTXSKH30/36), 70ft [21m] (NTXSKH24) and minimum: 16 ft [5 m]) of piping. The additional refrigerant charging work during installation often causes problems. It is completely eliminated by chargeless system. This unique system improves the quality and reliability of the work done. It also helps to speed up the installation time.

**Note:**

Please carefully consider the indoor unit location when piping lengths are less than 16 ft. (5 m) as there could be intermittent noises during normal operation that would be noticeable in very quiet environments.

| Service Ref.               |                           |        | NTXSKH24A112AA           | NTXSKH30A112AA    |
|----------------------------|---------------------------|--------|--------------------------|-------------------|
| Power supply               | Phase                     |        | Single                   |                   |
|                            | Cycle                     |        | 60 Hz                    |                   |
|                            | Voltage                   |        | 208/230 V                |                   |
| MCA                        |                           | A      | 17                       | 24                |
| MOCP                       |                           | A      | 27                       | 40                |
| Breaker size               |                           | A      | 25                       | 35                |
| External finish            |                           |        | Munsell 3Y 7.8/1.1       |                   |
| Heat exchanger             |                           |        | Plate fin coil           |                   |
| Defrost method             |                           |        | Reverse cycle            |                   |
| Crankcase heater           |                           | kW     | —                        |                   |
| Compressor                 |                           |        | Hermetic                 |                   |
|                            | Model                     |        | DNB28FBAMT               | ANB33FJMMT        |
|                            | Motor output              | kW     | 2.2                      | 2.5               |
|                            | R.L.A.                    |        | 9.0                      | 18.0              |
|                            | L.R.A.                    |        | 18.0                     | 27.5              |
|                            | Starter type              |        | Inverter                 |                   |
| Fan                        | Fan(drive) × No.          |        | Propeller fan x 1        | Propeller fan x 2 |
|                            | Fan motor output          | kW     | 0.074                    | 0.074 + 0.074     |
|                            | Fan motor                 | F.L.A. | 0.33                     | 0.33 + 0.33       |
|                            | Airflow                   | m3/min | 58                       | 115               |
|                            |                           | CFM    | 2050                     | 4060              |
| Sound pressure level (SPL) | Cooling                   | dB     | 52                       | 52                |
|                            | Heating                   | dB     | 53                       | 53                |
| Protection devices         |                           |        | HP switch                |                   |
|                            |                           |        | Comp. Surface thermistor |                   |
| Dimensions                 | W                         | in     | 37-13/32                 | 41-11/32          |
|                            | D                         | in     | 12-63/64+63/64           |                   |
|                            | H                         | in     | 37-1/8                   | 52-43/64          |
|                            | W                         | mm     | 950                      | 1050              |
|                            | D                         | mm     | 330 + 25                 |                   |
|                            | H                         | mm     | 943                      | 1338              |
| Weight                     |                           | lb     | 190                      | 261               |
|                            |                           | kg     | 86                       | 118               |
| Refrigerant                |                           |        | R410A                    |                   |
|                            | Charged                   | lb     | 7.72                     | 11.46             |
|                            |                           | kg     | 3.5                      | 5.2               |
|                            | Control                   |        | Linear expansion valve   |                   |
|                            | Oil Charged               | Model  | FVC68D                   | FV50S             |
|                            |                           | oz     | 34                       | 47                |
|                            |                           | L      | 1.0                      | 1.4               |
| Refrigerant piping         | Pipe size O.D. Liquid     | in     | 3/8                      |                   |
|                            |                           | mm     | 9.52                     |                   |
|                            | Pipe size O.D. Gas        | in     | 5/8                      |                   |
|                            |                           | mm     | 15.88                    |                   |
|                            | Connection method Indoor  |        | Flared                   |                   |
|                            | Connection method Outdoor |        | Flared                   |                   |
|                            | Height difference IU-OU   | ft     | Maximum 100              |                   |
|                            |                           | m      | Maximum 30               |                   |
|                            | Piping length             | ft     | Maximum 100              |                   |
|                            |                           | m      | Maximum 30               |                   |

|                            |                           |            |                          |       |                        |
|----------------------------|---------------------------|------------|--------------------------|-------|------------------------|
| Service Ref.               |                           |            | NTXSKH36A112AA           |       |                        |
| Power supply               | Phase                     |            | Single                   |       |                        |
|                            | Cycle                     |            | 60Hz                     |       |                        |
|                            | Voltage                   |            | 208/230 V                |       |                        |
| MCA                        |                           | A          | 26                       |       |                        |
| MOCP                       |                           | A          | 42                       |       |                        |
| Breaker size               |                           | A          | 35                       |       |                        |
| External finish            |                           |            | Munsell 3Y 7.8/1.1       |       |                        |
| Heat exchanger             |                           |            | Plate fin coil           |       |                        |
| Defrost method             |                           |            | Reverse cycle            |       |                        |
| Crankcase heater           |                           | kW         | —                        |       |                        |
| Compressor                 |                           |            | Hermetic                 |       |                        |
|                            | Model                     |            | ANB33FJMMT               |       |                        |
|                            | Motor output              | kW         | 2.5                      |       |                        |
|                            | R.L.A.                    |            | 18.0                     |       |                        |
|                            | L.R.A.                    |            | 27.5                     |       |                        |
|                            | Starter type              |            | Inverter                 |       |                        |
| Fan                        | Fan(drive) × No.          |            | Propeller fan x 2        |       |                        |
|                            | Fan motor output          | kW         | 0.074 + 0.074            |       |                        |
|                            | Fan motor                 | F.L.A.     | 0.33 + 0.33              |       |                        |
|                            | Airflow                   | m3/min     | 115                      |       |                        |
|                            |                           | CFM        | 4060                     |       |                        |
| Sound pressure level (SPL) | Cooling                   | dB         | 52                       |       |                        |
|                            | Heating                   | dB         | 53                       |       |                        |
| Protection devices         |                           |            | HP switch                |       |                        |
|                            |                           |            | Comp. Surface thermistor |       |                        |
| Dimensions                 | W                         | in         | 41-11/32                 |       |                        |
|                            | D                         | in         | 12-63/64+63/64           |       |                        |
|                            | H                         | in         | 52-43/64                 |       |                        |
|                            | W                         | mm         | 1050                     |       |                        |
|                            | D                         | mm         | 330 + 25                 |       |                        |
|                            | H                         | mm         | 1338                     |       |                        |
| Weight                     | lb                        |            | 261                      |       |                        |
|                            | kg                        |            | 118                      |       |                        |
| Refrigerant                |                           |            | R410A                    |       |                        |
|                            |                           |            | Charged                  | lb    | 11.46                  |
|                            |                           |            |                          | kg    | 5.2                    |
|                            |                           |            | Control                  |       | Linear expansion valve |
|                            |                           |            | Oil Charged              | Model | FV50S                  |
|                            |                           |            |                          | oz    | 47                     |
|                            |                           |            |                          | L     | 1.4                    |
| Refrigerant piping         | Pipe size O.D. Liquid     | in         | 3/8                      |       |                        |
|                            |                           | mm         | 9.52                     |       |                        |
|                            | Pipe size O.D. Gas        | in         | 5/8                      |       |                        |
|                            |                           | mm         | 15.88                    |       |                        |
|                            | Connection method Indoor  |            | Flared                   |       |                        |
|                            | Connection method Outdoor |            | Flared                   |       |                        |
|                            | Height difference IU-OU   | ft         | Maximum 100              |       |                        |
|                            |                           | m          | Maximum 30               |       |                        |
|                            | Piping length             | ft         | Maximum 100              |       |                        |
| m                          |                           | Maximum 30 |                          |       |                        |

### 5-1. REFILLING REFRIGERANT CHARGE (R410A: oz, kg)

| Service Ref.   | Piping Length (one way) |       |       |        | Factory Charged |
|----------------|-------------------------|-------|-------|--------|-----------------|
|                | 70 ft                   | 80 ft | 90 ft | 100 ft |                 |
|                | 21 m                    | 24 m  | 27 m  | 30 m   |                 |
| NTXSKH24A112AA | -                       | 7     | 14    | 21     | 123             |
|                | -                       | oz    | oz    | oz     | oz              |
|                | -                       | 0.2   | 0.4   | 0.6    | 3.5             |
|                |                         | kg    | kg    | kg     | kg              |
| NTXSKH30A112AA | -                       | -     | -     | -      | 183             |
| NTXSKH36A112AA | -                       | -     | -     | -      | oz              |
|                |                         |       |       |        | 5.2             |
|                |                         |       |       |        | kg              |

For pipes longer than 70 ft, additional charge is required.

### 5-2. COMPRESSOR TECHNICAL DATA


Winding temperature at 68°F [20°C]

| Service Ref.           |       | NTXSKH24A112AA | NTXSKH30A112AA | NTXSKH36A112AA |
|------------------------|-------|----------------|----------------|----------------|
| Compressor model       |       | DNB28FBAMT     | ANB33FJMMT     |                |
| Winding Resistance (Ω) | U - V | 0.74           | 0.188          |                |
|                        | U - W | 0.74           | 0.188          |                |
|                        | W - V | 0.74           | 0.188          |                |

5-3. NOISE CRITERION CURVES



NTXSKH24A112AA

| MODE    | SPL(dB) | LINE |
|---------|---------|------|
| COOLING | 52      | ○—○  |
| HEATING | 53      | ●—●  |

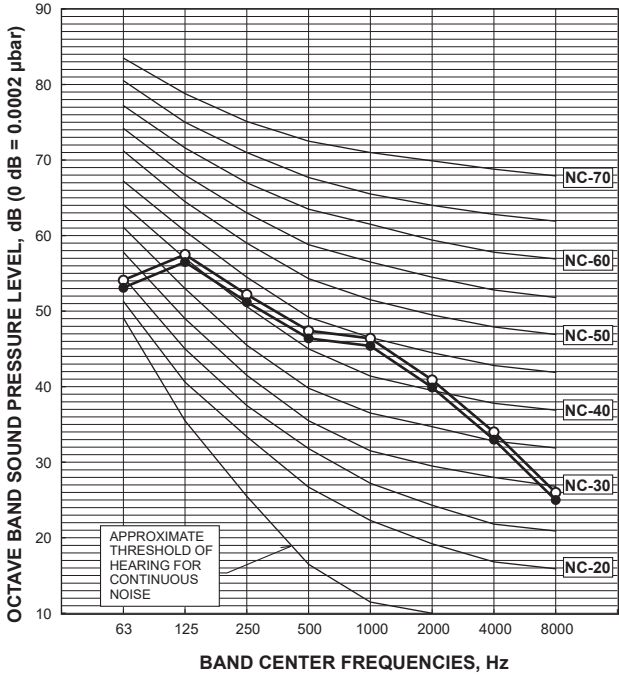

NTXSKH30A112AA  
NTXSKH36A112AA

| MODE    | SPL(dB) | LINE |
|---------|---------|------|
| COOLING | 52      | ○—○  |
| HEATING | 53      | ●—●  |

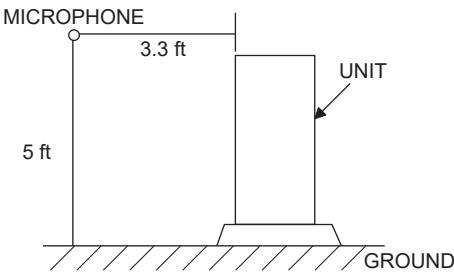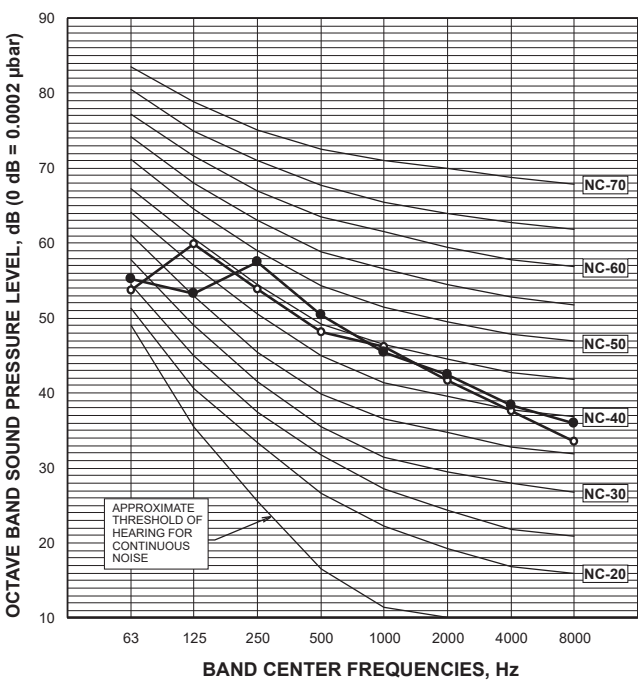


## 5-4. STANDARD OPERATION DATA

| Representative matching |                                |       | NTXAMT24A112AA<br>NAXAMT24A112AA |         | NTXAMT30A112AA<br>NAXAMT30A112AA |         |
|-------------------------|--------------------------------|-------|----------------------------------|---------|----------------------------------|---------|
| Mode                    |                                |       | COOLING                          | HEATING | COOLING                          | HEATING |
| Total                   | Capacity                       | Btu/h | 24,000                           | 23,000  | 27,000                           | 32,000  |
|                         | Input                          | W     | 2,420                            | 2,410   | 2,160                            | 2,400   |
| Electrical circuit      | Indoor unit model              |       | NTXAMT24A112AA<br>NAXAMT24A112AA |         | NTXAMT30A112AA<br>NAXAMT30A112AA |         |
|                         | Phase                          |       | Single                           |         |                                  |         |
|                         | Cycle                          |       | 60 Hz                            |         |                                  |         |
|                         | Voltage                        |       | 208/230 V                        |         |                                  |         |
|                         | Current                        |       | 1.40 A                           |         | 1.70 A                           |         |
|                         | Outdoor unit model             |       | NTXSKH24A112AA                   |         | NTXSKH30A112AA                   |         |
|                         | Phase                          |       | Single                           |         | Single                           |         |
|                         | Cycle                          |       | 60 Hz                            |         | 60 Hz                            |         |
|                         | Voltage                        |       | 208/230 V                        |         | 208/230 V                        |         |
|                         | Current                        |       | 9.12 A                           | 9.08 A  | 7.69 A                           | 8.73 A  |
| Refrigerant circuit     | Discharge pressure             | PSIG  | 412                              | 368     | 368                              | 339     |
|                         | Suction pressure               | PSIG  | 131                              | 106     | 146                              | 111     |
|                         | Discharge temperature          | °F    | 159                              | 152     | 146                              | 149     |
|                         | Condensing temperature         | °F    | 118                              | 109     | 110                              | 104     |
|                         | Suction temperature            | °F    | 51                               | 39      | 57                               | 45      |
|                         | Ref. Pipe length               | ft    | 25                               | 25      | 25                               | 25      |
|                         | Discharge pressure             | Mpa   | 2.84                             | 2.54    | 2.54                             | 2.33    |
|                         | Suction pressure               | Mpa   | 0.90                             | 0.73    | 1.01                             | 0.77    |
|                         | Discharge temperature          | °C    | 70.6                             | 66.9    | 63.4                             | 64.8    |
|                         | Condensing temperature         | °C    | 47.9                             | 42.5    | 43.6                             | 39.8    |
|                         | Suction temperature            | °C    | 10.8                             | 4.2     | 14.1                             | 7.2     |
|                         | Ref. Pipe length               | m     | 7.6                              | 7.6     | 7.6                              | 7.6     |
| Indoor side             | Intake air temperature D.B.    | °F    | 80                               | 70      | 80                               | 70      |
|                         | Intake air temperature W.B.    | °F    | 67                               | 60      | 67                               | 60      |
|                         | Discharge air temperature D.B. | °F    | 59                               | 101     | 59                               | 101     |
| Outdoor side            | Intake air temperature D.B.    | °F    | 95                               | 47      | 95                               | 47      |
|                         | Intake air temperature W.B.    | °F    | 75                               | 44      | 75                               | 43      |
| Indoor side             | Intake air temperature D.B.    | °C    | 26.6                             | 21.4    | 26.7                             | 21.1    |
|                         | Intake air temperature W.B.    | °C    | 19.5                             | 15.6    | 19.5                             | 15.6    |
|                         | Discharge air temperature D.B. | °C    | 14.9                             | 38.2    | 14.8                             | 38.2    |
| Outdoor side            | Intake air temperature D.B.    | °C    | 35.1                             | 8.5     | 35.0                             | 8.3     |
|                         | Intake air temperature W.B.    | °C    | 23.9                             | 6.6     | 23.9                             | 6.1     |
| SHF                     |                                |       | 0.78                             | -       | 0.83                             | -       |
| BF                      |                                |       | 0.15                             | -       | 0.08                             | -       |

|                         |                                |       |                                  |         |
|-------------------------|--------------------------------|-------|----------------------------------|---------|
| Representative matching |                                |       | NTXAMT36A112AA<br>NAXAMT36A112AA |         |
| Mode                    |                                |       | COOLING                          | HEATING |
| Total                   | Capacity                       | Btu/h | 36,000                           | 37,000  |
|                         | Input                          | W     | 3,790                            | 3,280   |
| Electrical circuit      | Indoor unit model              |       | NTXAMT36A112AA<br>NAXAMT36A112AA |         |
|                         | Phase                          |       | Single                           |         |
|                         | Cycle                          |       | 60 Hz                            |         |
|                         | Voltage                        |       | 208/230 V                        |         |
|                         | Current                        |       | 2.70 A                           |         |
|                         | Outdoor unit model             |       | NTXSKH36A112AA                   |         |
|                         | Phase                          |       | Single                           |         |
|                         | Cycle                          |       | 60 Hz                            |         |
|                         | Voltage                        |       | 208/230 V                        |         |
|                         | Current                        |       | 13.78 A                          | 11.56 A |
| Refrigerant circuit     | Discharge pressure             | PSIG  | 403                              | 376     |
|                         | Suction pressure               | PSIG  | 125                              | 103     |
|                         | Discharge temperature          | °F    | 165                              | 168     |
|                         | Condensing temperature         | °F    | 117                              | 110     |
|                         | Suction temperature            | °F    | 50                               | 45      |
|                         | Ref. Pipe length               | ft    | 25                               | 25      |
|                         | Discharge pressure             | Mpa   | 2.78                             | 2.59    |
|                         | Suction pressure               | Mpa   | 0.86                             | 0.71    |
|                         | Discharge temperature          | °C    | 73.7                             | 75.6    |
|                         | Condensing temperature         | °C    | 47.3                             | 43.4    |
|                         | Suction temperature            | °C    | 9.9                              | 7.4     |
|                         | Ref. Pipe length               | m     | 7.6                              | 7.6     |
| Indoor side             | Intake air temperature D.B.    | °F    | 80                               | 70      |
|                         | Intake air temperature W.B.    | °F    | 67                               | 60      |
|                         | Discharge air temperature D.B. | °F    | 55                               | 107     |
| Outdoor side            | Intake air temperature D.B.    | °F    | 95                               | 47      |
|                         | Intake air temperature W.B.    | °F    | 75                               | 43      |
| Indoor side             | Intake air temperature D.B.    | °C    | 26.7                             | 21.1    |
|                         | Intake air temperature W.B.    | °C    | 19.5                             | 15.7    |
|                         | Discharge air temperature D.B. | °C    | 12.9                             | 41.7    |
| Outdoor side            | Intake air temperature D.B.    | °C    | 35.0                             | 8.3     |
|                         | Intake air temperature W.B.    | °C    | 23.9                             | 6.1     |
| SHF                     |                                |       | 0.74                             | -       |
| BF                      |                                |       | 0.2                              | -       |

## NTXSKH24A112AA

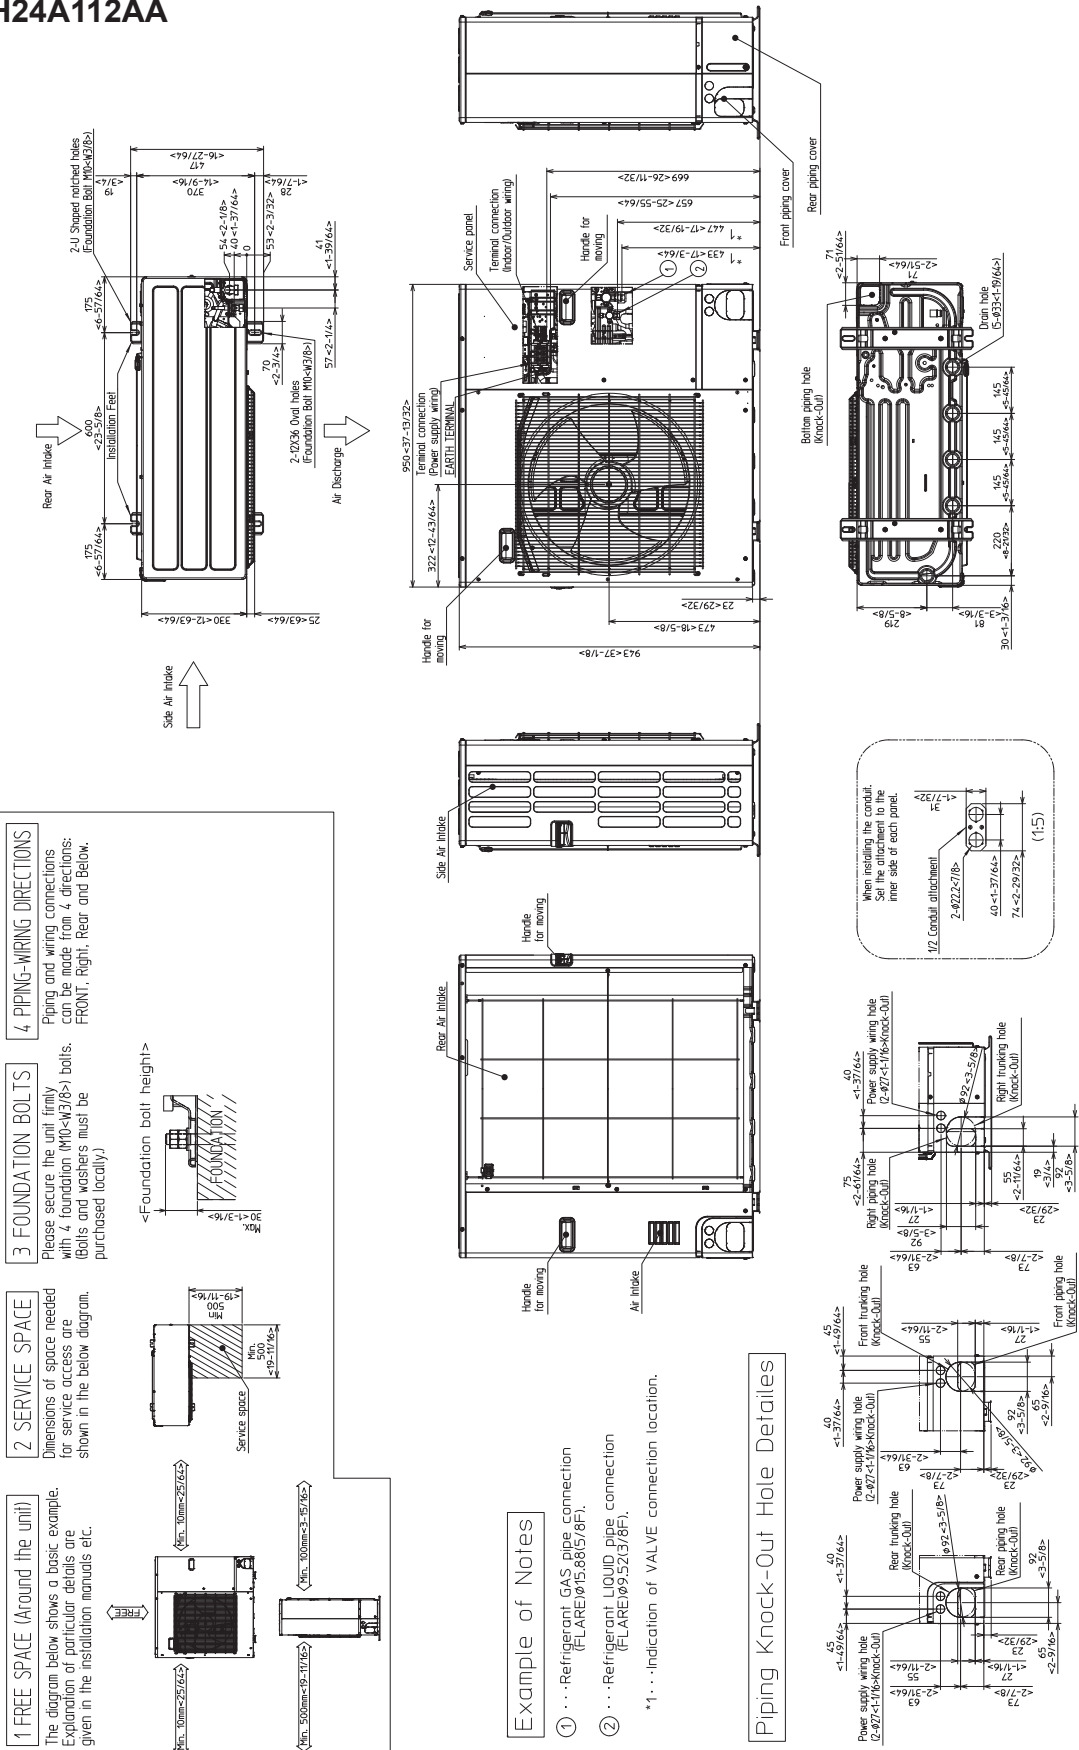


## Unit: mm&lt;in&gt;



## NTXSKH24A112AA

| SYMBOL | NAME                            | SYMBOL       | NAME                                                                      | SYMBOL   | NAME                                   |
|--------|---------------------------------|--------------|---------------------------------------------------------------------------|----------|----------------------------------------|
| TB1    | Terminal Block (Power Supply)   | TH8          | Thermistor (Heat Sink)                                                    | SW5      | Switch (Function Switch, Model Select) |
| TB2    | Terminal Block (Indoor/Outdoor) | TH33         | Thermistor (Comp. Surface)                                                | SW6      | Switch (Model Select)                  |
| MC     | Motor for Compressor            | LEV-A, LEV-B | Linear Expansion Valve                                                    | SW7      | Switch (Function Switch)               |
| MF1    | Fan Motor                       | DCL          | Reactor                                                                   | SW8      | Switch (Function Switch)               |
| 21S4   | Solenoid Valve (4-Way Valve)    | CY1, CY2     | Capacitor                                                                 | SW9      | Switch (Function Switch)               |
| 63H    | High Pressure Switch            | P. B.        | Power Circuit Board                                                       | SWP      | Switch (Pump Down)                     |
| BH     | Base Heater                     | C. B.        | Controller Circuit Board                                                  | CNM      | Connector (Connection for Option)      |
| THP    | Thermal Protector               | F1, F2       | Fuse (T10AL250V)                                                          | CN31     | Connector (Emergency Operation)        |
| TH3    | Thermistor (Liquid)             | F3, F4       | Fuse (T6.3AL250V)                                                         | CNDM     | Connector (Connection for Option)      |
| TH4    | Thermistor (Discharge)          | SW1          | Switch (Manual Defrost, Defect History Record Reset, Refrigerant Address) | SV2      | Connector                              |
| TH6    | Thermistor (2-Phase Pipe)       | SW4          | Switch (Function Switch)                                                  | X52, X55 | Relay                                  |
| TH7    | Thermistor (Ambient)            |              |                                                                           |          |                                        |

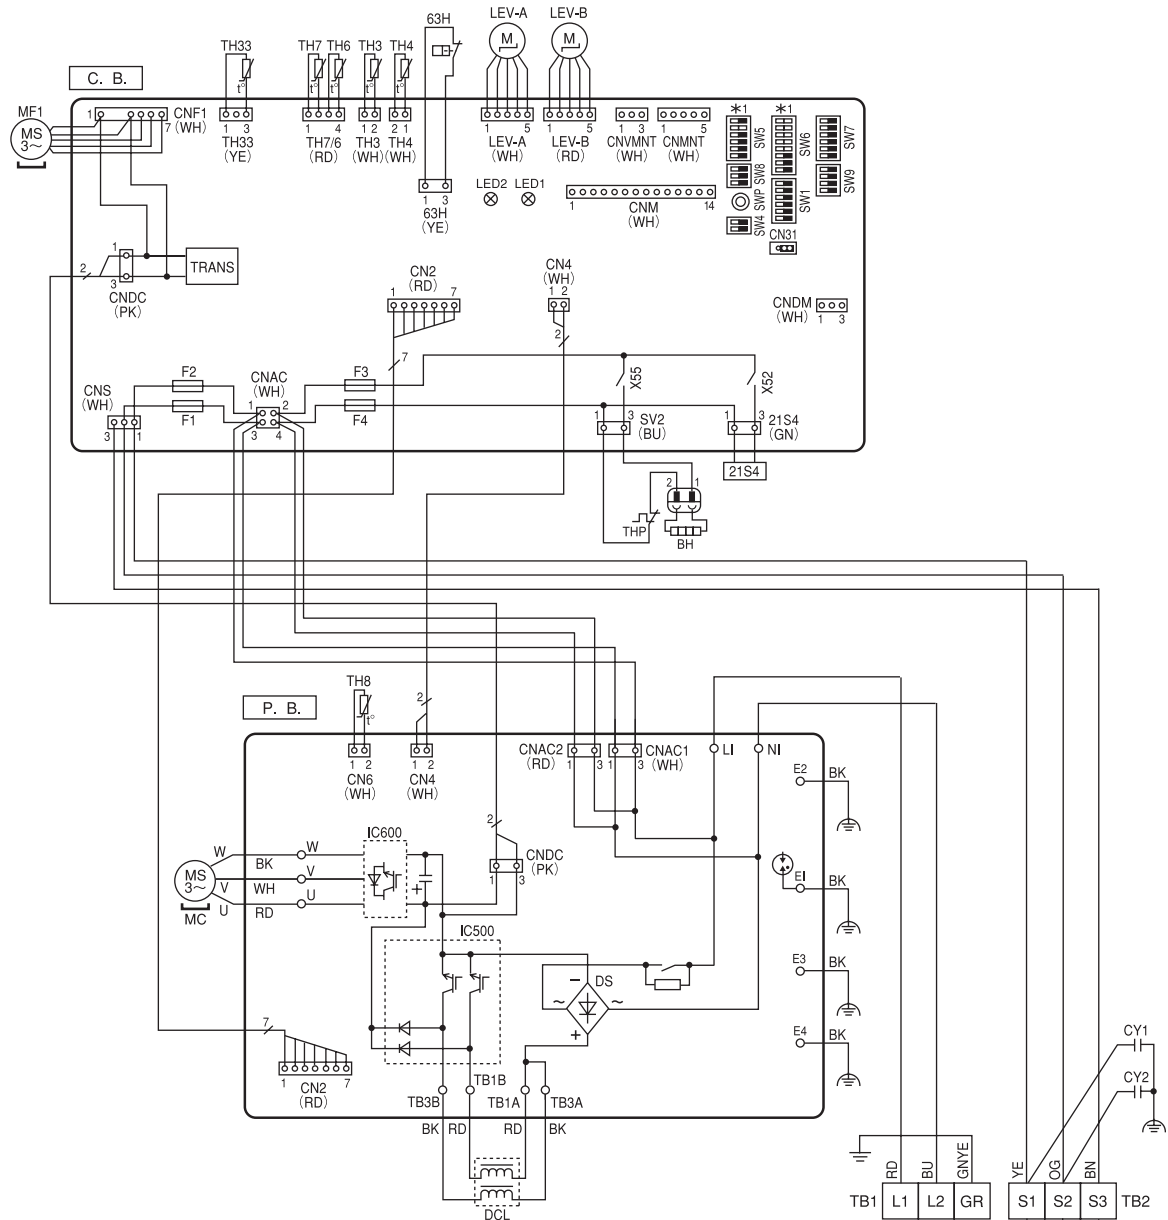

\*1. MODEL SELECT  
The black square (■) indicates a switch position.

| MODEL                    | SW6-4, 5, 6, 7, 8 *2                                                                                                                                                                                                                                                                                                                                                                             | SW5-5 *2                 |                          |                          |                          |                          |                          |                          |                          |   |   |   |   |   |   |   |   |                                                                                                                                                                                                                                                                                                            |                          |                          |                          |                          |                          |                          |   |   |   |   |   |   |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---|---|---|---|---|---|---|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---|---|---|---|---|---|
| NTXSKH24A112AA           | ON OFF <table><tr><td><input type="checkbox"/></td><td><input type="checkbox"/></td><td><input type="checkbox"/></td><td><input type="checkbox"/></td><td><input type="checkbox"/></td><td><input type="checkbox"/></td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr></table> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | ON OFF <table><tr><td><input type="checkbox"/></td><td><input type="checkbox"/></td><td><input type="checkbox"/></td><td><input type="checkbox"/></td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td></tr></table> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 1 | 2 | 3 | 4 | 5 | 6 |
| <input type="checkbox"/> | <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                         | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |                          |                          |   |   |   |   |   |   |   |   |                                                                                                                                                                                                                                                                                                            |                          |                          |                          |                          |                          |                          |   |   |   |   |   |   |
| 1                        | 2                                                                                                                                                                                                                                                                                                                                                                                                | 3                        | 4                        | 5                        | 6                        | 7                        | 8                        |                          |                          |   |   |   |   |   |   |   |   |                                                                                                                                                                                                                                                                                                            |                          |                          |                          |                          |                          |                          |   |   |   |   |   |   |
| <input type="checkbox"/> | <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                         | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |                          |                          |                          |                          |   |   |   |   |   |   |   |   |                                                                                                                                                                                                                                                                                                            |                          |                          |                          |                          |                          |                          |   |   |   |   |   |   |
| 1                        | 2                                                                                                                                                                                                                                                                                                                                                                                                | 3                        | 4                        | 5                        | 6                        |                          |                          |                          |                          |   |   |   |   |   |   |   |   |                                                                                                                                                                                                                                                                                                            |                          |                          |                          |                          |                          |                          |   |   |   |   |   |   |


\*2. SW6-1 to 3, SW5-1 to 4, 6 : Function Switch

POWER SUPPLY  
208/230 V AC 60 Hz

\*Use copper supply wires.

\*Utiliser des fils d'alimentation en cuivre.

| SYMBOL   | NAME                            | SYMBOL           | NAME                                                                      | SYMBOL   | NAME                                   |
|----------|---------------------------------|------------------|---------------------------------------------------------------------------|----------|----------------------------------------|
| TB1      | Terminal Block (Power Supply)   | TH8              | Thermistor (Heat Sink)                                                    | SW4      | Switch (Function Switch)               |
| TB2      | Terminal Block (Indoor/Outdoor) | TH32             | Thermistor (Suction)                                                      | SW5      | Switch (Function Switch, Model Select) |
| MC       | Motor for Compressor            | TH33             | Thermistor (Comp. Surface)                                                | SW6      | Switch (Model Select)                  |
| MF1, MF2 | Fan Motor                       | LEV1, LEV8, LEV9 | Linear Expansion Valve                                                    | SW7      | Switch (Function Switch)               |
| 21S4     | Solenoid Valve (4-Way Valve)    | DCL1, DCL2, DCL3 | Reactor                                                                   | SW8      | Switch (Function Switch)               |
| 63H      | High Pressure Switch            | CY1, CY2         | Capacitor                                                                 | SW9      | Switch (Function Switch)               |
| BH       | Base Heater                     | P. B.            | Power Circuit Board                                                       | SWP      | Switch (Pump Down)                     |
| THP      | Thermal Protector               | C. B.            | Controller Circuit Board                                                  | CNM      | Connector (Connection for Option)      |
| TH3      | Thermistor (Liquid)             | F1, F2           | Fuse (T10AL250V)                                                          | CN31     | Connector (Emergency Operation)        |
| TH4      | Thermistor (Discharge)          | F3, F4           | Fuse (T6.3AL250V)                                                         | CNDM     | Connector (Connection for Option)      |
| TH6      | Thermistor (2-Phase Pipe)       | SW1              | Switch (Manual Defrost, Defect History Record Reset, Refrigerant Address) | SV2      | Connector                              |
| TH7      | Thermistor (Ambient)            |                  |                                                                           | X52, X55 | Relay                                  |

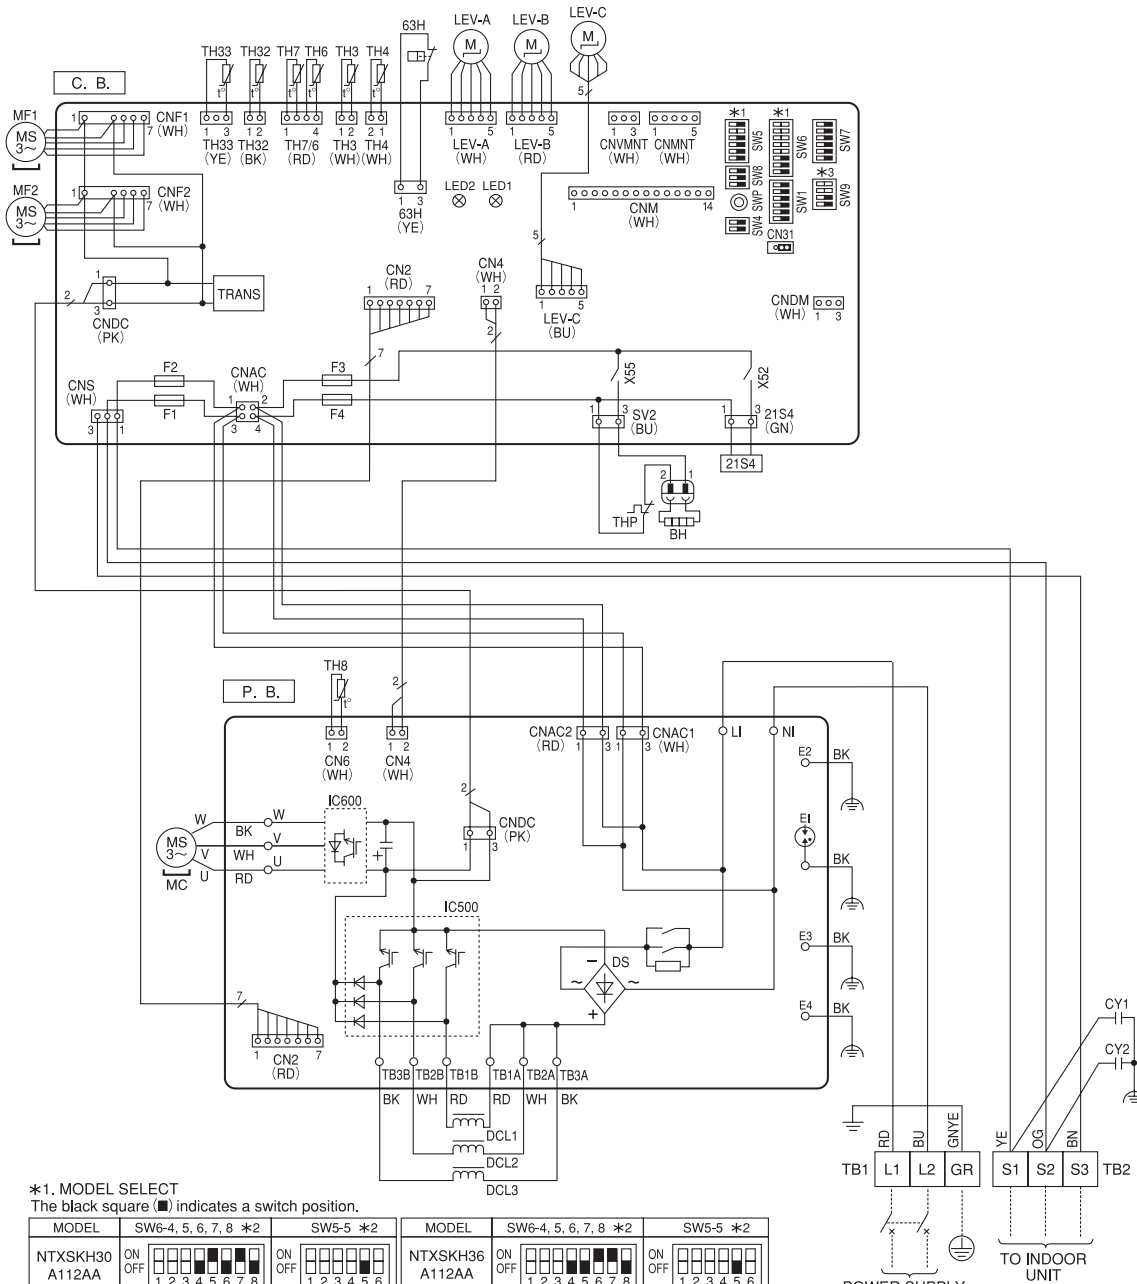

POWER SUPPLY  
208/230 V AC 60 Hz  
\*Use copper supply wires.  
\*Utiliser des fils d'alimentation en cuivre.

The black square (■) indicates a switch position.


| Ambient temp.                     | SW9-3,4 *4                                                                                         | Ambient temp. | SW9-3,4 *4                                                                                         | Ambient temp. | SW9-3,4 *4                                                                                         | Ambient temp. | SW9-3,4 *4                                                                                         |
|-----------------------------------|----------------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------------|
| 37°F or less<br>(Initial setting) | ON OFF  1 2 3 4 | 32°F or less  | ON OFF  1 2 3 4 | 27°F or less  | ON OFF  1 2 3 4 | 21°F or less  | ON OFF  1 2 3 4 |

### 8-1. INDOOR UNIT POWER SUPPLIED FROM OUTDOOR UNIT


The following illustrations show available connection patterns.

The outdoor unit power supply patterns vary on each model.

1:1 System

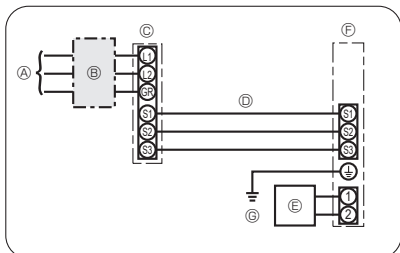

Simultaneous twin system

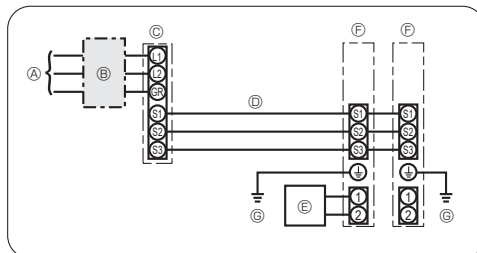

- Ⓐ Outdoor unit power supply
- Ⓑ Wiring circuit breaker or isolating switch
- Ⓒ Outdoor unit
- Ⓓ Indoor unit/outdoor unit connecting cords
- Ⓔ Remote controller
- Ⓕ Indoor unit
- Ⓖ Indoor unit earth

Affix a label A that is included with the manuals near each wiring diagram for the indoor and outdoor units.

| Outdoor model name                              |                                   | NTXSKH24A112AA           | NTXSKH30A112AA | NTXSKH36A112AA |
|-------------------------------------------------|-----------------------------------|--------------------------|----------------|----------------|
| Outdoor unit power supply                       |                                   | Single, 208/230 V, 60 Hz |                |                |
| Breaker size                                    |                                   | 25 A                     | 35 A           |                |
| Minimum circuit ampacity                        |                                   | 17 A                     | 24 A           | 26 A           |
| Maximum rating of overcurrent protective device |                                   | 27 A                     | 40 A           | 42 A           |
| Wiring<br>Wire No. x<br>size                    | Outdoor unit power supply         | 2 × Min AWG 12           |                |                |
|                                                 | Outdoor unit power supply earth   | 1 × Min AWG 12           |                |                |
|                                                 | Indoor unit-Outdoor unit *1       | 3 × AWG 14 (polar)       |                |                |
|                                                 | Indoor unit earth                 | 1 × Min AWG 14           |                |                |
|                                                 | Remote controller-Indoor unit *2  | 2 × AWG 22 (Non-polar)   |                |                |
| Circuit<br>rating                               | Outdoor unit L1-L2 *3             | 208/230 VAC              |                |                |
|                                                 | Indoor unit-Outdoor unit S1-S2 *3 | 208/230 VAC              |                |                |
|                                                 | Indoor unit-Outdoor unit S2-S3 *3 | 24 VDC                   |                |                |
|                                                 | Remote controller-Indoor unit *3  | 12 VDC                   |                |                |

**Please follow applicable federal, state, or local codes to prevent potential leakage/electric shock. Or install a ground fault interrupt for the prevention of leakage and electric shock.**

\*1. Maximum 147 ft [45 m].

If AWG13 used, maximum 164 ft [50 m].

If AWG13 used and S3 separated, maximum 262 ft [80 m].

\*2. The 30 ft [10 m] wire is attached in the remote controller accessory. Maximum 1500 ft [500 m].

\*3. The figures are NOT always against the ground.


S3 terminal has 24 VDC against S2 terminal. However between S3 and S1, these terminals are NOT electrically insulated by the transformer or other device.

**Notes:** 1. Wiring size must comply with the applicable local and national code.

2. Use copper supply wires.

3. Use wires rated 600 V or more for the power supply cables and the indoor/outdoor unit connecting cables.

4. Install an earth line longer than power cables.

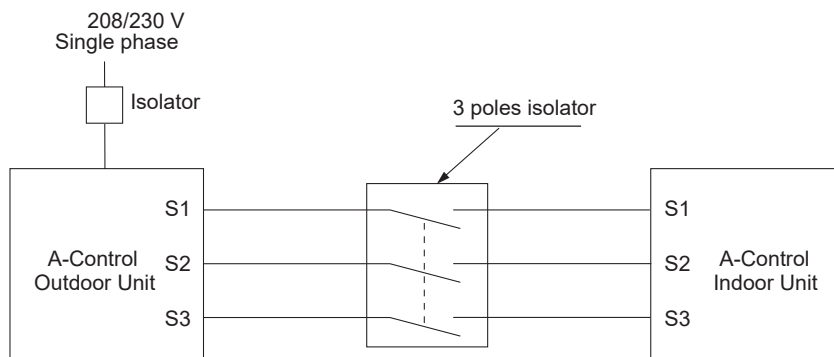

#### ⚠ Warning:

In the case of A-control wiring, there is high voltage potential on the S3 terminal caused by electrical circuit design that has no electrical insulation between power line and communication signal line. Therefore, please turn off the main power supply when servicing. And do not touch the S1, S2, S3 terminals when the power is energized. If isolator should be used between indoor unit and outdoor unit, please use 3-pole type.

• Turn on the main power when the ambient temperature is, -4°F [-20°C] or higher.


• In below, -4°F [-20°C] condition, it needs at least 4 h standby to operate in order to warm the electrical parts.

## 8-2. SEPARATE INDOOR UNIT/OUTDOOR UNIT POWER SUPPLIES

The following illustrations show available connection patterns.  
The outdoor unit power supply patterns vary on models.

### 1:1 System


The optional indoor power supply terminal kit is required.

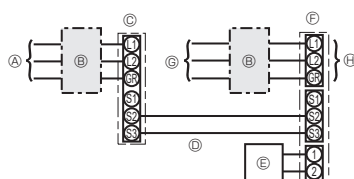

- Ⓐ Outdoor unit power supply
- Ⓑ Wiring circuit breaker or isolating switch
- Ⓒ Outdoor unit
- Ⓓ Indoor unit/outdoor unit connecting cords
- Ⓔ Remote controller
- Ⓕ Indoor unit
- Ⓖ Indoor unit power supply
- Ⓗ Option

Affix a label B that is included with the manuals near each wiring diagram for the indoor and outdoor units.

### Simultaneous twin system

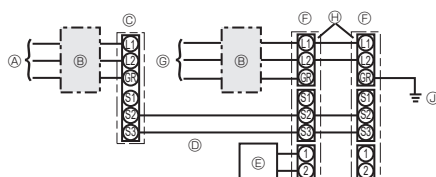


- Ⓐ Outdoor unit power supply
- Ⓑ Wiring circuit breaker or isolating switch
- Ⓒ Outdoor unit
- Ⓓ Indoor unit/outdoor unit connecting cords
- Ⓔ Remote controller
- Ⓕ Indoor unit
- Ⓖ Indoor unit power supply
- Ⓗ Option
- Ⓙ Indoor unit earth

Affix a label B that is included with the manuals near each wiring diagram for the indoor and outdoor units.

If the indoor and outdoor units have separate power supplies, refer to the table below.  
Change the indoor unit electrical box wiring referring to the figure in the right and the DIP switch settings of the outdoor unit control board.

|                                                                                                     | Indoor unit specifications |                                                                                                  |  |  |   |   |   |  |
|-----------------------------------------------------------------------------------------------------|----------------------------|--------------------------------------------------------------------------------------------------|--|--|---|---|---|--|
| Indoor unit electrical box connector connection change                                              | Required                   |                                                                                                  |  |  |   |   |   |  |
| Label affixed near each wiring diagram for the indoor and outdoor units                             | Required                   |                                                                                                  |  |  |   |   |   |  |
| Outdoor unit DIP switch settings (when using separate indoor unit/outdoor unit power supplies only) | ON<br>OFF                  | <table><tr><td></td><td></td><td>3</td></tr><tr><td>1</td><td>2</td><td></td></tr></table> (SW8) |  |  | 3 | 1 | 2 |  |
|                                                                                                     |                            | 3                                                                                                |  |  |   |   |   |  |
| 1                                                                                                   | 2                          |                                                                                                  |  |  |   |   |   |  |

Note:  
There are 3 types of label; A, B and C.  
Affix the appropriate label(s) to the units according to the wiring method.

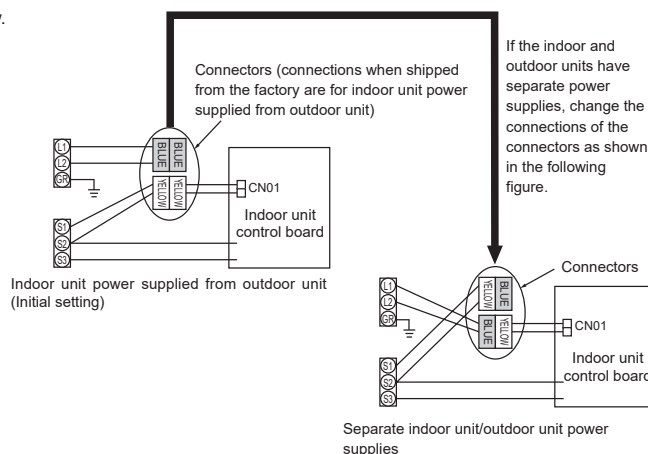

Separate indoor unit/outdoor unit power supplies

| Indoor model name                               |                                | A024                     | A030                   | A036   |
|-------------------------------------------------|--------------------------------|--------------------------|------------------------|--------|
| Indoor unit power supply                        |                                | Single, 208/230 V, 60 Hz |                        |        |
| Minimum circuit ampacity                        | NTXAMT/NAXAMT                  | 3.00 A                   | 4.13 A                 | 4.13 A |
|                                                 | TPEAD/APEAD                    | 2.63 A                   | 2.73 A                 | 3.3 A  |
| Maximum rating of overcurrent protective device |                                | 15 A                     |                        |        |
| Wiring<br>Wire No. x<br>size                    | Indoor unit power supply       | 2 × Min AWG 16           |                        |        |
|                                                 | Indoor unit power supply earth | 1 × Min AWG 16           |                        |        |
|                                                 | Indoor unit-Outdoor unit       | *1                       | 2 × AWG 22 (polar)     |        |
|                                                 | Indoor unit earth              |                          | -                      |        |
|                                                 | Remote controller-Indoor unit  | *2                       | 2 × AWG 22 (Non-polar) |        |
| Circuit<br>rating                               | Outdoor unit L1-L2             | *3                       | 208/230 VAC            |        |
|                                                 | Indoor unit-Outdoor unit S1-S2 | *3                       | -                      |        |
|                                                 | Indoor unit-Outdoor unit S2-S3 | *3                       | 24 VDC                 |        |
|                                                 | Remote controller-Indoor unit  | *3                       | 12 VDC                 |        |

\*1. Maximum 165 ft [50 m]

\*2. The 30 ft [10 m] wire is attached in the remote controller accessory. Maximum 1500 ft [500 m].

\*3. The figures are NOT always against the ground.

Notes: 1. Wiring size must comply with the applicable local and national code.  
2. Use copper supply wires.  
3. Use wires rated 300 V or more for the power supply cables.  
4. Install an earth line longer than power cables

### 8-3. INDOOR – OUTDOOR CONNECTING CABLE

| Outdoor power supply     | Wire No. × Size    |                    |                                    |
|--------------------------|--------------------|--------------------|------------------------------------|
|                          | Max. 147 ft [45 m] | Max. 164 ft [50 m] | Max. 262 ft [80 m]                 |
| Indoor unit-Outdoor unit | 3 × AWG15 (polar)  | 3 × AWG13 (polar)  | 3 × AWG13 (polar) and S3 separated |

Note: The maximum cable length may vary depending on the condition of installation, humidity or materials, etc.


| Indoor/Outdoor separate power supply | Wire No. × Size     |  |
|--------------------------------------|---------------------|--|
|                                      | Max. 393 ft [120 m] |  |
| Indoor unit-Outdoor unit             | 2 × Min AWG22       |  |

Note: The optional indoor power supply terminal kit is necessary.

Be sure to connect the indoor-outdoor connecting cables directly to the units (no intermediate connections). Intermediate connections can lead to communication errors if water enters the cables and causes insufficient insulation to ground or a poor electrical contact at the intermediate connection point.

NTXSKH24A112AA


Unit: in (mm)

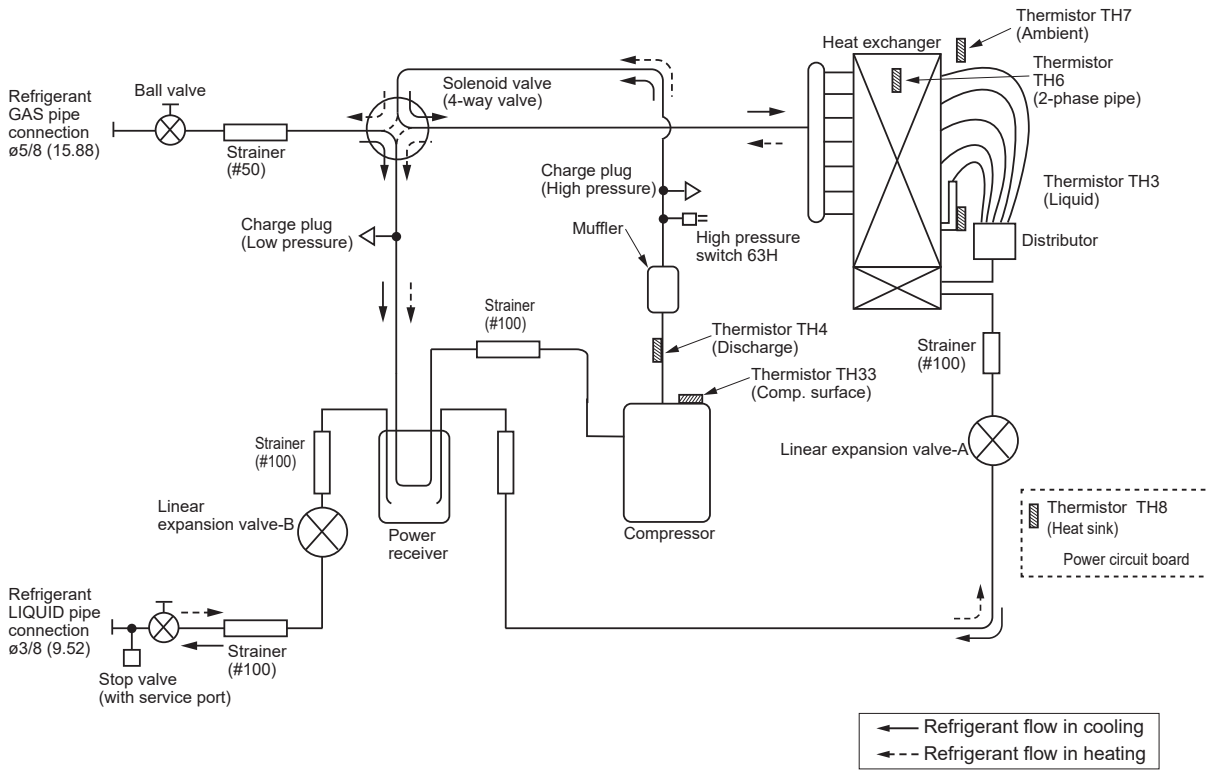

NTXSKH30A112AA

NTXSKH36A112AA

Unit: in (mm)

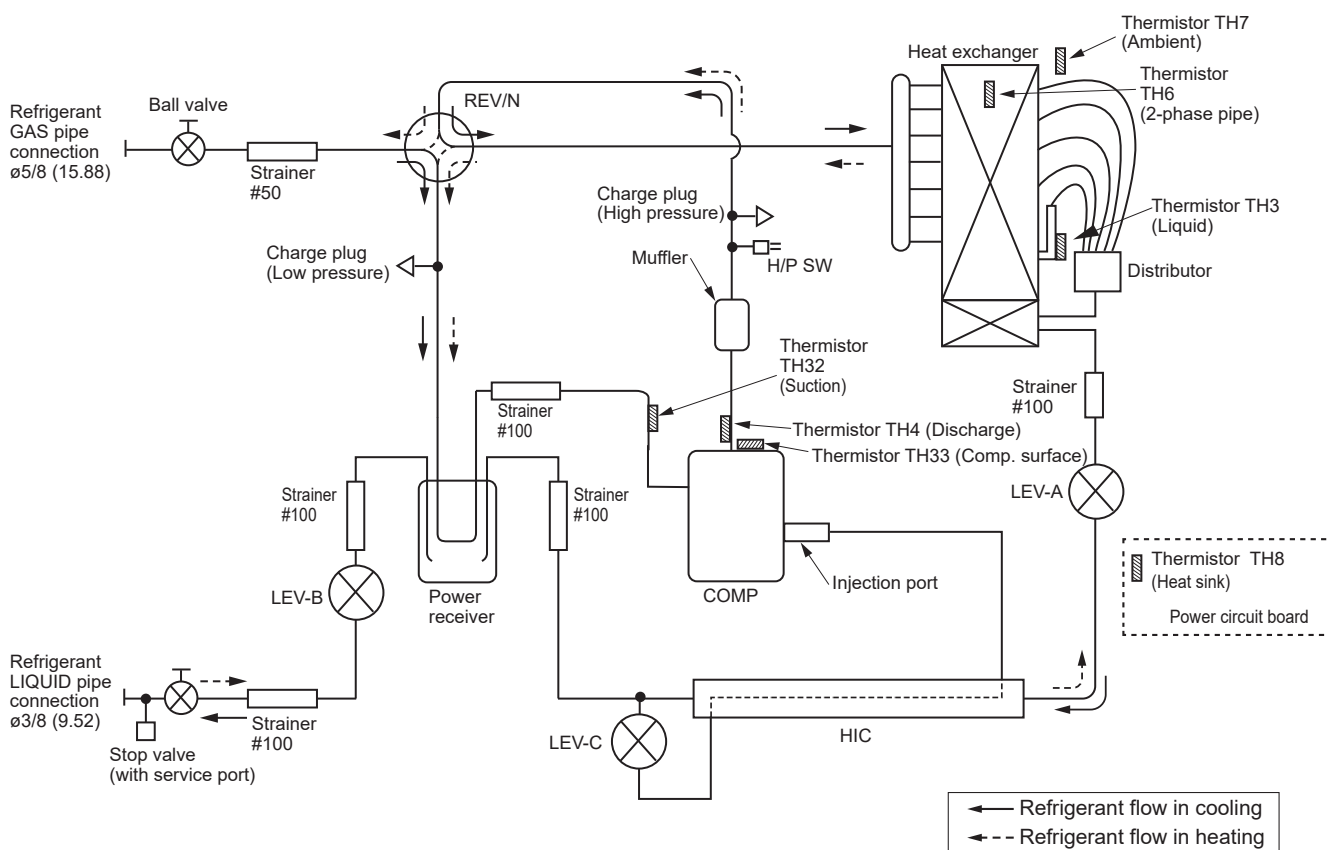

| Symbol         | Parts name                           | Detail                                                                   |
|----------------|--------------------------------------|--------------------------------------------------------------------------|
| COMP           | Compressor                           | DC inverter scroll compressor (Mitsubishi Electric Corporation)          |
| H/P SW         | High pressure switch (63H)           | For protection (OFF: 4.15MPa)                                            |
| REV/V          | Reversing (4-way) valve (21S4)       | Change the refrigerant circuit (Heating / Cooling) and for Defrosting    |
| Charge plug    | Charge plug                          | High pressure / Low pressure / For production test use                   |
| LEV-A          | Linear expansion valve -A            | Heating: Secondary LEV    Cooling: Primary LEV                           |
| LEV-B          | Linear expansion valve -B            | Heating: Primary LEV    Cooling: Secondary LEV                           |
| LEV-C          | Linear expansion valve -C            | For HIC (heating only)                                                   |
| TH32           | Suction temperature thermistor       | For LEV control                                                          |
| TH3            | Liquid temperature thermistor        | Heating: Evaporating temperature    Cooling: Sub cool liquid temperature |
| TH4            | Discharge temperature thermistor     | For LEV control and for compressor protection                            |
| TH6            | 2-phase pipe temperature thermistor  | Outdoor 2-phase pipe temperature                                         |
| TH7            | Ambient temperature thermistor       | For fan control and for compressor frequency control                     |
| TH33           | Comp. surface temperature thermistor | For protection                                                           |
| Power Receiver | Power Receiver                       | For accumulation of refrigerant                                          |
| HIC            | Heat interchange circuit             | For high heating capacity                                                |

## 9-1. REFRIGERANT COLLECTING (PUMP DOWN)

When relocating or disposing of the indoor/outdoor unit, pump down the system following the procedures below so that no refrigerant is released into the atmosphere.

- ① Turn off the power supply (circuit breaker).
- ② Connect the low pressure valve on the gauge manifold to the charge plug (low pressure side) on the outdoor unit.
- ③ Close the liquid stop valve completely.
- ④ Supply power (circuit breaker).
  - When power is supplied, make sure that “Centrally controlled” is not displayed on the remote controller. If “Centrally controlled” is displayed, the refrigerant collecting (pump down) cannot be completed normally.
  - Startup of the indoor-outdoor communication takes about 3 minutes after the power (circuit breaker) is turned on. Start the pump-down operation 3 to 4 minutes after the power (circuit breaker) is turned on.
- ⑤ Perform the refrigerant collecting operation (cooling test run).
  - Push the pump-down SWP switch (push-button type) on the control board of the outdoor unit. The compressor and ventilators (indoor and outdoor units) start operating (refrigerant collecting operation begins). (LED1 and LED2 on the control board of the outdoor unit are lit.)
  - Only push the pump-down SWP switch if the unit is stopped. However, even if the unit is stopped and the pump-down SWP switch is pushed less than 3 minutes after the compressor stops, the refrigerant collecting operation cannot be performed. Wait until the compressor has been stopped for 3 minutes and then push the pump-down SWP switch again.
- ⑥ Fully close the ball valve on the gas pipe side of the outdoor unit when the pressure gauge on the gauge manifold shows 0.05 to 0 MPa [Gauge] (approx. 0.5 to 0 kgf/cm<sup>2</sup>) and quickly stop the air conditioner.
  - Because the unit automatically stops in about 3 minutes when the refrigerant collecting operation is completed (LED1 off, LED2 lit), be sure to quickly close the gas ball valve. However, if LED1 is lit, LED2 is off, and the unit is stopped, open the liquid stop valve completely, close the valve completely after 3 minutes or more have passed, and then repeat step ⑤. (Open the gas ball valve completely.)
  - If the refrigerant collecting operation has been completed normally (LED1 off, LED2 lit), the unit will remain stopped until the power supply is turned off.
  - Note that it may not be possible to perform a pump-down operation when the extension piping is very long with a large refrigerant amount. In this case, use refrigerant recovery equipment to collect all of the refrigerant in the system.
- ⑦ Turn off the power supply (circuit breaker), remove the gauge manifold, and then disconnect the refrigerant pipes.

### ⚠ Warning:

**When pumping down the refrigerant, stop the compressor before disconnecting the refrigerant pipes.**


- If the refrigerant pipes are disconnected while the compressor is operating and the stop valve (ball valve) is open, the pressure in the refrigeration cycle could become extremely high if air is drawn in, causing the pipes to burst, personal injury, etc.
- Do not perform pump down work when there is a gas leak. The intake of air or other gases causes abnormally high pressure in the refrigeration cycle, which may cause explosion or injury.

## 9-2. START AND FINISH OF TEST RUN

- Operation from the indoor unit  
Execute the test run using the installation manual for the indoor unit.
- Operation from the outdoor unit  
By using the DIP switch SW4 on the control board of outdoor unit, test run can be started and finished, and its operation mode (cooling/heating) can be set up.

- ① Set the operation mode (cooling/heating) using SW4-2.
- ② Turn on SW4-1 to start test run with the operation mode set by SW4-2.
- ③ Turn off SW4-1 to finish the test run.

- There may be a faint knocking sound around the machine room after power is supplied. However, this is not a problem with product because the linear expansion valve is just moving to adjust opening pulse.
- There may be a knocking sound around the machine room for several seconds after compressor starts operating. However, this is not a problem with product because it is generated by the check valve itself due to a small pressure difference in the refrigerant circuit.



### Note:

The operation cannot be changed by SW4-2 during test run. (To change test run mode, stop the unit by SW4-1, change the operation mode and restart the test run by SW4-1.)

### 10-1. TROUBLESHOOTING

#### <Check code displayed by self-diagnosis and actions to be taken for service (summary)>

Present and past check codes are logged, and they can be displayed on the control board of outdoor unit. Actions to be taken for service, which depends on whether or not the trouble is reoccurring in the field, are summarized in the table below. Check the contents below before investigating details.

| Unit conditions at service      | Check code    | Actions to be taken for service (summary)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The trouble is reoccurring.     | Displayed     | Judge the problem and take a corrective action according to "10-3. SELF-DIAGNOSIS ACTION TABLE".                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                 | Not displayed | Conduct troubleshooting and ascertain the cause of the trouble according to "10-4. TROUBLESHOOTING BY INFERIOR PHENOMENA".                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| The trouble is not reoccurring. | Logged        | <ol style="list-style-type: none"> <li>1. Consider the temporary defects such as the work of protection devices in the refrigerant circuit including compressor, poor connection of wiring, noise, etc. Re-check the symptom, and check the installation environment, refrigerant amount, weather when the trouble occurred, matters related to wiring, etc.</li> <li>2. Reset check code logs and restart the unit after finishing service.</li> <li>3. There is no abnormality in electrical component, controller board, remote controller, etc.</li> </ol> |
|                                 | Not logged    | <ol style="list-style-type: none"> <li>1. Re-check the abnormal symptom.</li> <li>2. Conduct troubleshooting and ascertain the cause of the trouble according to "10-4. TROUBLESHOOTING BY INFERIOR PHENOMENA".</li> <li>3. Continue to operate unit for the time being if the cause is not ascertained.</li> <li>4. There is no abnormality concerning of parts such as electrical component, controller board, remote controller, etc.</li> </ol>                                                                                                            |

## **10-2. CHECK POINT UNDER TEST RUN**

### **10-2-1. Before test run**

- After installation of indoor and outdoor units, piping work and electric wiring work, re-check that there is no refrigerant leakage, loosened connections and incorrect polarity.
  - Measure impedance between the ground and the power supply terminal block (L1, L2) on the outdoor unit by 500 V Megger and check that it is 1.0 MΩ or over.
  - Do not use 500 V Megger to indoor/outdoor connecting wire terminal block (S1, S2, S3) and remote controller terminal block (1, 2). This may cause malfunction.
  - Make sure that test run switch (SW4) is set to OFF before turning on power supply.
  - Turn on power supply 12 hours before test run in order to protect compressor.
  - For specific models which requires higher ceiling settings or auto-recovery feature from power failure, make proper changes of settings referring to the description of "12. FUNCTION SETTING".
- Make sure to read operation manual before test run. (Especially items to secure safety.)

### **10-2-2. TEST RUN**

Refer to "15-4. TEST RUN" for operation procedure.

### **10-2-3. ERROR INFORMATION**

Refer to "15-2. ERROR INFORMATION" when an error occurs.

### **10-2-4. ERROR HISTORY**


Refer to "15-6. ERROR HISTORY" to check the errors occurred in the past.

### **10-2-5. SELF-DIAGNOSIS**


Refer to "15-7. SELF-DIAGNOSIS" to search for the error history.

- Refer to the following tables for details on the check codes.

#### [Output pattern A]

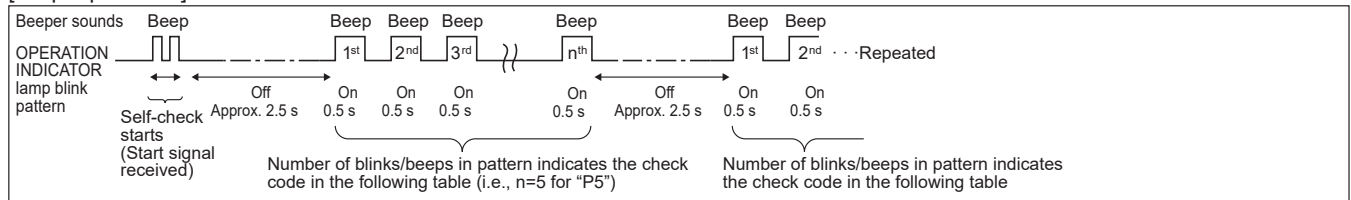

#### [Output pattern B]

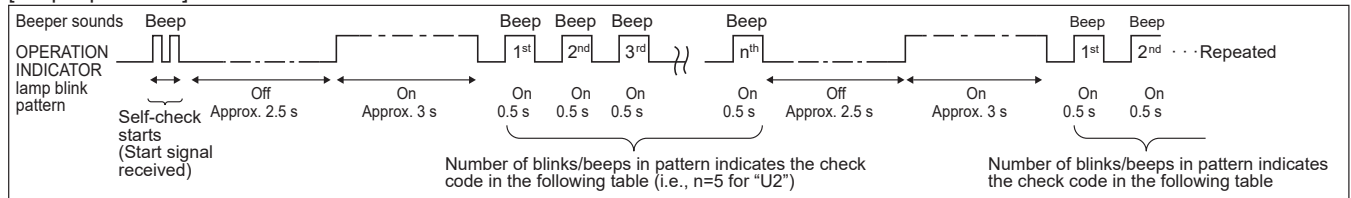

#### [Output pattern A] Errors detected by indoor unit

| IR wireless remote controller                                   | Wired remote controller | Symptom                                                  | Remark                                                     |
|-----------------------------------------------------------------|-------------------------|----------------------------------------------------------|------------------------------------------------------------|
| Beeper sounds/OPERATION INDICATOR lamp blinks (Number of times) | ① Check code            |                                                          |                                                            |
| 1                                                               | P1                      | Intake sensor error                                      | As for indoor unit, refer to indoor unit's service manual. |
| 2                                                               | P2                      | Pipe (TH2) sensor error                                  |                                                            |
|                                                                 | P9                      | Pipe (TH5) sensor error                                  |                                                            |
| 3                                                               | E6, E7                  | Indoor/outdoor unit communication error                  |                                                            |
| 4                                                               | P4                      | Drain sensor error/Float switch connector open           |                                                            |
| 5                                                               | P5                      | Drain pump error                                         |                                                            |
|                                                                 | PA                      | Forced compressor stop(due to water leakage abnormality) |                                                            |
| 6                                                               | P6                      | Freezing/Overheating protection operation                |                                                            |
| 7                                                               | EE                      | Combination error between indoor and outdoor units       |                                                            |
| 8                                                               | P8                      | Pipe temperature error                                   |                                                            |
| 9                                                               | E4, E5                  | Remote controller signal receiving error                 |                                                            |
| 10                                                              | —                       | —                                                        |                                                            |
| 11                                                              | —                       | —                                                        |                                                            |
| 12                                                              | FB (Fb)                 | Indoor unit control system error (memory error, etc.)    |                                                            |
| 14                                                              | PL                      | Abnormal refrigerant circuit                             |                                                            |
| —                                                               | E0, E3                  | Remote controller transmission error                     |                                                            |
| —                                                               | E1, E2                  | Remote controller control board error                    |                                                            |

#### [Output pattern B] Errors detected by unit other than indoor unit (outdoor unit, etc.)

| IR wireless remote controller<br>Beeper sounds/OPERATION<br>INDICATOR lamp blinks<br>(Number of times) | Wired remote controller<br>Check code | Symptom                                                                                                                     | Remark                                                                       |
|--------------------------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| 1                                                                                                      | E9                                    | Indoor/outdoor unit communication error<br>(Transmitting error) (Outdoor unit)                                              | For details, check<br>the LED display<br>of the outdoor<br>controller board. |
| 2                                                                                                      | UP                                    | Compressor overcurrent interruption                                                                                         |                                                                              |
| 3                                                                                                      | U3,U4                                 | Open/short of outdoor unit thermistors                                                                                      |                                                                              |
| 4                                                                                                      | UF                                    | Compressor overcurrent interruption (When compressor locked)                                                                |                                                                              |
| 5                                                                                                      | U2                                    | Abnormal high discharge temperature/49C worked/<br>insufficient refrigerant                                                 |                                                                              |
| 6                                                                                                      | U1,Ud                                 | Abnormal high pressure (63H worked)/Overheating<br>protection operation                                                     |                                                                              |
| 7                                                                                                      | U5                                    | Abnormal temperature of heatsink                                                                                            |                                                                              |
| 8                                                                                                      | U8                                    | Outdoor unit fan protection stop                                                                                            |                                                                              |
| 9                                                                                                      | U6                                    | Compressor overcurrent interruption/Abnormal of power module                                                                |                                                                              |
| 10                                                                                                     | U7                                    | Abnormality of super heat due to low discharge temperature                                                                  |                                                                              |
| 11                                                                                                     | U9,UH                                 | Abnormality such as overvoltage or voltage shortage and<br>abnormal synchronous signal to main circuit/Current sensor error |                                                                              |
| 12                                                                                                     | —                                     | —                                                                                                                           |                                                                              |
| 13                                                                                                     | —                                     | —                                                                                                                           |                                                                              |
| 14                                                                                                     | Others                                | Other errors                                                                                                                |                                                                              |

#### Notes:

1. If the beeper does not sound again after the initial 2 beeps to confirm the self-check start signal was received and the OPERATION INDICATOR lamp does not come on, there are no error records.
2. If the beeper sounds 3 times continuously "beep, beep, beep (0.4 + 0.4 + 0.4 s)" after the initial 2 beeps to confirm the self-check start signal was received, the specified refrigerant address is incorrect.

### 10-3. SELF-DIAGNOSIS ACTION TABLE

<Abnormalities detected when the power is turned on>

Note: Refer to indoor unit section for the codes starting with P and E.

| Check Code | Abnormal point and detection method | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Judgment and action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| None       | —                                   | <p>① No voltage is supplied to terminal block(TB1) of outdoor unit.<br/>a) Power supply breaker is turned off.<br/>b) Contact failure or disconnection of power supply terminal<br/>c) Open phase (L1 or L2 phase)</p> <p>② Electric power is not charged to power supply terminal of outdoor power circuit board.<br/>a) Contact failure of power supply terminal<br/>b) Open phase on the outdoor power circuit board<br/>Disconnection of connector LI or NI</p> <p>③ Electric power is not supplied to outdoor controller circuit board.<br/>a) Disconnection of connector (CNDC)</p> <p>④ Disconnection of reactor (DCL)</p> <p>⑤ Defective outdoor power circuit board</p> <p>⑥ Defective outdoor controller circuit board</p> | <p>① Check following items.<br/>a) Power supply breaker<br/>b) Connection of power supply terminal block (TB1)<br/>c) Connection of power supply terminal block (TB1)</p> <p>② Check following items.<br/>a) Connection of power supply terminal block (TB1)<br/>b) Connection of terminal on outdoor power circuit board<br/>Disconnection of connector LI or NI<br/>Refer to "10-8. TEST POINT DIAGRAM".</p> <p>③ Check connection of the connector (CNDC) on the outdoor controller circuit board.<br/>Check connection of the connector, CNDC, on the outdoor power circuit board. Refer to "10-8. TEST POINT DIAGRAM".</p> <p>④ Check connection of reactor. (DCL)<br/>Refer to "7. WIRING DIAGRAM".</p> <p>⑤ Replace outdoor power circuit board.</p> <p>⑥ Replace controller board (When items above are checked but the units cannot be repaired).</p> |

| Check Code   | Abnormal point and detection method                                                                                                                                                                                                                                                                                                                                                                                       | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Judgment and action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| F5<br>(5201) | <b>63H connector open</b><br>Abnormal if 63H connector circuit is open for 3 minutes continuously after power supply.<br>63H: High pressure switch                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>① Disconnection or contact failure of 63H connector on outdoor controller circuit board</li> <li>② Disconnection or contact failure of 63H</li> <li>③ 63H is working due to defective parts.</li> <li>④ Defective outdoor controller circuit board</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>① Check connection of 63H connector on outdoor controller circuit board. Refer to "10-8. TEST POINT DIAGRAM".</li> <li>② Check the 63H side of connecting wire.</li> <li>③ Check continuity by tester. Replace the parts if the parts are defective.</li> <li>④ Replace outdoor controller circuit board.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                         |
| EA<br>(6844) | <b>Miswiring of indoor/outdoor unit connecting wire</b><br>1. Outdoor controller circuit board can automatically check the number of connected indoor units. Abnormal if the number cannot be checked automatically due to miswiring of indoor/outdoor unit connecting wire, etc. after power is turned on for 4 minutes.<br>2. Abnormal if outdoor controller circuit board recognizes excessive number of indoor units. | <ul style="list-style-type: none"> <li>① Contact failure or miswiring of indoor/outdoor unit connecting wire</li> <li>② Diameter or length of indoor/outdoor unit connecting wire is out of specified capacity.</li> <li>③ Excessive number of indoor units are connected to 1 outdoor unit. (4 units or more)</li> <li>④ Defective transmitting receiving circuit of outdoor controller circuit board</li> <li>⑤ Defective transmitting receiving circuit of indoor controller board</li> <li>⑥ Defective indoor power board</li> <li>⑦ 2 or more outdoor units have refrigerant address "0" . (In the case of group control)</li> <li>⑧ Noise has entered into power supply or indoor / outdoor unit connecting wire.</li> </ul> | <ul style="list-style-type: none"> <li>① Check disconnection or looseness or polarity of indoor/outdoor unit connecting wire of indoor and outdoor units.</li> <li>② Check diameter and length of indoor/outdoor unit connecting wire.<br/>Total wiring length: 80m (including wiring connecting each indoor unit and between indoor and outdoor unit)<br/>Also check if the connection order of flat cable is S1, S2, S3.</li> <li>③ Check the number of indoor units that are connected to one outdoor unit. (If EA is detected)</li> <li>④—⑥ Turn the power off once, and on again to check.<br/>Replace outdoor controller circuit board, indoor controller board or indoor power board if abnormality occurs again.</li> </ul> |
| Eb<br>(6845) | <b>Miswiring of indoor/outdoor unit connecting wire (converse wiring or disconnection)</b><br>Outdoor controller circuit board can automatically set the unit number of indoor units.<br>Abnormal if the indoor unit number cannot be set within 4 minutes after power on because of miswiring (converse wiring or disconnection) of indoor/outdoor unit connecting wire.                                                 | <ul style="list-style-type: none"> <li>① Contact failure or miswiring of indoor/outdoor unit connecting wire</li> <li>② Diameter or length of indoor/outdoor unit connecting wire is out of specified capacity.</li> <li>④ Defective transmitting receiving circuit of outdoor controller circuit board</li> <li>⑤ Defective transmitting receiving circuit of indoor controller board</li> <li>⑥ Defective indoor power board</li> <li>⑦ 2 or more outdoor units have refrigerant address "0" . (In the case of group control)</li> <li>⑧ Noise has entered into power supply or indoor/outdoor unit connecting wire.</li> </ul>                                                                                                  | <ul style="list-style-type: none"> <li>⑦ Check if refrigerant addresses (SW1-3 to SW1-6 on outdoor controller circuit board) are overlapping in the case of group control system.</li> <li>⑧ Check transmission path, and remove the cause.</li> </ul> <p>Note: The descriptions above ①—⑧ are for EA, Eb and EC.</p>                                                                                                                                                                                                                                                                                                                                                                                                               |
| EC<br>(6846) | <b>Startup time over</b><br>The unit cannot finish startup process within 4 minutes after power on.                                                                                                                                                                                                                                                                                                                       | <ul style="list-style-type: none"> <li>① Contact failure of indoor/outdoor unit connecting wire</li> <li>② Diameter or length of indoor/outdoor unit connecting wire is out of specified capacity.</li> <li>⑦ 2 or more outdoor units have refrigerant address "0" . (In the case of group control)</li> <li>⑧ Noise has entered into power supply or indoor/outdoor unit connecting wire.</li> </ul>                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

<Abnormalities detected while unit is operating>

| Check Code   | Abnormal point and detection method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Judgment and action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| U1<br>(1302) | <p><b>High pressure (High pressure switch 63H worked)</b><br/>Abnormal if high pressure switch 63H worked (*) during compressor operation.<br/>*4.15 MPa [602PSIG]</p> <p>63H: High pressure switch</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <p>① Short cycle of indoor unit<br/>② Clogged filter of indoor unit<br/>③ Decreased airflow caused by dirt of indoor fan<br/>④ Dirt of indoor heat exchanger<br/>⑤ Locked indoor fan motor<br/>⑥ Malfunction of indoor fan motor<br/>⑦ Defective operation of stop valve (Not full open)<br/>⑧ Clogged or broken pipe<br/>⑨ Locked outdoor fan motor<br/>⑩ Malfunction of outdoor fan motor<br/>⑪ Short cycle of outdoor unit<br/>⑫ Dirt of outdoor heat exchanger<br/>⑬ Decreased airflow caused by defective inspection of outside temperature thermistor (It detects lower temperature than actual temperature.)<br/>⑭ Disconnection or contact failure of connector (63H) on outdoor controller board<br/>⑮ Disconnection or contact failure of 63H connection<br/>⑯ Defective outdoor controller board<br/>⑰ Defective action of linear expansion valve<br/>⑱ Malfunction of fan driving circuit</p> | <p>①—⑥ Check indoor unit and repair defect.<br/><br/>⑦ Check if stop valve is fully open.<br/><br/>⑧ Check piping and repair defect.<br/>⑨—⑫ Check outdoor unit and repair defect.<br/><br/>⑬ Check the detected temperature of outside temperature thermistor on LED display. (SW2 on A-Control Service Tool: Refer to "10-9. FUNCTION OF SWITCHES, CONNECTORS AND JUMPERS".)<br/><br/>⑭—⑯ Turn the power off and check F5 is displayed when the power is on again. When F5 is displayed, refer to "Judgment and action" for F5.<br/><br/>⑰ Check linear expansion valve. Refer to "10-5. HOW TO CHECK THE PARTS".<br/>⑱ Replace outdoor controller board.</p> |
| U2<br>(1102) | <p><b>High discharge temperature</b><br/>(1) Abnormal if TH4 exceeds 257°F [125°C] or 230°F [110°C] continuously for 5 minutes.<br/>Abnormal if TH4 exceeds 230°F [110°C] or more continuously for 30 seconds after 90 seconds have passed since the defrosting operation started.<br/><br/>(2) Abnormal if discharge superheat (Cooling: TH4-T<sub>63HS</sub> / Heating: TH4-T<sub>63HS</sub>) exceeds 126°F [70°C] continuously for 10 minutes.<br/><br/>TH4: Thermistor &lt;Discharge&gt;</p> <p><b>High comp. surface temperature</b><br/>Abnormal if TH33 exceeds 257°F [125°C].<br/>In the case of high comp. surface temperature error, compressor does not restart unless the thermistor (TH33) becomes less than 203°F [95°C].<br/><br/>TH33: Thermistor &lt;Comp. surface&gt;</p> | <p>① Overheated compressor operation caused by shortage of refrigerant<br/>② Defective operation of stop valve<br/>③ Defective thermistor<br/>④ Defective outdoor controller board<br/>⑤ Defective action of linear expansion valve<br/>⑥ Clogging with foreign objects in refrigerant circuit<br/>Note: Clogging occur in the parts which become below freezing point when water enters in refrigerant circuit.<br/>⑦ In the case of the unit does not restart:<br/>Detection temp. of thermistor (TH33) ≥ 203°F [95°C]</p>                                                                                                                                                                                                                                                                                                                                                                              | <p>① Check intake superheat.<br/>Check leakage of refrigerant.<br/>Charge additional refrigerant.<br/>② Check if stop valve is fully open.<br/><br/>③④ Turn the power off and check if U3 is displayed when the power is turned on again. When U3 is displayed, refer to "Judgement and action" for U3.<br/>⑤ Check linear expansion valve. Refer to "10-5. HOW TO CHECK THE PARTS".<br/>⑥ After recovering refrigerant, remove water from entire refrigerant circuit under vacuum more than 1 hour.</p>                                                                                                                                                        |

| Check Code                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Abnormal point and detection method                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Cause                                                                                                                                                                                                                                                               | Judgment and action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |             |  |                |                 |        |      |           |                                |                        |                       |     |                           |                        |                       |     |                      |                        |                       |     |                       |                        |                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--|----------------|-----------------|--------|------|-----------|--------------------------------|------------------------|-----------------------|-----|---------------------------|------------------------|-----------------------|-----|----------------------|------------------------|-----------------------|-----|-----------------------|------------------------|------------------------|
| U3<br>(5104)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>Open/short circuit of outdoor unit temperature thermistor (TH4, TH33)</b><br>Abnormal if open (37°F [3°C] or less) or short (422°F [217°C] or more) is detected during compressor operation.<br>(Detection is inoperative for 10 minutes of compressor starting process and for 10 minutes after and during defrosting.)<br>TH4: Thermistor <Discharge><br>TH33: Thermistor <Comp. surface>                                                                                         | ① Disconnection or contact failure of connectors (TH4, TH33) on the outdoor controller circuit board<br>② Defective thermistor<br>③ Defective outdoor controller circuit board                                                                                      | ① Check connection of connector (TH4, TH33) on the outdoor controller circuit board. Check breaking of the lead wire for TH4, TH33. Refer to "10-8. TEST POINT DIAGRAM".<br>② Check resistance value of TH4, TH33 or temperature by microprocessor.<br>(Thermistor/TH4, TH33: Refer to "10-5. HOW TO CHECK THE PARTS".) (SW2 on A-Control Service Tool: Refer to "10-9. FUNCTION OF SWITCHES, CONNECTORS AND JUMPERS".)<br>③ Replace outdoor controller board.                                                                                                                                                                                                                                                                  |             |  |                |                 |        |      |           |                                |                        |                       |     |                           |                        |                       |     |                      |                        |                       |     |                       |                        |                        |
| U4<br>(TH3: 5105)<br>(TH6: 5107)<br>(TH7: 5106)<br>(TH8: 5110)<br>(TH32: 5105)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>Open/short of outdoor unit thermistors (TH3, TH32, TH6, TH7, and TH8)</b><br>Abnormal if open or short is detected during compressor operation.<br>Open detection of TH3, TH32 and TH6 is inoperative for 10 seconds to 10 minutes after compressor starting and 10 minutes after and during defrosting.<br>Note: Check which unit has abnormality in its thermistor by switching the mode of SW2. (PAC-SK52ST)<br>(Refer to "10-9. FUNCTION OF SWITCHES, CONNECTORS AND JUMPERS".) | ① Disconnection or contact failure of connectors<br>Outdoor controller circuit board:<br>(TH3, TH32, TH7/6)<br>Outdoor power circuit board:<br>(CN6)<br>② Defective thermistor<br>③ Defective outdoor controller circuit board                                      | ① Check connection of connector (TH3, TH32, TH7/6) on the outdoor controller circuit board. Check connection of connector (CN6) on the outdoor power circuit board. Check breaking of the lead wire for TH3, TH32, TH6, TH7, TH8. Refer to "10-8. TEST POINT DIAGRAM".<br>② Check resistance value of TH3, TH32, TH6, TH7, TH8 or check temperature by microprocessor.<br>(TH3, TH6, TH7, TH8: Refer to "10-5. HOW TO CHECK THE PARTS".) (SW2 on A-Control Service Tool: Refer to "10-9. FUNCTION OF SWITCHES, CONNECTORS AND JUMPERS".)<br>③ Replace outdoor controller circuit board.<br>Note: Emergency operation is available in the case of abnormalities of TH3, TH32, TH6 and TH7. Refer to "10-7. EMERGENCY OPERATION". |             |  |                |                 |        |      |           |                                |                        |                       |     |                           |                        |                       |     |                      |                        |                       |     |                       |                        |                        |
| <table border="1"> <thead> <tr> <th colspan="2">Thermistors</th><th rowspan="2">Open detection</th><th rowspan="2">Short detection</th></tr> <tr> <th>Symbol</th><th>Name</th></tr> </thead> <tbody> <tr> <td>TH3, TH32</td><td>Thermistor &lt;Liquid&gt;, &lt;Suction&gt;</td><td>-54°F [-48°C] or below</td><td>194°F [90°C] or above</td></tr> <tr> <td>TH6</td><td>Thermistor &lt;2-phase pipe&gt;</td><td>-54°F [-48°C] or below</td><td>194°F [90°C] or above</td></tr> <tr> <td>TH7</td><td>Thermistor &lt;Ambient&gt;</td><td>-54°F [-48°C] or below</td><td>194°F [90°C] or above</td></tr> <tr> <td>TH8</td><td>Thermistor &lt;Heatsink&gt;</td><td>-54°F [-48°C] or below</td><td>216°F [102°C] or above</td></tr> </tbody> </table> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Thermistors |  | Open detection | Short detection | Symbol | Name | TH3, TH32 | Thermistor <Liquid>, <Suction> | -54°F [-48°C] or below | 194°F [90°C] or above | TH6 | Thermistor <2-phase pipe> | -54°F [-48°C] or below | 194°F [90°C] or above | TH7 | Thermistor <Ambient> | -54°F [-48°C] or below | 194°F [90°C] or above | TH8 | Thermistor <Heatsink> | -54°F [-48°C] or below | 216°F [102°C] or above |
| Thermistors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Open detection                                                                                                                                                                                                                                                      | Short detection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |  |                |                 |        |      |           |                                |                        |                       |     |                           |                        |                       |     |                      |                        |                       |     |                       |                        |                        |
| Symbol                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |  |                |                 |        |      |           |                                |                        |                       |     |                           |                        |                       |     |                      |                        |                       |     |                       |                        |                        |
| TH3, TH32                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Thermistor <Liquid>, <Suction>                                                                                                                                                                                                                                                                                                                                                                                                                                                         | -54°F [-48°C] or below                                                                                                                                                                                                                                              | 194°F [90°C] or above                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |  |                |                 |        |      |           |                                |                        |                       |     |                           |                        |                       |     |                      |                        |                       |     |                       |                        |                        |
| TH6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Thermistor <2-phase pipe>                                                                                                                                                                                                                                                                                                                                                                                                                                                              | -54°F [-48°C] or below                                                                                                                                                                                                                                              | 194°F [90°C] or above                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |  |                |                 |        |      |           |                                |                        |                       |     |                           |                        |                       |     |                      |                        |                       |     |                       |                        |                        |
| TH7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Thermistor <Ambient>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | -54°F [-48°C] or below                                                                                                                                                                                                                                              | 194°F [90°C] or above                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |  |                |                 |        |      |           |                                |                        |                       |     |                           |                        |                       |     |                      |                        |                       |     |                       |                        |                        |
| TH8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Thermistor <Heatsink>                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | -54°F [-48°C] or below                                                                                                                                                                                                                                              | 216°F [102°C] or above                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |             |  |                |                 |        |      |           |                                |                        |                       |     |                           |                        |                       |     |                      |                        |                       |     |                       |                        |                        |
| U5<br>(4230)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>Temperature of heatsink</b><br>Abnormal if heat sink thermistor (TH8) detects temperature indicated below.<br>NTXSKH24 ..... 170°F [77°C]<br>NTXSKH30/36 ..... 177°F [81°C]                                                                                                                                                                                                                                                                                                         | ① The outdoor fan motor is locked.<br>② Failure of outdoor fan motor<br>③ Airflow path is clogged.<br>④ Rise of ambient temperature<br>⑤ Defective thermistor<br>⑥ Defective input circuit of outdoor power circuit board<br>⑦ Failure of outdoor fan drive circuit | ①② Check outdoor fan.<br>③ Check airflow path for cooling.<br>④ Check if there is something which causes temperature rise around outdoor unit.<br>(Upper limit of ambient temperature is 114°F [46°C].)<br>Turn off power, and on again to check if U5 is displayed within 30 minutes.<br>If U4 is displayed instead of U5, follow the action to be taken for U4.<br>⑤ Check resistance value of thermistor (TH8) or temperature by microprocessor.<br>(Thermistor/TH8: Refer to "10-5. HOW TO CHECK THE PARTS".) (SW2 on A-Control Service Tool: Refer to "10-9. FUNCTION OF SWITCHES, CONNECTORS AND JUMPERS")<br>⑥ Replace outdoor power circuit board.<br>⑦ Replace outdoor controller circuit board.                       |             |  |                |                 |        |      |           |                                |                        |                       |     |                           |                        |                       |     |                      |                        |                       |     |                       |                        |                        |
| U6<br>(4250)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>Power module</b><br>Check abnormality by driving power module in case overcurrent is detected.<br>(UF or UP error condition)                                                                                                                                                                                                                                                                                                                                                        | ① Outdoor stop valve is closed.<br>② Decrease of power supply voltage<br>③ Looseness, disconnection or converse of compressor wiring connection<br>④ Defective compressor<br>⑤ Defective outdoor power circuit board                                                | ① Open stop valve.<br>② Check facility of power supply.<br>③ Correct the wiring (U·V·W phase) to compressor. Refer to "10-8. TEST POINT DIAGRAM" (Outdoor power circuit board).<br>④ Check compressor referring to "10-5. HOW TO CHECK THE PARTS".<br>⑤ Replace outdoor power circuit board.                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |  |                |                 |        |      |           |                                |                        |                       |     |                           |                        |                       |     |                      |                        |                       |     |                       |                        |                        |

| Check Code   | Abnormal point and detection method                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                               | Cause                                                                                                                                                                                                                                                                                                                                                                                                   | Judgment and action                                                                                                                                                                                                                                                                                                                                       |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| U7<br>(1502) | <b>Too low superheat due to low discharge temperature</b><br>Abnormal if discharge superheat is continuously detected less than or equal to 5°F [-15°C] for 3 minutes even though linear expansion valve has minimum open pulse after compressor starts operating for 10 minutes.                                                                                                                                           |                                                                                                                                                                                                               | ① Disconnection or loose connection of discharge temperature thermistor (TH4)<br>② Defective holder of discharge temperature thermistor<br>③ Disconnection or loose connection of linear expansion valve's coil<br>④ Disconnection or loose connection of linear expansion valve's connector<br>⑤ Defective linear expansion valve                                                                      | ①② Check the installation conditions of discharge temperature thermistor (TH4).<br><br>③ Check the coil of linear expansion valve. Refer to "10-6. HOW TO CHECK THE COMPONENTS".<br>④ Check the connection or contact of LEV-A and LEV-B on outdoor controller circuit board.<br>⑤ Check linear expansion valve. Refer to "10-5. HOW TO CHECK THE PARTS". |
| U8<br>(4400) | <b>Outdoor fan motor</b><br>Abnormal if rotational frequency of the fan motor is not detected during DC fan motor operation.<br>Fan motor rotational frequency is abnormal if; <ul style="list-style-type: none"> <li>• 100 rpm or below detected continuously for 15 seconds at 68°F [20°C] or more outside air temperature.</li> <li>• 50 rpm or below or 1500 rpm or more detected continuously for 1 minute.</li> </ul> |                                                                                                                                                                                                               | ① Failure in the operation of the DC fan motor<br>② Failure in the outdoor circuit controller board                                                                                                                                                                                                                                                                                                     | ① Check or replace the DC fan motor.<br><br>② Check the voltage of the outdoor circuit controller board during operation.<br>③ Replace the outdoor circuit controller board. (when the failure is still indicated even after performing the remedy ① above.)                                                                                              |
| U9<br>(4220) | Detailed codes                                                                                                                                                                                                                                                                                                                                                                                                              | To find out the detail history (latest) about U9 error, turn ON SW2-1, 2-2 and 2-6.<br>Refer to "10-9. FUNCTION OF SWITCHES, CONNECTORS AND JUMPERS".                                                         |                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                           |
|              | 01                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>Overvoltage error</b><br>• Increase in DC bus voltage to 430 V                                                                                                                                             | ① Abnormal increase in power source voltage<br>② Disconnection of compressor wiring<br>③ Defective outdoor power circuit board<br>④ Compressor has a ground fault.                                                                                                                                                                                                                                      | ① Check the field facility for the power supply.<br>② Correct the wiring (U·V·W phase) to compressor. Refer to "10-8. TEST POINT DIAGRAM" (Outdoor power circuit board).<br>③ Replace outdoor power circuit board.<br>④ Check compressor for electrical insulation. Replace compressor.                                                                   |
|              | 02                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>Undervoltage error</b><br>• Instantaneous decrease in DC bus voltage to 200 V                                                                                                                              | ① Decrease in power source voltage, instantaneous stop.<br>② Defective converter drive circuit in outdoor power circuit board<br>③ Defective 52C drive circuit in outdoor power circuit board<br>④ Disconnection or loose connection of CN2 on the outdoor power circuit board / controller circuit board<br>⑤ Power circuit failure on DC supply for 15 VDC output on outdoor controller circuit board | ① Check the field facility for the power supply.<br>② Replace outdoor power circuit board.<br>③ Replace outdoor power circuit board.<br>④ Check CN2 wiring.<br>⑤ Replace outdoor controller circuit board.                                                                                                                                                |
|              | 04                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>Input current sensor error</b><br>• Decrease in input current through outdoor unit to 0.5 A only if operation frequency is more than or equal to 40 Hz or compressor current is more than or equal to 6 A. | ① Defective input current detection circuit in outdoor power circuit board<br>② Defective outdoor controller circuit board                                                                                                                                                                                                                                                                              | ① Replace outdoor power circuit board.<br><br>② Replace outdoor controller circuit board.                                                                                                                                                                                                                                                                 |

| Check Code   | Abnormal point and detection method                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                  | Cause                                                                                                                                                                                                                                                                                                                                                                                             | Judgment and action                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| U9<br>(4220) | Detailed codes                                                                                                                                                                                                                             | <b>Abnormal power synchronous signal</b><br>• No input of power synchronous signal to power circuit board<br>• Power synchronous signal of 44 Hz or less, or 65 Hz or more is detected on power circuit board.                                                                                                   | ① Distortion of power source voltage, noise superimposition<br>② Disconnection or loose connection of earth wiring<br>③ Disconnection or loose connection of CN2 on the outdoor power circuit board / controller circuit board<br>④ Defective power synchronous signal circuit in outdoor controller circuit board<br>⑤ Defective power synchronous signal circuit in outdoor power circuit board | ① Check the field facility for the power supply.<br>② Check earth wiring.<br>③ Check CN2 wiring.<br>④ Replace outdoor controller circuit board.<br>⑤ Replace outdoor power circuit board.                                                                                                                                                                                                                                                                                          |
|              | 08                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|              | 10                                                                                                                                                                                                                                         | <b>PFC error (Overvoltage/Undervoltage/Overcurrent)</b><br>• PFC detected any of the following:<br>a) Increase of DC bus voltage as follows: 430 V<br><br>b) Decrease in PFC control voltage to 13 VDC or lower<br><br>c) Increase in input current as follows.<br>NTXSKH24: 42 A peak<br>NTXSKH30/36: 62 A peak | ① Abnormal increase in power source voltage<br>② Decrease in power source voltage, instantaneous stop<br>③ Disconnection of compressor wiring<br><br>④ Misconnection of reactor (DCL)<br>⑤ Defective outdoor power circuit board<br>⑥ Defective reactor (DCL)<br>⑦ Disconnection or loose connection of CN2 on the outdoor power circuit board/ controller circuit board                          | ①② Check the field facility for the power supply.<br><br>③ Correct the wiring (U·V·W phase) to compressor. Refer to "10-8. TEST POINT DIAGRAM".<br>④ Correct the wiring (U·V·W phase) or reactor (DCL).<br>⑤ Replace outdoor power circuit board.<br>⑥ Replace reactor (DCL).<br>⑦ Check CN2 wiring.                                                                                                                                                                               |
| UF<br>(4100) | <b>Compressor overcurrent interruption (When compressor locked)</b><br>Abnormal if overcurrent of DC bus or compressor is detected within 30 seconds after compressor starts operating.                                                    |                                                                                                                                                                                                                                                                                                                  | ① Stop valve is closed.<br>② Decrease of power supply voltage<br>③ Looseness, disconnection or converse of compressor wiring connection<br>④ Defective compressor<br><br>⑤ Defective outdoor power board<br>⑥ DIP switch setting difference of outdoor controller circuit board.                                                                                                                  | ① Open stop valve.<br>② Check facility of power supply.<br><br>③ Correct the wiring (U·V·W phase) to compressor. Refer to "10-8. TEST POINT DIAGRAM" (Outdoor power circuit board).<br>④ Check compressor. Refer to "10-5. HOW TO CHECK THE PARTS".<br>⑤ Replace outdoor power circuit board.<br>⑥ Check the dip switch setting of outdoor controller circuit board. Refer to "Model Select" in "1) Function of switches" in "10-9. FUNCTION OF SWITCHES, CONNECTORS AND JUMPERS". |
| UH<br>(5300) | <b>Current sensor error</b><br>• It is abnormal for 38 A the input current or 10 seconds continuous 34 A or more.                                                                                                                          |                                                                                                                                                                                                                                                                                                                  | ① Defective circuit of current sensor on outdoor power circuit board<br>② Decrease of power supply voltage                                                                                                                                                                                                                                                                                        | ① Replace outdoor power circuit board.<br>② Check the facility of power supply.                                                                                                                                                                                                                                                                                                                                                                                                    |
| Ud<br>(1504) | <b>Overheat protection</b><br>Abnormal if outdoor pipe thermistor (TH3), condensing temperature T <sub>63HS</sub> detects 158°F [70°C] or more during compressor operation.                                                                |                                                                                                                                                                                                                                                                                                                  | ① Defective outdoor fan (fan motor) or short cycle of outdoor unit during cooling operation<br>② Defective outdoor pipe thermistor (TH3), condensing temperature T <sub>63HS</sub><br>③ Defective outdoor controller board                                                                                                                                                                        | ① Check outdoor unit air passage.<br><br>②③ Turn the power off and on again to check the check code. If U4 is displayed, follow the U4 processing direction.                                                                                                                                                                                                                                                                                                                       |
| UE<br>(1302) | <b>Abnormal pressure of 63HS</b><br>Abnormal if 63HS detects 14.5 PSIG [0.1 MPa] or less.<br>Detection is inoperative for 3 minutes after compressor starting and 3 minutes after and during defrosting.<br><br>63HS: High pressure sensor |                                                                                                                                                                                                                                                                                                                  | ① Disconnection or contact failure of connector (63HS) on the outdoor controller circuit board<br>② Defective pressure sensor<br><br>③ Defective outdoor controller circuit board                                                                                                                                                                                                                 | ① Check connection of connector (63HS) on the outdoor controller circuit board. Check breaking of the lead wire for 63HS.<br>② Check pressure by microprocessor. (Pressure sensor/ 63HS) (SW2: Refer to "10-9. FUNCTION OF SWITCHES, CONNECTORS AND JUMPERS".)<br>③ Replace outdoor controller board.                                                                                                                                                                              |

| Check Code     | Abnormal point and detection method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Judgment and action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UL<br>(1300)   | <b>Abnormal low pressure (63L worked)</b><br>Abnormal if 63L is worked (under -4 PSIG [-0.03 MPa]) during compressor operation.<br>63L: Low pressure switch                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ① Stop valve of outdoor unit is closed during operation.<br>② Disconnection or loose connection of connector (63L) on outdoor controller board<br>③ Disconnection or loose connection of 63L<br>④ Defective outdoor controller board<br>⑤ Leakage or shortage of refrigerant<br>⑥ Malfunction of linear expansion valve                                                                                                                                                                                                                              | ① Check stop valve.<br>②-④ Turn the power off and on again to check if F3 is displayed on restarting.<br>If F3 is displayed, follow the F3 processing direction.<br>⑤ Correct to proper amount of refrigerant.<br>⑥ Check linear expansion valve. Refer to "10-5. HOW TO CHECK THE PARTS".                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| UP<br>(4210)   | <b>Compressor overcurrent interruption</b><br>Abnormal if overcurrent DC bus or compressor is detected after compressor starts operating for 30 seconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | ① Stop valve of outdoor unit is closed.<br>② Decrease of power supply voltage<br>③ Looseness, disconnection or converse of compressor wiring connection<br>④ Defective fan of indoor/outdoor units<br>⑤ Short cycle of indoor/outdoor units<br>⑥ Defective input circuit of outdoor controller board<br>⑦ Defective compressor<br>⑧ Defective outdoor power circuit board<br>⑨ Dip switch setting difference of outdoor controller circuit board                                                                                                     | ① Open stop valve.<br>② Check facility of power supply.<br>③ Correct the wiring (U-V-W phase) to compressor. Refer to "10-8. TEST POINT DIAGRAM". (Outdoor power circuit board).<br>④ Check indoor/outdoor fan.<br>⑤ Solve short cycle.<br>⑥ Replace outdoor controller circuit board.<br>⑦ Check compressor. Refer to "10-5. HOW TO CHECK THE PARTS".<br>Before the replacement of the outdoor controller circuit board, disconnect the wiring to compressor from the outdoor power circuit board and check the output voltage among phases, U, V, W, during test run. No defect on board if voltage among phases (U-V, V-W and W-U) is same. Make sure to perform the voltage check with same performing frequency.<br>⑧ Replace outdoor power circuit board<br>⑨ Check the dip switch setting of outdoor controller circuit board                                                                                                                                                                                                                                                                                              |
| E0<br>or<br>E4 | <b>Remote controller transmission error(E0)/signal receiving error(E4)</b><br>① Abnormal if main or sub remote controller cannot receive normally any transmission from indoor unit of refrigerant address "0" for 3 minutes. (Check code: E0)<br>② Abnormal if sub-remote controller could not receive any signal for 2 minutes. (Check code: E0)<br>① Abnormal if indoor controller board can not receive any data normally from remote controller board or from other indoor controller board for 3 minutes. (Check code: E4)<br>② Indoor controller board cannot receive any signal from remote controller for 2 minutes. (Check code: E4) | ① Contact failure at transmission wire of remote controller<br>② All remote controllers are set as "sub" remote controller. In this case, E0 is displayed on remote controller, and E4 is displayed at LED (LED1, LED2) on the outdoor controller circuit board.<br>③ Miswiring of remote controller<br>④ Defective transmitting receiving circuit of remote controller<br>⑤ Defective transmitting receiving circuit of indoor controller board of refrigerant address "0".<br>⑥ Noise has entered into the transmission wire of remote controller. | ① Check disconnection or looseness of indoor unit or transmission wire of remote controller.<br>② Set one of the remote controllers "main".<br>If there is no problem with the action above.<br>③ Check wiring of remote controller. <ul style="list-style-type: none"> <li>• Total wiring length: max. 1640 ft [500 m] (Do not use cable with 3 or more cores.)</li> <li>• The number of connecting indoor units: max.16 units</li> <li>• The number of connecting remote controller: max. 2 units</li> </ul> If the cause of trouble is not any of ①-③ above, diagnose ④-⑥ by remote controllers. <ul style="list-style-type: none"> <li>a) When "OK" is displayed, remote controllers have no problem.<br/>Turn the power off, and on again to check. If abnormality occurs again, replace indoor controller board.</li> <li>b) When "NG" is displayed, replace remote controller.</li> <li>c) When "E3" or "ERC" is displayed, noise may be causing abnormality.</li> </ul> Note: If the unit is not normal after replacing indoor controller board in group control, indoor controller board of address "0" may be abnormal. |
| E1<br>or<br>E2 | <b>Remote controller control board</b><br>① Abnormal if data cannot be read normally from the nonvolatile memory of the remote controller control board. (Check code: E1)<br>② Abnormal if the clock function of remote controller cannot be operated normally. (Check code: E2)                                                                                                                                                                                                                                                                                                                                                               | ① Defective remote controller                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ① Replace remote controller.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

| Check Code     | Abnormal point and detection method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                      | Judgment and action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| E3<br>or<br>E5 | <b>Remote controller transmission error(E3)/signal receiving error(E5)</b><br>① Abnormal if remote controller could not find blank of transmission path for 6 seconds and could not transmit. (Check code: E3)<br>② Remote controller receives transmitted data at the same time, compares the data, and when detecting it, judges different data to be abnormal 30 continuous times. (Check code: E3)<br><br>① Abnormal if indoor controller board could not find blank of transmission path. (Check code: E5)<br>② Indoor controller board receives transmitted data at the same time, compares the data, and when detecting it, judges different data to be abnormal 30 continuous times. (Check code: E5) | ① 2 remote controllers are set as "main." (In the case of 2 remote controllers)<br>② Remote controller is connected with 2 indoor units or more.<br>③ Repetition of refrigerant address<br>④ Defective transmitting receiving circuit of remote controller<br>⑤ Defective transmitting receiving circuit of indoor controller board<br>⑥ Noise has entered into transmission wire of remote controller.                                    | ① Set a remote controller to main, and the other to sub.<br><br>② Remote controller is connected with only one indoor unit.<br>③ The address changes to a separate setting.<br><br>④-⑥ Diagnose remote controller.<br>a) When "OK" is displayed, remote controllers have no problem. Turn the power off, and on again to check. When becoming abnormal again, replace indoor controller board.<br>b) When "NG" is displayed, replace remote controller.<br>c) When "E3" or "ERC" is displayed, noise may be causing abnormality.                                                                                                                                                                                                                                                                                                                                                                                                                        |
| E6<br>(6840)   | <b>Indoor/outdoor unit communication error (Signal receiving error)</b><br>① Abnormal if indoor controller board could not receive any signal normally for 6 minutes after turning the power on.<br>② Abnormal if indoor controller board could not receive any signal normally for 3 minutes.<br>③ Consider the unit as abnormal under the following condition When 2 or more indoor units are connected to an outdoor unit, indoor controller board could not receive a signal for 3 minutes from outdoor controller circuit board, a signal which allows outdoor controller circuit board to transmit signals.                                                                                             | ① Contact failure, short circuit or miswiring (converse wiring) of indoor/outdoor unit connecting wire<br><br>② Defective transmitting receiving circuit of outdoor controller circuit board.<br>③ Defective transmitting receiving circuit of indoor controller board.<br>④ Noise has entered into indoor/outdoor unit connecting wire.<br>⑤ Defective fan motor<br><br>⑥ Defective rush current resistor of outdoor power circuit board. | Note: Check LED display on outdoor controller circuit board. (Connect A-Control service tool (PAC-SG50ST))<br>Refer to EA-EC item if LED displays EA-AC.<br>① Check disconnecting or looseness of indoor/outdoor unit connecting wire of indoor unit or outdoor unit.<br>Check all the units in the case of twin indoor unit system.<br>②-④ Turn the power off, and on again to check. If abnormality occurs again, replace indoor controller board or outdoor controller circuit board.<br>⑤ Turn the power off, and detach fan motor from connector (CNF1,2). Then turn the power on again. If abnormality is not displayed, replace fan motor. If abnormality is displayed, replace outdoor controller circuit board.<br>⑥ Check the rush current resistor on outdoor noise filter board with a tester. If open is detected, replace the power board.<br>Note: Other indoor controller board may have defect in the case of twin indoor unit system. |
| E7             | <b>Indoor/outdoor unit communication error (Transmitting error)</b><br>Abnormal if "1" receiving is detected 30 times continuously though indoor controller board has transmitted "0".                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ① Defective transmitting receiving circuit of indoor controller board<br>② Noise has entered into power supply.<br>③ Noise has entered into outdoor control wire.                                                                                                                                                                                                                                                                          | ①-③ Turn the power off, and on again to check. Replace indoor controller board if abnormality is displayed again.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| E8<br>(6840)   | <b>Indoor/outdoor unit communication error (Signal receiving error) (Outdoor unit)</b><br>Abnormal if outdoor controller circuit board could not receive anything normally for 3 minutes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | ① Contact failure of indoor/outdoor unit connecting wire<br>② Defective communication circuit of outdoor controller circuit board<br>③ Defective communication circuit of indoor controller board<br>④ Noise has entered into indoor/outdoor unit connecting wire.                                                                                                                                                                         | ① Check disconnection or looseness of indoor/outdoor unit connecting wire of indoor or outdoor units.<br>②-④ Turn the power off, and on again to check. Replace indoor controller board or outdoor controller circuit board if abnormality is displayed again.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| E9<br>(6841)   | <b>Indoor/outdoor unit communication error (Transmitting error) (Outdoor unit)</b><br>① Abnormal if "0" receiving is detected 30 times continuously though outdoor controller circuit board has transmitted "1".<br>② Abnormal if outdoor controller circuit board could not find blank of transmission path for 3 minutes.                                                                                                                                                                                                                                                                                                                                                                                   | ① Indoor/outdoor unit connecting wire has contact failure.<br>② Defective communication circuit of outdoor controller circuit board<br>③ Noise has entered power supply.<br>④ Noise has entered indoor/outdoor unit connecting wire.                                                                                                                                                                                                       | ① Check disconnection or looseness of indoor/outdoor unit connecting wire.<br>②-④ Turn the power off, and on again to check. Replace outdoor controller circuit board if abnormality is displayed again.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

| Check Code                 | Abnormal point and detection method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Judgment and action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EF<br>(6607<br>or<br>6608) | <b>Non defined check code</b><br>This code is displayed when non-defined check code is received.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | ① Noise has entered transmission wire of remote controller.<br>② Noise has entered indoor/ outdoor unit connecting wire.<br>③ Outdoor unit is not inverter model.                                                                                                                                                                                                                                                                                                                                                                                                                                       | ①② Turn the power off, and on again to check.<br>Replace indoor controller board or outdoor controller circuit board if abnormality is displayed again.<br>③ Replace outdoor unit with power inverter type.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Ed<br>(0403)               | <b>Serial communication error</b><br>1. Abnormal if serial communication between outdoor controller circuit board and outdoor power circuit board is defective.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | ① Breaking of wire or contact failure of connector CN2 between the outdoor controller circuit board and the outdoor power circuit board<br>② Breaking of wire or contact failure of connector CN4 between the outdoor controller circuit board and the outdoor power circuit board<br>③ Defective communication circuit of outdoor power circuit board<br>④ Defective communication circuit of outdoor controller circuit board for outdoor power circuit board                                                                                                                                         | ①② Check connection of each connector CN2 and CN4 between the outdoor controller circuit board and the outdoor power circuit board.<br>③ Replace outdoor power circuit board.<br>④ Replace outdoor controller circuit board.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                            | 2. Abnormal if communication between outdoor controller circuit board and M-NET board is not available.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | ① Breaking of wire or contact failure of connector between outdoor controller circuit board and M-NET board<br>② Contact failure of M-NET board power supply line<br>③ Noise has entered into M-NET transmission wire.                                                                                                                                                                                                                                                                                                                                                                                  | ① Check disconnection, looseness, or breaking of connection wire between outdoor controller circuit board (CNMNT) and M-NET board (CN5).<br>② Check disconnection, looseness, or breaking of connection wire between outdoor controller circuit board (CNMNT) and M-NET board (CND).<br>③ Check M-NET transmission wiring method.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| P8                         | <b>Pipe temperature</b><br><b>&lt;Cooling mode&gt;</b><br>Detected as abnormal when the pipe temperature is not in the cooling range 3 minutes after compressor start and 6 minutes after the liquid or condenser/evaporator pipe is out of cooling range.<br>Note 1: It takes at least 9 minutes to detect.<br>Note 2: Abnormality P8 is not detected in drying mode.<br>Cooling range: Indoor pipe temperature (TH2 or TH5)-room temperature (TH1) $\leq -5.4^{\circ}\text{F}$ [ $-3^{\circ}\text{C}$ ]<br>TH: Lower temperature between liquid pipe temperature and condenser/evaporator temperature<br><br><b>&lt;Heating mode&gt;</b><br>When 10 seconds have passed after the compressor starts operation and the hot adjustment mode has finished, the unit is detected as abnormal when condenser/evaporator pipe temperature is not in heating range within 20 minutes.<br><br>Note 3: It takes at least 27 minutes to detect abnormality.<br>Note 4: It excludes the period of defrosting (Detection restarts when defrosting mode is over)<br>Heating range: $-5.4^{\circ}\text{F}$ [ $-3^{\circ}\text{C}$ ] $\leq$ (Condenser/Evaporator temperature(TH5)-room temperature(TH1)) | ① Slight temperature difference between indoor room temperature and pipe <liquid or condenser/evaporator> temperature thermistor<br>• Shortage of refrigerant<br>• Disconnected holder of pipe <liquid or condenser/evaporator> thermistor<br>• Defective refrigerant circuit<br>② Converse connection of extension pipe (on plural units connection)<br>③ Converse wiring of indoor/outdoor unit connecting wire (on plural units connection)<br>④ Defective detection of indoor room temperature and pipe <condenser/evaporator> temperature thermistor<br><br>⑤ Stop valve is not opened completely. | ①-④ Check pipe <liquid or condenser/evaporator> temperature with room temperature display on remote controller and outdoor controller circuit board.<br>Pipe <liquid or condenser/evaporator> temperature display is indicated by setting SW2 of outdoor controller circuit board as follows.<br><br><div style="border: 1px solid black; padding: 10px; margin: 10px 0;"> <p style="text-align: center;">( Conduct temperature check with outdoor controller circuit board after connecting 'A-Control Service Tool(PAC-SK52ST)' )</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Temperature display of indoor liquid pipe Indoor 1</p> </div> <div style="text-align: center;"> <p>Temperature display of indoor condenser/evaporator pipe Indoor 1</p> </div> </div> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Temperature display of indoor liquid pipe Indoor 2</p> </div> <div style="text-align: center;"> <p>Temperature display of indoor condenser/evaporator pipe Indoor 2</p> </div> </div> <p style="text-align: center; font-size: small;">A-Control Service Tool SW2 setting</p> </div><br>②③ Check converse connection of extension pipe or converse wiring of indoor/outdoor unit connecting wire.<br>⑤ Check the stop valve is opened completely. |

| Check Code | Abnormal point and detection method                                                                                                                                                                                                                                                                                                                                                                                                                | Cause                                                                                                                                                                                                                                                                                                          | Judgment and action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PL         | <p><b>Abnormal refrigerant circuit</b><br/>During Cooling, Dry, or Auto Cooling operation, the following conditions are regarded as failures when detected for 1 second.</p> <p>a)The compressor continues to run for 30 or more seconds.<br/>b)The liquid pipe temperature or the condenser/evaporator temperature is 167°F [75°C] or more.</p> <p><b><u>These detected errors will not be cancelled until the power source is reset.</u></b></p> | <p>① Abnormal operation of 4-way valve<br/>② Disconnection of or leakage in refrigerant pipes<br/>③ Air into refrigerant piping</p> <p>④ Abnormal operation (no rotation) of indoor fan<br/>· Defective fan motor.<br/>· Defective indoor control board.</p> <p>⑤ Defective refrigerant circuit (clogging)</p> | <p>① <b><u>When this error occurs, be sure to replace the 4-way valve.</u></b><br/>② Check refrigerant pipes for disconnection or leakage.<br/>③ After the recovery of refrigerant, vacuum dry the whole refrigerant circuit.<br/>④ Refer to section "10-5. HOW TO CHECK THE PARTS".<br/>⑤ Check refrigerant circuit for operation.</p> <p><b><u>To avoid entry of moisture or air into refrigerant circuit which could cause abnormal high pressure, purge air in refrigerant circuit or replace refrigerant.</u></b></p> |

<M-NET communication error>

Note: "Indoor unit" in the text indicates M-NET board in outdoor unit.

| Check Code   | Abnormal point and detection method                                                                                                                                                                                                                                                                                                                                                                    | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Judgment and action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A0<br>(6600) | <b>Address duplicate definition</b><br>This error is displayed when transmission from the units of same address is detected.<br>Note: The address and attribute displayed at remote controller indicate the controller that detected abnormality.                                                                                                                                                      | <ul style="list-style-type: none"> <li>① There are 2 or more same address of controller of outdoor unit, indoor unit, FRESH MASTER, or LOSSNAY.</li> <li>② Noise has entered into transmission signal and signal was transformed.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Search the unit with same address as abnormality occurred. If the same address is found, turn off the power supply of outdoor unit and indoor unit and FRESH MASTER or LOSSNAY at the same time for 2 minutes or more after the address is corrected, and turn the power on again.<br>Check transmission waveform or noise on transmission wire.                                                                                                                                                                                                                                     |
| A2<br>(6602) | <b>Hardware error of transmission processor</b><br>Transmission processor intended to transmit "0", but "1" appeared on transmission wire.<br>Note: The address and attribute display at remote controller indicate the controller that detected abnormality.                                                                                                                                          | <ul style="list-style-type: none"> <li>① Error is detected if waveform is transformed when wiring works of transmission wire of outdoor unit, indoor unit, FRESH MASTER or LOSSNAY are done, or polarity is changed with the power on and transmission data collide each other.</li> <li>② Defective transmitting receiving circuit of transmission processor</li> <li>③ Transmission data is changed by the noise on transmission.</li> </ul>                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>① If the works of transmission wire is done with the power on, turn off the power supply of outdoor unit and indoor unit and FRESH MASTER or LOSSNAY at the same time for 2 minutes or more, and turn the power on again.</li> <li>② Check transmission waveform or noise on transmission wire.</li> </ul>                                                                                                                                                                                                                                    |
| A3<br>(6603) | <b>BUS BUSY</b><br>1. Overtime error by collision damage<br>Abnormal if transmitting signal is not possible for 8-10 minutes continuously because of collision of transmission.<br>2. Data could not reach transmission wire for 8-10 minutes continuously because of noise, etc.<br>Note: The address and attribute displayed at remote controller indicate the controller that detected abnormality. | <ul style="list-style-type: none"> <li>① Transmission processor could not transmit signal because short cycle voltage of noise and the like have entered into transmission wire continuously.</li> <li>② Transmission quantity has increased and transmission is not possible because there was wiring mistake of terminal block for transmission wire (TB3) and terminal block for central control (TB7) in outdoor unit.</li> <li>③ Transmission are mixed with others and occupation rate on transmission wire rose because of defective repeater (a function to connector or disconnect transmission of control and central control system) of outdoor unit, then abnormality is detected.</li> </ul> | <ul style="list-style-type: none"> <li>① Check if transmission wire of indoor unit, FRESH MASTER, LOSSNAY, or remote controller is not connected to terminal block for central control (TB7) of outdoor unit.</li> <li>② Check if transmission wire of indoor unit, FRESH MASTER or LOSSNAY is not connected to terminal block for transmission wire of outdoor unit.</li> <li>③ Check if terminal block for transmission wire (TB3) and terminal block for central control (TB7) is not connected.</li> <li>④ Check transmission waveform or noise on transmission wire.</li> </ul> |
| A6<br>(6606) | <b>Communication error with communication processor</b><br>Defective communication between unit processor and transmission processor<br>Note: The address and attribute display at remote controller indicate the controller that detected abnormality.                                                                                                                                                | <ul style="list-style-type: none"> <li>① Data of transmission processor or unit processor is not transmitted normally because of accidental trouble such as noise or thunder surge.</li> <li>② Address forwarding from unit processor is not transmitted normally because of defective transmission processor hardware.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                        | Turn off the power supply of outdoor unit and indoor unit and FRESH MASTER or LOSSNAY at the same time for 2 minutes or more, and turn the power on again. System returns to normal if abnormality was accidental malfunction. If the same abnormality occurs again, abnormality-detected controller may be defective.                                                                                                                                                                                                                                                               |

| Check Code   | Abnormal point and detection method                                                                                                                                                                                                                                                                                                                                 | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Judgment and action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A7<br>(6607) | <b>NO ACK signal</b><br>1. Transmitting side controller detects abnormal if a message was transmitted but there is no reply (ACK) that a message was received. Transmitting side detects abnormality every 30 seconds, 6 times continuously.<br>Note: The address and attribute displayed at remote controller is indicate the controller that did not reply (ACK). | Common factor that has no relation with abnormality source.<br>① The unit of former address does not exist as address switch has changed while the unit was energized.<br>② Voltage drop and weak signal which lead communication error are caused by over-range transmission wire.<br>• Maximum distance... 656 ft [200 m]<br>• Remote controller line (39 ft [12m])<br>③ Voltage drop and weak signal which lead communication error are caused by type-unmatched transmission wire.<br>Type...<br>With shield wire-<br>CVVS, CPEVS<br>With normal wire (no shield)-<br>VCTF, VCTFK, CVV<br>CVS, VVR, VVF, VCT<br>Diameter... 1.25mm <sup>2</sup> [AWG16] or more<br>④ Voltage drop and weak signal which lead communication error are caused by over-numbered units.<br>⑤ Accidental malfunction of abnormality-detected controller (noise, thunder surge)<br>⑥ Defective of abnormality-detected controller | <b>Always try the following when the error "A7" occurs.</b><br>① Turn off the power supply of outdoor unit and indoor unit and FRESH MASTER or LOSSNAY at the same time for 2 minutes or more, and turn the power on again. If malfunction was accidental, the unit returns to normal.<br>② Check address switch of abnormality-detected address.<br>③ Check disconnection or looseness of abnormality-detected transmission wire (terminal block and connector)<br>④ Check if tolerance range of transmission wire is not exceeded.<br>⑤ Check if type of transmission wire is correct or not.<br><br>If there were some troubles of ①—⑤ above, repair the defective, then turn off the power supply of outdoor unit and indoor unit and FRESH MASTER or LOSSNAY at the same time for 2 minutes or more, and turn the power on again.<br>• If there was no trouble with ①—⑤ above in single refrigerant system (one outdoor unit), controller of displayed address or attribute is defective.<br>• If there was no trouble with ①—⑤ above in different refrigerant system (2 or more outdoor units), judge with ⑥.<br><br>⑥ If address of abnormality source is the address that should not exist, there is the unit that memorizes nonexistent address information. Delete unused address information with manual setting function of remote controller.<br>Only the system FRESH MASTER or LOSSNAY are connected to, or the system that is equipped with group setting of different refrigerant system. |
|              | 2. If displayed address or attribute is outdoor unit, indoor unit detects abnormality when indoor unit transmitted to outdoor unit and there was no reply (ACK).                                                                                                                                                                                                    | ① Contact failure of transmission wire of outdoor unit or indoor unit<br>② Disconnection of transmission connector (CN2M) of outdoor unit<br>③ Defective transmitting receiving circuit of outdoor unit or indoor unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | If there was no trouble with ①—⑥ above, replace the controller board of displayed address or attribute.<br>If the unit does not return to normal, multi-controller board of outdoor unit may be defective (repeater circuit).<br>Replace multi-controller board one by one to check if the unit returns to normal.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|              | 3. If displayed address or attribute is indoor unit, remote controller detects abnormality when remote controller transmitted to indoor unit and there was no reply (ACK).                                                                                                                                                                                          | ① During group operation with indoor unit of multi-refrigerant system, if remote controller transmit to indoor unit while outdoor unit power supply of one refrigerant system is turned off or within 2 minutes of restart, abnormality is detected.<br>② Contact failure of transmission wire of remote controller or indoor unit<br>③ Disconnection of transmission connector (CN2M) of indoor unit<br>④ Defective transmitting receiving circuit of indoor unit or remote controller                                                                                                                                                                                                                                                                                                                                                                                                                         | If there was no trouble with ①—⑥ above, replace the controller board of displayed address or attribute.<br>If the unit does not return to normal, multi-controller board of outdoor unit may be defective (repeater circuit).<br>Replace multi-controller board one by one to check if the unit returns to normal.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

Continued to the next page.

From the previous page.

| Check Code   | Abnormal point and detection method                                                                                                                                           | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Judgment and action                             |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| A7<br>(6607) | 4. If displayed address or attribute is remote controller,<br>Indoor unit detects abnormality when indoor unit transmitted to remote controller and there was no reply (ACK). | <ul style="list-style-type: none"> <li>① During group operation with indoor unit of multi- refrigerant system, if indoor unit transmit to remote controller while outdoor unit power supply of one refrigerant system is turned off or within 2 minutes of restart, abnormality is detected.</li> <li>② Contact failure of transmission wire of remote controller or indoor unit</li> <li>③ Disconnection of transmission connector (CN2M) of indoor unit</li> <li>④ Defective transmitting receiving circuit of indoor unit or remote controller</li> </ul>                                                                                                                | Same as mentioned in “A7” of the previous page. |
|              | 5. If displayed address or attribute is FRESH MASTER, indoor unit detects abnormality when indoor unit transmitted to FRESH MASTER and there was no reply (ACK).              | <ul style="list-style-type: none"> <li>① During sequential operation of indoor unit and FRESH MASTER of other refrigerant system, if indoor unit transmits to FRESH MASTER while outdoor unit power supply of same refrigerant system with FRESH MASTER is turned off or within 2 minutes of restart, abnormality is detected.</li> <li>② Contact failure of transmission wire of indoor unit or FRESH MASTER</li> <li>③ Disconnection of transmission connector (CN2M) of indoor unit or FRESH MASTER</li> <li>④ Defective transmitting receiving circuit of indoor unit or FRESH MASTER</li> </ul>                                                                        |                                                 |
|              | 6. If displayed address or attribute is LOSSNAY, indoor unit detects abnormality when indoor unit transmitted to LOSSNAY and there was no reply (ACK).                        | <ul style="list-style-type: none"> <li>① If the power supply of LOSSNAY is off, indoor unit detects abnormality when it transmits to LOSSNAY.</li> <li>② During sequential operation of indoor unit and LOSSNAY of other refrigerant system, if indoor unit transmits to LOSSNAY while outdoor unit power supply of same refrigerant system with LOSSNAY is turned off or within 2 minutes of restart, abnormality is detected.</li> <li>③ Contact failure of transmission wire of indoor unit of LOSSNAY</li> <li>④ Disconnection of transmission connector (CN2M) of indoor unit</li> <li>⑤ Defective transmitting receiving circuit of indoor unit or LOSSNAY</li> </ul> |                                                 |
|              | 7. If displayed address or attribute is non-existent,                                                                                                                         | <ul style="list-style-type: none"> <li>① The unit of former address does not exist as address switch has changed while the unit was energized.</li> <li>② Abnormality is detected when indoor unit transmitted because the address of FRESH MASTER and LOSSNAY are changed after sequential operation of FRESH MASTER and LOSSNAY by remote controller.</li> </ul>                                                                                                                                                                                                                                                                                                          |                                                 |

| Check Code   | Abnormal point and detection method                                                                                                                                                                                                                                                                                                                             | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Judgment and action                                                                                                                                                                                                                                                                                                                                                                          |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A8<br>(6608) | <b>M-NET NO RESPONSE</b><br>Abnormal if a message was transmitted and there were reply (ACK) that message was received, but response command does not return. Transmitting side detects abnormality every 30 seconds, 6 times continuously.<br>Note: The address and attribute displayed at remote controller indicate the controller that did not reply (ACK). | ① Transmitting condition is repeated fault because of noise and the like.<br>② Voltage drop and weak signal which lead communication error are caused by over-range transmission wire.<br>• Maximum distance... 656 ft [ 200 m]<br>• Remote controller line(39 ft [12m])<br>③ Voltage drop and weak signal which lead communication error are caused by over-range transmission wire.<br>Type...<br>With shield wire-<br>CVVS, CPEVS<br>With normal wire (no shield)-<br>VCTF, VCTFK, CVV<br>CVS, VVR, VVF, VCT<br>Diameter...1.25 mm <sup>2</sup> [AWG16]<br>or more<br>④ Accidental malfunction of abnormality-detected controller | ① Check transmission waveform or noise on transmission wire.<br>② Turn off the power supply of outdoor unit and indoor unit and FRESH MASTER or LOSSNAY at the same time for 2 minutes or more, and turn the power on again. If malfunction was accidental, the unit returns to normal. If the same abnormality occurs again controller of displayed address and attribute may be defective. |

## 10-4. TROUBLESHOOTING BY INFERIOR PHENOMENA

| Phenomena                                                                                                                 | Factor                                                                                                                                                                                                                                                                           | Countermeasure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Remote controller display does not work.                                                                               | ① 12 VDC is not supplied to remote controller.<br>② 12–15 VDC is supplied to remote controller, however, no display is indicated.<br>• "Please Wait" is not displayed.<br>• "Please Wait" is displayed.                                                                          | ① Check LED2 on indoor controller board.<br>(1) When LED2 is lit:<br>check the remote controller wiring for breaking or contact failure.<br>(2) When LED2 is blinking:<br>check short circuit of remote controller wiring.<br>(3) When LED2 is not lit:<br>refer to No.3 below.<br>② Check the following.<br>• Failure of remote controller if "Please Wait" is not displayed<br>• Refer to No.2 below if "Please Wait" is displayed.                                                                                                                                                                                                                                                   |
| 2. "Please Wait" display is remained on the remote controller.                                                            | ① At longest 2 minutes after the power supply "Please Wait" is displayed to start up.<br>② Communication error between the remote controller and indoor unit<br>③ Communication error between the indoor and outdoor unit<br>④ Outdoor unit protection device connector is open. | ① Normal operation<br>② Self-diagnosis of remote controller<br>③ "Please Wait" is displayed for 6 minutes at most in the case of indoor/outdoor unit communication error. Check LED3 on indoor controller board.<br>(1)When LED3 is not blinking:<br>check indoor/outdoor connecting wire for miswiring.<br>(Converse wiring of S1 and S2, or break of S3 wiring.)<br>(2)When LED3 is blinking:<br>indoor/outdoor connecting wire is normal.<br>④ Check LED display on outdoor controller circuit board. Refer to "10-8. FUNCTION OF SWITCHES, CONNECTORS AND JUMPERS".<br>Check protection device connector (63L and 63H) for contact failure.<br>Refer to "10-8. TEST POINT DIAGRAM". |
| 3. When pressing the remote controller operation switch the OPERATION display is appeared but it will be turned off soon. | ① After cancelling to select function from the remote controller, the remote controller operation switch will not be accepted for approx. 30 seconds.                                                                                                                            | ① Normal operation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

| Phenomena                                                                                                                                                                                                                                                                                                                                                                | Factor                                                                                                                                                                                                                                                                                                                                                                                 | Countermeasure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4. Even controlling by the IR wireless remote controller no beep is heard and the unit does not start operating. Operation display is indicated on the IR wireless remote controller.                                                                                                                                                                                    | ① The pair number settings of the IR wireless remote controller and indoor controller board are mismatched.                                                                                                                                                                                                                                                                            | ① Check the pair number settings.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 5. When operating by the IR wireless remote controller, beep sound is heard, however, unit does not start operating.                                                                                                                                                                                                                                                     | ① No operation for 2 minutes at most after the power supply ON.<br>② Hand-held remote controller operation is prohibited.<br>• Remote controlling adaptor is connected to CN32 on the indoor controller board.<br>• Hand-held remote controller operation is prohibited by centralized controller etc. since it is connected to MELANS.<br>③ Refer to factor of No.2 on previous page. | ① Normal operation<br>② Normal operation<br><br>③ Check phenomena of No.2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 6. Remote controller display works normally and the unit performs cooling operation, however, the capacity cannot be fully obtained. (The air does not cool well.)                                                                                                                                                                                                       | ① Refrigerant shortage<br><br>② Filter clogging<br><br>③ Heat exchanger clogging<br><br>④ Air duct short cycle                                                                                                                                                                                                                                                                         | ① If refrigerant leaks, discharge temperature rises and LEV opening increases. Inspect leakage by checking the temperature and opening. Check pipe connections for gas leakage.<br>② Open intake grille and check the filter. Clean the filter by removing dirt or dust on it.<br>③ If the filter is clogged, indoor pipe temperature rises and discharging pressure increases. Check if heat exchanger is clogged by inspecting discharging pressure. Clean the heat exchanger.<br>④ Remove the shield.                                                                                                                                                                                                                                                   |
| 7. Remote controller display works normally and the unit performs heating operation, however, the capacity cannot be fully obtained.                                                                                                                                                                                                                                     | ① Linear expansion valve fault<br>Opening cannot be adjusted well due to linear expansion valve fault.<br><br>② Refrigerant shortage<br><br>③ Lack of insulation for refrigerant piping<br>④ Filter clogging<br><br>⑤ Heat exchanger clogging<br><br>⑥ Air duct short cycle<br>⑦ Bypass circuit of outdoor unit fault                                                                  | ① Discharge temperature and indoor heat exchanger temperature does not rise. Inspect the failure by checking discharge pressure. Replace linear expansion valve.<br><br>② If refrigerant leaks, discharge temperature rises and LEV opening increases. Inspect leakage by checking the temperature and opening. Check pipe connections for gas leakage.<br>③ Check the insulation.<br>④ Open intake grill and check the filter. Clean the filter by removing dirt or dust on it.<br>⑤ If the filter is clogged, indoor pipe temperature rises and discharge pressure increases. Check if heat exchanger is clogged by inspecting discharge pressure. Clean the heat exchanger.<br><br>⑥ Remove the shield.<br>⑦ Check refrigerant system during operation. |
| 8. ①For 3 minutes after temperature adjuster turns off, the compressor will not start operating even if temperature adjuster is turned on.<br>②For 3 minutes after temperature adjuster turns on, the compressor will not stop operating even if temperature adjuster is turned off. (Compressor stops operating immediately when turning off by the remote controller.) | ①② Normal operation<br>(For protection of compressor)                                                                                                                                                                                                                                                                                                                                  | ①② Normal operation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

**Symptoms: “Please Wait” is kept being displayed on the remote controller.**

| Diagnosis flow                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Cause                                                                                                                                                                                                                                                                                                                                                                                   | Inspection method and troubleshooting                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre> graph TD     Start([Check the display time of "Please Wait" after turning on the main power.]) --&gt; D1{How long is "Please Wait" kept being displayed on the remote controller?}     D1 -- "2 minutes or less" --&gt; C1[• "Please Wait" will be displayed during the startup diagnosis after turning on the main power.]     D1 -- "6 minutes or more" --&gt; D2{Are any check codes displayed on the remote controller?}     D2 -- NO --&gt; C1     D2 -- YES --&gt; P1[Check the LED display of the outdoor controller circuit board.]     P1 --&gt; D3{Are any check codes displayed on the LED?}     D3 -- YES --&gt; C2[• Miswiring of indoor/outdoor connecting wire<br/>• Breaking of indoor/outdoor connecting wire (S3)<br/>• Defective indoor controller board<br/>• Defective outdoor controller circuit board]     D3 -- NO --&gt; C3[• Defective indoor controller board<br/>• Defective remote controller]           </pre> | <p>• “Please Wait” will be displayed during the startup diagnosis after turning on the main power.</p> <p>• Miswiring of indoor/outdoor connecting wire<br/>• Breaking of indoor/outdoor connecting wire (S3)<br/>• Defective indoor controller board<br/>• Defective outdoor controller circuit board</p> <p>• Defective indoor controller board<br/>• Defective remote controller</p> | <p>• Normal<br/>The startup diagnosis will be over in around 2 minutes.</p> <p>• Refer to “Self-diagnosis action table” in order to solve the trouble.</p> <p>• In the case of communication errors, the display of remote controller may not match the LED display of the outdoor unit.</p> |

## Symptoms: Nothing is displayed on the remote controller ①

LED display of the indoor controller board

LED1: ○  
LED2: ○  
LED3: ○

| Diagnosis flow                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Inspection method and troubleshooting                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Check the voltage between S1 and S2 on the terminal block (TB4) of the indoor unit.</p> <p>198 to 253 VAC?</p> <p>NO</p> <p>Check the voltage among L1 and L2 on the terminal block (TB1) of the outdoor power circuit board.</p> <p>198 to 253 VAC?</p> <p>NO</p> <p>Check the voltage between S1 and S2 on the terminal block (TB1) of the outdoor unit which is used to connect the indoor unit and the outdoor unit.</p> <p>198 to 253 VAC?</p> <p>NO</p> <p>Check the voltage of indoor controller board (CN2D).</p> <p>12 to 16 VDC?</p> <p>YES</p> <p>Check the voltage of the unit after removing the indoor power board (CN2S).</p> <p>12 to 16 VDC?</p> <p>YES</p> <p>NO</p> | <ul style="list-style-type: none"> <li>• Troubles concerning power supply</li> <li>• Bad wiring of the outdoor controller board</li> <li>• The fuses on the outdoor controller circuit board are blown.</li> <li>• Bad wiring of the outdoor controller board</li> <li>• The fuses on the outdoor controller circuit board are blown.</li> <li>• Defective indoor controller board</li> <li>• Miswiring, breaking or poor connection of indoor/outdoor connecting wire</li> <li>• Defective indoor power board</li> </ul> | <ul style="list-style-type: none"> <li>• Check the power wiring to the outdoor unit.</li> <li>• Check the breaker.</li> <li>• Check the wiring of the outdoor unit.</li> <li>• Check if the wiring is bad. Check if the fuses are blown. The fuses on the outdoor controller circuit board will be blown when the indoor /outdoor connecting wire short-circuits.</li> <li>• Check if miswiring, breaking or poor contact is causing this problem. Indoor/outdoor connecting wire is polarized 3-core type. Connect the indoor unit and the outdoor unit by wiring each pair of S1, S2 and S3 on the both side of indoor/outdoor terminal blocks.</li> <li>• Replace the indoor controller board.</li> <li>• Check if there is miswiring or breaking of wire.</li> <li>• Replace the indoor power board.</li> </ul> |

## Symptoms: Nothing is displayed on the remote controller ②

LED display of the indoor controller board  
 LED1:   
 LED2:   
 LED3:  or 

| Diagnosis flow                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Inspection method and troubleshooting                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Check the voltage between S1 and S2 on the terminal block (TB4) of the indoor unit.</p> <p>198 to 253 VAC?</p> <p>NO → Check the looseness or disconnection of the indoor/outdoor connecting wire.</p> <p>YES → Check the status of the indoor controller board LED3 display.</p> <p>Not lighting. → Check the looseness or disconnection of the indoor/outdoor connecting wire.</p> <p>Blinking → Check the refrigerant address of the outdoor unit. (SW1-3 to 1-6)</p> <p>Is the refrigerant address "0"?</p> <p>NO → Normal Only the unit which has the refrigerant address "0" supplies power to the remote controller.</p> <p>YES → Check the LED display of the outdoor unit after turning on the main power again.</p> <p>Is anything displayed?</p> <p>NO → Defective outdoor controller circuit board</p> <p>YES → Is "EA" or "Eb" displayed?</p> <p>NO → Can the unit be restarted?</p> <p>YES → Is "E8" displayed?</p> <p>NO → Can all the indoor unit be operated?</p> <p>YES → Influence of electromagnetic noise</p> <p>NO → Check the voltage between S2 and S3 on the terminal block of the outdoor unit.</p> <p>17 to 28 VDC?</p> <p>NO → Defective outdoor power circuit board</p> <p>YES → Defective indoor power board</p> | <ul style="list-style-type: none"> <li>• Breaking or poor contact of the indoor/outdoor connecting wire</li> <li>• Normal Only the unit which has the refrigerant address "0" supplies power to the remote controller.</li> <li>• Defective outdoor controller circuit board</li> <li>• Defective outdoor controller circuit board</li> <li>• Defective indoor controller board</li> <li>• Influence of electromagnetic noise</li> <li>• Defective outdoor power circuit board</li> <li>• Defective indoor power board</li> </ul> | <ul style="list-style-type: none"> <li>• Fix the breaking or poor contact of the indoor/outdoor connecting wire.</li> <li>• Set the refrigerant address to "0". In the case of the multiple grouping system, recheck the refrigerant address again.</li> <li>• Replace the outdoor controller circuit board.</li> <li>• Replace the outdoor controller circuit board.</li> <li>• Replace the indoor controller board of the indoor unit which does not operate.</li> <li>• Not abnormal. There may be the influence of electromagnetic noise. Check the transmission wire and get rid of the causes.</li> <li>• Replace the outdoor power circuit board.</li> <li>• Replace the indoor power board.</li> </ul> |

|                                                                  |                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Symptoms: Nothing is displayed on the remote controller ③</b> | LED display of the indoor controller board<br>LED1: <br>LED2:  or <br>LED3: — |
|------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

| Diagnosis flow                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Cause                                                                                                                                                                                                                                                                                                                                                                                                                        | Inspection method and troubleshooting                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div data-bbox="178 612 469 704">           Check the voltage of the terminal block (TB6) of the indoor unit.         </div> <div data-bbox="188 746 459 853">           10 to 16 VDC?         </div> <div data-bbox="469 783 520 810">           YES         </div> <div data-bbox="336 880 376 908">           NO         </div> <div data-bbox="188 974 459 1066">           Check the status of the LED2.         </div> <div data-bbox="469 1002 555 1029">           Lighting         </div> <div data-bbox="336 1102 424 1129">           Blinking         </div> <div data-bbox="146 1172 505 1287">           Check the status of the LED2 after disconnecting the remote controller wire from the terminal block (TB5) of the indoor unit.         </div> <div data-bbox="188 1351 459 1442">           Check the status of the LED2.         </div> <div data-bbox="469 1372 555 1400">           Lighting         </div> <div data-bbox="336 1472 424 1500">           Blinking         </div> | <div data-bbox="884 798 1082 853">           • Defective remote controller         </div> <div data-bbox="884 1023 1126 1100">           • Breaking or poor contact of the remote controller wire         </div> <div data-bbox="884 1393 1126 1449">           • The remote controller wire short-circuits         </div> <div data-bbox="884 1549 1075 1604">           • Defective indoor controller board         </div> | <div data-bbox="1142 798 1343 853">           • Replace the remote controller.         </div> <div data-bbox="1142 1023 1433 1312">           • Check if there is breaking or poor contact of the remote controller wire. Check the voltage of the terminal block (TB5) connecting the remote controller wire. If it is not between 10 VDC and 16 VDC, the indoor controller board must be defective.         </div> <div data-bbox="1142 1393 1369 1470">           • Check if the remote controller wire is short-circuited.         </div> <div data-bbox="1142 1549 1362 1604">           • Replace the indoor controller board.         </div> |

• **Before repair**  
**Frequent calls from customers**





| Phone Calls From Customers    |                                                                                                                     | How to Respond                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Note                                                                                                                                                                                  |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Unit does not operate at all. | ① The operating display of remote controller does not come on.                                                      | ① Check if power is supplied to air conditioner. Nothing appears on the display unless power is supplied.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | _____                                                                                                                                                                                 |
|                               | ② Unit cannot be restarted for a while after it's stopped.                                                          | ② Wait around 3 minutes to restart unit.<br>The air conditioner is in a state of being protected by the microprocessor's directive. Once the compressor is stopped, the unit cannot be restarted for 3 minutes. This control is also applied when the unit is turned on and off by remote controller.                                                                                                                                                                                                                                                                                                                                                                                                                  | _____                                                                                                                                                                                 |
|                               | ③ Check code appears and blinks on the display of remote controller.                                                | ③ Check code will be displayed if any protection devices of the air conditioner are actuated.<br>What is check code? -----                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Refer to "SELF-DIAGNOSIS ACTION TABLE".<br>→ Check if servicing is required for the error.                                                                                            |
| Remote controller             | ① "Please Wait" is displayed on the screen.                                                                         | ① Wait around 2 minutes.<br>An automatic startup test will be conducted for 2 minutes when power is supplied to the air conditioner. "Please Wait" will be kept displayed while that time.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | _____                                                                                                                                                                                 |
|                               | ② "  " is displayed on the screen. | ② This indicates that it is time to clean the air filters. Clean the air filters. "  " can be cleared from the filter information of the maintenance menu. See the operation manual that came with the product for how to clean the filters.                                                                                                                                                                                                                                                                                                                                                                                          | Display time of "  " depends on the model.<br>Long life filter: 2500 h.<br>Standard filter: 100 h. |
|                               | ③ "Heat Standby" is displayed on the screen.                                                                        | ③ This is displayed when the unit starts HEAT operation, when the thermostat puts the compressor in operation mode, or when the outdoor unit ends DEFROST operation and returns to HEAT operation.<br>The display will automatically disappear around 10 minutes later.<br>While "Heat Standby" is displayed on the remote controller, the airflow amount will be restricted because the indoor unit's heat exchanger is not fully heated up. In addition to that, the up/down vane will be automatically set to horizontal blow in order to prevent cold air from directly blowing out to human body. The up/down vane will return to the setting specified by the remote controller when "Heat Standby" is released. | _____                                                                                                                                                                                 |
|                               | ④ "Heat Defrost" is displayed on the screen. (No air comes out of the unit.)                                        | ④ The outdoor unit gets frosted when the outside temperature is low and the humidity is high. "Heat Defrost" indicates the DEFROST operation is being performed to melt this frost. The DEFROST operation ends in around 10 minutes (at most 15 minutes).<br>During the DEFROST operation, the indoor unit's heat exchanger becomes cold, so the fan is stopped. The up/down vane will be automatically set to horizontal blow in order to prevent cold air from directly blowing out to human body. The display will turn into "Heat Standby" when DEFROST operation ends.                                                                                                                                            | _____                                                                                                                                                                                 |

| Phone Calls From Customers                        |                                                                                                                                             | How to Respond                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Note                                                                                                                                                                                                                     |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The room cannot be cooled or heated sufficiently. |                                                                                                                                             | ① Check the set temperature of remote controller.<br>The outdoor unit cannot be operated if the set temperature is not appropriate.<br>The outdoor unit operates in the following modes.<br>COOL: When the set temperature is lower than the room temperature.<br>HEAT: When the set temperature is higher than the room temperature.                                                                                                                                                                                                                                              | _____                                                                                                                                                                                                                    |
|                                                   |                                                                                                                                             | ② Check if filters are not dirty and clogged. If filters are clogged, the airflow amount will be reduced and the unit capacity will be lowered. See the instruction manual that came with the product for how to clean the filters.                                                                                                                                                                                                                                                                                                                                                | _____                                                                                                                                                                                                                    |
|                                                   |                                                                                                                                             | ③ Check there is enough space around the air conditioner.<br>If there are any obstacles in the air intake or air outlet of indoor/outdoor units, they block the airflow direction so that the unit capacity will be lowered.                                                                                                                                                                                                                                                                                                                                                       | _____                                                                                                                                                                                                                    |
| Sound comes out from the air conditioner.         | ① An gas escaping sound is heard sometimes.                                                                                                 | ① This is not a malfunction.<br>This is the sound when the flow of refrigerant in the air conditioner is switched.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | _____                                                                                                                                                                                                                    |
|                                                   | ② A cracking sound is heard sometimes.                                                                                                      | ② This is not a malfunction.<br>This is the sound when internal parts of units expand or contract when the temperature changes.                                                                                                                                                                                                                                                                                                                                                                                                                                                    | _____                                                                                                                                                                                                                    |
|                                                   | ③ A buzzing sound is heard sometimes.                                                                                                       | ③ This is not a malfunction.<br>This is the sound when the outdoor unit starts operating.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | _____                                                                                                                                                                                                                    |
|                                                   | ④ A ticking sound is heard from the outdoor unit sometimes.                                                                                 | ④ This is not a malfunction.<br>This is the sound when the blower of the outdoor unit is controlling the airflow amount in order to keep the optimum operating condition.                                                                                                                                                                                                                                                                                                                                                                                                          | _____                                                                                                                                                                                                                    |
|                                                   | ⑤ A sound, similar to water flowing, is heard from the unit.                                                                                | ⑤ This is not a malfunction.<br>This is the sound when the refrigerant is flowing inside the indoor unit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | _____                                                                                                                                                                                                                    |
| Something is wrong with the blower.....           | ① The fan speed does not match the setting of the remote controller during DRY operation.(No air comes out sometimes during DRY operation.) | ① This is not a malfunction. During the DRY operation, the blower's ON/OFF is controlled by the microprocessor to prevent overcooling and to ensure efficient dehumidification. The fan speed cannot be set by the remote controller during DRY operation.                                                                                                                                                                                                                                                                                                                         | _____                                                                                                                                                                                                                    |
|                                                   | ② The fan speed does not match the setting of the remote controller in HEAT operation.                                                      | ② This is not a malfunction.<br>1) When the HEAT operation starts, to prevent the unit from blowing cold air, the fan speed is gradually increased from zero to the set speed, in proportion to the temperature rise of the discharged air.<br>2) When the room temperature reaches the set temperature and the outdoor unit stops, the unit starts the LOW AIR operation.<br>3) During the HEAT operation, the DEFROST operation is performed to defrost the outdoor unit. During the DEFROST operation, the blower is stopped to prevent cold air coming out of the indoor unit. | The up/down vane will be automatically set to horizontal blow in these cases listed up on the left (①—③). After a while, the up/down vane will be automatically moved according to the setting of the remote controller. |

| Phone Calls From Customers                                                                             |                                                                                                                          | How to Respond                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Note                                                                                                                                               |
|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Something is wrong with the blower.....                                                                | ③ Air blows out for a while after HEAT operation is stopped.                                                             | ③ This is not a malfunction.<br>The blower is operating just for cooling down the heated-up air conditioner. This will be done within 1 minute.<br>This control is conducted only when the HEAT operation is stopped with the electric heater ON.                                                                                                                                                                                                                                                                                                                                              | However, this control is also applied to the models which has no electric heater.                                                                  |
| Something is wrong with the airflow direction....                                                      | ① The airflow direction is changed during COOL operation.                                                                | ① If the up/down vane is set to downward in COOL operation, it will be automatically set to horizontal blow by the microprocessor in order to prevent water from dropping down.<br>“1 h” will be displayed on the remote controller if the up/down vane is set to downward with the fan speed set to be less than “LOW”.                                                                                                                                                                                                                                                                       | _____                                                                                                                                              |
|                                                                                                        | ② The airflow direction is changed during HEAT operation.<br>(The airflow direction cannot be set by remote controller.) | ② In HEAT operation, the up/down vane is automatically controlled according to the temperature of the indoor unit's heat exchanger. In the following cases written below, the up/down vane will be set to horizontal blow, and the setting cannot be changed by remote controller.<br>1) At the beginning of the HEAT operation<br>2) While the outdoor unit is being stopped by thermostat or when the outdoor unit gets started to operate.<br>3) During DEFROST operation<br>The airflow direction will be back to the setting of remote controller when the above situations are released. | “Heat Standby” will be displayed on the remote controller in the case of ① and ②. “Heat Defrost” will be displayed on the screen in the case of ③. |
|                                                                                                        | ③ The airflow direction does not change.<br>(Up/down vane, left/right louver)                                            | ③ 1) Check if the vane is set to a fixed position.<br>(Check if the vane motor connector is removed.)<br>2) Check if the air conditioner has a function for switching the air direction.<br>3) If the air conditioner does not have that function, “Unsupported function” will be displayed on the remote controller when “AIR DIRECTION” or “LOUVER” button is pressed.                                                                                                                                                                                                                       | _____                                                                                                                                              |
| The air conditioner starts operating even though any buttons on the remote controller are not pressed. |                                                                                                                          | ① Check if you set ON/OFF timer.<br>The air conditioner starts operating at the time designated if ON timer has been set before.                                                                                                                                                                                                                                                                                                                                                                                                                                                               | _____                                                                                                                                              |
|                                                                                                        |                                                                                                                          | ② Check if any operations are ordered by distant control system or the central remote controller.<br>While “Centrally controlled” is displayed on the remote controller, the air conditioner is under the control of external directive.                                                                                                                                                                                                                                                                                                                                                       | There might be a case that “Centrally controlled” will not be displayed.                                                                           |
|                                                                                                        |                                                                                                                          | ③ Check if power is recovered from power failure (black out).<br>The units will automatically start operating when power is recovered after power failure (black out) occurs. This function is called “auto recovery feature from power”.                                                                                                                                                                                                                                                                                                                                                      | _____                                                                                                                                              |
| The air conditioner stops even though any buttons on the remote controller are not pressed.            |                                                                                                                          | ① Check if you set ON/OFF timer.<br>The air conditioner stops operating at the time designated if OFF timer has been set before.<br><br>② Check if any operations are ordered by distant control system or the central remote controller.<br>While “Centrally controlled” is displayed on the remote controller, the air conditioner is under the control of external directive.                                                                                                                                                                                                               | There might be a case that “Centrally controlled” will not be displayed.                                                                           |

| Phone Calls From Customers                                                                                                                                      | How to Respond                                                                                                                                                                                                                                                      | Note  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| A white mist is expelled from the indoor unit.                                                                                                                  | This is not a malfunction.<br>This may occur when the operation is started in the room with high humidity.                                                                                                                                                          | _____ |
| Water or moisture is expelled from the outdoor unit.                                                                                                            | COOL: when pipes or piping joints are cooled, they sweat and water drips down.<br>HEAT: water drips down from the heat exchanger.<br>Note: Make use of optional parts "Drain Socket" and "Drain pan" if these water needs to be collected and drained out for once. | _____ |
| The display of wireless remote controller gets dim or does not come on.<br>The indoor unit does not receive a signal from remote controller at a long distance. | Batteries are being exhausted. Replace them and press the reset button of remote controller.                                                                                                                                                                        | _____ |

## 10-5. HOW TO CHECK THE PARTS

| Parts name                                                                                                                                                                                                                                                    | Checkpoints                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                            |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------------------|----------------------|--------------------------------------------|----------------|---------------|---------------------------|----------------------------|----------------------------|-------------------------------|----------------------|--------------------------------------------|--|--|
| Thermistor (TH3)<br><Liquid pipe><br>Thermistor (TH4)<br><Discharge><br>Thermistor (TH6)<br><2-phase pipe><br>Thermistor (TH7)<br><Ambient><br>Thermistor (TH8)<br><Heat sink><br>Thermistor (TH32)<br><Suction pipe><br>Thermistor (TH33)<br><Comp. surface> | Disconnect the connector then measure the resistance with a multimeter.<br>(Ambient temperature 50 to 86°F [10 to 30°C]) <table><tr><td></td><td>Normal</td><td>Abnormal</td></tr><tr><td>TH4<br/>TH33</td><td>160 to 410 kΩ</td><td rowspan="3">Open or short</td></tr><tr><td>TH3<br/>TH6<br/>TH7<br/>TH32</td><td>4.3 to 9.6 kΩ</td></tr><tr><td>TH8</td><td>39 to 105 kΩ</td></tr></table>                                                                                                                                                                                  |                            | Normal                        | Abnormal             | TH4<br>TH33                                | 160 to 410 kΩ  | Open or short | TH3<br>TH6<br>TH7<br>TH32 | 4.3 to 9.6 kΩ              | TH8                        | 39 to 105 kΩ                  |                      |                                            |  |  |
|                                                                                                                                                                                                                                                               | Normal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Abnormal                   |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| TH4<br>TH33                                                                                                                                                                                                                                                   | 160 to 410 kΩ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Open or short              |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| TH3<br>TH6<br>TH7<br>TH32                                                                                                                                                                                                                                     | 4.3 to 9.6 kΩ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                            |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| TH8                                                                                                                                                                                                                                                           | 39 to 105 kΩ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                            |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| Fan motor(MF1, MF2) <div></div>                                                                                                                                             | Measure the resistance between the connector pins with a tester.<br>(At the ambient temperature 20°C)<br>Note that the resistance between the connector pins may vary depending on the ambient temperature, so use those values as reference. <table><tr><td></td><td colspan="4">Normal</td><td>Abnormal</td></tr><tr><td>NTXSKH24/30/36</td><td>Red - Blue<br/>1.1 ± 0.6 MΩ</td><td>Brown - Blue<br/>40 ± 20 kΩ</td><td>Orange - Blue<br/>220 ± 110 kΩ</td><td>White - Blue<br/>Open</td><td>Open or short<br/>(short, for White - Blue)</td></tr></table><br>*OL : Over Load |                            | Normal                        |                      |                                            |                | Abnormal      | NTXSKH24/30/36            | Red - Blue<br>1.1 ± 0.6 MΩ | Brown - Blue<br>40 ± 20 kΩ | Orange - Blue<br>220 ± 110 kΩ | White - Blue<br>Open | Open or short<br>(short, for White - Blue) |  |  |
|                                                                                                                                                                                                                                                               | Normal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                            |                               |                      | Abnormal                                   |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| NTXSKH24/30/36                                                                                                                                                                                                                                                | Red - Blue<br>1.1 ± 0.6 MΩ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Brown - Blue<br>40 ± 20 kΩ | Orange - Blue<br>220 ± 110 kΩ | White - Blue<br>Open | Open or short<br>(short, for White - Blue) |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| Solenoid valve coil<br><Four-way valve><br>(21S4)                                                                                                                                                                                                             | Measure the resistance between the terminals with a multimeter.<br>(Ambient temperature 68°F [20°C] ) <table><tr><td>Model</td><td>Normal</td><td>Abnormal</td></tr><tr><td>NTXSKH24</td><td>1190.3 ± 119 Ω</td><td rowspan="2">Open or short</td></tr><tr><td>NTXSKH30/36</td><td>1567.5 ± 156.8 Ω</td></tr></table>                                                                                                                                                                                                                                                           | Model                      | Normal                        | Abnormal             | NTXSKH24                                   | 1190.3 ± 119 Ω | Open or short | NTXSKH30/36               | 1567.5 ± 156.8 Ω           |                            |                               |                      |                                            |  |  |
| Model                                                                                                                                                                                                                                                         | Normal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Abnormal                   |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| NTXSKH24                                                                                                                                                                                                                                                      | 1190.3 ± 119 Ω                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Open or short              |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| NTXSKH30/36                                                                                                                                                                                                                                                   | 1567.5 ± 156.8 Ω                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                            |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| Motor for compressor<br>(MC) <div></div>                                                                                                                                   | Measure the resistance between the terminals with a multimeter.<br>(Winding temperature 68°F [20°C] ) <table><tr><td>Model</td><td>Normal</td><td>Abnormal</td></tr><tr><td>NTXSKH24</td><td>0.74 Ω</td><td rowspan="2">Open or short</td></tr><tr><td>NTXSKH30/36</td><td>0.188 Ω</td></tr></table>                                                                                                                                                                                                                                                                            | Model                      | Normal                        | Abnormal             | NTXSKH24                                   | 0.74 Ω         | Open or short | NTXSKH30/36               | 0.188 Ω                    |                            |                               |                      |                                            |  |  |
| Model                                                                                                                                                                                                                                                         | Normal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Abnormal                   |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| NTXSKH24                                                                                                                                                                                                                                                      | 0.74 Ω                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Open or short              |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| NTXSKH30/36                                                                                                                                                                                                                                                   | 0.188 Ω                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                            |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| Linear expansion valve<br>(LEV-A/B) For NTXSKH24 <div></div>                                                                                                               | Disconnect the connector then measure the resistance with a tester.<br>(Winding temperature 68°F [20°C]) <table><tr><td colspan="4">Normal</td><td>Abnormal</td></tr><tr><td>Red - White</td><td>Red - Orange</td><td>Red - Yellow</td><td>Red - Blue</td><td rowspan="2">Open or short</td></tr><tr><td colspan="4">46 ± 4 Ω</td></tr></table>                                                                                                                                                                                                                                 | Normal                     |                               |                      |                                            | Abnormal       | Red - White   | Red - Orange              | Red - Yellow               | Red - Blue                 | Open or short                 | 46 ± 4 Ω             |                                            |  |  |
| Normal                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                            |                               | Abnormal             |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| Red - White                                                                                                                                                                                                                                                   | Red - Orange                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Red - Yellow               | Red - Blue                    | Open or short        |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| 46 ± 4 Ω                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                            |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| Linear expansion valve<br>(LEV-A/B/C) For NTXSKH30/36 <div></div>                                                                                                          | Disconnect the connector then measure the resistance with a tester.<br>(Winding temperature 68°F [20°C]) <table><tr><td colspan="4">Normal</td><td>Abnormal</td></tr><tr><td>Gray - Black</td><td>Gray - Red</td><td>Gray - Yellow</td><td>Gray - Orange</td><td rowspan="2">Open or short</td></tr><tr><td colspan="4">46 ± 3 Ω</td></tr></table>                                                                                                                                                                                                                              | Normal                     |                               |                      |                                            | Abnormal       | Gray - Black  | Gray - Red                | Gray - Yellow              | Gray - Orange              | Open or short                 | 46 ± 3 Ω             |                                            |  |  |
| Normal                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                            |                               | Abnormal             |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| Gray - Black                                                                                                                                                                                                                                                  | Gray - Red                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Gray - Yellow              | Gray - Orange                 | Open or short        |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |
| 46 ± 3 Ω                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                            |                               |                      |                                            |                |               |                           |                            |                            |                               |                      |                                            |  |  |



# Check method of DC fan motor (fan motor/outdoor controller circuit board)

## ① Notes

- High voltage is applied to the connector (CNF1, 2) for the fan motor. Pay attention to the service.
- Do not pull out the connector (CNF1, 2) for the motor with the power supply on.  
(It causes trouble of the outdoor controller circuit board and fan motor.)

## ② Self check

Symptom: The outdoor fan cannot rotate.

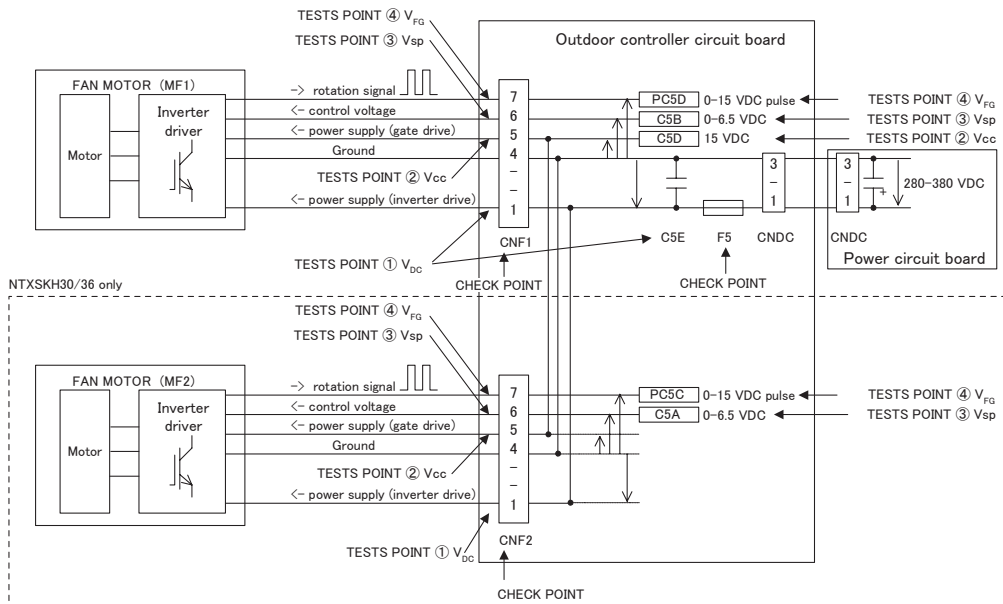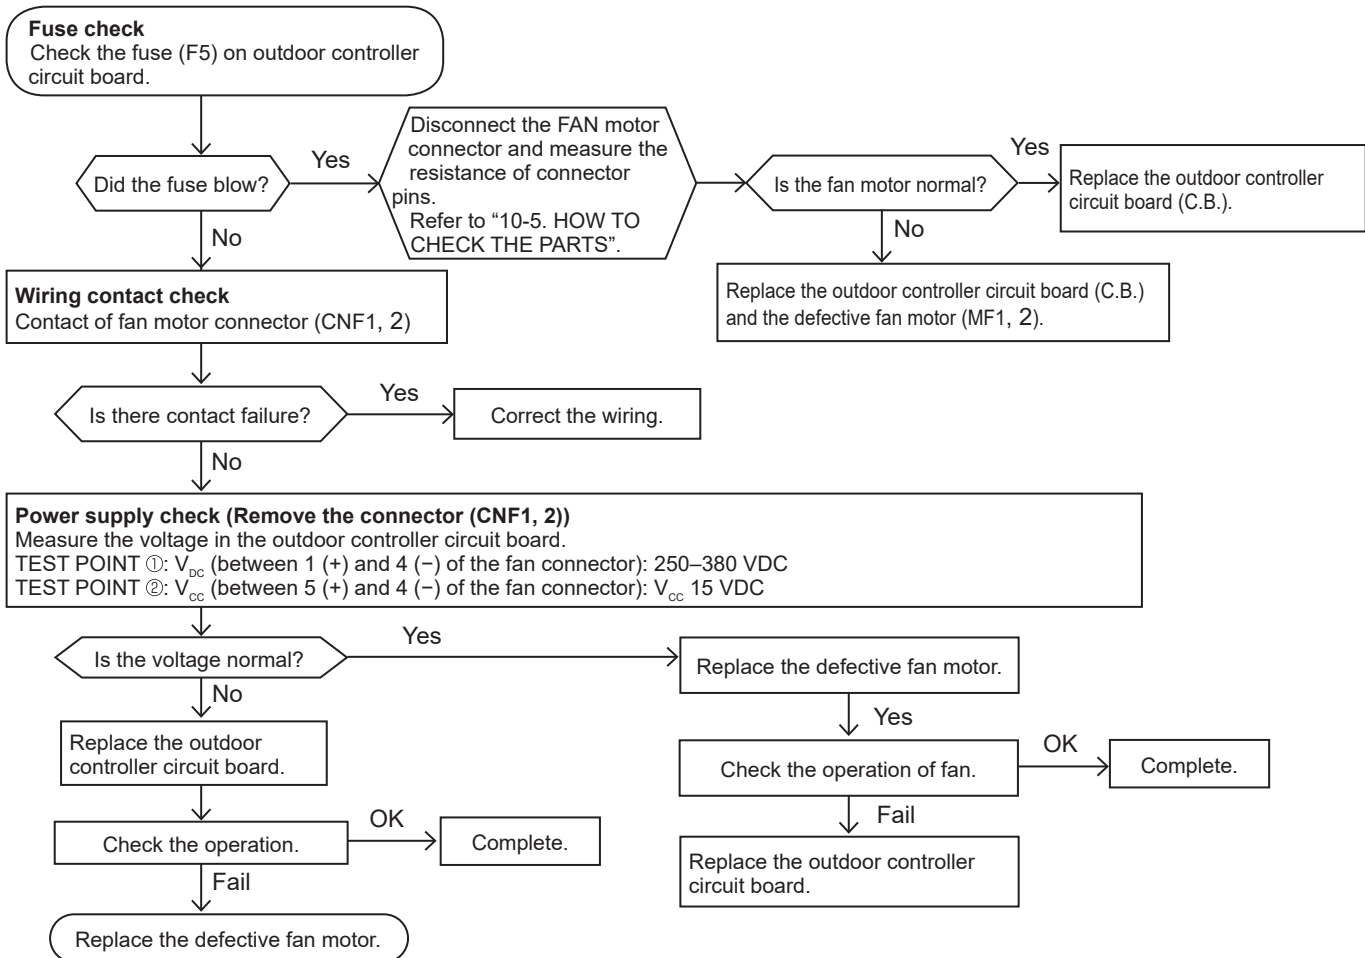

- The inverter control P.C. board is built in the fan motor of this outdoor unit.
- When F5 that is on controller board is opened, change the fan motor and outdoor controller board at the same time (F5 is impossible to change).
- It is abnormal when the abnormality is detected from either both fan motors or only one side.

## 10-6. HOW TO CHECK THE COMPONENTS

### <Thermistor feature chart>

#### Low temperature thermistors

- Thermistor <Liquid pipe> (TH3)
- Thermistor <2-phase pipe> (TH6)
- Thermistor <Ambient> (TH7)
- Thermistor <Suction pipe> (TH32)


Thermistor R0 = 15 kΩ ± 3%

B constant = 3480 ± 1%

$$t (^{\circ}\text{C}): R_t = 15 \exp\left\{3480\left(\frac{1}{273+t} - \frac{1}{273}\right)\right\}$$

$$T (^{\circ}\text{F}): R_T = 15 \exp\left\{3480\left(\frac{1}{273+(T-32)/1.8} - \frac{1}{273}\right)\right\}$$

|             |        |              |        |
|-------------|--------|--------------|--------|
| 32°F [0°C]  | 15 kΩ  | 86°F [30°C]  | 4.3 kΩ |
| 50°F [10°C] | 9.6 kΩ | 104°F [40°C] | 3.0 kΩ |
| 68°F [20°C] | 6.3 kΩ |              |        |
| 77°F [25°C] | 5.2 kΩ |              |        |

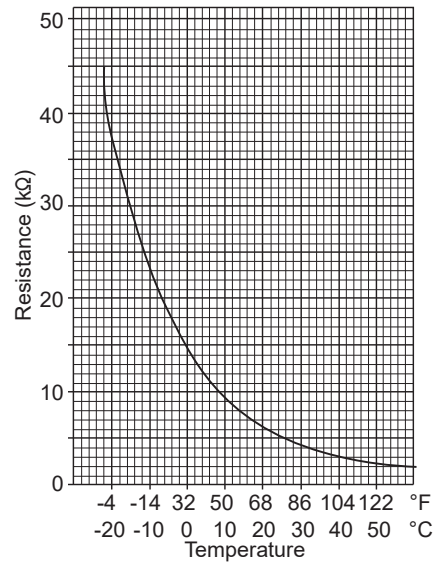

#### Medium temperature thermistor

- Thermistor <Heat sink> (TH8)


Thermistor R50 = 17 kΩ ± 2%

B constant = 4150 ± 3%

$$t (^{\circ}\text{C}): R_t = 17 \exp\left\{4150\left(\frac{1}{273+t} - \frac{1}{323}\right)\right\}$$

$$T (^{\circ}\text{F}): R_T = 17 \exp\left\{4150\left(\frac{1}{273+(T-32)/1.8} - \frac{1}{323}\right)\right\}$$

|              |        |
|--------------|--------|
| 32°F [0°C]   | 180 kΩ |
| 77°F [25°C]  | 50 kΩ  |
| 122°F [50°C] | 17 kΩ  |
| 158°F [70°C] | 8 kΩ   |
| 194°F [90°C] | 4 kΩ   |

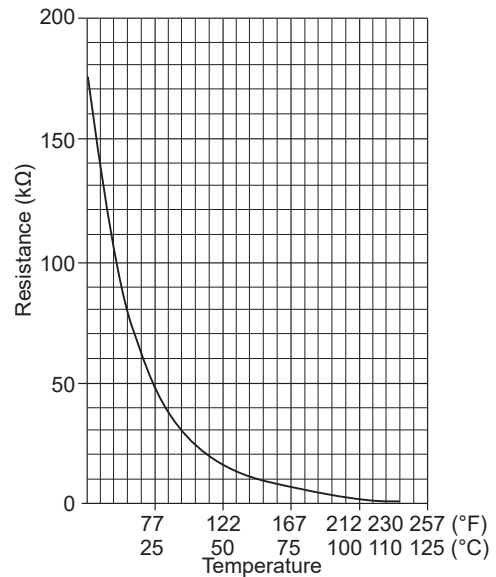

#### High temperature thermistors

- Thermistor <Discharge> (TH4)
- Thermistor <Comp. surface> (TH33)


Thermistor R120 = 7.465 kΩ ± 2%

B constant = 4057 ± 2%

$$t (^{\circ}\text{C}): R_t = 7.465 \exp\left\{4057\left(\frac{1}{273+t} - \frac{1}{393}\right)\right\}$$

$$T (^{\circ}\text{F}): R_T = 7.465 \exp\left\{4057\left(\frac{1}{273+(T-32)/1.8} - \frac{1}{393}\right)\right\}$$

|              |        |               |         |
|--------------|--------|---------------|---------|
| 68°F [20°C]  | 250 kΩ | 158°F [70°C]  | 34 kΩ   |
| 86°F [30°C]  | 160 kΩ | 176°F [80°C]  | 24 kΩ   |
| 104°F [40°C] | 104 kΩ | 194°F [90°C]  | 17.5 kΩ |
| 122°F [50°C] | 70 kΩ  | 212°F [100°C] | 13.0 kΩ |
| 140°F [60°C] | 48 kΩ  | 230°F [110°C] | 9.8 kΩ  |

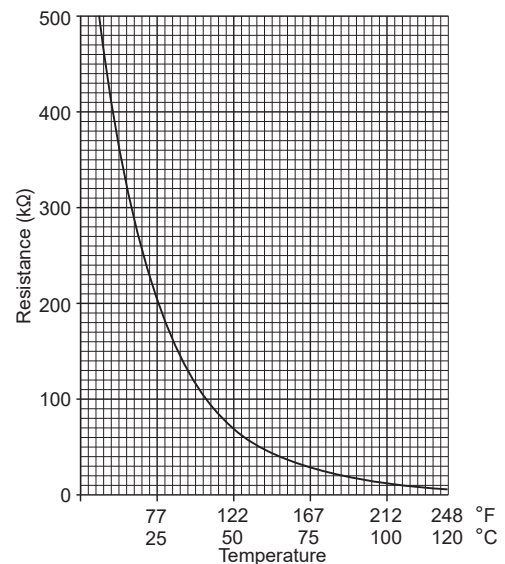


## Linear expansion valve (NTXSKH24)

### (1) Operation summary of the linear expansion valve

- Linear expansion valve opens/closes through stepping motor after receiving the pulse signal from the outdoor controller board.
- Valve position can be changed in proportion to the number of pulse signal.

<Connection between the outdoor controller board and the linear expansion valve>

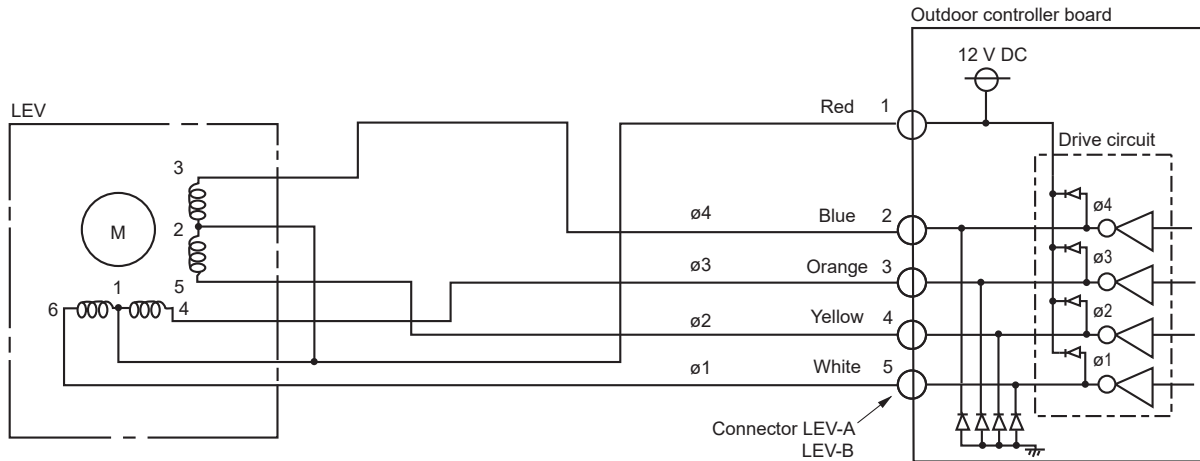

### <Output pulse signal and the valve operation>

| Output (Phase) | Output |     |     |     |     |     |     |     |
|----------------|--------|-----|-----|-----|-----|-----|-----|-----|
|                | 1      | 2   | 3   | 4   | 5   | 6   | 7   | 8   |
| ø1             | ON     | ON  | OFF | OFF | OFF | OFF | OFF | ON  |
| ø2             | OFF    | ON  | ON  | ON  | OFF | OFF | OFF | OFF |
| ø3             | OFF    | OFF | OFF | ON  | ON  | ON  | OFF | OFF |
| ø4             | OFF    | OFF | OFF | OFF | OFF | ON  | ON  | ON  |


The output pulse shifts in the following order.

Opening a valve: 8 → 7 → 6 → 5 → 4 → 3 → 2 → 1 → 8

Closing a valve: 1 → 2 → 3 → 4 → 5 → 6 → 7 → 8 → 1

- When linear expansion valve operation stops, all output phases become OFF.

### (2) Linear expansion valve operation

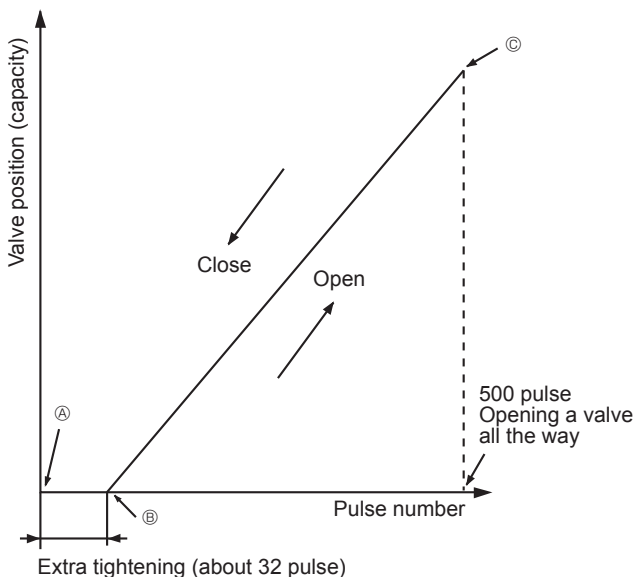


- When the power is turned on, 700 pulse closing valve signal will be sent till it goes to A point in order to define the valve position.  
(The pulse signal is being sent for about 20 seconds.)
- When the valve moves smoothly, there is no sound or vibration occurring from the linear expansion valve; however, when the pulse number moves from B to A or when the valve is locked, sound can be heard than normal situation.  
No sound is heard when the pulse number moves from B to A in case coil is burn out or motor is locked by open-phase.
- Sound can be detected by placing the ear against the screw driver handle while putting the screw driver to the linear expansion valve.

## Linear expansion valve (NTXSKH30/36)

### (1) Operation summary of the linear expansion valve

- Linear expansion valve opens/closes through stepping motor after receiving the pulse signal from the outdoor controller board.
- Valve position can be changed in proportion to the number of pulse signal.

<Connection between the outdoor controller board and the linear expansion valve>

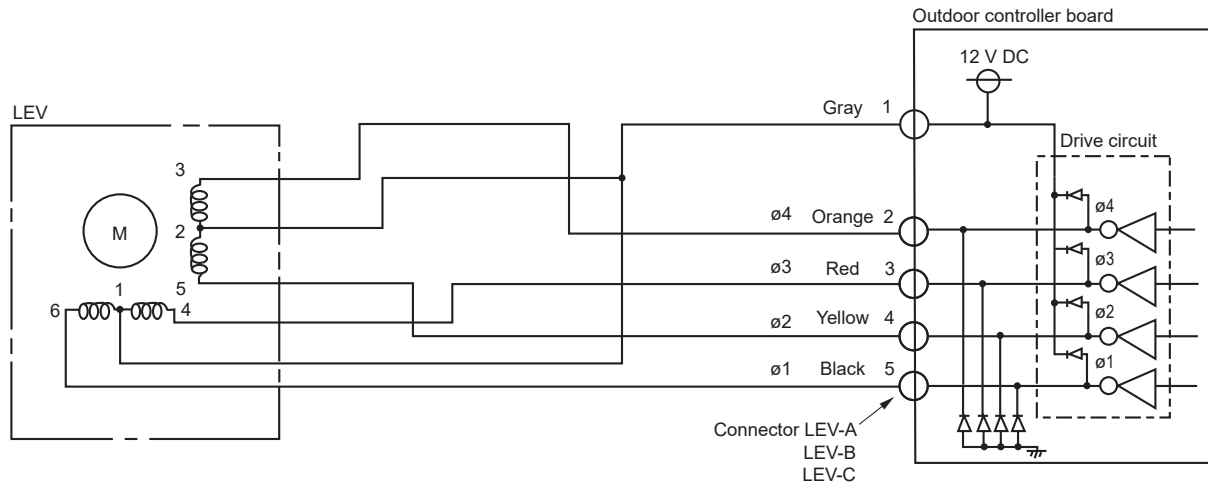

### <Output pulse signal and the valve operation>

| Output (Phase) | Output |     |     |     |     |     |     |     |
|----------------|--------|-----|-----|-----|-----|-----|-----|-----|
|                | 1      | 2   | 3   | 4   | 5   | 6   | 7   | 8   |
| ø1             | ON     | ON  | OFF | OFF | OFF | OFF | OFF | ON  |
| ø2             | OFF    | ON  | ON  | ON  | OFF | OFF | OFF | OFF |
| ø3             | OFF    | OFF | OFF | ON  | ON  | ON  | OFF | OFF |
| ø4             | OFF    | OFF | OFF | OFF | OFF | ON  | ON  | ON  |


The output pulse shifts in the following order.

Opening a valve: 8 → 7 → 6 → 5 → 4 → 3 → 2 → 1 → 8

Closing a valve: 1 → 2 → 3 → 4 → 5 → 6 → 7 → 8 → 1

- When linear expansion valve operation stops, all output phases become OFF.

### (2) Linear expansion valve operation

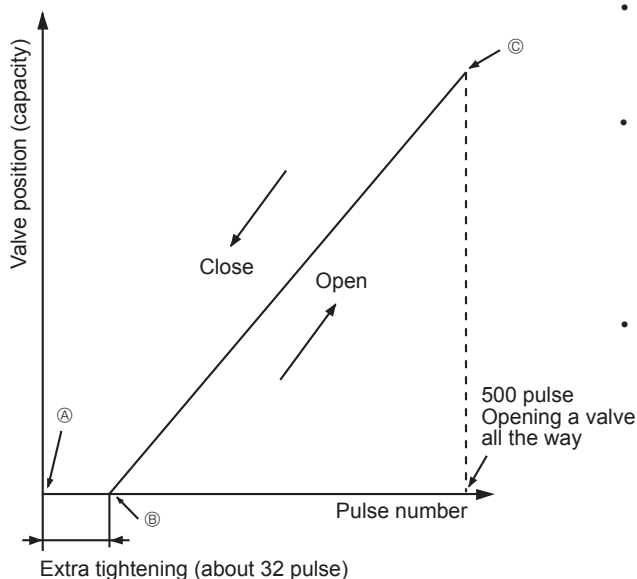


- When the power is turned on, 700 pulse closing valve signal will be sent till it goes to A point in order to define the valve position. (The pulse signal is being sent for about 20 seconds.)
- When the valve moves smoothly, there is no sound or vibration occurring from the linear expansion valve; however, when the pulse number moves from B to A or when the valve is locked, sound can be heard than normal situation. No sound is heard when the pulse number moves from B to A in case coil is burn out or motor is locked by open-phase.
- Sound can be detected by placing the ear against the screw driver handle while putting the screw driver to the linear expansion valve.

### (3) How to attach and detach the coil of linear expansion valve

#### <Composition>


Linear expansion valve is separable into the main body and the coil as shown in the diagram below.

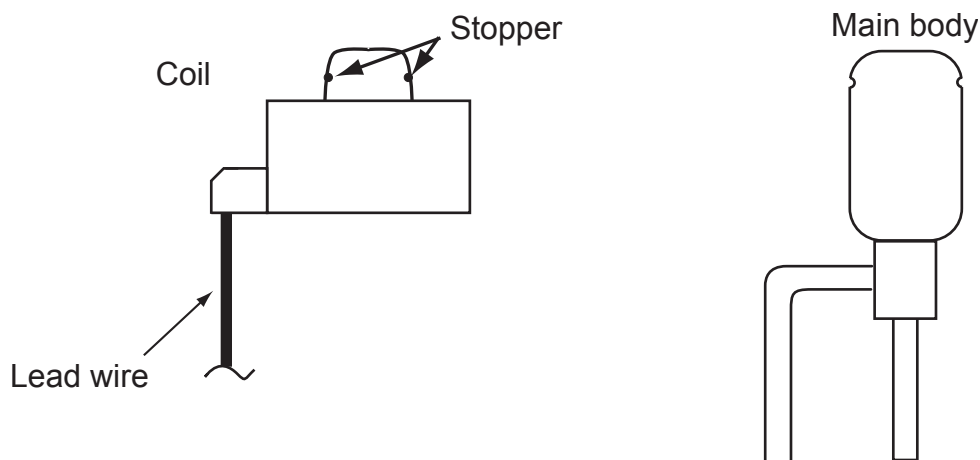

#### <How to detach the coil>

Hold the lower part of the main body (shown as A) firmly so that the main body does not move and detach the coil by pulling it upward.


Be sure to detach the coil holding main body firmly. Otherwise pipes can bend due to stress.

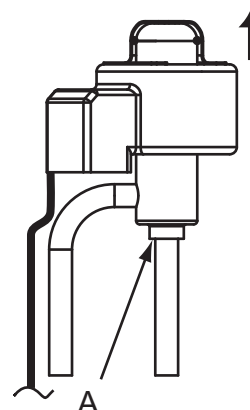

#### <How to attach the coil>

Hold the lower part of the main body (shown as A) firmly so that the main body does not move and attach the coil by inserting it downward into the main body. Then securely attach the coil stopper to main body. (At this time, be careful that stress is not added to lead wire and main body is not wound by lead wire.) If the stopper is not firmly attached to main body, coil may be detached from the main body and that can cause defective operation of linear expansion valve.

To prevent piping stress, be sure to attach the coil holding the main body of linear expansion valve firmly. Otherwise pipe may break.

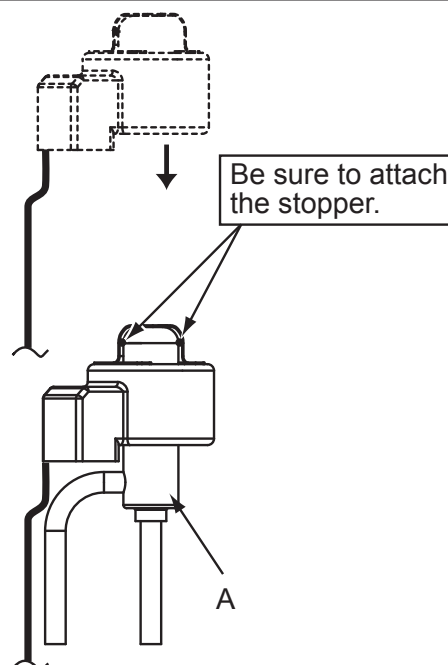

## 10-7. EMERGENCY OPERATION

(1) When any check codes shown below is displayed on outdoor unit, or microprocessor for wired remote controller or indoor unit has a failure while no other problems are found, emergency operation will be available by setting the emergency operation switch (SWE) ON and short-circuiting the connector (CN31) on outdoor controller board.

●When following abnormalities occur, emergency operation will be available.


| Check code | Inspected content                                                                                 |
|------------|---------------------------------------------------------------------------------------------------|
| U4         | Open/short of thermistor (TH3/TH6/TH7/TH32/TH8)                                                   |
| UE         | Open of pressure sensor (T <sub>63HS</sub> )                                                      |
| E8         | Indoor/outdoor unit communication error •Signal receiving error (Outdoor unit)                    |
| E9         | Indoor/outdoor unit communication error •Transmitting error (Indoor unit)                         |
| E0 – E7    | Communication error other than outdoor unit                                                       |
| Ed         | Communication error between outdoor controller board and M-NET board (Serial communication error) |

(2) Check the following items and cautions for emergency operation

- ① Make sure that there is no abnormality in outdoor unit other than the above abnormalities. (Emergency operation will not be available when check codes other than the above are indicated.)
- ② For emergency operation, it is necessary to set the emergency operation switch (SWE) on indoor controller board. (Refer to the electrical wiring diagram of indoor unit for how to set the indoor unit.)
- ③ During emergency operation, the air-conditioner will continuously be operated by supplying power and stopping it. It can not be turned on or off by remote control, and temperature control is not possible.
- ④ Do not perform emergency heating operation for an extended period of time. If the outdoor unit starts defrosting during this period, cold air will blow out from the indoor unit.
- ⑤ Do not perform emergency cooling operation for more than 10 hours. Neglecting this could result in freezing the heat exchanger in indoor unit.

(3) Emergency operation procedure


- ① Turn the main power supply off.
- ② Turn on the emergency operation switch (SWE) on indoor controller board.
- ③ Set the shorting pins of emergency operation connector (CN31) on outdoor controller board to ON.
- ④ Use SW4-2 on outdoor controller board to set the operation mode (cooling or heating). (SW4-1 is not used.)
- ⑤ Turning the main power supply on will start the emergency operation.

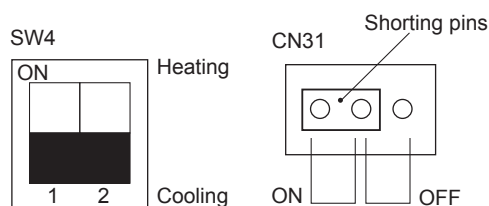

(4) Releasing emergency operation

- ① Turn the main power supply off.
- ② Set the emergency operation switch (SWE) on indoor controller board to OFF.
- ③ Set the shorting pins of emergency operation connector (CN31) on outdoor controller board to OFF.
- ④ Set SW4-2 on outdoor controller board as shown in the right.

Note: If shorting pins are not set on emergency operation connector (CN31), the setting remains OFF.



### (5) Operation data during emergency operation

During emergency operation, no communication is performed with the indoor unit, so the data items needed for operation are set to the following values:

| Operation data                                                             | Operation mode |               | Remarks |
|----------------------------------------------------------------------------|----------------|---------------|---------|
|                                                                            | COOL           | HEAT          |         |
| Intake temperature (TH1)                                                   | 81°F [27°C]    | 69°F [20.5°C] |         |
| Indoor fluid pipe temperature (TH2)                                        | 41°F [5°C]     | 113°F [45°C]  |         |
| Indoor 2-phase pipe temperature (TH5)                                      | 41°F [5°C]     | 122°F [50°C]  |         |
| Set temperature                                                            | 77°F [25°C]    | 72°F [22°C]   |         |
| Outdoor pipe temperature (TH3)                                             | 113°F [45°C]   | 41°F [5°C]    | *1      |
| Outdoor 2-phase pipe temperature (TH6)                                     | 122°F [50°C]   | 41°F [5°C]    | *1      |
| Outdoor air temperature (TH7)                                              | 95°F [35°C]    | 45°F [7°C]    | *1      |
| Temperature difference code<br>(intake temperature - set temperature) (Tj) | 5              | 5             | *1      |
| Discharge superheat (SHd)                                                  | 54°F [30°C]    | 54°F [30°C]   |         |
| Sub-cool (SC)                                                              | 9°F [5°C]      | 9°F [5°C]     | *2      |

\*1: If the thermistor temperature data is normal (not open/short), that data is loaded into the control as valid data.  
If the unit enters emergency operation because TH values have become mismatched, setting the thermistors to open/short corrects the settings.

\*2: If one thermistor is set to open/short, the values for each will be different.  
[Example] When pipe temperature thermistor (TH3) has an open or short circuit.

| Thermistor        | COOL                                    | HEAT         |
|-------------------|-----------------------------------------|--------------|
| TH3               | 113°F [45°C]                            | 41°F [5°C]   |
| TH6               | Ta                                      | Tb           |
|                   | Regard normal figure as effective data. |              |
| TH4               | Tc                                      | Td           |
|                   | Regard normal figure as effective data. |              |
| TH5               | 41°F [5°C]                              | 122°F [50°C] |
| TH2               | 41°F [5°C]                              | 113°F [45°C] |
| T <sub>63HS</sub> | Te                                      | Tf           |
|                   | Regard normal figure as effective data. |              |

Discharge superheat (SHd)

Cooling = TH4 - T<sub>63HS</sub> = Tc - Te

Heating = TH4 - T<sub>63HS</sub> = Tf

Degree of subcooling (SC)


Cooling = T<sub>63HS</sub> - TH3 = Te - 113°F [45°C]

Heating = T<sub>63HS</sub> - TH2 = Tf - 113°F [45°C]

## 10-8. TEST POINT DIAGRAM

### Outdoor controller circuit board

<CAUTION> TEST POINT① is high voltage.

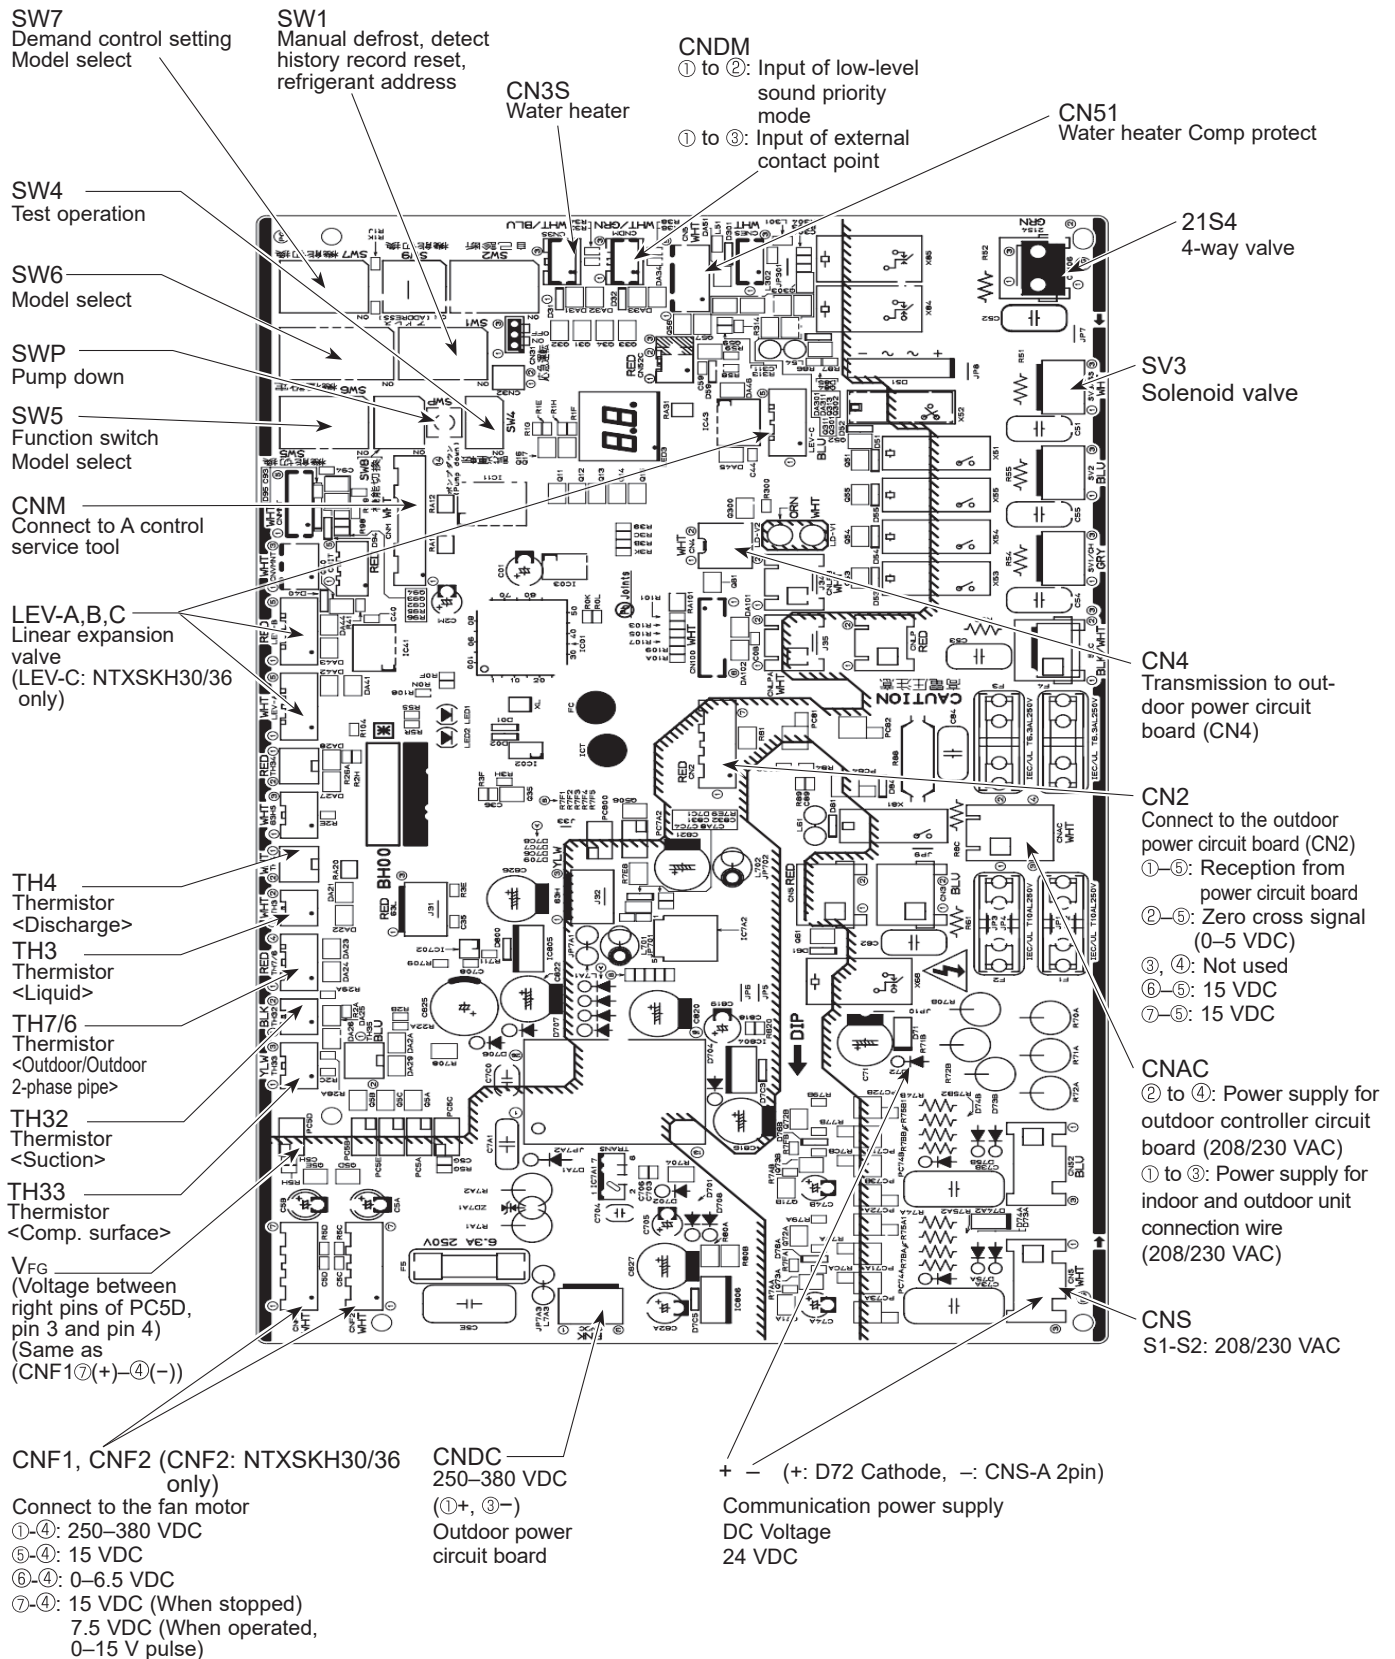

## Outdoor power circuit board

### NTXSKH24A112AA

#### Brief Check of POWER MODULE

If they are short-circuited, it means that they are broken.  
Measure the resistance in the following points (connectors, etc.).

##### 1. Check POWER MODULE

###### ① Check of DIODE circuit

R - P1 S - P1 R - N1 S - N1


###### ② Check of PFC circuit

P2 - L1 P2 - L3 N2 - L1 N2 - L3

###### ③ Check of INVERTER circuit

P3 - U, P3 - V, P3 - W, N3 - U, N3 - V, N3 - W

Note: The marks R, S, L1, L3, P1, P2, P3, N1, N2, N3, U, V and W show in the diagram are not actually printed on the board.

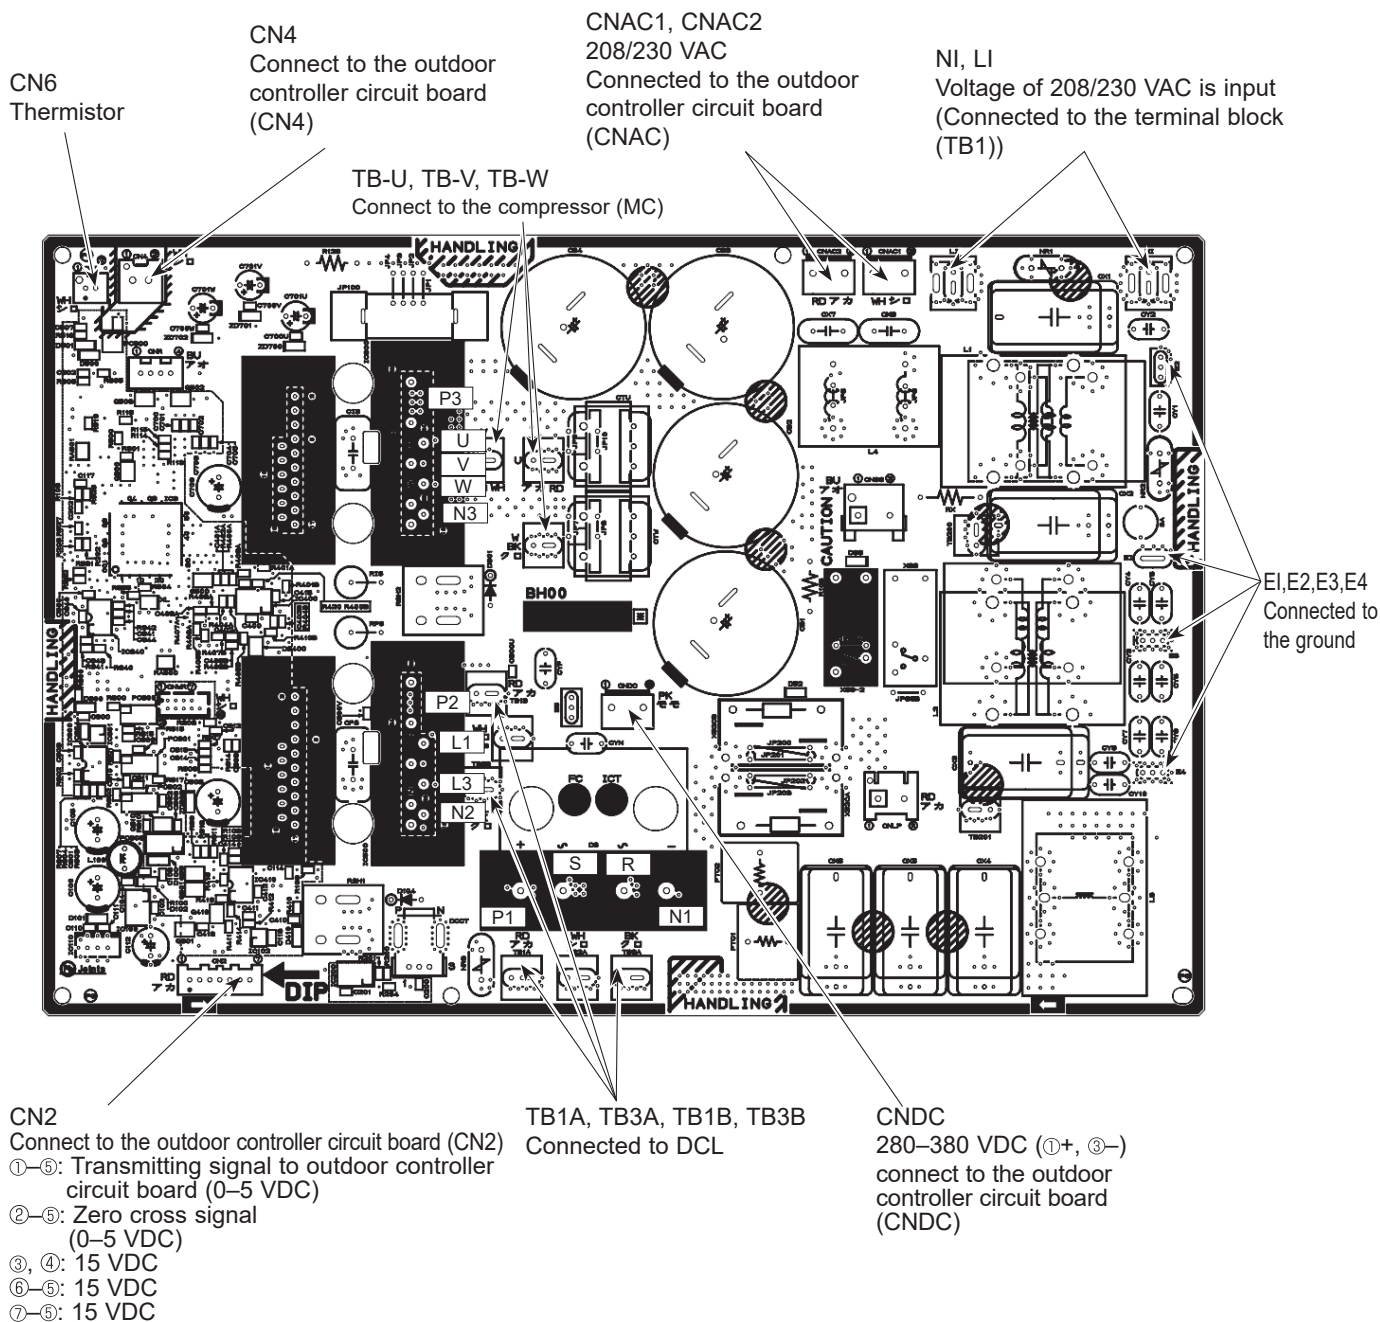

## Outdoor power circuit board

NTXSKH30A112AA  
NTXSKH36A112AA

### Brief Check of POWER MODULE

If they are short-circuited, it means that they are broken.  
Measure the resistance in the following points (connectors, etc.).

#### 1. Check POWER MODULE

##### ① Check of DIODE circuit

R - P1 S - P1 R - N1 S - N1


##### ② Check of PFC circuit

P2 - L1 P2 - L2 P2 - L3 N2 - L1 N2 - L2 N2 - L3

##### ③ Check of INVERTER circuit

P3 - U, P3 - V, P3 - W, N3 - U, N3 - V, N3 - W













Note: The marks R, S, L1, L2, L3, P1, P2, P3, N1, N2, N3, U, V and W show in the diagram are not actually printed on the board.

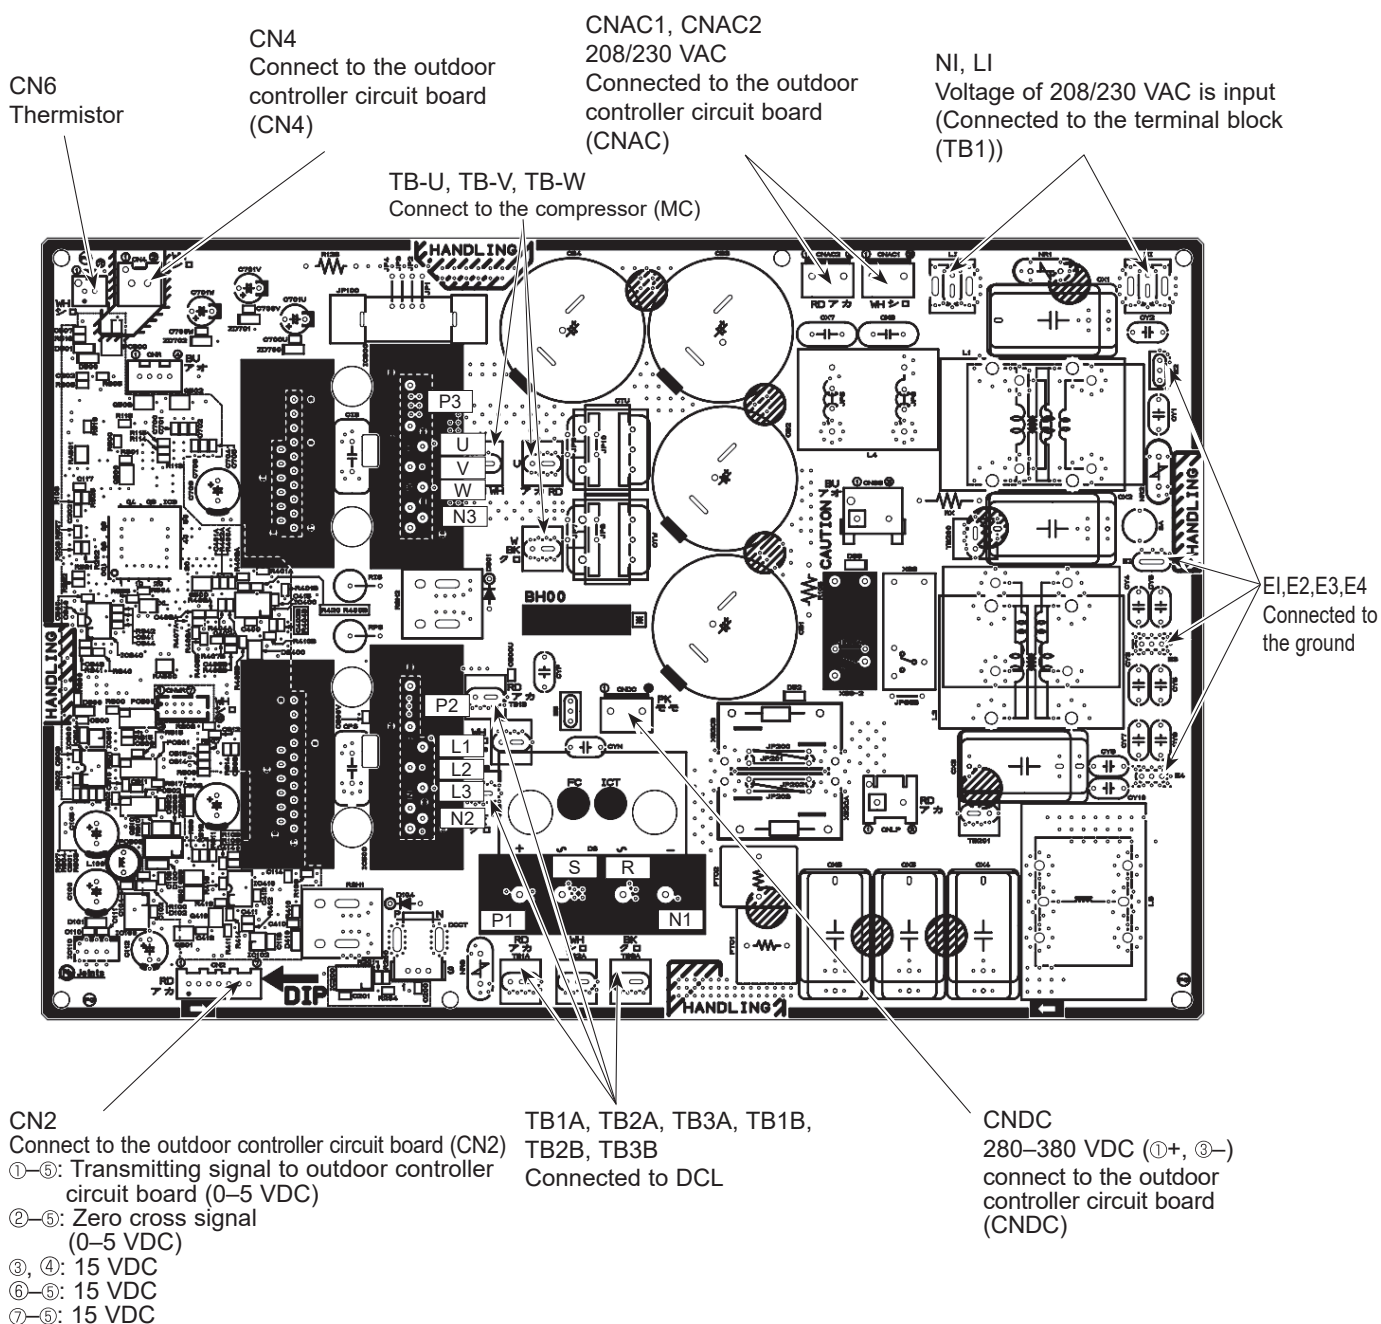

## 10-9. FUNCTION OF SWITCHES, CONNECTORS AND JUMPERS

### (1) Function of switches

The black square (■) indicates a switch position.

| Type of switch | Switch      | No. | Function                                    | Action by the switch operation                                                          |                                                                                         | Effective timing                                                                        |                                                                                          |                      |
|----------------|-------------|-----|---------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------------|
|                |             |     |                                             | ON                                                                                      | OFF                                                                                     |                                                                                         |                                                                                          |                      |
| DIP switch     | SW1         | 1   | Manual defrost*                             | Start                                                                                   | Normal                                                                                  | When compressor is working in heating operation.*                                       |                                                                                          |                      |
|                |             | 2   | Abnormal history clear                      | Clear                                                                                   | Normal                                                                                  | off or operating                                                                        |                                                                                          |                      |
|                |             | 3   | Refrigerant address setting                 | <br>0  | <br>1  | <br>2  | <br>3  | When power supply ON |
|                |             | 4   |                                             | <br>4  | <br>5  | <br>6  | <br>7  |                      |
|                |             | 5   |                                             | <br>8  | <br>9  | <br>10 | <br>11 |                      |
|                |             | 6   |                                             | <br>12 | <br>13 | <br>14 | <br>15 |                      |
|                | SW4         | 1   | Test run                                    | Operating                                                                               | OFF                                                                                     | Under suspension                                                                        |                                                                                          |                      |
|                |             | 2   | Test run mode setting                       | Heating                                                                                 | Cooling                                                                                 |                                                                                         |                                                                                          |                      |
|                | SW8         | 1   | Use of existing pipe                        | Used                                                                                    | Not used                                                                                | Always                                                                                  |                                                                                          |                      |
|                |             | 2   | No function                                 | —                                                                                       | —                                                                                       | —                                                                                       |                                                                                          |                      |
|                |             | 3   | Separate indoor/outdoor unit power supplies | Used                                                                                    | Not used                                                                                | When power supply ON                                                                    |                                                                                          |                      |
|                | Push switch | SWP |                                             | Pump down                                                                               | Start                                                                                   | Normal                                                                                  | Under suspension                                                                         |                      |

\*Manual defrost should be done as follows;

① Change the DIP SW1-1 on the outdoor controller board from OFF to ON.

② Manual defrost will start by the above operation ① if all these conditions written below are satisfied.

- Heat mode setting
- 10 minutes have passed since compressor started operating or previous manual defrost finished.
- Pipe temperature is less than or equal to 46°F [8°C].

Manual defrost will finish if certain conditions have been satisfied.

Manual defrost can be done if above conditions have been satisfied when DIP SW1-1 is changed from OFF to ON.

After DIP SW1-1 is changed from OFF to ON, there is no problem if DIP SW1-1 is left ON or changed to OFF again.

This depends on the service conditions.

Continue to the next page.

| Type of Switch | Switch | No.            | Function                           | Action by the switch operation                                                                                                                                                                                                                                                                                                                                                                                                                                         |                  | Effective timing     |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|----------------|--------|----------------|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------------|--|-------------------------------------------------------------------------------------------------|-----|----------------|-----------------------------------------------------------------------------------------------|----------------|-----------------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------------------|
|                |        |                |                                    | ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | OFF              |                      |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
| DIP switch     | SW5    | 1              | No function                        | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | —                | —                    |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 2              | Power failure automatic recovery*2 | Auto recovery                                                                                                                                                                                                                                                                                                                                                                                                                                                          | No auto recovery | When power supply ON |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 3,4,5,6        | No function                        | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | —                | —                    |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                | SW7*4  | 1              | Model select*3                     | Demand function                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Low noise mode   | Always               |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 2              | No function                        | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | —                | —                    |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 3              | Max. Hertz setting (cooling)       | Max. Hertz (cooling) × 0.8                                                                                                                                                                                                                                                                                                                                                                                                                                             | Normal           | Always               |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 4              | Max. Hertz setting (heating)       | Max. Hertz (heating) × 0.8                                                                                                                                                                                                                                                                                                                                                                                                                                             | Normal           | Always               |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 5              | No function                        | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | —                | —                    |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 6              | Defrost setting                    | For high humidity                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Normal           | Always               |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                | SW9    | 1              | No function                        | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | —                | —                    |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 2              | No function                        | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | —                | —                    |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 3,4            | No function                        | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | —                | —                    |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                | SW6    | 1              | Model select                       | <table><tr><th>MODEL</th><th>SW6</th></tr><tr><td>NTXSKH24A112AA</td><td>ON<br/>OFF</td></tr><tr><td>NTXSKH30A112AA</td><td>ON<br/>OFF</td></tr><tr><td>NTXSKH36A112AA</td><td>ON<br/>OFF</td></tr></table> |                  |                      |  | MODEL                                                                                           | SW6 | NTXSKH24A112AA | ON<br>OFF  | NTXSKH30A112AA | ON<br>OFF  | NTXSKH36A112AA | ON<br>OFF  |
|                |        | MODEL          |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  | SW6                                                                                             |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | NTXSKH24A112AA |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  | ON<br>OFF    |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | NTXSKH30A112AA |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  | ON<br>OFF    |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | NTXSKH36A112AA |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  | ON<br>OFF  |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 2              |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 3              |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
|                |        | 4              |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
| 5              |        |                |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
| 6              |        |                |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
| 7              |        |                |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
| 8              |        |                |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |
| SW5            | 6      |                |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                      |  |                                                                                                 |     |                |                                                                                               |                |                                                                                               |                |                                                                                                 |

\*2 “Power failure automatic recovery” can be set by either remote controller or this DIP SW. If one of them is set to ON, “Auto recovery” activates. Please set “Auto recovery” basically by remote controller because all units do not have DIP SW. Please refer to the indoor unit installation manual.

\*3 SW7-1,2 are used for demand control. SW7-1,2 are effective only at the demand control.  
(Refer to next page: Special function (b))

\*4 Please do not use SW7-3-6 usually. Trouble might be caused by the usage condition.

## (2) Function of connector

| Types     | Connector | Function            | Action by open/ short operation |        | Effective timing     |
|-----------|-----------|---------------------|---------------------------------|--------|----------------------|
|           |           |                     | Short                           | Open   |                      |
| Connector | CN31      | Emergency operation | Start                           | Normal | When power supply ON |

## Special function

### (a) Low-level sound priority mode (Local wiring)


Unit enters into Low-level sound priority mode by external signal input setting.

Inputting external signals to the outdoor unit decreases the outdoor unit operation sound 3 to 4 dB lower than that of usual. Adding a commercial timer or on-off switch contactor setting to the CNDM connector which is optional contactor for demand input located on the outdoor unit controller board enables to control compressor operation frequency.

Note: The performance depends on the load of conditioned outdoor temperature.

#### How to wire

##### <Low-level sound priority mode circuit>

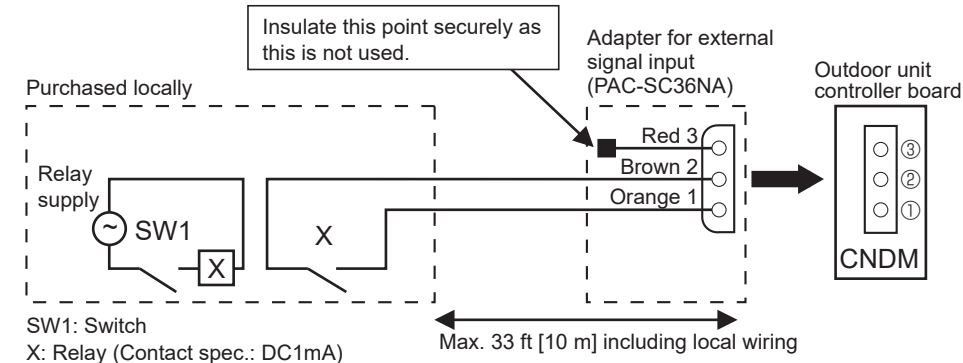

- 1) Make the circuit as shown above with adapter for external signal input (PAC-SC36NA).
- 2) Turn SW1 to on for Low-level sound priority mode.  
Turn SW1 to off to release Low-level sound priority mode and normal operation.


### (b) On demand control (Local wiring)

By performing the following modification, energy consumption can be reduced to 0–100% of the normal consumption.

The demand function will be activated when a commercially available timer or the contact input of an ON/OFF switch is added to the CNDM connector (option) on the control board of the outdoor unit.

- ① Complete the circuit as shown when using the external input adapter (PAC-SC36NA-E). (Option)
- ② By setting SW7-1 on the control board of the outdoor unit, the energy consumption (compared to the normal consumption) can be limited as shown below.

|                 | SW7-1 | SW2 | SW3 | Energy consumption |
|-----------------|-------|-----|-----|--------------------|
| Demand function | ON    | OFF | OFF | 100%               |
|                 |       | ON  | OFF | 75%                |
|                 |       | ON  | ON  | 50%                |
|                 |       | OFF | ON  | 0% (Stop)          |

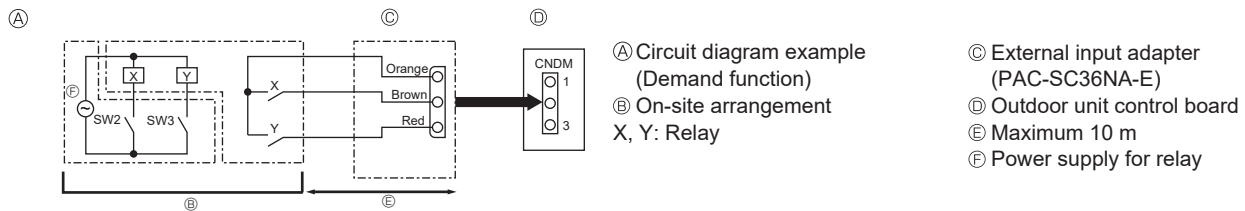

### <Display function of inspection for outdoor unit>

The blinking patterns of both LED1(green) and LED2(red) indicate the types of abnormality when it occurs.

Types of abnormality can be indicated in details by connecting an optional part "A-Control Service Tool (PAC-SK52ST)" to connector CNM on outdoor controller board.

[Display]

#### (1)Normal condition

| Unit condition                | Outdoor controller board |            | A-Control Service Tool |                              |
|-------------------------------|--------------------------|------------|------------------------|------------------------------|
|                               | LED1 (Green)             | LED2 (Red) | Check code             | Indication of the display    |
| When the power is turned on   | Lit                      | Lit        | — ⇔ —                  | Alternately blinking display |
| When unit stops               | Lit                      | Not lit    | 00, etc.               | Operation mode               |
| When compressor is warming up | Lit                      | Not lit    | 08, etc.               |                              |
| When unit operates            | Lit                      | Lit        | C5, H7, etc.           |                              |

#### (2)Abnormal condition

| Indication               |            | Error                                                                                                                                                                           |             |                                                                                                                                                                                                                                               |                         |
|--------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| Outdoor controller board |            | Contents                                                                                                                                                                        | Check code* | Inspection method                                                                                                                                                                                                                             | Detailed reference page |
| LED1 (Green)             | LED2 (Red) |                                                                                                                                                                                 |             |                                                                                                                                                                                                                                               |                         |
| 1 blinking               | 2 blinking | Connector(63H) is open.                                                                                                                                                         | F5          | ① Check if connector (63H) on the outdoor controller board is not disconnected.<br>② Check continuity of pressure switch (63H) by tester.                                                                                                     | P.27                    |
| 2 blinking               | 1 blinking | Miswiring of indoor/outdoor unit connecting wire, excessive number of indoor units (4 units or more)                                                                            | —           | ① Check if indoor/outdoor connecting wire is connected correctly.<br>② Check if 4 or more indoor units are connected to outdoor unit.                                                                                                         | P.27 (EA)               |
|                          |            | Miswiring of indoor/outdoor unit connecting wire (converse wiring or disconnection)                                                                                             | —           | ③ Check if noise entered into indoor/outdoor connecting wire or power supply.                                                                                                                                                                 | P.27 (Eb)               |
|                          |            | Startup time over                                                                                                                                                               | —           | ④ Re-check error by turning off power, and on again.                                                                                                                                                                                          | P.27 (EC)               |
|                          | 2 blinking | Indoor/outdoor unit communication error (signal receiving error) is detected by indoor unit.                                                                                    | E6          | ① Check if indoor/outdoor connecting wire is connected correctly.<br>② Check if noise entered into indoor/outdoor connecting wire or power supply.                                                                                            | **                      |
|                          |            | Indoor/outdoor unit communication error (transmitting error) is detected by indoor unit.                                                                                        | E7          | ③ Check if noise entered into indoor/outdoor controller board.                                                                                                                                                                                | **                      |
|                          |            | Indoor/outdoor unit communication error (signal receiving error) is detected by outdoor unit.                                                                                   | —           | ④ Re-check error by turning off power, and on again.                                                                                                                                                                                          | P.33 (E8)               |
|                          |            | Indoor/outdoor unit communication error (transmitting error) is detected by outdoor unit.                                                                                       | —           |                                                                                                                                                                                                                                               | P.33 (E9)               |
|                          | 3 blinking | Remote controller signal receiving error is detected by remote controller.                                                                                                      | E0          | ① Check if connecting wire of indoor unit or remote controller is connected correctly.                                                                                                                                                        | P.32                    |
|                          |            | Remote controller transmitting error is detected by remote controller.                                                                                                          | E3          | ② Check if noise entered into transmission wire of remote controller.                                                                                                                                                                         | P.33                    |
|                          |            | Remote controller signal receiving error is detected by indoor unit.                                                                                                            | E4          | ③ Re-check error by turning off power, and on again.                                                                                                                                                                                          | P.32                    |
|                          |            | Remote controller transmitting error is detected by indoor unit.                                                                                                                | E5          |                                                                                                                                                                                                                                               | P.33                    |
|                          | 4 blinking | Check code is not defined.                                                                                                                                                      | EF          | ① Check if noise entered into transmission wire of remote controller.<br>② Check if noise entered into indoor/outdoor connecting wire.<br>③ Re-check error by turning off power, and on again.                                                | P.34                    |
|                          | 5 blinking | Serial communication error<br><Communication between outdoor controller board and outdoor power board><br><Communication between outdoor controller board and M-NET P.C. board> | Ed          | ① Check if connector (CN4) on outdoor controller board and outdoor power board is not disconnected.<br>② Check if there is poor connection of connector on outdoor controller board(CNMNT and CNVMNT).<br>③ Check M-NET communication signal. | P.34                    |
|                          |            | Communication error of M-NET system                                                                                                                                             | A0-A8       |                                                                                                                                                                                                                                               | P.36-P.39               |

\*Check code displayed on remote controller

\*\*Refer to service manual for indoor unit.

Continue to the next page.



| Indication               |            | Error                                                                           |             |                                                                                                                                                                                                                                                                                                |                         |
|--------------------------|------------|---------------------------------------------------------------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| Outdoor controller board |            | Contents                                                                        | Check code* | Inspection method                                                                                                                                                                                                                                                                              | Detailed reference page |
| LED1 (Green)             | LED2 (Red) |                                                                                 |             |                                                                                                                                                                                                                                                                                                |                         |
| 3 blinking               | 1 blinking | Abnormality of Discharge temperature (TH4) and Comp. surface temperature (TH33) | U2          | ① Check if stop valves are open.<br>② Check if connectors (TH4, TH33, LEV-A, and LEV-B) on outdoor controller board are not disconnected.                                                                                                                                                      | P.28                    |
|                          |            | Abnormality of superheat due to low discharge temperature                       | U7          | ③ Check if unit is filled with specified amount of refrigerant.<br>④ Measure resistance values among terminals on indoor valve and outdoor linear expansion valve using a tester.                                                                                                              | P.30                    |
|                          | 2 blinking | Abnormal high pressure (High pressure switch 63H worked.)                       | U1          | ① Check if indoor/outdoor units have a short cycle on their air ducts.<br>② Check if connector (63H) (63L) on outdoor controller board is not disconnected.                                                                                                                                    | P.28                    |
|                          |            | Abnormal low pressure (Low pressure switch 63L worked.)                         | UL          | ③ Check if heat exchanger and filter is not dirty.<br>④ Measure resistance values among terminals on linear expansion valve using a tester.                                                                                                                                                    | P.32                    |
|                          | 3 blinking | Abnormality of outdoor fan motor rotational speed                               | U8          | ① Check the outdoor fan motor.<br>② Check if connector (TH3) (T <sub>63HS</sub> ) on outdoor controller board is disconnected.                                                                                                                                                                 | P.30                    |
|                          |            | Protection from overheat operation(TH3)(T <sub>63HS</sub> )                     | Ud          |                                                                                                                                                                                                                                                                                                | P.31                    |
|                          | 4 blinking | Compressor overcurrent breaking (Startup locked)                                | UF          | ① Check if stop valves are open.<br>② Check looseness, disconnection, and converse connection of compressor wiring.                                                                                                                                                                            | P.31                    |
|                          |            | Compressor overcurrent breaking (P.B.)                                          | UP          | ③ Measure resistance values among terminals on compressor using a tester.                                                                                                                                                                                                                      | P.32                    |
|                          |            | Abnormality of current sensor (P.B.)                                            | UH          | ④ Check if outdoor unit has a short cycle on its air duct.                                                                                                                                                                                                                                     | P.31                    |
|                          |            | Abnormality of power module                                                     | U6          |                                                                                                                                                                                                                                                                                                | P.29                    |
|                          | 5 blinking | Open/short of discharge thermistors (TH4) (TH33)                                | U3          | ① Check if connectors (TH3, TH32, TH33, TH4, and TH7/6) on outdoor controller board and connector (CN6) on outdoor power board are not disconnected.                                                                                                                                           | P.29                    |
|                          |            | Open/short of outdoor thermistors (TH3, TH32, TH6, TH7 and TH8)                 | U4          | ② Measure resistance value of outdoor thermistors.                                                                                                                                                                                                                                             | P.29                    |
|                          | 6 blinking | Abnormality of heatsink temperature                                             | U5          | ① Check if indoor/outdoor units have a short cycle on their air ducts.<br>② Measure resistance value of outdoor thermistor (TH8).                                                                                                                                                              | P.29                    |
|                          | 7 blinking | Abnormality of voltage                                                          | U9          | ① Check looseness, disconnection, and converse connection of compressor wiring.<br>② Measure resistance value among terminals on compressor using a tester.<br>③ Check if power supply voltage decreases.                                                                                      | P.30                    |
| 4 blinking               | 1 blinking | Abnormality of room temperature thermistor (TH1)                                | P1          | ① Check if connectors (CN20, CN21, CN29 and CN44) on indoor controller board are not disconnected.                                                                                                                                                                                             | **                      |
|                          |            | Abnormality of pipe temperature thermistor /Liquid (TH2)                        | P2          | ② Measure resistance value of indoor thermistors.                                                                                                                                                                                                                                              | **                      |
|                          |            | Abnormality of pipe temperature thermistor/Condenser-Evaporator                 | P9          |                                                                                                                                                                                                                                                                                                | **                      |
|                          | 2 blinking | Abnormality of drain sensor (DS) Float switch connector open (FS)               | P4          | ① Check if connector (CN31)(CN4F) on indoor controller board is not disconnected.                                                                                                                                                                                                              | **                      |
|                          |            | Indoor drain overflow protection                                                | P5          | ② Measure resistance value of indoor thermistors.<br>③ Measure resistance value among terminals on drain-up machine using a tester.<br>④ Check if drain-up machine works.<br>⑤ Check drain function.                                                                                           | **                      |
|                          | 3 blinking | Freezing (cooling)/overheating (heating) protection                             | P6          | ① Check if indoor unit has a short cycle on its air duct.<br>② Check if heat exchanger and filter is not dirty.<br>③ Measure resistance value on indoor and outdoor fan motors.<br>④ Check if the inside of refrigerant piping is not clogged.                                                 | **                      |
|                          | 4 blinking | Abnormality of pipe temperature                                                 | P8          | ① Check if indoor thermistors(TH2 and TH5) are not disconnected from holder.<br>② Check if stop valve is open.<br>③ Check converse connection of extension pipe. (on plural units connection)<br>④ Check if indoor/outdoor connecting wire is connected correctly.(on plural units connection) | **                      |

\*Check code displayed on remote controller

\*\*Refer to service manual for indoor unit.


# <Outdoor unit operation monitor function>

[When optional part "A-Control Service Tool(PAC-SK52ST)" is connected to outdoor controller board(CNM)]

Digital indicator LED1 displays 2 digit number or code to inform operation condition and the meaning of check code by controlling DIP SW2 on "A-Control Service Tool".

Operation indicator SW2: Indicator change of self-diagnosis

| SW2 setting | Display detail | Explanation for display | Unit |
|-------------|----------------|-------------------------|------|
|-------------|----------------|-------------------------|------|




**<Digital indicator LED1 working details>**  
(Be sure that 1 to 6 in the SW2 are set to OFF.)

(1) Display when the power supply turns ON  
When the power supply turns ON, blinking displays by turns.  
Wait for 4 minutes at the longest.

(2) When the display lights (Normal operation)  
①Operation mode display

LED1



(Lighting)


The tens digit: Operation mode

| Display | Operation Model |
|---------|-----------------|
| O       | OFF / FAN       |
| C       | COOLING / DRY   |
| H       | HEATING         |
| d       | DEFROSTING      |

The ones digit: Relay output

| Display | Warming-up Compressor | Compressor | 4-way valve | Solenoid valve |
|---------|-----------------------|------------|-------------|----------------|
| 0       | —                     | —          | —           | —              |
| 1       | —                     | —          | —           | ON             |
| 2       | —                     | —          | ON          | —              |
| 3       | —                     | —          | ON          | ON             |
| 4       | —                     | ON         | —           | —              |
| 5       | —                     | ON         | —           | ON             |
| 6       | —                     | ON         | ON          | —              |
| 7       | —                     | ON         | ON          | ON             |
| 8       | ON                    | —          | —           | —              |
| A       | ON                    | —          | ON          | —              |

SW2



(Initial setting)

(2)Display during error postponement  
Postponement code is displayed when compressor stops due to the work of protection device.  
Postponement code is displayed while error is being postponed.










(3) When the display blinks  
Inspection code is displayed when compressor stops due to the work of protection devices.

| Display | Inspection unit |
|---------|-----------------|
| 0       | Outdoor unit    |
| 1       | Indoor unit 1   |
| 2       | Indoor unit 2   |





| Display | Contents to be inspected (During operation)                          |
|---------|----------------------------------------------------------------------|
| U1      | Abnormal high pressure (63H worked)                                  |
| U2      | Abnormal high discharge temperature, shortage of refrigerant         |
| U3      | Open/short circuit of discharge thermistor (TH4) (TH33)              |
| U4      | Open/short of outdoor unit thermistors (TH3, TH32, TH6, TH7 and TH8) |
| U5      | Abnormal temperature of heatsink                                     |
| U6      | Abnormality of power module                                          |
| U7      | Abnormality of superheat due to low discharge temperature            |
| U8      | Abnormality in outdoor fan motor                                     |
| Ud      | Overheat protection                                                  |
| UE      | Abnormal pressure of 63HS                                            |
| UF      | Compressor overcurrent interruption (When Comp. locked)              |
| UH      | Current sensor error                                                 |
| UL      | Abnormal low pressure(63L worked)                                    |
| UP      | Compressor overcurrent interruption                                  |
| P1~P8   | Abnormality of indoor units                                          |
| PL      | Abnormal refrigerant circuit                                         |
| A0~A7   | Communication error of M-NET system                                  |

| Display | Contents to be inspected (When power is turned on)                                                   |
|---------|------------------------------------------------------------------------------------------------------|
| F3      | 63L connector(red) is open.                                                                          |
| F5      | 63H connector(yellow) is open.                                                                       |
| E8      | Indoor/outdoor communication error (Signal receiving error) (Outdoor unit)                           |
| E9      | Indoor/outdoor communication error (Transmitting error) (Outdoor unit)                               |
| EA      | Miswiring of indoor/outdoor unit connecting wire, excessive number of indoor units (4 units or more) |
| Eb      | Miswiring of indoor/outdoor unit connecting wire(converse wiring or disconnection)                   |
| EC      | Startup time over                                                                                    |
| E0~E7   | Communication error except for outdoor unit                                                          |








The black square (■) indicates a switch position.

| SW2 setting                                                                        | Display detail                                          | Explanation for display                                                                                                                                                                                                           | Unit         |
|------------------------------------------------------------------------------------|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
|    | Pipe temperature / Liquid (TH3)<br>-40 to 194           | -40 to 194 [-40 to 90°C]<br>(When the coil thermistor detects 0°F [0°C] or below, “-” and temperature are displayed by turns.)<br>Example: When -10°F;<br>0.5 s      0.5 s      2 s<br>-□      → 10      → □□                     | °F [°C]      |
|    | Discharge temperature (TH4)<br>37 to 433                | 37 to 433 [3 to 217°C]<br>(When the discharge thermistor detects 100°F or more, hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 105°F;<br>0.5 s      0.5 s      2 s<br>□1      → 05      → □□ | °F [°C]      |
|    | Output step of outdoor FAN<br>0 to 10                   | 0 to 10                                                                                                                                                                                                                           | Step         |
|    | The number of ON / OFF times of compressor<br>0 to 9999 | 0 to 9999<br>(When the number of times is 100 or more, hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 42500 times (425 × 100 times);<br>0.5 s      0.5 s      2 s<br>□4      → 25      → □□  | 100 times    |
|   | Compressor integrating operation times<br>0 to 9999     | 0 to 9999<br>(When it is 100 hours or more, hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 2450 hours (245 × 10 hours);<br>0.5 s      0.5 s      2 s<br>□4      → 25      → □□               | 10 hours     |
|  | Compressor operating current<br>0 to 50                 | 0 to 50<br>Note: Omit the figures after the decimal fractions.                                                                                                                                                                    | A            |
|  | Compressor operating frequency<br>0 to 255              | 0 to 255<br>(When it is 100 Hz or more, hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 125 Hz;<br>0.5 s      0.5 s      2 s<br>□1      → 25      → □□                                        | Hz           |
|  | LEV-A opening pulse<br>0 to 480                         | 0 to 480<br>(When it is 100 pulse or more, hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 150 pulse;<br>0.5 s      0.5 s      2 s<br>□1      → 50      → □□                                  | Pulse        |
|  | Error postponement code history (1)<br>of outdoor unit  | Postponement code display<br>Blinking: During postponement<br>Lighting: Cancellation of postponement<br>“00” is displayed in the case of no postponement.                                                                         | Code display |
|  | Operation mode on error occurring                       | Operation mode of when operation stops due to error is displayed by setting SW2 like below.<br>(SW2)                                          | Code display |

The black square (■) indicates a switch position.

| SW2 setting                                                                         | Display detail                                                                              | Explanation for display                                                                                                                                                                                                 | Unit         |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
|    | Pipe temperature / Liquid (TH3) on error occurring<br>-40 to 194                            | -40 to 194 [-40 to 90°C]<br>(When the coil thermistor detects 0°F [0°C] or below, “-” and temperature are displayed by turns.)<br>Example: When -15°F;<br>0.5 s      0.5 s      2 s<br>-□      → 15      → □□           | °F [°C]      |
|    | Compressor temperature (TH4) or discharge temperature (TH4) on error occurring<br>37 to 433 | 37 to 433 [3 to 217°C]<br>(When the temperature is 100°F or more, the hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 130°F;<br>0.5 s      0.5 s      2 s<br>□1      → 30      → □□ | °F [°C]      |
|    | Compressor operating current on error occurring<br>0 to 50                                  | 0 to 50                                                                                                                                                                                                                 | A            |
|    | Error history (1) (latest)<br>Alternate display of abnormal unit number and code            | When no error history,<br>“0” and “-” are displayed by turns.                                                                                                                                                           | Code display |
|  | Error history (2)<br>Alternate display of error unit number and code                        | When no error history,<br>“0” and “-” are displayed by turns.                                                                                                                                                           | Code display |
|  | Thermostat ON time<br>0 to 999                                                              | 0 to 999<br>(When it is 100 minutes or more, the hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 245 minutes;<br>0.5 s      0.5 s      2 s<br>□2      → 45      → □□                | Minute       |
|                                                                                     | Test run elapsed time<br>0 to 120                                                           | 0 to 120<br>(When it is 100 minutes or more, the hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 105 minutes;<br>0.5 s      0.5 s      2 s<br>□1      → 05      → □□                | Minute       |







The black square (■) indicates a switch position.

| SW2 setting                                                                        | Display detail                                                           | Explanation for display                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Unit            |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|--------------------|---------------------------------------------|------------------------|-------------------------------|-----------------|-----------------|-------------------|-----------------------------------|--------------|
|    | The number of connected indoor units                                     | 0 to 3<br>(The number of connected indoor units are displayed.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Unit            |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
|    | Capacity setting display                                                 | Displayed as an outdoor capacity code<br><table><tr><th>Capacity</th><th>Code</th></tr><tr><td>NTXSKH24</td><td>11</td></tr><tr><td>NTXSKH30</td><td>14</td></tr><tr><td>NTXSKH36</td><td>20</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                              | Capacity        | Code            | NTXSKH24           | 11                                          | NTXSKH30               | 14                            | NTXSKH36        | 20              | Code display      |                                   |              |
| Capacity                                                                           | Code                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
| NTXSKH24                                                                           | 11                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
| NTXSKH30                                                                           | 14                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
| NTXSKH36                                                                           | 20                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
|    | Outdoor unit setting information                                         | <ul style="list-style-type: none"><li>The tens digit (Total display for applied setting)<table><tr><th>Setting details</th><th>Display details</th></tr><tr><td>H·P / Cooling only</td><td>0: H·P                      1: Cooling only</td></tr><tr><td>Single phase / 3 phase</td><td>0: Single phase    2: 3 phase</td></tr></table></li><li>The ones digit<table><tr><th>Setting details</th><th>Display details</th></tr><tr><td>Defrosting switch</td><td>0: Normal    1: For high humidity</td></tr></table></li></ul> <p>Example: When heat pump, 3 phase and defrosting (normal) are set up, “20” is displayed.</p> | Setting details | Display details | H·P / Cooling only | 0: H·P                      1: Cooling only | Single phase / 3 phase | 0: Single phase    2: 3 phase | Setting details | Display details | Defrosting switch | 0: Normal    1: For high humidity | Code display |
| Setting details                                                                    | Display details                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
| H·P / Cooling only                                                                 | 0: H·P                      1: Cooling only                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
| Single phase / 3 phase                                                             | 0: Single phase    2: 3 phase                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
| Setting details                                                                    | Display details                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
| Defrosting switch                                                                  | 0: Normal    1: For high humidity                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
|  | Indoor pipe temperature/ Liquid (TH2(1))<br>Indoor 1<br>-38 to 190       | -38 to 190 [-39 to 88°C]<br>(When the temperature is 0°F [0°C] or less, “-” and temperature are displayed by turns.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | °F [°C]         |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
|  | Indoor pipe temperature/ Cond. / Eva. (TH5(1))<br>Indoor 1<br>-38 to 190 | -38 to 190 [-39 to 88°C]<br>(When the temperature is 0°F [0°C] or less, “-” and temperature are displayed by turns.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | °F [°C]         |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
|  | Indoor pipe temperature/ Liquid (TH2(2))<br>Indoor 2<br>-38 to 190       | -38 to 190 [-39 to 88°C]<br>(When the temperature is 0°F [0°C] or less, “-” and temperature are displayed by turns.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | °F [°C]         |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
|  | Indoor pipe temperature/ Cond./ Eva. (TH5(2))<br>Indoor 2<br>-38 to 190  | -38 to 190 [-39 to 88°C]<br>(When the temperature is 0°F [0°C] or less, “-” and temperature are displayed by turns.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | °F [°C]         |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |
|  | Indoor room temperature (TH1)<br>46 to 102                               | 46 to 102 [8 to 39°C]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | °F [°C]         |                 |                    |                                             |                        |                               |                 |                 |                   |                                   |              |







The black square (■) indicates a switch position.

| SW2 setting                                                                                                             | Display detail                                                                                                                                     | Explanation for display                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Unit        |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------|--------|----|-------------------|----|--------------------|----|----------------------------|----|-----------------------------------|----|--------------------------------------------------|----|--------------|
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Indoor setting temperature<br>62 to 86                                                                                                             | 62 to 86 [17 to 30°C]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | °F [°C]     |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Outdoor pipe temperature/2-phase (TH6)<br>-38 to 190                                                                                               | -38 to 190 [-39 to 88°C]<br>(When the temperature is 0°F [0°C] or less, “-” and temperature are displayed by turns.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | °F [°C]     |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Outdoor outside temperature (TH7)<br>-38 to 190                                                                                                    | -38 to 190 (-39 to 88°C)<br>(When the temperature is 0°F [0°C] or less, “-” and temperature are displayed by turns.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | °F [°C]     |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Outdoor heatsink temperature (TH8)<br>-40 to 327                                                                                                   | -40 to 327 [-40 to 164°C]<br>(When the temperature is 0°F [0°C] or less, “-” and temperature are displayed by turns.)<br>(When the thermistor detects 100°F or more, hundreds digit, tens digit and ones digit are displayed by turns.)                                                                                                                                                                                                                                                                                                                                                                      | °F [°C]     |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Discharge superheat. SHd<br>0 to 458<br>[Cooling = [Higher temperature of TH4 or TH32] -TH6<br>Heating = [Higher temperature of TH4 or TH32] -TH5] | 0 to 458 [0 to 255°C]<br>(When the temperature is 100°F or more, hundreds digit, tens digit and ones digit are displayed by turns.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | °F [°C]     |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Number of defrost cycles<br>0 to FFFE                                                                                                              | 0 to FFFE (in hexadecimal notation)<br>(When more than FF in hex (255 in decimal), the number is displayed in order of 16 <sup>3</sup> 's and 16 <sup>2</sup> 's, and 16 <sup>1</sup> 's and 16 <sup>0</sup> 's places.<br>Example: When 5000 cycles;<br>0.5 s      0.5 s      2 s<br>□9      → C4      → □□                                                                                                                                                                                                                                                                                                 | 2 cycles    |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Input current of outdoor unit                                                                                                                      | 0 to 500<br>(When it is 100 or more, hundreds digit, tens digit and ones digit are displayed by turns.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 0.1 A       |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | LEV-B opening pulse<br>0 to 480                                                                                                                    | 0 to 480<br>(When it is 100 pulse or more, hundreds digit, tens digit and ones digit are displayed by turns.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Pulse       |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | U9 error detail history (latest)                                                                                                                   | <table><tr><th>Description</th><th>Display</th></tr><tr><td>Normal</td><td>00</td></tr><tr><td>Overvoltage error</td><td>01</td></tr><tr><td>Undervoltage error</td><td>02</td></tr><tr><td>Input current sensor error</td><td>04</td></tr><tr><td>Abnormal power synchronous signal</td><td>08</td></tr><tr><td>PFC error (Overvoltage/Undervoltage/Overcurrent)</td><td>10</td></tr></table> <div>• Display examples for multiple errors:<br/>Overvoltage (01) + Undervoltage (02) = 03<br/>Undervoltage (02) + Power-sync signal error (08) = 0A<br/>L1 phase open error (04) + PFC error (10) = 14</div> | Description | Display | Normal | 00 | Overvoltage error | 01 | Undervoltage error | 02 | Input current sensor error | 04 | Abnormal power synchronous signal | 08 | PFC error (Overvoltage/Undervoltage/Overcurrent) | 10 | Code display |
| Description                                                                                                             | Display                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| Normal                                                                                                                  | 00                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| Overvoltage error                                                                                                       | 01                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| Undervoltage error                                                                                                      | 02                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| Input current sensor error                                                                                              | 04                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| Abnormal power synchronous signal                                                                                       | 08                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |
| PFC error (Overvoltage/Undervoltage/Overcurrent)                                                                        | 10                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |         |        |    |                   |    |                    |    |                            |    |                                   |    |                                                  |    |              |

The black square (■) indicates a switch position.

| SW2 setting                                                                        | Display detail                                                                                                                                                                                                          | Explanation for display                                                                                                                                                                                                                                       | Unit         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
|    | DC bus voltage<br>180 to 760                                                                                                                                                                                            | 180 to 760<br>(When it is 100 V or more, hundreds digit, tens digit and ones digit are displayed by turns.)                                                                                                                                                   | V            |
|    | Capacity save<br>0 to 100<br>When air conditioner is connected to M-NET and capacity save mode is demanded, a value from "0" to "100" is displayed.<br>[When there is no setting of capacity save, "100" is displayed.] | 0 to 100<br>(When the capacity is 100%, hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 100%;<br>0.5 s      0.5 s      2 s<br>□ 1      → 00      → □ □                                                                    | %            |
|    | Error postponement code history (2)<br>of outdoor unit                                                                                                                                                                  | Postponement code display<br>Blinking: During postponement<br>Lighting: Cancellation of postponement<br>"00" is displayed in the case of no postponement.                                                                                                     | Code display |
|    | Error postponement code history (3)<br>of outdoor unit                                                                                                                                                                  | Postponement code display<br>Blinking: During postponement<br>Lighting: Cancellation of postponement<br>"00" is displayed in the case of no postponement.                                                                                                     | Code display |
|  | Error history (3) (Oldest)<br>Alternate display of abnormal unit number and code.                                                                                                                                       | When no error history, "0" and "—" are displayed by turns.                                                                                                                                                                                                    | Code display |
|  | Error thermistor display<br>[When there is no error thermistor, "—" is displayed.]                                                                                                                                      | 3: Liquid pipe temperature (TH3)<br>4: Discharge pipe temperature (TH4)<br>6: 2-phase pipe temperature (TH6)<br>7: Ambient temperature (TH7)<br>8: Heat sink temperature (TH8)<br>32: Suction pipe temperature (TH32)<br>34: Comp. surface temperature (TH33) | Code display |
|  | Operation frequency on error occurring<br>0 to 255                                                                                                                                                                      | 0 to 255<br>(When it is 100 Hz or more, hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 125 Hz;<br>0.5 s      0.5 s      2 s<br>□ 1      → 25      → □ □                                                                  | Hz           |
|  | Fan step on error occurring<br>0 to 10                                                                                                                                                                                  | 0 to 10                                                                                                                                                                                                                                                       | Step         |




The black square (■) indicates a switch position.

| SW2 setting                                                                         | Display detail                                                            | Explanation for display                                                                                                                                                                                                              | Unit    |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | LEV-C opening pulse on error occurring<br>0 to 480                        | 0 to 480<br>(When it is 100 pulse or more, hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 130 pulse;<br>0.5 s      0.5 s      2 s<br>□ 1      → 30      → □ □                                   | Pulse   |
|    | Indoor room temperature (TH1) on error occurring<br>46 to 102             | 46 to 102 [8 to 39°C]                                                                                                                                                                                                                | °F [°C] |
|    | Indoor pipe temperature / Liquid (TH2) on error occurring<br>-38 to 190   | -38 to 190 [-39 to 88°C]<br>(When the temperature is 32°F [0°C] or less, “-” and temperature are displayed by turns.)<br>Example: When -15°F;<br>0.5 s      0.5 s      2 s<br>-□      → 15      → □ □                                | °F [°C] |
|   | Indoor pipe temperature/Cond./Eva. (TH5) on error occurring<br>-38 to 190 | -38 to 190 [-39 to 88°C]<br>(When the temperature is 32°F [0°C] or less, “-” and temperature are displayed by turns.)<br>Example: When -15°F;<br>0.5 s      0.5 s      2 s<br>-□      → 15      → □ □                                | °F [°C] |
|  | Outdoor pipe temperature / 2-phase (TH6) on error occurring<br>-38 to 190 | -38 to 190 [-39 to 88°C]<br>(When the temperature is 32°F [0°C] or less, “-” and temperature are displayed by turns.)<br>Example: When -15°F;<br>0.5 s      0.5 s      2 s<br>-□      → 15      → □ □                                | °F [°C] |
|  | Outdoor ambient temperature (TH7) on error occurring<br>-38 to 190        | -38 to 190 [-39 to 88°C]<br>(When the temperature is 32°F [0°C] or less, “-” and temperature are displayed by turns.)<br>Example: When - 15°F;<br>0.5 s      0.5 s      2 s<br>-□      → 15      → □ □                               | °F [°C] |
|  | Outdoor heatsink temperature (TH8) on error occurring<br>-40 to 392       | -40 to 392 [-40 to 200°C]<br>(When the temperature is 32°F [0°C] or less, “-” and temperature are displayed by turns.)<br>(When the temperature is 100°F or more, hundreds digit, tens digit and ones digit are displayed by turns.) | °F [°C] |

The black square (■) indicates a switch position.

| SW2 setting                                                                                                             | Display detail                                                                                                                                                                                  | Explanation for display                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Unit    |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----------------------------------------|---|-------------------------|---|---------------------------|---------|----------------------------------------|---|----------------------------------------------------------------------------|---|-----------------------------------------------------------------------------|---|--------------------------|---|---------------------------------------------------------------------|--------------|
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Discharge superheat on error occurring SHd<br>0 to 327<br><div><div>Cooling = [Higher temperature of TH4 or TH32] -TH6</div><div>Heating = [Higher temperature of TH4 or TH32] -TH5</div></div> | 0 to 327 [0 to 182°C]<br>(When the temperature is 100°F or more, hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 150°F ; <div><div>0.5 s</div><div>0.5 s</div><div>2 s</div><div>□1</div><div>→50</div><div>→□□</div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | °F [°C] |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Sub cool on error occurring. SC<br>0 to 234<br><div><div>Cooling = TH6 - TH3</div><div>Heating = TH5 - TH2</div></div>                                                                          | 0 to 234 [0 to 130°C]<br>(When the temperature is 100°F or more, hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 115°F; <div><div>0.5 s</div><div>0.5 s</div><div>2 s</div><div>□1</div><div>→15</div><div>→□□</div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | °F [°C] |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Thermo-on time until error stops<br>0 to 999                                                                                                                                                    | 0 to 999<br>(When it is 100 minutes or more, hundreds digit, tens digit and ones digit are displayed by turns.)<br>Example: When 415 minutes; <div><div>0.5 s</div><div>0.5 s</div><div>2 s</div><div>□4</div><div>→15</div><div>→□□</div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Minute  |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Indoor pipe temperature / Liquid (TH2 (3))<br>Indoor 3<br>-38 to 190                                                                                                                            | -38 to 190 [-39 to 88°C]<br>(When the temperature is 0°F [°C] or less, “-” and temperature are displayed by turns.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | °F [°C] |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Indoor pipe temperature / Cond./ Eva. (TH5 (3))<br>Indoor 3<br>-38 to 190                                                                                                                       | -38 to 190 [-39 to 88°C]<br>(When the temperature is 0°F [°C] or less, “-” and temperature are displayed by turns.)<br><br>When there is no indoor unit, “00” is displayed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | °F [°C] |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>123456</div></div> | Controlling status of compressor operating frequency                                                                                                                                            | The following code will be a help to know the operating status of unit.<br>•The tens digit <table><tr><th>Display</th><th>Compressor operating frequency control</th></tr><tr><td>1</td><td>Primary current control</td></tr><tr><td>2</td><td>Secondary current control</td></tr></table> •The ones digit (In this digit, the total number of activated control is displayed.) <table><tr><th>Display</th><th>Compressor operating frequency control</th></tr><tr><td>1</td><td>Preventive control for excessive temperature rise of discharge temperature</td></tr><tr><td>2</td><td>Preventive control for excessive temperature rise of condensing temperature</td></tr><tr><td>4</td><td>Frost preventing control</td></tr><tr><td>8</td><td>Preventive control for excessive temperature rise of radiator panel</td></tr></table> (Example)<br>The following controls are activated.<br>• Primary current control<br>• Preventive control for excessive temperature rise of condensing temperature<br>• Preventive control for excessive temperature rise of heatsink <div>LED<div>18</div></div> | Display | Compressor operating frequency control | 1 | Primary current control | 2 | Secondary current control | Display | Compressor operating frequency control | 1 | Preventive control for excessive temperature rise of discharge temperature | 2 | Preventive control for excessive temperature rise of condensing temperature | 4 | Frost preventing control | 8 | Preventive control for excessive temperature rise of radiator panel | Code display |
| Display                                                                                                                 | Compressor operating frequency control                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |         |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| 1                                                                                                                       | Primary current control                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |         |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| 2                                                                                                                       | Secondary current control                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |         |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| Display                                                                                                                 | Compressor operating frequency control                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |         |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| 1                                                                                                                       | Preventive control for excessive temperature rise of discharge temperature                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |         |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| 2                                                                                                                       | Preventive control for excessive temperature rise of condensing temperature                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |         |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| 4                                                                                                                       | Frost preventing control                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |         |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |
| 8                                                                                                                       | Preventive control for excessive temperature rise of radiator panel                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |         |                                        |   |                         |   |                           |         |                                        |   |                                                                            |   |                                                                             |   |                          |   |                                                                     |              |

The black square (■) indicates a switch position.

| SW2 setting                                                                       | Display detail                                                            | Explanation for display                                                                                                                                                                                                                                                                                                                                                                               | Unit    |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|  | Outdoor suction pipe temperature (TH32)<br>-38 to 190                     | -38 to 190 [-39 to 88°C]<br>(When the temperature is 0°F [0°C] or less, “-” and temperature are displayed by turns.)<br>Example: When -15°C;<br><div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">0.5 s<br/>-□</div> <div style="text-align: center;">0.5 s<br/>→ 15</div> <div style="text-align: center;">2 s<br/>→ □□</div> </div> | °F [°C] |
|  | Indoor pipe temperature / Liquid (TH2 (4))<br>Indoor 4<br>-38 to 190      | -38 to 190 [-39 to 88°C]<br>(When the temperature is 0°F [°C] or less, “-” and temperature are displayed by turns.)                                                                                                                                                                                                                                                                                   | °F [°C] |
|  | Indoor pipe temperature / Cond./ Eva. (TH5 (4))<br>Indoor 4<br>-38 to 190 | -38 to 190 [-39 to 88°C]<br>(When the temperature is 0°F [°C] or less, “-” and temperature are displayed by turns.)<br><br>When there is no indoor unit, “00” is displayed.                                                                                                                                                                                                                           | °F [°C] |

## 11-1. SMOOTH MAINTENANCE

<TAR-4xMAA ("x" represents 0 or later)>

Refer to "15-9. SMOOTH MAINTENANCE" for operation procedure.


Maintenance data, such as the indoor/outdoor unit's heat exchanger temperature and compressor operation current can be displayed with "Smooth maintenance".

**This cannot be executed during test operation.**

**Depending on the combination with the outdoor unit, this may not be supported by some models.**

- Reduces maintenance work drastically.
- Enables you to check operation data of the indoor and outdoor units by remote controller.

Furthermore, use of maintenance stable-operation control that fixes the operating frequency, allows smooth inspection, even for inverter models.

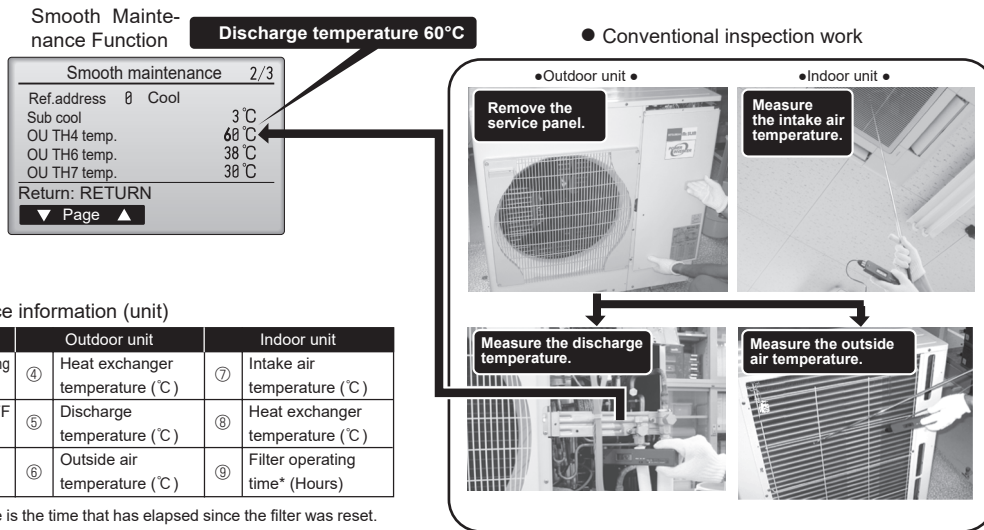

Easy maintenance information (unit)

| Compressor |                                        | Outdoor unit |                                 | Indoor unit |                                 |
|------------|----------------------------------------|--------------|---------------------------------|-------------|---------------------------------|
| ①          | Accumulated operating time (×10 hours) | ④            | Heat exchanger temperature (°C) | ⑦           | Intake air temperature (°C)     |
| ②          | Number of ON/OFF times (×10 times)     | ⑤            | Discharge temperature (°C)      | ⑧           | Heat exchanger temperature (°C) |
| ③          | Operating current (A)                  | ⑥            | Outside air temperature (°C)    | ⑨           | Filter operating time* (Hours)  |

\* The filter operating time is the time that has elapsed since the filter was reset.

## 11-2. Guide for operation condition

### Checkpoints

Enter the temperature differences between ⑤, ④, ⑦ and ⑧ into the graph given below.

Operation state is determined according to the plotted areas on the graph.

For data measurements, set the fan speed to "Hi" before activating maintenance mode.

| Inspection item |                              | Result                                   |                 |
|-----------------|------------------------------|------------------------------------------|-----------------|
| Power supply    | Loose connection             | Breaker                                  | Good            |
|                 |                              | Outdoor Unit                             | Good            |
|                 |                              | Indoor Unit                              | Good            |
|                 | (Insulation resistance)      |                                          | MΩ              |
| Compressor      | (Voltage)                    |                                          | V               |
|                 | ① Accumulated operating time |                                          | Time            |
|                 | ② Number of ON/OFF times     |                                          | Times           |
|                 | ③ Current                    |                                          | A               |
| Outdoor Unit    | Temperature                  | ④ Refrigerant/heat exchanger temperature | COOL °C HEAT °C |
|                 |                              | ⑤ Refrigerant/discharge temperature      | COOL °C HEAT °C |
|                 |                              | ⑥ Air/outside air temperature            | COOL °C HEAT °C |
|                 |                              | (Air/discharge temperature)              | COOL °C HEAT °C |
|                 | Cleanliness                  | Appearance                               | Good            |
|                 |                              | Heat exchanger                           | Good            |
|                 |                              | Sound/vibration                          | None            |
|                 | Indoor Unit                  | ⑦ Air/intake air temperature             | COOL °C HEAT °C |
|                 |                              | (Air/discharge temperature)              | COOL °C HEAT °C |
|                 |                              | ⑧ Refrigerant/heat exchanger temperature | COOL °C HEAT °C |
|                 |                              | ⑨ Filter operating time*                 | Time            |
| Indoor Unit     | Cleanliness                  | Decorative panel                         | Good            |
|                 |                              | Filter                                   | Good            |
|                 |                              | Fan                                      | Good            |
|                 |                              | Heat exchanger                           | Good            |
|                 | Sound/vibration              | Sound/vibration                          | None            |
|                 |                              | Sound/vibration                          | Present         |


\* The filter operating time is the time that has elapsed since the filter was reset.

| Classification | Item                   | Result                                                                    |                 |
|----------------|------------------------|---------------------------------------------------------------------------|-----------------|
| Cool           | Inspection             | Is "D000" displayed stably on the remote controller?                      | Stable Unstable |
|                | Temperature difference | (⑤ Discharge temperature) – (④ Outdoor heat exchanger temperature)        | °C              |
|                |                        | (⑦ Indoor intake air temperature) – (⑧ Indoor heat exchanger temperature) | °C              |
| Heat           | Inspection             | Is "D000" displayed stably on the remote controller?                      | Stable Unstable |
|                | Temperature difference | (⑤ Discharge temperature) – (⑧ Indoor heat exchanger temperature)         | °C              |
|                |                        | (⑧ Indoor heat exchanger temperature) – (⑦ Indoor intake air temperature) | °C              |

Notes:


- Fixed Hz operation may not be possible under the following temperature ranges.
  - In cool mode, outdoor intake air temperature is 40 °C or higher or indoor intake air temperature is 23 °C or lower.
  - In heat mode, outdoor intake air temperature is 20 °C or higher or indoor intake air temperature is 25 °C or lower.
- If the air conditioner is operated at a temperature range other than the ones above but operation is not stabilized after 30 minutes or more have elapsed, carry out inspection.
- In heat mode, the operation state may vary due to frost forming on the outdoor heat exchanger.

Cool mode



(⑤ Discharge temperature) – (④ Outdoor heat exchanger temperature)

Heat mode



(⑤ Discharge temperature) – (⑧ Indoor heat exchanger temperature)

### Result

| Area              | Check item                                                 | Judgement |      |
|-------------------|------------------------------------------------------------|-----------|------|
|                   |                                                            | Cool      | Heat |
| Normal            | Normal operation state                                     |           |      |
| Filter inspection | Filter may be clogged. *1                                  |           |      |
| Inspection A      | Performance has dropped. Detailed inspection is necessary. |           |      |
| Inspection B      | Refrigerant amount is dropping.                            |           |      |
| Inspection C      | Filter or indoor heat exchanger may be clogged.            |           |      |

Note:

The above judgement is just guide based on Japanese standard conditions. It may be changed depending on the indoor and outdoor temperature.

\*1 It may be judged as "Filter inspection" due to the outdoor and indoor temperature, even though it is not clogged.

### 12-1. UNIT FUNCTION SETTING BY THE REMOTE CONTROLLER

Each function can be set as necessary using the remote controller. The setting of function for each unit can only be done by the remote controller. Select function available from the table 1.

(1) Functions available when setting the unit number to 00 (Select 00 referring to ④ setting the indoor unit number.)

<Table 1> Function selections

| Function                         | Settings                                                            | Mode No.<br>Wired remote controller<br>(RF thermostat) | Setting No. | ● : Initial setting<br>(when sent from the factory) | Remarks                                                                 |
|----------------------------------|---------------------------------------------------------------------|--------------------------------------------------------|-------------|-----------------------------------------------------|-------------------------------------------------------------------------|
| Power failure automatic recovery | Not available                                                       | 01<br>(101)                                            | 1           |                                                     | The setting is applied to all the units in the same refrigerant system. |
| Indoor temperature detection     | Available                                                           |                                                        | 2           | ●                                                   |                                                                         |
|                                  | Average data from each indoor unit                                  | 02<br>(-)                                              | 1           | ●                                                   |                                                                         |
|                                  | Data from the indoor unit with remote controllers                   |                                                        | 2           |                                                     |                                                                         |
|                                  | Data from main remote controller                                    |                                                        | 3           |                                                     |                                                                         |
| LOSSNAY connectivity             | Not supported                                                       | 03<br>(103)                                            | 1           | ●                                                   |                                                                         |
|                                  | Supported (indoor unit does not intake outdoor air through LOSSNAY) |                                                        | 2           |                                                     |                                                                         |
|                                  | Supported (indoor unit intakes outdoor air through LOSSNAY)         |                                                        | 3           |                                                     |                                                                         |
| Power supply voltage             | 230V                                                                | 04<br>(104)                                            | 1           | ●                                                   |                                                                         |
|                                  | 208V                                                                |                                                        | 2           |                                                     |                                                                         |
| Frost prevention temperature     | 36°F [2°C] (Normal)                                                 | 15<br>(115)                                            | 1           | ●                                                   |                                                                         |
|                                  | 37°F [3°C]                                                          |                                                        | 2           |                                                     |                                                                         |
| Humidifier control               | When the compressor operates, the humidifier also operates.         | 16<br>(116)                                            | 1           | ●                                                   |                                                                         |
|                                  | When the fan operates, the humidifier also operates.                |                                                        | 2           |                                                     |                                                                         |
| Change of defrosting control     | Standard                                                            | 17<br>(117)                                            | 1           | ●                                                   |                                                                         |
|                                  | For high humidity                                                   |                                                        | 2           |                                                     |                                                                         |

<Table 2> Meaning of "Function setting"  
Mode 02: indoor temperature detecting

| No.  | Indoor temperature(ta)=                                                     |                 | Diagram 1: Average data from all indoor units (A and B) | Diagram 2: Data from indoor unit B (A and B) | Diagram 3: Data from indoor unit A (A) | Diagram 4: Data from main remote controller (C) |
|------|-----------------------------------------------------------------------------|-----------------|---------------------------------------------------------|----------------------------------------------|----------------------------------------|-------------------------------------------------|
| No.1 | Average data of the sensor on all the indoor units                          | Initial setting | ta=(A+B)/2                                              | ta=(A+B)/2                                   | ta=A                                   | ta=A                                            |
| No.2 | Data of the sensor on the indoor unit that connected with remote controller | Initial setting | ta=A                                                    | ta=B                                         | ta=A                                   | ta=A                                            |
| No.3 | Data of the sensor on main remote controller                                | Initial setting | ta=C                                                    | ta=C                                         | ta=C                                   | ta=C                                            |

- (2) Functions available when setting the unit number to 01-03 or AL (07 in the case of the IR wireless remote controller)
- When setting functions for an indoor unit in an independent system, set the unit number to 01 referring to ④ setting the indoor unit number.
  - When setting functions for a simultaneous twin indoor unit system, set the unit number to 01 to 03 for each indoor unit in the case of selecting different functions for each unit referring to ④ setting the indoor unit number.
  - When setting the same functions for an entire simultaneous Twin-indoor unit system, set refrigerant address to AL (07 in the case of the IR wireless remote controller) referring to ④ setting the indoor unit number.

<Table 3> Available functions and settings

| Function                                              | Settings                                                                                                             | Mode No.<br><br>Wired remote controller (RF thermostat) | Setting No. | ● : Initial setting (Factory setting) |                          | Check |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------|---------------------------------------|--------------------------|-------|
|                                                       |                                                                                                                      |                                                         |             | Ceiling suspended                     | Multi position           |       |
|                                                       |                                                                                                                      |                                                         |             | TPEAD·AA<br>APEAD·AA                  | NTXAMT*AA<br>NAXAMT*AA   |       |
| Filter sign                                           | 100h                                                                                                                 | 07<br>(107)                                             | 1           |                                       |                          |       |
|                                                       | 2500h                                                                                                                |                                                         | 2           |                                       |                          |       |
|                                                       | No filter sign indicator                                                                                             |                                                         | 3           | ●                                     | ●                        |       |
| External static pressure                              | 5/15/35/50Pa<br>(0.02/0.06/0.14/0.20in.WG)                                                                           | 08<br>(108)                                             |             | Refer to the table below              | Refer to the table below |       |
|                                                       |                                                                                                                      | 10<br>(110)                                             |             | Refer to the table below              | Refer to the table below |       |
| Heater control *2                                     | No heater present                                                                                                    | 11<br>(111)                                             | 1           | ●                                     | ●                        |       |
|                                                       | Heater present                                                                                                       |                                                         | 2           |                                       |                          |       |
|                                                       | NTXDKS / NAXDKS:<br>Set temp -4.5°F ON<br>TPEAD / APEAD, NTXAMT / NAXAMT:<br>Heater not operation in Defrost/Error   | 23<br>(123)                                             | 1           | ●                                     | ●                        |       |
|                                                       | NTXDKS / NAXDKS:<br>Set temp -1.8°F ON<br>TPEAD / APEAD, NTXAMT / NAXAMT:<br>Heater not operation in Defrost/Error*4 |                                                         | 2           |                                       |                          |       |
|                                                       |                                                                                                                      |                                                         |             |                                       |                          |       |
| Set temperature in heating mode *3                    | Available                                                                                                            | 24<br>(124)                                             | 1           | ●                                     | ●                        |       |
|                                                       | Not available                                                                                                        |                                                         | 2           |                                       |                          |       |
| Fan speed during the heating thermo OFF               | Extra low                                                                                                            | 25<br>(125)                                             | 1           | ●                                     | ●                        |       |
|                                                       | Stop                                                                                                                 |                                                         | 2           |                                       |                          |       |
|                                                       | Set fan speed                                                                                                        |                                                         | 3           |                                       |                          |       |
| Fan speed during the cooling thermo OFF               | Set fan speed                                                                                                        | 27<br>(127)                                             | 1           | ●                                     | ●                        |       |
|                                                       | Stop                                                                                                                 |                                                         | 2           |                                       |                          |       |
| Detection of abnormality of the pipe temperature (P8) | Available                                                                                                            | 28<br>(128)                                             | 1           |                                       |                          |       |
|                                                       | Not available                                                                                                        |                                                         | 2           | ●                                     | ●                        |       |

\*2 For the detail of Heater control, refer to the service manual.

\*3 4 degC (7.2 degF) up

\*4 Depend on the error, heater may not operate please refer to NTXAMT\*AA / NAXAMT\*AA service manual.

External static pressure setting for NTXAMT\*AA / NAXAMT\*AA (Vertical, Horizontal left, Horizontal right position\*).

| External static pressure | Setting No. |             | ● : Initial setting (Factory setting) | Check |
|--------------------------|-------------|-------------|---------------------------------------|-------|
|                          | Mode No. 08 | Mode No. 10 |                                       |       |
| 75Pa (0.3in.WG)          | 1           | 1           |                                       |       |
| 125Pa (0.5in.WG)         | 2           | 1           | ●                                     |       |
| 200Pa (0.8in.WG)         | 3           | 1           |                                       |       |

\* Regarding to down flow setting, please refer to down flow kit installation manual.

External static pressure setting for TPEAD / APEAD.

| External static pressure | Setting No. |             | ● : Initial setting (Factory setting) | Check |
|--------------------------|-------------|-------------|---------------------------------------|-------|
|                          | Mode No. 08 | Mode No. 10 |                                       |       |
| 35Pa (0.14in.WG)         | 2           | 1           |                                       |       |
| 50Pa (0.20in.WG)         | 3           | 1           | ●                                     |       |
| 70Pa (0.28in.WG)         | 1           | 2           |                                       |       |
| 100Pa (0.40in.WG)        | 2           | 2           |                                       |       |
| 150Pa (0.60in.WG)        | 3           | 2           |                                       |       |

## 12-2. SELECTING FUNCTIONS USING THE REMOTE CONTROLLER

Refer to "15-3. SERVICE MENU" and "15-5. FUNCTION SETTING" when selecting functions.

### 13-1. HOW TO "MONITOR THE OPERATION DATA"

Refer to "15-10. REQUEST CODE" when monitoring the operation data.

### 13-2. REQUEST CODE LIST

Certain indoor/outdoor combinations do not have the request code function; therefore, no request codes are displayed.


| Request code | Request content                                                                    | Description<br>(Display range)                    | Unit      | Remarks                                                       |
|--------------|------------------------------------------------------------------------------------|---------------------------------------------------|-----------|---------------------------------------------------------------|
| 0            | Operation state                                                                    | Refer to 13-2-1. Detail Contents in Request Code. | —         |                                                               |
| 1            | Compressor-Operating current (rms)                                                 | 0 – 50                                            | A         |                                                               |
| 2            | Compressor-Accumulated operating time                                              | 0 – 9999                                          | 10 hours  |                                                               |
| 3            | Compressor-Number of operation times                                               | 0 – 9999                                          | 100 times |                                                               |
| 4            | Discharge temperature (TH4)                                                        | 37 – 327                                          | °F        |                                                               |
| 5            | Outdoor unit - Liquid pipe 1 temperature (TH3)                                     | –40 – 194                                         | °F        |                                                               |
| 6            | Outdoor unit - Liquid pipe 2 temperature                                           | –40 – 194                                         | °F        |                                                               |
| 7            | Outdoor unit-2-phase pipe temperature (TH6)                                        | –38 – 190                                         | °F        |                                                               |
| 8            | Outdoor suction pipe temperature (TH32)                                            | –38 – 190                                         | °F        |                                                               |
| 9            | Outdoor unit-Ambient air temperature (TH7)                                         | –38 – 190                                         | °F        |                                                               |
| 10           | Outdoor unit-Heatsink temperature (TH8)                                            | –40 – 327                                         | °F        |                                                               |
| 11           |                                                                                    |                                                   |           |                                                               |
| 12           | Discharge superheat (SHd)                                                          | 0 – 327                                           | °F        |                                                               |
| 13           | Sub-cool (SC)                                                                      | 0 – 234                                           | °F        |                                                               |
| 14           |                                                                                    |                                                   |           |                                                               |
| 15           |                                                                                    |                                                   |           |                                                               |
| 16           | Compressor-Operating frequency                                                     | 0 – 255                                           | Hz        |                                                               |
| 17           | Compressor-Target operating frequency                                              | 0 – 255                                           | Hz        |                                                               |
| 18           | Outdoor unit-Fan output step                                                       | 0 – 10                                            | Step      |                                                               |
| 19           | Outdoor unit-Fan 1 speed<br>(Only for air conditioners with DC fan motor)          | 0 – 9999                                          | rpm       |                                                               |
| 20           | Outdoor unit-Fan 2 speed<br>(Only for air conditioners with DC fan motor)          | 0 – 9999                                          | rpm       | "0" is displayed if the air conditioner is a single-fan type. |
| 21           |                                                                                    |                                                   |           |                                                               |
| 22           | LEV (A) opening                                                                    | 0 – 500                                           | Pulses    |                                                               |
| 23           | LEV (B) opening                                                                    | 0 – 500                                           | Pulses    |                                                               |
| 24           | LEV (C) opening                                                                    | 0 – 500                                           | Pulses    |                                                               |
| 25           | Primary current                                                                    | 0 – 50                                            | A         |                                                               |
| 26           | DC bus voltage                                                                     | 180 – 370                                         | V         |                                                               |
| 27           |                                                                                    |                                                   |           |                                                               |
| 28           |                                                                                    |                                                   |           |                                                               |
| 29           | Number of connected indoor units                                                   | 0 – 4                                             | Units     |                                                               |
| 30           | Indoor unit-Setting temperature                                                    | 62 – 86                                           | °F        |                                                               |
| 31           | Indoor unit-Intake air temperature <Measured by thermostat>                        | 46 – 102                                          | °F        |                                                               |
| 32           | Indoor unit-Intake air temperature (Unit No. 1)<br><Heat mode-4 degree correction> | 46 – 102                                          | °F        | "0" is displayed if the target unit is not present.           |
| 33           | Indoor unit-Intake air temperature (Unit No. 2)<br><Heat mode-4 degree correction> | 46 – 102                                          | °F        | ↑                                                             |
| 34           | Indoor unit-Intake air temperature (Unit No. 3)<br><Heat mode-4 degree correction> | 46 – 102                                          | °F        | ↑                                                             |
| 35           | Indoor unit-Intake air temperature (Unit No. 4)<br><Heat mode-4 degree correction> | 46 – 102                                          | °F        | ↑                                                             |
| 36           |                                                                                    |                                                   |           |                                                               |
| 37           | Indoor unit - Liquid pipe temperature (Unit No. 1)                                 | –38 – 190                                         | °F        | "0" is displayed if the target unit is not present.           |
| 38           | Indoor unit - Liquid pipe temperature (Unit No. 2)                                 | –38 – 190                                         | °F        | ↑                                                             |
| 39           | Indoor unit - Liquid pipe temperature (Unit No. 3)                                 | –38 – 190                                         | °F        | ↑                                                             |
| 40           | Indoor unit - Liquid pipe temperature (Unit No. 4)                                 | –38 – 190                                         | °F        | ↑                                                             |
| 41           |                                                                                    |                                                   |           |                                                               |
| 42           | Indoor unit-Cond./Eva. pipe temperature (Unit No. 1)                               | –38 – 190                                         | °F        | "0" is displayed if the target unit is not present.           |
| 43           | Indoor unit-Cond./Eva. pipe temperature (Unit No. 2)                               | –38 – 190                                         | °F        | ↑                                                             |
| 44           | Indoor unit-Cond./Eva. pipe temperature (Unit No. 3)                               | –38 – 190                                         | °F        | ↑                                                             |
| 45           | Indoor unit-Cond./Eva. pipe temperature (Unit No. 4)                               | –38 – 190                                         | °F        | ↑                                                             |

| Request code | Request content                                           | Description<br>(Display range)                                                                  | Unit    | Remarks                                                          |
|--------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------|------------------------------------------------------------------|
| 46           |                                                           |                                                                                                 |         |                                                                  |
| 47           |                                                           |                                                                                                 |         |                                                                  |
| 48           | Thermostat ON operating time                              | 0 – 999                                                                                         | Minutes |                                                                  |
| 49           | Test run elapsed time                                     | 0 – 120                                                                                         | Minutes | ◀ Not possible to activate maintenance mode during the test run. |
| 50           | Indoor unit-Control state                                 | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 51           | Outdoor unit-Control state                                | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 52           | Compressor-Frequency control state                        | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 53           | Outdoor unit-Fan control state                            | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 54           | Actuator output state                                     | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 55           | Error content (U9)                                        | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 56           |                                                           |                                                                                                 |         |                                                                  |
| 57           |                                                           |                                                                                                 |         |                                                                  |
| 58           |                                                           |                                                                                                 |         |                                                                  |
| 59           |                                                           |                                                                                                 |         |                                                                  |
| 60           | Signal transmission demand capacity                       | 0 – 255                                                                                         | %       |                                                                  |
| 61           | Contact demand capacity                                   | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 62           | External input state (silent mode, etc.)                  | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 63           |                                                           |                                                                                                 |         |                                                                  |
| 64           |                                                           |                                                                                                 |         |                                                                  |
| 65           |                                                           |                                                                                                 |         |                                                                  |
| 66           |                                                           |                                                                                                 |         |                                                                  |
| 67           |                                                           |                                                                                                 |         |                                                                  |
| 68           |                                                           |                                                                                                 |         |                                                                  |
| 69           |                                                           |                                                                                                 |         |                                                                  |
| 70           | Outdoor unit-Capacity setting display                     | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 71           | Outdoor unit-Setting information                          | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 72           |                                                           |                                                                                                 |         |                                                                  |
| 73           | Outdoor unit-SW1 setting information                      | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 74           | Outdoor unit-SW2 setting information                      | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 75           |                                                           |                                                                                                 |         |                                                                  |
| 76           | Outdoor unit-SW4 setting information                      | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 77           | Outdoor unit-SW5 setting information                      | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 78           | Outdoor unit-SW6 setting information                      | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 79           | Outdoor unit-SW7 setting information                      | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 80           | Outdoor unit-SW8 setting information                      | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 81           | Outdoor unit-SW9 setting information                      | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 82           | Outdoor unit-SW10 setting information                     | Refer to 13-2-1.Detail Contents in Request Code.                                                | –       |                                                                  |
| 83           |                                                           |                                                                                                 |         |                                                                  |
| 84           | M-NET adapter connection (presence/absence)               | "0000": Not connected<br>"0001": Connected                                                      | –       |                                                                  |
| 85           |                                                           |                                                                                                 |         |                                                                  |
| 86           |                                                           |                                                                                                 |         |                                                                  |
| 87           |                                                           |                                                                                                 |         |                                                                  |
| 88           |                                                           |                                                                                                 |         |                                                                  |
| 89           | Display of execution of replace/wash operation            | "0000": Not washed<br>"0001": Washed                                                            | –       |                                                                  |
| 90           | Outdoor unit-Microprocessor version information           | Examples) Ver 5.01 → "0501"                                                                     | Ver     |                                                                  |
| 91           | Outdoor unit-Microprocessor version information (sub No.) | Auxiliary information (displayed after version information)<br>Examples) Ver 5.01 A000 → "A000" | –       |                                                                  |
| 92           |                                                           |                                                                                                 |         |                                                                  |
| 93           |                                                           |                                                                                                 |         |                                                                  |
| 94           |                                                           |                                                                                                 |         |                                                                  |
| 95           |                                                           |                                                                                                 |         |                                                                  |
| 96           |                                                           |                                                                                                 |         |                                                                  |
| 97           |                                                           |                                                                                                 |         |                                                                  |
| 98           |                                                           |                                                                                                 |         |                                                                  |
| 99           |                                                           |                                                                                                 |         |                                                                  |

| Request code | Request content                                                                        | Description<br>(Display range)                                                        | Unit             | Remarks                                                                                                          |
|--------------|----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------|------------------------------------------------------------------------------------------------------------------|
| 100          | Outdoor unit - Error postponement history 1 (latest)                                   | Displays postponement code. (" - - " is displayed if no postponement code is present) | Code             |                                                                                                                  |
| 101          | Outdoor unit - Error postponement history 2 (previous)                                 | Displays postponement code. (" - - " is displayed if no postponement code is present) | Code             |                                                                                                                  |
| 102          | Outdoor unit - Error postponement history 3 (last but one)                             | Displays postponement code. (" - - " is displayed if no postponement code is present) | Code             |                                                                                                                  |
| 103          | Error history 1 (latest)                                                               | Displays error history. (" - - " is displayed if no history is present.)              | Code             |                                                                                                                  |
| 104          | Error history 2 (second to last)                                                       | Displays error history. (" - - " is displayed if no history is present.)              | Code             |                                                                                                                  |
| 105          | Error history 3 (third to last)                                                        | Displays error history. (" - - " is displayed if no history is present.)              | Code             |                                                                                                                  |
| 106          | Abnormal thermistor display<br>(TH3/TH6/TH7/TH8)                                       | 3: TH3<br>6: TH6<br>7: TH7<br>8: TH8<br>0: No thermistor error                        | Sensor<br>number |                                                                                                                  |
| 107          | Operation mode at time of error                                                        | Displayed in the same way as request code "0".                                        | —                |                                                                                                                  |
| 108          | Compressor-Operating current at time of error                                          | 0 – 50                                                                                | A                |                                                                                                                  |
| 109          | Compressor-Accumulated operating time at time of error                                 | 0 – 9999                                                                              | 10 hours         |                                                                                                                  |
| 110          | Compressor-Number of operation times at time of error                                  | 0 – 9999                                                                              | 100 times        |                                                                                                                  |
| 111          | Discharge temperature at time of error                                                 | 37 – 327                                                                              | °F               |                                                                                                                  |
| 112          | Outdoor unit - Liquid pipe 1 temperature (TH3) at time of error                        | –40 – 194                                                                             | °F               |                                                                                                                  |
| 113          | Outdoor unit - Liquid pipe 2 temperature at time of error                              | –40 – 194                                                                             | °F               |                                                                                                                  |
| 114          | Outdoor unit-2-phase pipe temperature (TH6) at time of error                           | –38 – 190                                                                             | °F               |                                                                                                                  |
| 115          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 116          | Outdoor unit-Outside air temperature (TH7) at time of error                            | –38 – 190                                                                             | °F               |                                                                                                                  |
| 117          | Outdoor unit-Heat sink temperature (TH8) at time of error                              | –40 – 327                                                                             | °F               |                                                                                                                  |
| 118          | Discharge super heat (SHd) at time of error                                            | 0 – 327                                                                               | °F               |                                                                                                                  |
| 119          | Sub-cool (SC) at time of error                                                         | 0 – 234                                                                               | °F               |                                                                                                                  |
| 120          | Compressor-Operating frequency at time of error                                        | 0 – 255                                                                               | Hz               |                                                                                                                  |
| 121          | Outdoor unit at time of error<br>· Fan output step                                     | 0 – 10                                                                                | Step             |                                                                                                                  |
| 122          | Outdoor unit at time of error<br>· Fan 1 speed (Only for air conditioners with DC fan) | 0 – 9999                                                                              | rpm              |                                                                                                                  |
| 123          | Outdoor unit at time of error<br>· Fan 2 speed (Only for air conditioners with DC fan) | 0 – 9999                                                                              | rpm              | "0" is displayed if the air conditioner is a single-fan type.                                                    |
| 124          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 125          | LEV (A) opening at time of error                                                       | 0 – 500                                                                               | Pulses           |                                                                                                                  |
| 126          | LEV (B) opening at time of error                                                       | 0 – 500                                                                               | Pulses           |                                                                                                                  |
| 127          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 128          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 129          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 130          | Thermostat ON time until operation stops due to error                                  | 0 – 999                                                                               | Minutes          |                                                                                                                  |
| 131          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 132          | Indoor - Liquid pipe temperature at time of error                                      | –38 – 190                                                                             | °F               | Average value of all indoor units is displayed if the air conditioner consists of 2 or more indoor units (twin). |
| 133          | Indoor-Cond./Eva. pipe temperature at time of error                                    | –38 – 190                                                                             | °F               | Average value of all indoor units is displayed if the air conditioner consists of 2 or more indoor units (twin). |
| 134          | Indoor at time of error<br>· Intake air temperature <Thermostat judge temperature>     | –38 – 190                                                                             | °F               |                                                                                                                  |
| 135          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 136          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 137          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 138          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 139          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 140          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| to           |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 146          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 147          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 148          |                                                                                        |                                                                                       |                  |                                                                                                                  |
| 149          |                                                                                        |                                                                                       |                  |                                                                                                                  |

| Request code | Request content                                          | Description<br>(Display range)                                                                                                                    | Unit     | Remarks                               |
|--------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------------------------|
| 150          | Indoor-Actual intake air temperature                     | -38 – 190                                                                                                                                         | 'F       |                                       |
| 151          | Indoor - Liquid pipe temperature                         | -38 – 190                                                                                                                                         | 'F       |                                       |
| 152          | Indoor-Cond./Eva. pipe temperature                       | -38 – 190                                                                                                                                         | 'F       |                                       |
| 153          |                                                          |                                                                                                                                                   |          |                                       |
| 154          | Indoor-Fan operating time<br>(After filter is reset)     | 0 – 9999                                                                                                                                          | 1 hour   |                                       |
| 155          | Indoor-Total operating time<br>(Fan motor ON time)       | 0 – 9999                                                                                                                                          | 10 hours |                                       |
| 156          |                                                          |                                                                                                                                                   |          |                                       |
| 157          | Indoor fan output value (Sj value)                       | 0 – 255 Fan control data                                                                                                                          | –        | For indoor fan phase control          |
| 158          | Indoor fan output value<br>(Pulsation ON/OFF)            | "00 *** ****" indicates fan control data.                                                                                                         | –        | For indoor fan pulsation control      |
| 159          | Indoor fan output value (duty value)                     | "00 *** ****" indicates fan control data.                                                                                                         | –        | For indoor DC brushless motor control |
| 160          |                                                          |                                                                                                                                                   |          |                                       |
| 161          |                                                          |                                                                                                                                                   |          |                                       |
| 162          | Indoor unit-Model setting information                    | Refer to 13-2-1. Detail Contents in Request Code.                                                                                                 | –        |                                       |
| 163          | Indoor unit-Capacity setting information                 | Refer to 13-2-1. Detail Contents in Request Code.                                                                                                 | –        |                                       |
| 164          | Indoor unit-SW3 information                              | Undefined                                                                                                                                         | –        |                                       |
| 165          | Wireless pair No. (indoor control board side) setting    | Refer to 13-2-1. Detail Contents in Request Code.                                                                                                 | –        |                                       |
| 166          | Indoor unit-SW5 information                              | Undefined                                                                                                                                         | –        |                                       |
| 167          |                                                          |                                                                                                                                                   |          |                                       |
| ~            |                                                          |                                                                                                                                                   |          |                                       |
| 189          |                                                          |                                                                                                                                                   |          |                                       |
| 190          | Indoor unit-Microprocessor version information           | Examples) Ver 5.01 → "0501"                                                                                                                       | Ver      |                                       |
| 191          | Indoor unit-Microprocessor version information (sub No.) | Auxiliary information (displayed after version information)<br>Examples) Ver 5.01 A000 → "A000"                                                   | –        |                                       |
| 192          |                                                          |                                                                                                                                                   |          |                                       |
| ~            |                                                          |                                                                                                                                                   |          |                                       |
| 764          |                                                          |                                                                                                                                                   |          |                                       |
| 765          | Stable operation (Heat mode)                             | This request code is not provided to collect data. It is used to fix the operation state.                                                         |          |                                       |
| 766          | Stable operation (Cool mode)                             | This request code is not provided to collect data. It is used to fix the operation state.                                                         |          |                                       |
| 767          | Stable operation cancellation                            | This request code is not provided to collect data. It is used to cancel the operation state that has been fixed by request codes "765" and "766". |          |                                       |

## 13-2-1. Detail Contents in Request Code



[ Example ) Request code "004"  
Discharge temperature 156°F  
Refrigerant address "00" ]

### [Operation state] (Request code: "0")

Data display

□ □ C 4

Relay output state

Operation mode

Operation mode

| Display | Operation mode |
|---------|----------------|
| 0       | STOP • FAN     |
| C       | COOL • DRY     |
| H       | HEAT           |
| d       | DEFROST        |

Relay output state

| Display | Power currently supplied to compressor | Compressor | Four-way valve | Solenoid valve |
|---------|----------------------------------------|------------|----------------|----------------|
| 0       | —                                      | —          | —              | —              |
| 1       |                                        |            |                | ON             |
| 2       |                                        |            | ON             |                |
| 3       |                                        |            | ON             | ON             |
| 4       |                                        | ON         |                |                |
| 5       |                                        | ON         |                | ON             |
| 6       |                                        | ON         | ON             |                |
| 7       |                                        | ON         | ON             | ON             |
| 8       | ON                                     |            |                |                |
| A       | ON                                     |            | ON             |                |

### [Indoor unit – Control state] (Request code: "50 ")

Data display

\* \* \* \*

Unit No. 4 state

Unit No. 3 state

Unit No. 2 state

Unit No. 1 state

| Display | State                              |
|---------|------------------------------------|
| 0       | Normal                             |
| 1       | Preparing for heat operation.      |
| 2       | —                                  |
| 3       | —                                  |
| 4       | Heater is ON.                      |
| 5       | Anti-freeze protection is ON.      |
| 6       | Overheat protection is ON.         |
| 7       | Requesting compressor to turn OFF. |
| F       | There are no corresponding units.  |

### [Outdoor unit – Control state] (Request code: "51")

| Data display | State                         |
|--------------|-------------------------------|
| 0 0 0 0      | Normal                        |
| 0 0 0 1      | Preparing for heat operation. |
| 0 0 0 2      | Defrost                       |

### [Compressor – Frequency control state] (Request code: "52")

Data display

0 0 \* \*

Frequency control state ②

Frequency control state ①

Frequency control state ①

| Display | Current limit control                  |
|---------|----------------------------------------|
| 0       | No current limit                       |
| 1       | Primary current limit control is ON.   |
| 2       | Secondary current limit control is ON. |

Frequency control state ②

| Display | Discharge temperature overheat prevention | Condensation temperature overheat prevention | Anti-freeze protection control | Heatsink temperature overheat prevention |
|---------|-------------------------------------------|----------------------------------------------|--------------------------------|------------------------------------------|
| 0       |                                           |                                              |                                |                                          |
| 1       | Controlled                                |                                              |                                |                                          |
| 2       |                                           | Controlled                                   |                                |                                          |
| 3       | Controlled                                | Controlled                                   |                                |                                          |
| 4       |                                           |                                              | Controlled                     |                                          |
| 5       | Controlled                                |                                              | Controlled                     |                                          |
| 6       |                                           | Controlled                                   | Controlled                     |                                          |
| 7       | Controlled                                | Controlled                                   | Controlled                     |                                          |
| 8       |                                           |                                              |                                | Controlled                               |
| 9       | Controlled                                |                                              |                                | Controlled                               |
| A       |                                           | Controlled                                   |                                | Controlled                               |
| b       | Controlled                                | Controlled                                   |                                | Controlled                               |
| C       |                                           |                                              | Controlled                     | Controlled                               |
| d       | Controlled                                |                                              | Controlled                     | Controlled                               |
| E       |                                           | Controlled                                   | Controlled                     | Controlled                               |
| F       | Controlled                                | Controlled                                   | Controlled                     | Controlled                               |

### [Fan control state] (Request code: "53")

Data display 

|   |   |   |   |
|---|---|---|---|
| 0 | 0 | * | * |
|---|---|---|---|

Fan step correction value by heatsink temperature overhear prevention control

Fan step correction value by cool condensation temperature overhear prevention control

| Display   | Correction value |
|-----------|------------------|
| - (minus) | - 1              |
| 0         | 0                |
| 1         | +1               |
| 2         | +2               |

### [Actuator output state] (Request code: "54")

Data display 

|   |   |   |   |
|---|---|---|---|
| 0 | 0 | * | * |
|---|---|---|---|

Actuator output state ①

Actuator output state ②

#### Actuator output state ①

| Display | SV1 | Four-way valve | Compressor | Compressor is warming up |
|---------|-----|----------------|------------|--------------------------|
| 0       |     |                |            |                          |
| 1       | ON  |                |            |                          |
| 2       |     | ON             |            |                          |
| 3       | ON  | ON             |            |                          |
| 4       |     |                | ON         |                          |
| 5       | ON  |                | ON         |                          |
| 6       |     | ON             | ON         |                          |
| 7       | ON  | ON             | ON         |                          |
| 8       |     |                |            | ON                       |
| 9       | ON  |                |            | ON                       |
| A       |     | ON             |            | ON                       |
| b       | ON  | ON             |            | ON                       |
| C       |     |                | ON         | ON                       |
| d       | ON  |                | ON         | ON                       |
| E       |     | ON             | ON         | ON                       |
| F       | ON  | ON             | ON         | ON                       |

#### Actuator output state ②

| Display | 52C | SV2 | SS |
|---------|-----|-----|----|
| 0       |     |     |    |
| 1       | ON  |     |    |
| 2       |     | ON  |    |
| 3       | ON  | ON  |    |
| 4       |     |     | ON |
| 5       | ON  |     | ON |
| 6       |     | ON  | ON |
| 7       | ON  | ON  | ON |

### [Error content (U9)] (Request code: "55")

Data display 

|   |   |   |   |
|---|---|---|---|
| 0 | 0 | * | * |
|---|---|---|---|

Error content ①

Error content ②

#### Error content ①

● : Detected

| Display | Overvoltage error | Undervoltage error | L1-phase open error | Power synchronizing signal error |
|---------|-------------------|--------------------|---------------------|----------------------------------|
| 0       |                   |                    |                     |                                  |
| 1       | ●                 |                    |                     |                                  |
| 2       |                   | ●                  |                     |                                  |
| 3       | ●                 | ●                  |                     |                                  |
| 4       |                   |                    | ●                   |                                  |
| 5       | ●                 |                    | ●                   |                                  |
| 6       |                   | ●                  | ●                   |                                  |
| 7       | ●                 | ●                  | ●                   |                                  |
| 8       |                   |                    |                     | ●                                |
| 9       | ●                 |                    |                     | ●                                |
| A       |                   | ●                  |                     | ●                                |
| b       | ●                 | ●                  |                     | ●                                |
| C       |                   |                    | ●                   | ●                                |
| d       | ●                 |                    | ●                   | ●                                |
| E       |                   | ●                  | ●                   | ●                                |
| F       | ●                 | ●                  | ●                   | ●                                |

#### Error content ②

● : Detected

| Display | Converter Fo error | PAM error |
|---------|--------------------|-----------|
| 0       |                    |           |
| 1       | ●                  |           |
| 2       |                    | ●         |
| 3       | ●                  | ●         |

### [Contact demand capacity] (Request code: "61")

Data display 

|   |   |   |   |
|---|---|---|---|
| 0 | 0 | 0 | * |
|---|---|---|---|

 Setting content

Setting content

| Display | Setting value | Setting |       |
|---------|---------------|---------|-------|
|         |               | SW7-1   | SW7-2 |
| 0       | 0%            |         |       |
| 1       | 50%           | ON      |       |
| 2       | 75%           |         | ON    |
| 3       | 100%          | ON      | ON    |

### [External input state] (Request code: "62")

Data display 

|   |   |   |   |
|---|---|---|---|
| 0 | 0 | 0 | * |
|---|---|---|---|

 Input state

Input state

● : Input position

| Display | Contact demand input | Silent mode input | Spare 1 input | Spare 2 input |
|---------|----------------------|-------------------|---------------|---------------|
| 0       |                      |                   |               |               |
| 1       | ●                    |                   |               |               |
| 2       |                      | ●                 |               |               |
| 3       | ●                    | ●                 |               |               |
| 4       |                      |                   | ●             |               |
| 5       | ●                    |                   | ●             |               |
| 6       |                      | ●                 | ●             |               |
| 7       | ●                    | ●                 | ●             |               |
| 8       |                      |                   |               | ●             |
| 9       | ●                    |                   |               | ●             |
| A       |                      | ●                 |               | ●             |
| b       | ●                    | ●                 |               | ●             |
| C       |                      |                   | ●             | ●             |
| d       | ●                    |                   | ●             | ●             |
| E       |                      | ●                 | ●             | ●             |
| F       | ●                    | ●                 | ●             | ●             |

### [Outdoor unit – Capacity setting display] (Request code: "70")

| Data display | Capacity |
|--------------|----------|
| 9            | 12       |
| 10           | 18       |
| 11           | 24       |
| 14           | 30       |
| 20           | 36       |
| 25           | 42       |

### [Outdoor unit – Setting information] (Request code: "71")

Data display 

|   |   |   |   |
|---|---|---|---|
| 0 | 0 | * | * |
|---|---|---|---|

 Setting information ①  
Setting information ②

Setting information ①

| Display | Defrost mode      |
|---------|-------------------|
| 0       | Standard          |
| 1       | For high humidity |

Setting information ②

| Display | Single-/three-phase | Heat pump/cooling only |
|---------|---------------------|------------------------|
| 0       | Single-phase        | Heat pump              |
| 1       |                     | Cooling only           |
| 2       | Three-phase         | Heat pump              |
| 3       |                     | Cooling only           |

**[Outdoor unit switch setting display (SW1 to SW10, except SW3)] Request codes: "73 to 82"**

0: Switch OFF 1: Switch ON

| SW1, SW2, SW6, SW7 |   |   |   |   |   | Data display |
|--------------------|---|---|---|---|---|--------------|
| 1                  | 2 | 3 | 4 | 5 | 6 |              |
| 0                  | 0 | 0 | 0 | 0 | 0 | 00 00        |
| 1                  | 0 | 0 | 0 | 0 | 0 | 00 01        |
| 0                  | 1 | 0 | 0 | 0 | 0 | 00 02        |
| 1                  | 1 | 0 | 0 | 0 | 0 | 00 03        |
| 0                  | 0 | 1 | 0 | 0 | 0 | 00 04        |
| 1                  | 0 | 1 | 0 | 0 | 0 | 00 05        |
| 0                  | 1 | 1 | 0 | 0 | 0 | 00 06        |
| 1                  | 1 | 1 | 0 | 0 | 0 | 00 07        |
| 0                  | 0 | 0 | 1 | 0 | 0 | 00 08        |
| 1                  | 0 | 0 | 1 | 0 | 0 | 00 09        |
| 0                  | 1 | 0 | 1 | 0 | 0 | 00 0A        |
| 1                  | 1 | 0 | 1 | 0 | 0 | 00 0b        |
| 0                  | 0 | 1 | 1 | 0 | 0 | 00 0C        |
| 1                  | 0 | 1 | 1 | 0 | 0 | 00 0d        |
| 0                  | 1 | 1 | 1 | 0 | 0 | 00 0E        |
| 1                  | 1 | 1 | 1 | 0 | 0 | 00 0F        |
| 0                  | 0 | 0 | 0 | 1 | 0 | 00 10        |
| 1                  | 0 | 0 | 0 | 1 | 0 | 00 11        |
| 0                  | 1 | 0 | 0 | 1 | 0 | 00 12        |
| 1                  | 1 | 0 | 0 | 1 | 0 | 00 13        |
| 0                  | 0 | 1 | 0 | 1 | 0 | 00 14        |
| 1                  | 0 | 1 | 0 | 1 | 0 | 00 15        |
| 0                  | 1 | 1 | 0 | 1 | 0 | 00 16        |
| 1                  | 1 | 1 | 0 | 1 | 0 | 00 17        |
| 0                  | 0 | 0 | 1 | 1 | 0 | 00 18        |
| 1                  | 0 | 0 | 1 | 1 | 0 | 00 19        |
| 0                  | 1 | 0 | 1 | 1 | 0 | 00 1A        |
| 1                  | 1 | 0 | 1 | 1 | 0 | 00 1B        |
| 0                  | 0 | 1 | 1 | 1 | 0 | 00 1C        |
| 1                  | 0 | 1 | 1 | 1 | 0 | 00 1D        |
| 0                  | 1 | 1 | 1 | 1 | 0 | 00 1E        |
| 1                  | 1 | 1 | 1 | 1 | 0 | 00 1F        |
| 0                  | 0 | 0 | 0 | 0 | 1 | 00 20        |
| 1                  | 0 | 0 | 0 | 0 | 1 | 00 21        |
| 0                  | 1 | 0 | 0 | 0 | 1 | 00 22        |
| 1                  | 1 | 0 | 0 | 0 | 1 | 00 23        |
| 0                  | 0 | 1 | 0 | 0 | 1 | 00 24        |
| 1                  | 0 | 1 | 0 | 0 | 1 | 00 25        |
| 0                  | 1 | 1 | 0 | 0 | 1 | 00 26        |
| 1                  | 1 | 1 | 0 | 0 | 1 | 00 27        |
| 0                  | 0 | 0 | 1 | 0 | 1 | 00 28        |
| 1                  | 0 | 0 | 1 | 0 | 1 | 00 29        |
| 0                  | 1 | 0 | 1 | 0 | 1 | 00 2A        |
| 1                  | 1 | 0 | 1 | 0 | 1 | 00 2B        |
| 0                  | 0 | 1 | 1 | 0 | 1 | 00 2C        |
| 1                  | 0 | 1 | 1 | 0 | 1 | 00 2D        |
| 0                  | 1 | 1 | 1 | 0 | 1 | 00 2E        |
| 1                  | 1 | 1 | 1 | 0 | 1 | 00 2F        |
| 0                  | 0 | 0 | 0 | 1 | 1 | 00 30        |
| 1                  | 0 | 0 | 0 | 1 | 1 | 00 31        |
| 0                  | 1 | 0 | 0 | 1 | 1 | 00 32        |
| 1                  | 1 | 0 | 0 | 1 | 1 | 00 33        |
| 0                  | 0 | 1 | 0 | 1 | 1 | 00 34        |
| 1                  | 0 | 1 | 0 | 1 | 1 | 00 35        |
| 0                  | 1 | 1 | 0 | 1 | 1 | 00 36        |
| 1                  | 1 | 1 | 0 | 1 | 1 | 00 37        |
| 0                  | 0 | 0 | 1 | 1 | 1 | 00 38        |
| 1                  | 0 | 0 | 1 | 1 | 1 | 00 39        |
| 0                  | 1 | 0 | 1 | 1 | 1 | 00 3A        |
| 1                  | 1 | 0 | 1 | 1 | 1 | 00 3B        |
| 0                  | 0 | 1 | 1 | 1 | 1 | 00 3C        |
| 1                  | 0 | 1 | 1 | 1 | 1 | 00 3D        |
| 0                  | 1 | 1 | 1 | 1 | 1 | 00 3E        |
| 1                  | 1 | 1 | 1 | 1 | 1 | 00 3F        |

0: Switch OFF 1: Switch ON

| SW5 |   |   |   | Data display |
|-----|---|---|---|--------------|
| 1   | 2 | 3 | 4 |              |
| 0   | 0 | 0 | 0 | 00 00        |
| 1   | 0 | 0 | 0 | 00 01        |
| 0   | 1 | 0 | 0 | 00 02        |
| 1   | 1 | 0 | 0 | 00 03        |
| 0   | 0 | 1 | 0 | 00 04        |
| 1   | 0 | 1 | 0 | 00 05        |
| 0   | 1 | 1 | 0 | 00 06        |
| 1   | 1 | 1 | 0 | 00 07        |
| 0   | 0 | 0 | 1 | 00 08        |
| 1   | 0 | 0 | 1 | 00 09        |
| 0   | 1 | 0 | 1 | 00 0A        |
| 1   | 1 | 0 | 1 | 00 0b        |
| 0   | 0 | 1 | 1 | 00 0C        |
| 1   | 0 | 1 | 1 | 00 0d        |
| 0   | 1 | 1 | 1 | 00 0E        |
| 1   | 1 | 1 | 1 | 00 0F        |

0: Switch OFF 1: Switch ON

| SW8 |   |   | Data display |
|-----|---|---|--------------|
| 1   | 2 | 3 |              |
| 0   | 0 | 0 | 00 00        |
| 1   | 0 | 0 | 00 01        |
| 0   | 1 | 0 | 00 02        |
| 1   | 1 | 0 | 00 03        |
| 0   | 0 | 1 | 00 04        |
| 1   | 0 | 1 | 00 05        |
| 0   | 1 | 1 | 00 06        |
| 1   | 1 | 1 | 00 07        |

0: Switch OFF 1: Switch ON

| SW4, SW9, SW10 |   | Data display |
|----------------|---|--------------|
| 1              | 2 |              |
| 0              | 0 | 00 00        |
| 1              | 0 | 00 01        |
| 0              | 1 | 00 02        |
| 1              | 1 | 00 03        |

**[Indoor unit – Model setting information] (Request code: "162")**

Data display

|   |   |   |   |
|---|---|---|---|
| 0 | 0 | * | * |
|---|---|---|---|

See the table on the right.

| Display | Model setting state           | Display | Model setting state           |
|---------|-------------------------------|---------|-------------------------------|
| 00      |                               | 20      |                               |
| 01      |                               | 21      |                               |
| 02      |                               | 22      |                               |
| 03      |                               | 23      |                               |
| 04      | NTXAMT**A112A*/NAXAMT**A112A* | 24      |                               |
| 05      |                               | 25      |                               |
| 06      |                               | 26      |                               |
| 07      |                               | 27      |                               |
| 08      |                               | 28      |                               |
| 09      |                               | 29      |                               |
| 0A      |                               | 2A      |                               |
| 0b      |                               | 2b      |                               |
| 0C      |                               | 2C      |                               |
| 0d      |                               | 2d      |                               |
| 0E      |                               | 2E      |                               |
| 0F      |                               | 2F      |                               |
| 10      |                               | 30      | TPEADA**1AA***/APEADA**1AA*** |
| 11      |                               | 31      |                               |
| 12      |                               | 32      |                               |
| 13      |                               | 33      |                               |
| 14      |                               | 34      |                               |
| 15      |                               | 35      |                               |
| 16      |                               | 36      |                               |
| 17      |                               | 37      |                               |
| 18      |                               | 38      |                               |
| 19      |                               | 39      |                               |
| 1A      |                               | 3A      |                               |
| 1b      |                               | 3b      |                               |
| 1C      |                               | 3C      |                               |
| 1d      |                               | 3d      |                               |
| 1E      |                               | 3E      |                               |
| 1F      |                               | 3F      |                               |

**[Indoor unit – Capacity setting information] (Request code: "163")**

Data display

|   |   |   |   |
|---|---|---|---|
| 0 | 0 | * | * |
|---|---|---|---|

See the table on the right.

| Display | Capacity setting state | Display | Capacity setting state |
|---------|------------------------|---------|------------------------|
| 00      |                        | 10      | 42                     |
| 01      |                        | 11      |                        |
| 02      |                        | 12      |                        |
| 03      |                        | 13      |                        |
| 04      |                        | 14      |                        |
| 05      |                        | 15      |                        |
| 06      | 12                     | 16      |                        |
| 07      |                        | 17      |                        |
| 08      |                        | 18      |                        |
| 09      | 18                     | 19      |                        |
| 0A      |                        | 1A      |                        |
| 0b      | 24                     | 1b      |                        |
| 0C      |                        | 1C      |                        |
| 0d      | 30                     | 1d      |                        |
| 0E      |                        | 1E      |                        |
| 0F      | 36                     | 1F      |                        |

**[Wireless pair No. (indoor control board side) setting] (Request code: "165")**

Data display





|   |   |   |   |
|---|---|---|---|
| 0 | 0 | * | * |
|---|---|---|---|




See the table on the right.

| Display | Pair No. setting state      |
|---------|-----------------------------|
| 00      | No. 0                       |
| 01      | No. 1 J41 disconnected      |
| 02      | No. 2 J42 disconnected      |
| 03      | No. 3 J41, J42 disconnected |

## NTXSKH24A112AA

—————> : Indicates the visible parts in the photos/figures.
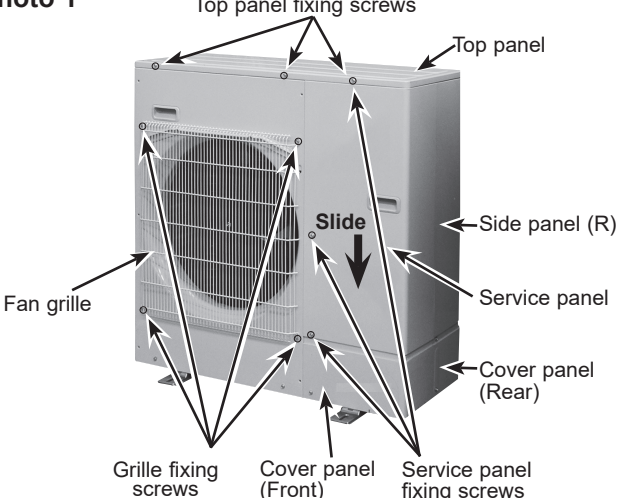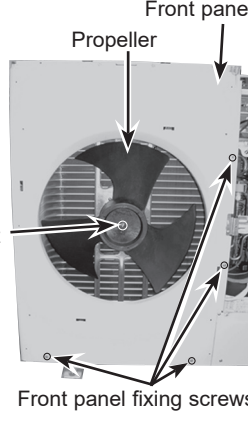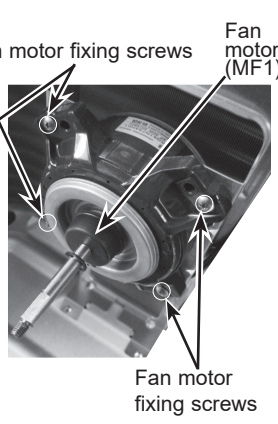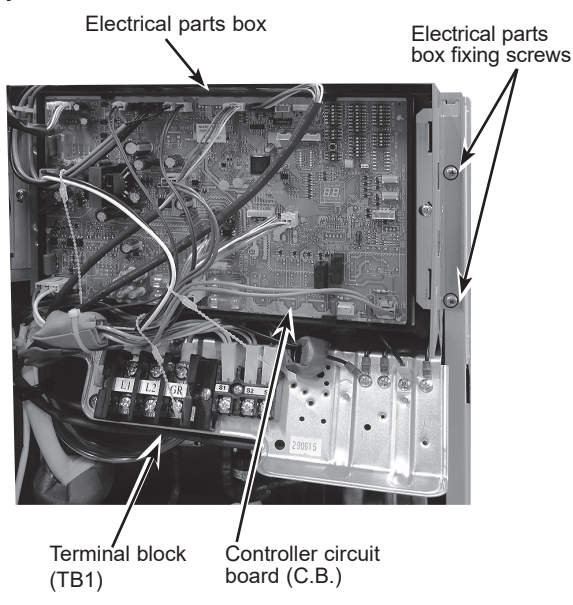
| OPERATING PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | PHOTOS/FIGURES                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>1. Removing the service panel and top panel</b></p> <p>(1) Remove 3 service panel fixing screws (5 × 12) and slide the hook on the right downward to remove the service panel.</p> <p>(2) Remove screws (3 for front, 3 for rear/5 × 12) of the top panel and remove it.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <p><b>Photo 1</b></p>                                                                                                                                                                                                                                                                        |
| <p><b>2. Removing the fan motor (MF1)</b></p> <p>(1) Remove the service panel. (See Photo 1)</p> <p>(2) Remove the top panel. (See Photo 1)</p> <p>(3) Remove 4 fan grille fixing screws (5 × 12) to detach the fan grille. (See Photo 1)</p> <p>(4) Remove a nut (for right handed screw of M6) to detach the propeller. (See Photo 2)</p> <p>(5) Disconnect the connector CNF1 on controller circuit board in electrical parts box.</p> <p>(6) Remove 4 fan motor fixing screws (5 × 20) to detach the fan motor. (See Photo 3)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <div style="display: flex; justify-content: space-around;"> <div data-bbox="837 851 1141 1330"> <p><b>Photo 2</b></p>  </div> <div data-bbox="1141 851 1520 1330"> <p><b>Photo 3</b></p>  </div> </div> |
| <p><b>3. Removing the electrical parts box</b></p> <p>(1) Remove the service panel. (See Photo 1)</p> <p>(2) Remove the top panel. (See Photo 1)</p> <p>(3) Disconnect the indoor/outdoor connecting wire from terminal block.</p> <p>(4) Disconnect the connector CNF1, SV2, LEV-A and LEV-B on the controller circuit board.</p> <p>&lt;Symbols on the board&gt;</p> <ul style="list-style-type: none"> <li>• CNF1: Fan motor</li> <li>• LEV-A, LEV-B: LEV</li> <li>• SV2: Base Heater</li> </ul> <p>(5) Disconnect the pipe-side connections of the following parts.</p> <ul style="list-style-type: none"> <li>• Thermistor &lt;Liquid&gt; (TH3)</li> <li>• Thermistor &lt;Discharge&gt; (TH4)</li> <li>• Thermistor &lt;2-phase pipe, Ambient&gt; (TH7/6)</li> <li>• High pressure switch (63H)</li> <li>• 4-way valve coil (21S4)</li> <li>• Thermistor &lt;Comp. surface&gt; (TH33)</li> </ul> <p>(6) Remove the terminal cover and disconnect the compressor lead wire.</p> <p>(7) Remove an electrical parts box fixing screw (4 × 10) and detach the electrical parts box by pulling it upward. The electrical parts box is fixed with 2 hooks on the left and 1 hook on the right.</p> | <p><b>Photo 4</b></p>                                                                                                                                                                                                                                                                      |
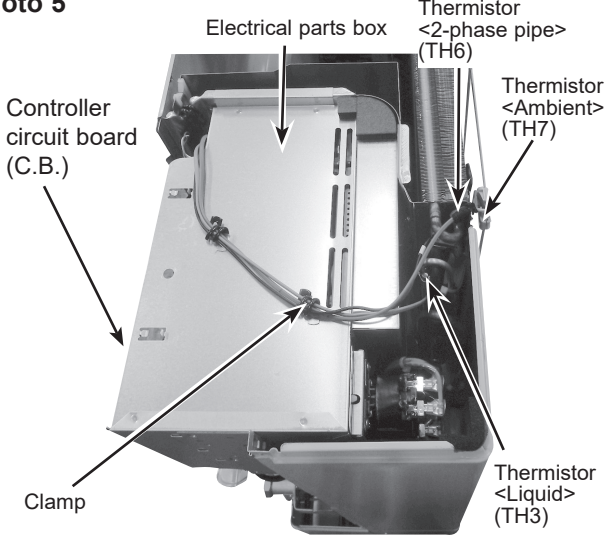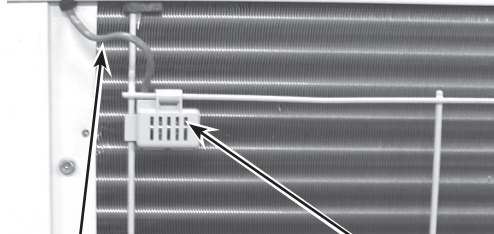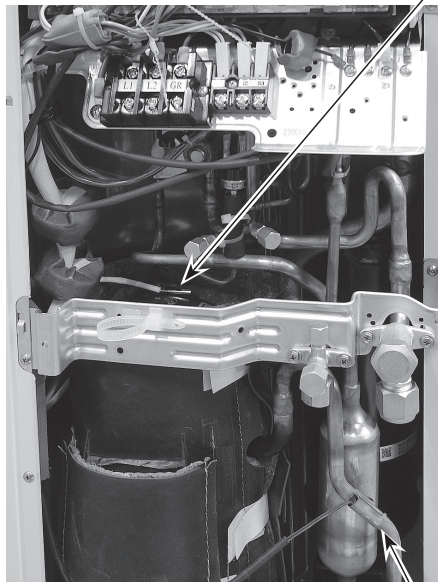
| OPERATING PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | PHOTOS/FIGURES                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>4. Removing the thermistor &lt;Liquid&gt; (TH3) and thermistor &lt;2-phase pipe&gt; (TH6)</b></p> <ol style="list-style-type: none"> <li>(1) Remove the service panel. (See Photo 1)</li> <li>(2) Remove the top panel. (See Photo 1)</li> <li>(3) Disconnect the connector TH7/6 (red) and TH3 (white) on the controller circuit board in the electrical parts box.</li> <li>(4) Loosen the 2 clamps for the lead wires on the top of the electrical parts box.</li> <li>(5) Pull out the thermistor &lt;2-phase pipe&gt; (TH6) and the thermistor &lt;Liquid&gt; (TH3) from each sensor holders.</li> </ol> <p><b>Note: When replacing thermistor &lt;2-phase pipe&gt; (TH6), replace it together with thermistor &lt;Ambient&gt; (TH7), since they are combined together. Refer to procedure No.5 below to remove thermistor &lt;Ambient&gt;.</b></p> | <p><b>Photo 5</b></p>  <p>Electrical parts box</p> <p>Thermistor &lt;2-phase pipe&gt; (TH6)</p> <p>Thermistor &lt;Ambient&gt; (TH7)</p> <p>Controller circuit board (C.B.)</p> <p>Clamp</p> <p>Thermistor &lt;Liquid&gt; (TH3)</p> |
| <p><b>5. Removing the thermistor &lt;Ambient&gt; (TH7)</b></p> <ol style="list-style-type: none"> <li>(1) Remove the service panel. (See Photo 1)</li> <li>(2) Remove the top panel. (See Photo 1)</li> <li>(3) Disconnect the connector TH7/6 (red) on the controller circuit board in the electrical parts box.</li> <li>(4) Loosen the clamp for the lead wire in the rear of the electrical parts box. (See Photo 5)</li> <li>(5) Pull out the thermistor &lt;Ambient&gt; (TH7) from the sensor holder.</li> </ol> <p><b>Note: When replacing thermistor &lt;Ambient&gt; (TH7), replace it together with thermistor &lt;2-phase pipe&gt; (TH6), since they are combined together. Refer to procedure No.4 above to remove thermistor &lt;2-phase pipe&gt;.</b></p>                                                                                         | <p><b>Photo 6</b></p>  <p>Lead wire of thermistor &lt;Ambient&gt; (TH7)</p> <p>Sensor holder</p>                                                                                                                                  |
| <p><b>6. Removing the thermistor &lt;Discharge&gt; (TH4) and thermistor &lt;Comp. surface&gt; (TH33)</b></p> <ol style="list-style-type: none"> <li>(1) Remove the service panel. (See Photo 1)</li> <li>(2) Disconnect the connectors, TH4 (white) and TH33 (yellow), on the controller circuit board in the electrical parts box.</li> <li>(3) Loosen the clamp for the lead wire in the rear of the electrical parts box. (See Photo 5)</li> <li>(4) Pull out the thermistor &lt;Discharge&gt; (TH4) from the sensor holder.</li> </ol> <p>[Removing the thermistor&lt;Comp. surface&gt; (TH33)]</p> <ol style="list-style-type: none"> <li>(5) Remove the compressor cover (upper) and pull out the thermistor &lt;Comp. surface&gt; (TH33) from the holder of the compressor shell.</li> </ol>                                                            | <p><b>Photo 7</b></p>  <p>Thermistor &lt;Comp.Surface&gt; (TH33)</p> <p>Thermistor &lt;Discharge&gt; (TH4)</p>                                                                                                                   |

## OPERATING PROCEDURE

### 7. Removing the 4-way valve coil (21S4), LEV coil (LEV(A), LEV(B))

- (1) Remove the service panel. (See Photo 1)
- (2) Remove the top panel. (See Photo 1)
- (3) Remove the electrical parts box. (See Photo 4)
- [Removing the 4-way valve coil]**
- (4) Remove 4-way valve coil fixing screw (M4 × 6).
- (5) Remove the 4-way valve coil by sliding the coil toward you.
- (6) Disconnect the connector 21S4 (green) on the controller board in the electrical parts box.

#### **[Removing the LEV coil]**

- (4) Remove the LEV coil by sliding the coil upward.
- (5) Disconnect the connectors, LEV A (white) and LEV B (red), on the controller circuit board in the electrical parts box.

### 8. Removing the 4-way valve

- (1) Remove the service panel. (See Photo 1)
- (2) Remove the top panel. (See Photo 1)
- (3) Remove the electrical parts box. (See Photo 4)
- (4) Remove 3 valve bed fixing screws (4 × 10) and 4 ball valve and stop valve fixing screws (5 × 16) and then remove the valve bed.
- (5) Remove 3 right side panel fixing screws (5 × 12) in the rear of the unit and then remove the right side panel.
- (6) Remove the 4-way valve coil. (See Photo 8)
- (7) Recover refrigerant.
- (8) Remove the welded part of 4-way valve.

**Note 1: Recover refrigerant without spreading it in the air.**

**Note 2: The welded part can be removed easily by removing the right side panel.**

**Note 3: When installing the 4-way valve, cover it with a wet cloth to prevent it from heating (120°C or more), then braze the pipes so that the inside of pipes are not oxidized.**

### 9. Removing the LEV

- (1) Remove the service panel. (See Photo 1)
- (2) Remove the top panel. (See Photo 1)
- (3) Remove the electrical parts box. (See Photo 4)
- (4) Remove 3 valve bed fixing screws (4 × 10) and 4 ball valve and stop valve fixing screws (5 × 16) and then remove the valve bed.
- (5) Remove 3 right side panel fixing screws (5 × 12) in the rear of the unit and then remove the right side panel.
- (6) Remove the LEV.
- (7) Recover refrigerant.
- (8) Remove the welded part of linear expansion valve.

**Note 1: Recover refrigerant without spreading it in the air.**

**Note 2: The welded part can be removed easily by removing the right side panel.**

**Note 3: When installing the LEV, cover it with a wet cloth to prevent it from heating (120°C or more), then braze the pipes so that the inside of pipes are not oxidized.**

## PHOTOS/FIGURES

Photo 8






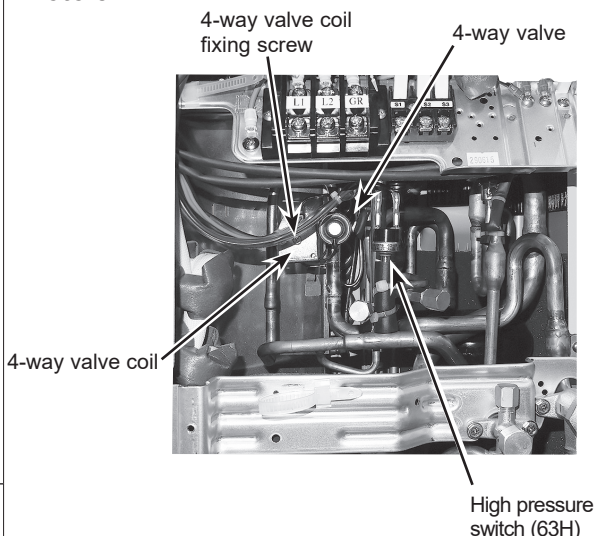


Figure 1

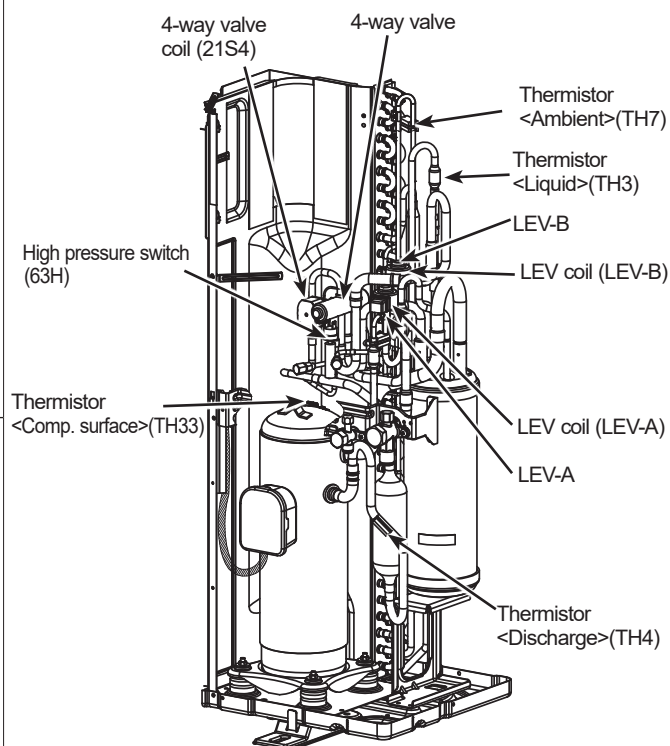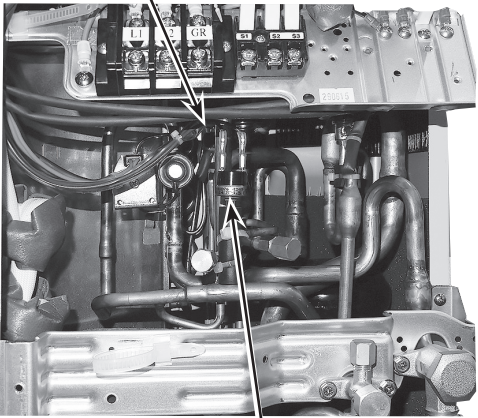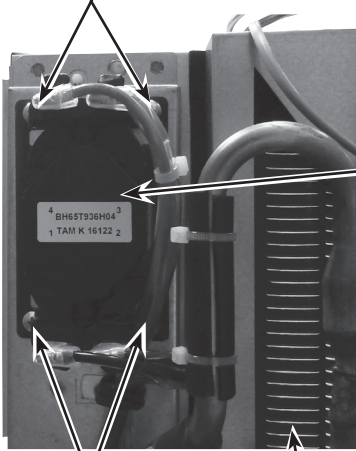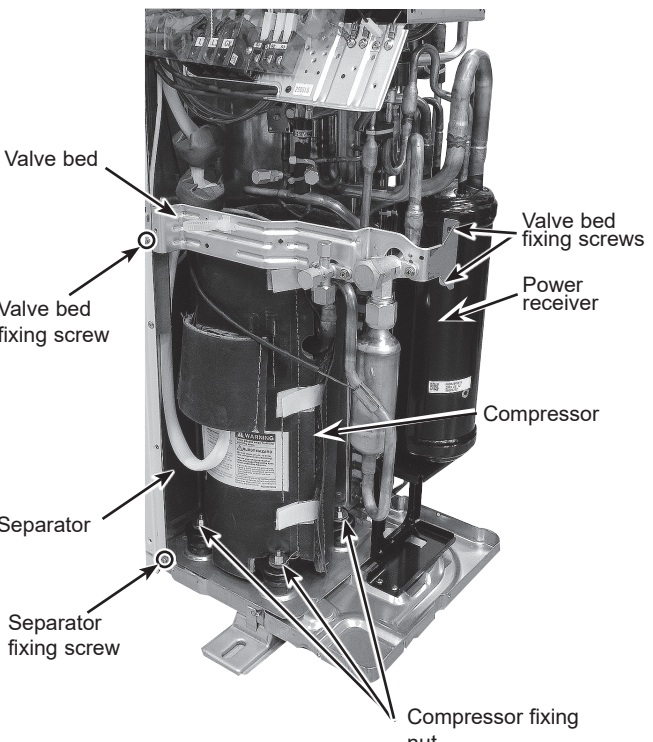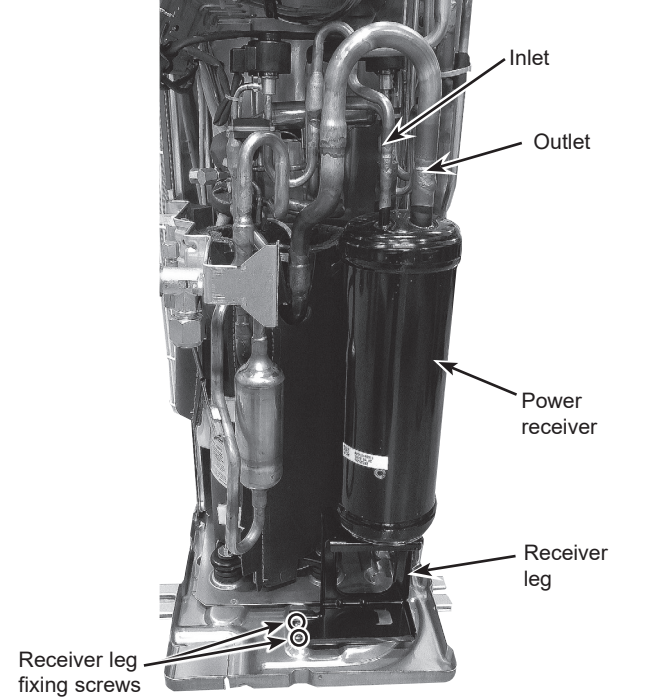

| OPERATING PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | PHOTOS/FIGURES                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>10. Removing the high pressure switch (63H)</b></p> <ol style="list-style-type: none"> <li>(1) Remove the service panel. (See Photo 1)</li> <li>(2) Remove the top panel. (See Photo 1)</li> <li>(3) Remove the electrical parts box. (See Photo 4)</li> <li>(4) Remove 3 right side panel fixing screws (5 × 12) in the rear of the unit and remove the right side panel.</li> <li>(5) Pull out the lead wire of high pressure switch.</li> <li>(6) Recover refrigerant.</li> <li>(7) Remove the welded part of high pressure switch.</li> </ol> <p><b>Note 1:</b> Recover refrigerant without spreading it in the air.</p> <p><b>Note 2:</b> The welded part can be removed easily by removing the right side panel.</p> <p><b>Note 3:</b> When installing the high pressure switch, cover it with a wet cloth to prevent it from heating (100°C or more), then braze the pipes so that the inside of pipes are not oxidized.</p> | <p><b>Photo 9</b></p> <p>Lead wire of high pressure switch</p>  <p>High pressure switch (63H)</p>                                  |
| <p><b>11. Removing the reactor (DCL)</b></p> <ol style="list-style-type: none"> <li>(1) Remove the service panel. (See Photo 1)</li> <li>(2) Remove the top panel. (See Photo 1)</li> <li>(3) Remove the electrical parts box. (See Photo 4)</li> <li>(4) Remove the reactor fixing screws (4 places, 4 × 10)</li> </ol> <p><b>Note:</b> The reactor is attached to the rear of the electrical parts box.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <p><b>Photo10</b></p> <p>Reactor fixing screws</p>  <p>Reactor (DCL)</p> <p>Reactor fixing screws</p> <p>Electrical parts box</p> |

| OPERATING PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | PHOTOS/FIGURES                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <p><b>12. Removing the compressor (MC)</b></p> <ol style="list-style-type: none"> <li>(1) Remove the service panel. (See Photo 1)</li> <li>(2) Remove the top panel. (See Photo 1)</li> <li>(3) Remove 2 front cover panel fixing screws (5 × 12) and remove the front cover panel. (See Photo 1)</li> <li>(4) Remove 2 back cover panel fixing screws (5 × 12) and remove the back cover panel.</li> <li>(5) Remove the electrical parts box. (See Photo 4)</li> <li>(6) Remove 3 valve bed fixing screws (4 × 10) and 4 ball valve and stop valve fixing screws (5 × 16) and then remove the valve bed.</li> <li>(7) Remove 3 right side panel fixing screws (5 × 12) in the rear of the unit then remove the right side panel.</li> <li>(8) Remove 2 separator fixing screws (4 × 10) and remove the separator.</li> <li>(9) Recover refrigerant.</li> <li>(10) Remove the 3 points of the compressor fixing nut using a spanner or a adjustable wrench.</li> <li>(11) Remove the welded pipe of compressor inlet and outlet then remove the compressor.</li> </ol> <p><b>Note: Recover refrigerant without spreading it in the air.</b></p> | <p><b>Photo 11</b></p>   |
| <p><b>13. Removing the power receiver</b></p> <ol style="list-style-type: none"> <li>(1) Remove the service panel. (See Photo 1)</li> <li>(2) Remove the top panel. (See Photo 1)</li> <li>(3) Remove 2 front cover panel fixing screws (5 × 12) and remove the front cover panel. (See Photo 1)</li> <li>(4) Remove 2 back cover panel fixing screws (5 × 12) and remove the back cover panel.</li> <li>(5) Remove the electrical parts box. (See Photo 4)</li> <li>(6) Remove 3 valve bed fixing screws (4 × 10) and 4 ball valve and stop valve fixing screws (5 × 16) then remove the valve bed.</li> <li>(7) Remove 3 right side panel fixing screws (5 × 12) in the rear of the unit then remove the right side panel.</li> <li>(8) Recover refrigerant.</li> <li>(9) Remove 4 welded pipes of power receiver inlet and outlet.</li> <li>(10) Remove 2 receiver leg fixing screws (4 × 10).</li> </ol> <p><b>Note: Recover refrigerant without spreading it in the air.</b></p>                                                                                                                                                           | <p><b>Photo 12</b></p>  |

## OPERATING PROCEDURE

### 14. Removing the base heater

- (1) Remove the service panel. (See Photo 1)
- (2) Remove the top panel. (See Photo 1)
- (3) Remove the upper 2 screws ( $5 \times 12$ ) fixing the motor support, the lower 2 screws ( $5 \times 12$ ) fixing the base and the screw ( $4 \times 10$ ) fixing the separator to detach the front panel. (See Photo 1)
- (4) Remove a nut (for right handed screw of M6) to detach the propeller. (See Photo 2)
- (5) Remove all of the following connectors from controller circuit board;  
<Diagram symbol in the connector housing>
  - Fan motor (CNF1)
  - Base heater (SV2)
 Pull out the disconnected wire from the electrical parts box. (See Photo 4)
- (6) Loosen the clamps on the side of the motor support and on the upper side of the separator.
- (7) Remove 2 motor support fixing screws ( $4 \times 10$ ), then remove the motor support with fan motor still attached. (See Photo 13)
- (8) Remove 4 base heater support fixing screws ( $4 \times 10$ ), then remove the base heater support.
- (9) Remove the base heater. (See Photo 14)

#### Notes:

1. Tighten the propeller fan with a torque of  $5.7 \pm 0.3$  N·m [ $4.2 \pm 0.2$  ft = lbs]
2. Rotate the propeller fan and make sure that the base heater and the lead wires do not interfere with the movement of the propeller fan.

## PHOTOS/FIGURES

Photo 13


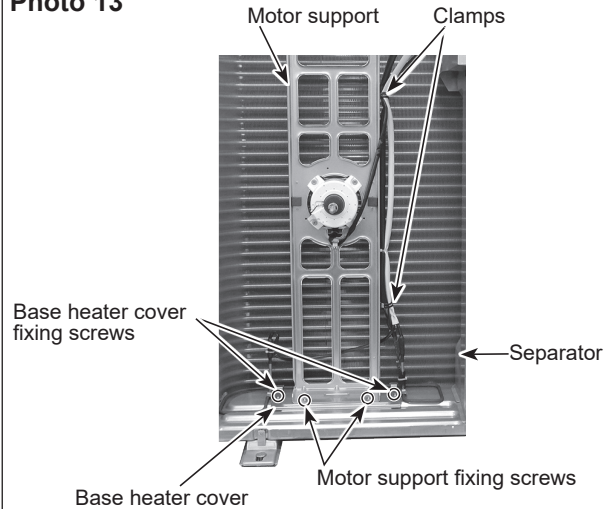


Photo 14






# NTXSKH30A112AA

# NTXSKH36A112AA

—————> : Indicates the visible parts in the photos/figures.

-----> : Indicates the invisible parts in the photos/figures.
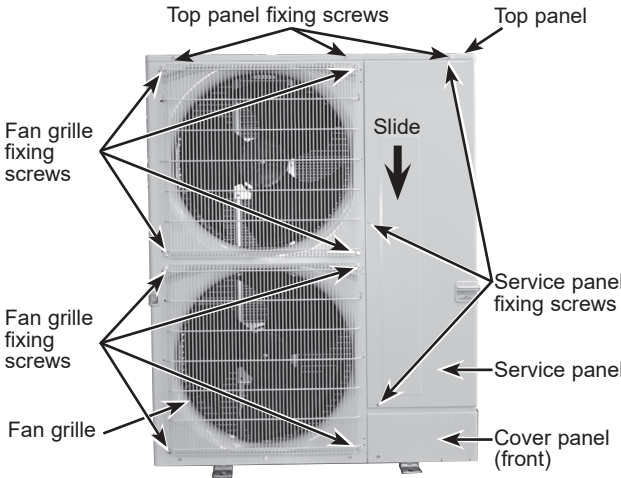
| OPERATING PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | PHOTOS/FIGURES                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>1. Removing the service panel and top panel</b></p> <p>(1) Remove 3 service panel fixing screws (5 × 12) and slide the hook on the right downward to remove the service panel.</p> <p>(2) Remove screws (3 for front, 3 for rear/5 × 12) of the top panel and remove it.</p>                                                                                                                                                                                                                                                                 | <p><b>Photo 1</b></p>                                                                                                                                                                                                                                                                            |
| <p><b>2. Removing the fan motor (MF1, MF2)</b></p> <p>(1) Remove the service panel. (See Photo 1)</p> <p>(2) Remove the top panel. (See Photo 1)</p> <p>(3) Remove 4 fan grille fixing screws (5 × 12) to detach the fan grille. (See Photo 1)</p> <p>(4) Remove a nut (for right handed screw of M6) to detach the propeller. (See Photo 2)</p> <p>(5) Disconnect the connectors, CNF1, CNF2 on controller circuit board in electrical parts box.</p> <p>(6) Remove 4 fan motor fixing screws (5 × 20) to detach the fan motor. (See Photo 3)</p> | <div style="display: flex; justify-content: space-around;"> <div data-bbox="885 1117 1173 1521"> <p><b>Photo 2</b></p>  </div> <div data-bbox="1181 1117 1508 1521"> <p><b>Photo 3</b></p>  </div> </div> |


## OPERATING PROCEDURE

### 3. Removing the electrical parts box

- (1) Remove the service panel. (See Photo 1)
- (2) Remove the top panel. (See Photo 1)
- (3) Disconnect the indoor/outdoor connecting wire and the power supply wire from terminal block.
- (4) Disconnect the connector CNF1, CNF2, SV2, LEV-A, LEV-B and LEV-C on the controller circuit board.  
<Symbols on the board>
  - CNF1, CNF2: Fan motor
  - LEV-A, LEV-B, LEV-C: LEV
  - SV2: Base Heater
- (5) Disconnect the pipe-side connections of the following parts.
  - Thermistor <Liquid>(TH3)
  - Thermistor <Discharge>(TH4)
  - Thermistor <2-phase pipe>(TH6)
  - Thermistor <Ambient>(TH7)
  - Thermistor <Suction> (TH32)
  - Thermistor <Comp. surface> (TH33)
  - High pressure switch (63H)
  - 4-way valve coil (21S4)
- (6) Remove the terminal cover and disconnect the compressor lead wire.
- (7) Loosen the clamp for lead wires on the separator.
- (8) Remove 2 electrical parts box fixing screws (4 × 10) and detach the electrical parts box by pulling it upward.  
The electrical parts box is fixed with 2 hooks on the left and 1 hook on the right.

## PHOTOS/FIGURES

Photo 4

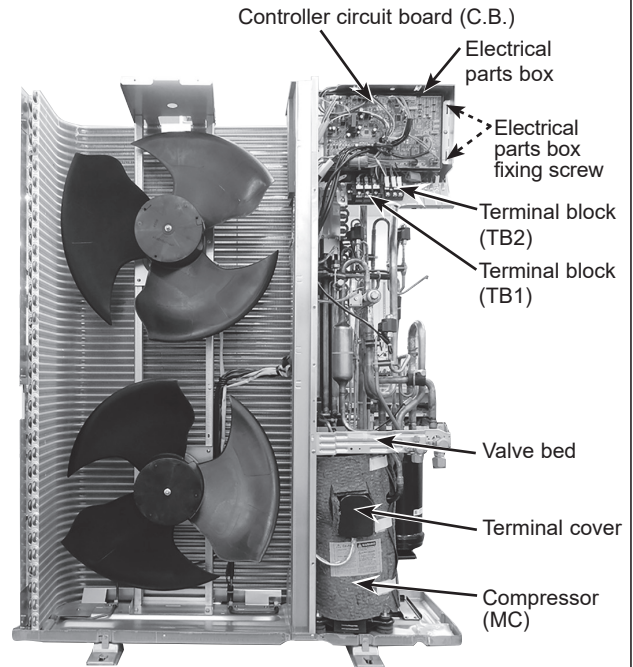

## OPERATING PROCEDURE

### 4. Removing the thermistor <2-phase pipe> (TH6) and thermistor <Ambient>(TH7)

- (1) Remove the service panel. (See Photo 1)
- (2) Remove the top panel. (See Photo 1)
- (3) Disconnect the connectors TH7/6 (red) on the controller circuit board in the electrical parts box.  
Loosen fasteners for lead wires in the electrical parts box.
- (4) Loosen the clamp for lead wires in the rear of the electrical parts box.
- (5) Pull out the thermistor <2-phase pipe> (TH6) and thermistor <Ambient> (TH7) from the sensor holder.

**Note:** When replacing thermistor <2-phase pipe> (TH6) or thermistor <Ambient> (TH7), replace it together.

## PHOTOS/FIGURES

Photo 5



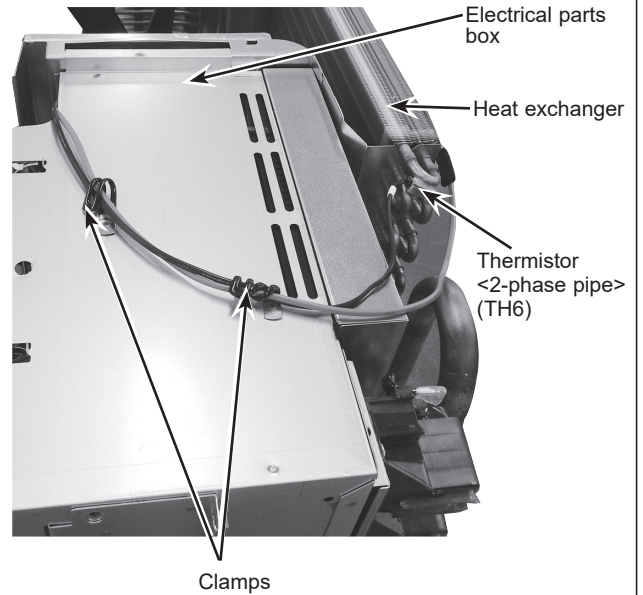


Photo 6

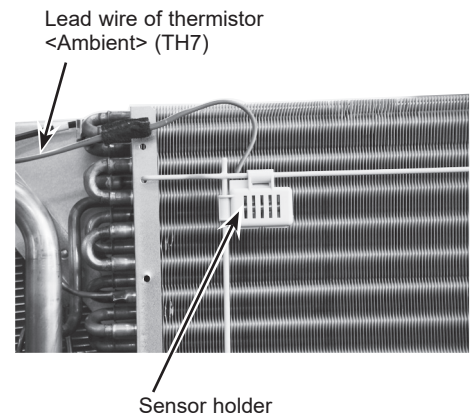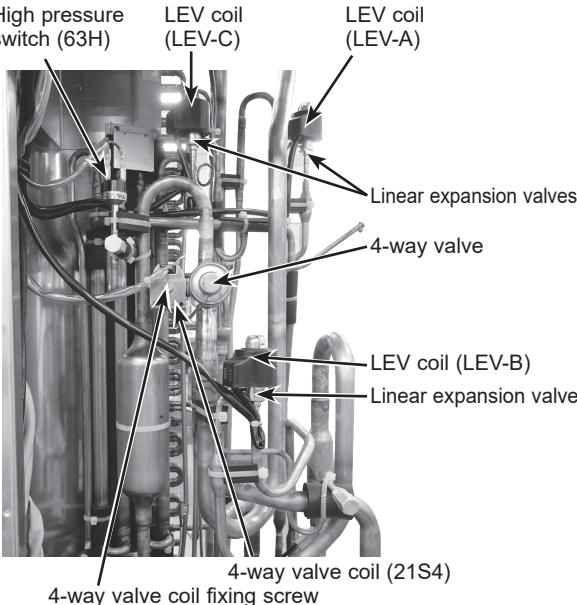

| OPERATING PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | PHOTOS/FIGURES        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| <p><b>5. Removing the thermistor &lt;Discharge&gt; (TH4)</b></p> <p>(1) Remove the service panel. (See Photo 1)</p> <p>(2) Disconnect the connector TH4 (white) on the controller circuit board in the electrical parts box.<br/>Loosen fasteners for lead wires in the electrical parts box.</p> <p>(3) Loosen clamps for the lead wire on the separator (See Photo 7).</p> <p>(4) Pull out the thermistor &lt;Discharge&gt; (TH4) from the sensor holder.</p>                                                                                                                                                                                                                                                                                                                                                                         | <p><b>Photo 7</b></p> |
| <p><b>6. Removing the thermistor &lt;Liquid&gt; (TH3), thermistor &lt;Suction&gt; (TH32), thermistor &lt;Comp. surface&gt; (TH33)</b></p> <p>(1) Remove the service panel. (See Photo 1)</p> <p>(2) Disconnect the connectors, TH3 (white) and TH32 (black), TH33 (red) on the controller circuit board in the electrical parts box.<br/>Loosen fasteners for lead wires in the electrical parts box.</p> <p>(3) Loosen clamps for the lead wires on the separator (See Photo 7).<br/>Loosen clamp and cable strap for lead wires on the bottom of the electrical parts box. (Note that this procedure is only for removing TH32.)</p> <p>(4) Loosen clamp for the lead wire for TH3 and TH32.</p> <p>(5) Pull out the thermistor &lt;Liquid&gt; (TH3), thermistor &lt;Suction&gt; (TH32), thermistor &lt;Comp. surface&gt; (TH33).</p> | <p><b>Photo 8</b></p> |

| OPERATING PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | PHOTOS/FIGURES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>7. Removing the 4-way valve coil (21S4), and linear expansion valve coil (LEV-A, LEV-B, LEV-C)</b></p> <ol style="list-style-type: none"> <li>(1) Remove the service panel. (See Photo 1)</li> <li>(2) Remove the top panel. (See Photo 1)</li> <li>(3) Remove the electrical parts box. (See Photo 4)</li> </ol> <p><b>[Removing the 4-way valve coil]</b></p> <ol style="list-style-type: none"> <li>(4) Remove 4-way valve coil fixing screw (M5 × 7).</li> <li>(5) Remove the 4-way valve coil by sliding the coil toward you. Loosen the clamp for lead wires on the separator. Loosen fasteners and the cable strap for lead wires in the electrical parts box.</li> <li>(6) Disconnect the connector 21S4 (green) on the controller circuit board in the electrical parts box.</li> </ol> <p><b>[Removing the linear expansion valve coil]</b></p> <ol style="list-style-type: none"> <li>(4) Loosen a fastener for lead wires.</li> <li>(5) Remove the linear expansion valve coil by sliding the coil upward. Loosen the clamp for lead wires on the separator. Loosen a fastener for lead wires in the electrical parts box.</li> <li>(6) Disconnect the connectors, LEV-A (white), LEV-B (red) and LEV-C (blue) on the controller circuit board in the electrical parts box.</li> </ol> | <p><b>Photo 9</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <p><b>8. Removing the 4-way valve</b></p> <ol style="list-style-type: none"> <li>(1) Remove the service panel. (See Photo 1)</li> <li>(2) Remove the top panel. (See Photo 1)</li> <li>(3) Remove the electrical parts box. (See Photo 4)</li> <li>(4) Remove 2 cover panel front fixing screws (5 × 12) and remove the cover panel front. (See Photo 1)</li> <li>(5) Remove 2 cover panel rear fixing screws (5 × 12) and remove the cover panel rear.</li> <li>(6) Remove 3 valve bed fixing screws (4 × 10) and 4 ball valve and stop valve fixing screws (5 × 16) then remove the valve bed.</li> <li>(7) Remove 3 side panel (R) fixing screws (5 × 12) in the rear of the unit then remove the side panel (R).</li> <li>(8) Remove the 4-way valve coil.</li> <li>(9) Recover refrigerant.</li> <li>(10) Remove the welded part of 4-way valve.</li> </ol> <p><b>Note :</b>When installing the 4-way valve, cover it with a wet cloth to prevent it from heating (250°F [120°C] or more), then braze the pipes so that the inside of pipes are not oxidized.</p>                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <p><b>9. Removing linear expansion valve</b></p> <ol style="list-style-type: none"> <li>(1) Remove the service panel. (See Photo 1)</li> <li>(2) Remove the top panel. (See Photo 1)</li> <li>(3) Remove the electrical parts box. (See Photo 4)</li> <li>(4) Remove the cover panel front. (Refer to procedure 8)</li> <li>(5) Remove the cover panel rear. (Refer to procedure 8)</li> <li>(6) Remove the valve bed. (Refer to procedure 8)</li> <li>(7) Remove the side panel (R). (Refer to procedure 8)</li> <li>(8) Remove the linear expansion valve coil.</li> <li>(9) Recover refrigerant.</li> <li>(10) Remove the welded part of linear expansion valve.</li> </ol> <p><b>Note :</b> When installing the linear expansion valve, cover it with a wet cloth to prevent it from heating (250°F [120°C] or more), then braze the pipes so that the inside of pipes are not oxidized.</p>                                                                                                                                                                                                                                                                                                                                                                                                         | <p><b>10. Removing the high pressure switch (63H)</b></p> <ol style="list-style-type: none"> <li>(1) Remove the service panel. (See Photo 1)</li> <li>(2) Remove the top panel. (See Photo 1)</li> <li>(3) Remove the electrical parts box. (See Photo 4)</li> <li>(4) Remove the cover panel front.</li> <li>(5) Remove the cover panel rear.</li> <li>(6) Remove the valve bed. (Refer to procedure 8)</li> <li>(7) Remove the side panel (R). (Refer to procedure 8)</li> <li>(8) Pull out the lead wire of high pressure switch (63H).</li> <li>(9) Recover refrigerant.</li> <li>(10) Remove the welded part of high pressure switch (63H).</li> </ol> <p><b>Note :</b> When installing the high pressure switch, cover it with a wet cloth to prevent it from heating (210°F [100°C] or more), then braze the pipes so that the inside of pipes are not oxidized.</p> |

## OPERATING PROCEDURE

### 11. Removing the reactor (DCL)


- (1) Remove the service panel. (See Photo 1)
- (2) Remove the top panel. (See Photo 1)
- (3) Remove the electrical parts box. (See Photo 4)
- (4) Remove 6 reactor fixing screws (4 × 10) and remove the reactors.

**Note 1:** The reactor and capacitor is attached to the rear of the electrical parts box.

**Note 2:** The 3 pieces of reactors to be replaced must have the same color of sticker. (Green, Orange, or Blue)

## PHOTOS/FIGURES

**Photo 10**

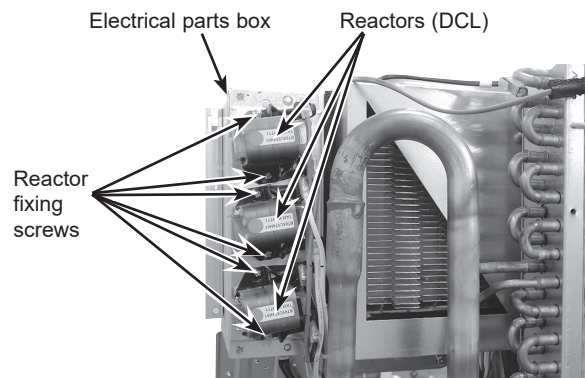

### 12. Removing the compressor (MC)

- (1) Remove the service panel. (See Photo 1)
- (2) Remove the top panel. (See Photo 1)
- (3) Remove the electrical parts box. (See Photo 4)
- (4) Remove the cover panel front. (Refer to procedure 8)
- (5) Remove the cover panel rear. (Refer to procedure 8)
- (6) Remove the valve bed. (Refer to procedure 8)
- (7) Remove the side panel (R). (Refer to procedure 8)
- (8) Remove 3 separator fixing screws (4 × 10) and remove the separator.
- (9) Remove the comp felt for compressor.
- (10) Recover refrigerant.
- (11) Remove the welded pipe of compressor inlet and outlet then remove the compressor.
- (12) Remove the 3 points of the compressor fixing nut using a spanner or a adjustable wrench.


**Note:** Recover refrigerant without spreading it in the air.

### 13. Removing the power receiver

- (1) Remove the service panel. (See Photo 1)
- (2) Remove the top panel. (See Photo 1)
- (3) Remove the electrical parts box. (See Photo 4)
- (4) Remove the cover panel front. (Refer to procedure 8)
- (5) Remove the cover panel rear. (Refer to procedure 8)
- (6) Remove the valve bed. (Refer to procedure 8)
- (7) Remove the side panel (R). (Refer to procedure 8)
- (8) Recover refrigerant.
- (9) Remove 4 welded pipes of power receiver inlet and outlet.
- (10) Remove 2 receiver leg fixing screws (4 × 10).

**Note:** Recover refrigerant without spreading it in the air.

**Photo 11**

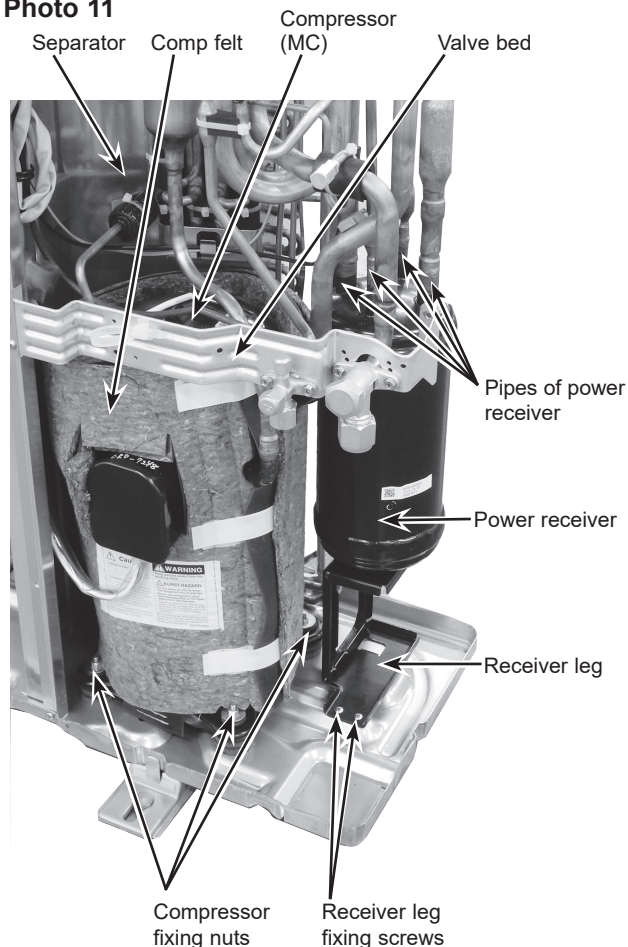

## OPERATING PROCEDURE

### 14. Removing the base heater

- (1) Remove the service panel. (See Photo 1)
- (2) Remove the top panel. (See Photo 1)
- (3) Remove the upper 2 screws (5 × 12) fixing the motor support, the lower 3 screws (5 × 12) fixing the base and the 2 screws (4 × 10) fixing the separator to detach the front panel. (See Photo 1)
- (4) Remove a nut (for right handed screw of M6) to detach the propeller. (See Photo 2)
- (5) Remove all of the following connectors from controller circuit board;  
<Diagram symbol in the connector housing>
  - Fan motor (CNF1, CNF2)
  - Base heater (SV2)
 Pull out the disconnected wire from the electrical parts box. (See Photo 4)
- (6) Loosen the wire clamps on the side of the motor support and separator.
- (7) Remove 2 motor support fixing screws (5 x 12), then remove the motor support with fan motor still attached. (See Photo 12)
- (8) Remove 4 base heater cover fixing screws (4 x 10), then remove the base heater cover.
- (9) Remove the base heater. (See Photo 13)

#### Notes:

1. Tighten the propeller fan with a torque of  $5.7 \pm 0.3$  N·m [ $4.2 \pm 0.2$  ft = lbs]
2. Rotate the propeller fan and make sure that the base heater and the lead wires do not interfere with the movement of the propeller fan.

## PHOTOS/FIGURES

Photo 12


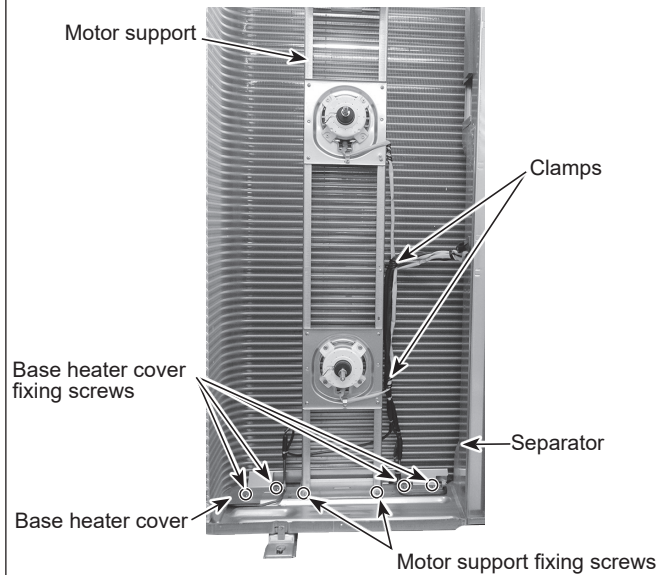



Photo 13



## 15-1. REMOTE CONTROLLER FUNCTIONS

&lt;TAR-40MAA&gt;

## Controller interface

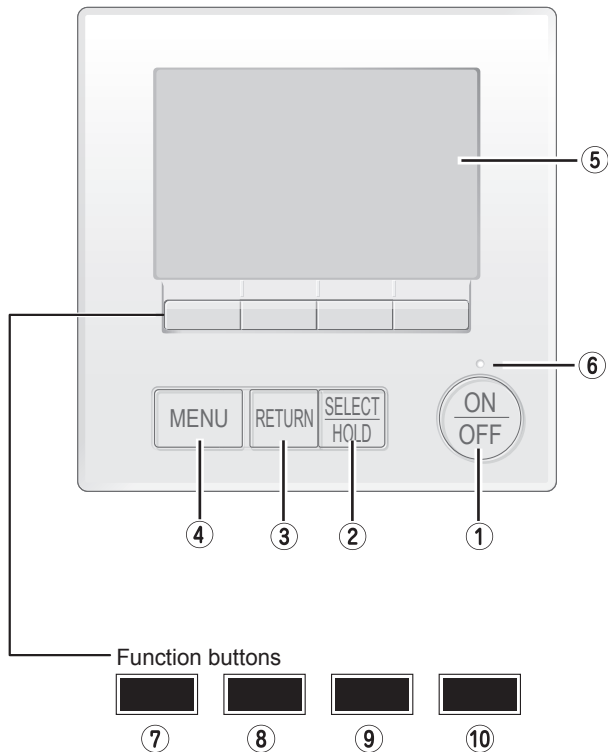


The functions of the function buttons change depending on the screen.


Refer to the button function guide that appears at the bottom of the LCD for the functions they serve on a given screen.

When the system is centrally controlled, the button function guide that corresponds to the locked button will not appear.


## Main display



## Main menu



## Menu screen



## Function guide

## ① [ON/OFF] button

Press to turn ON/OFF the indoor unit.

## ② [SELECT/HOLD] button

Press to save the setting.

When the Main menu is displayed, pressing this button will enable/disable the HOLD function.

## ③ [RETURN] button

Press to return to the previous screen.

## ④ [MENU] button

Press to bring up the Main menu.

## ⑤ Backlit LCD

Operation settings will appear.

When the backlight is off, pressing any button turns the backlight on and it will stay lit for a certain period of time depending on the screen.

When the backlight is off, pressing any button turns the backlight on and does not perform its function. (except for the [ON/OFF] button)

## ⑥ ON/OFF lamp

This lamp lights up in green while the unit is in operation. It blinks while the remote controller is starting up or when there is an error.

## ⑦ Function button [F1]

Main display: Press to change the operation mode.

Menu screen: The button function varies with the screen.

## ⑧ Function button [F2]

Main display: Press to decrease temperature.

Main menu: Press to move the cursor left.

Menu screen: The button function varies with the screen.

## ⑨ Function button [F3]

Main display: Press to increase temperature.

Main menu: Press to move the cursor right.

Menu screen: The button function varies with the screen.

## ⑩ Function button [F4]

Main display: Press to change the fan speed.


Menu screen: The button function varies with the screen.

## Display


The main display can be displayed in two different modes: "Full" and "Basic". The initial setting is "Full". To switch to the "Basic" mode, change the setting on the Main display setting. (Refer to operation manual included with remote controller.)

### <Full mode>

All icons are displayed for explanation.

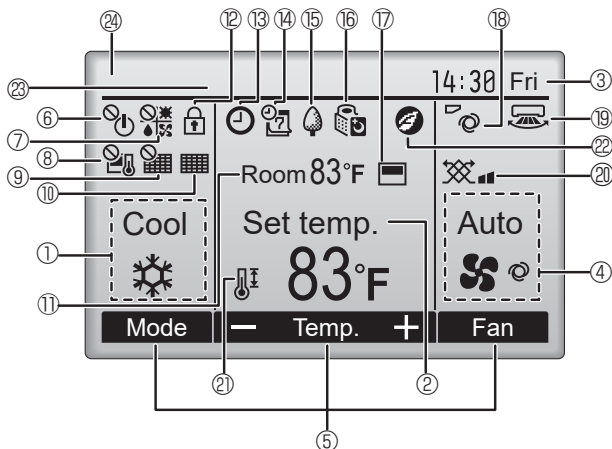

### <Basic mode>

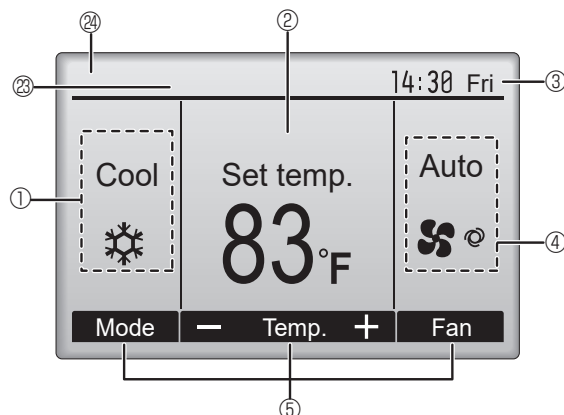

#### ① Operation mode

#### ② Preset temperature

#### ③ Clock

#### ④ Fan speed

#### ⑤ Button function guide

Functions of the corresponding buttons appear here.



Appears when the ON/OFF operation is centrally controlled.



Appears when the operation mode is centrally controlled.



Appears when the preset temperature is centrally controlled.



Appears when the filter reset function is centrally controlled.



Indicates when filter needs maintenance.

#### ⑪ Room temperature



Appears when the buttons are locked.



Appears when the On/Off timer or Auto-off timer function is enabled.

appears when the timer is disabled by the centralized control system.

appears when the HOLD function is enable.



Appears when the Weekly timer is enabled.



Appears while the units are operated in the energy saving mode. (Will not appear on some models of indoor units)



Appears while the outdoor units are operated in the silent mode.



Appears when the built-in thermistor on the remote controller is activated to monitor the room temperature (⑪).

appears when the thermistor on the indoor unit is activated to monitor the room temperature.



Indicates the vane setting.



Indicates the louver setting.



Indicates the ventilation setting.



Appears when the preset temperature range is restricted.



Appears when an energy saving operation is performed using a "3D i-See sensor" function.

#### ②③ Centrally controlled


Appears for a certain period of time when a centrally-controlled item is operated.

#### ②④ Preliminary error display

An check code appears during the preliminary error.


Most settings (except ON/OFF, mode, fan speed, temperature) can be made from the Main menu.

## Menu structure

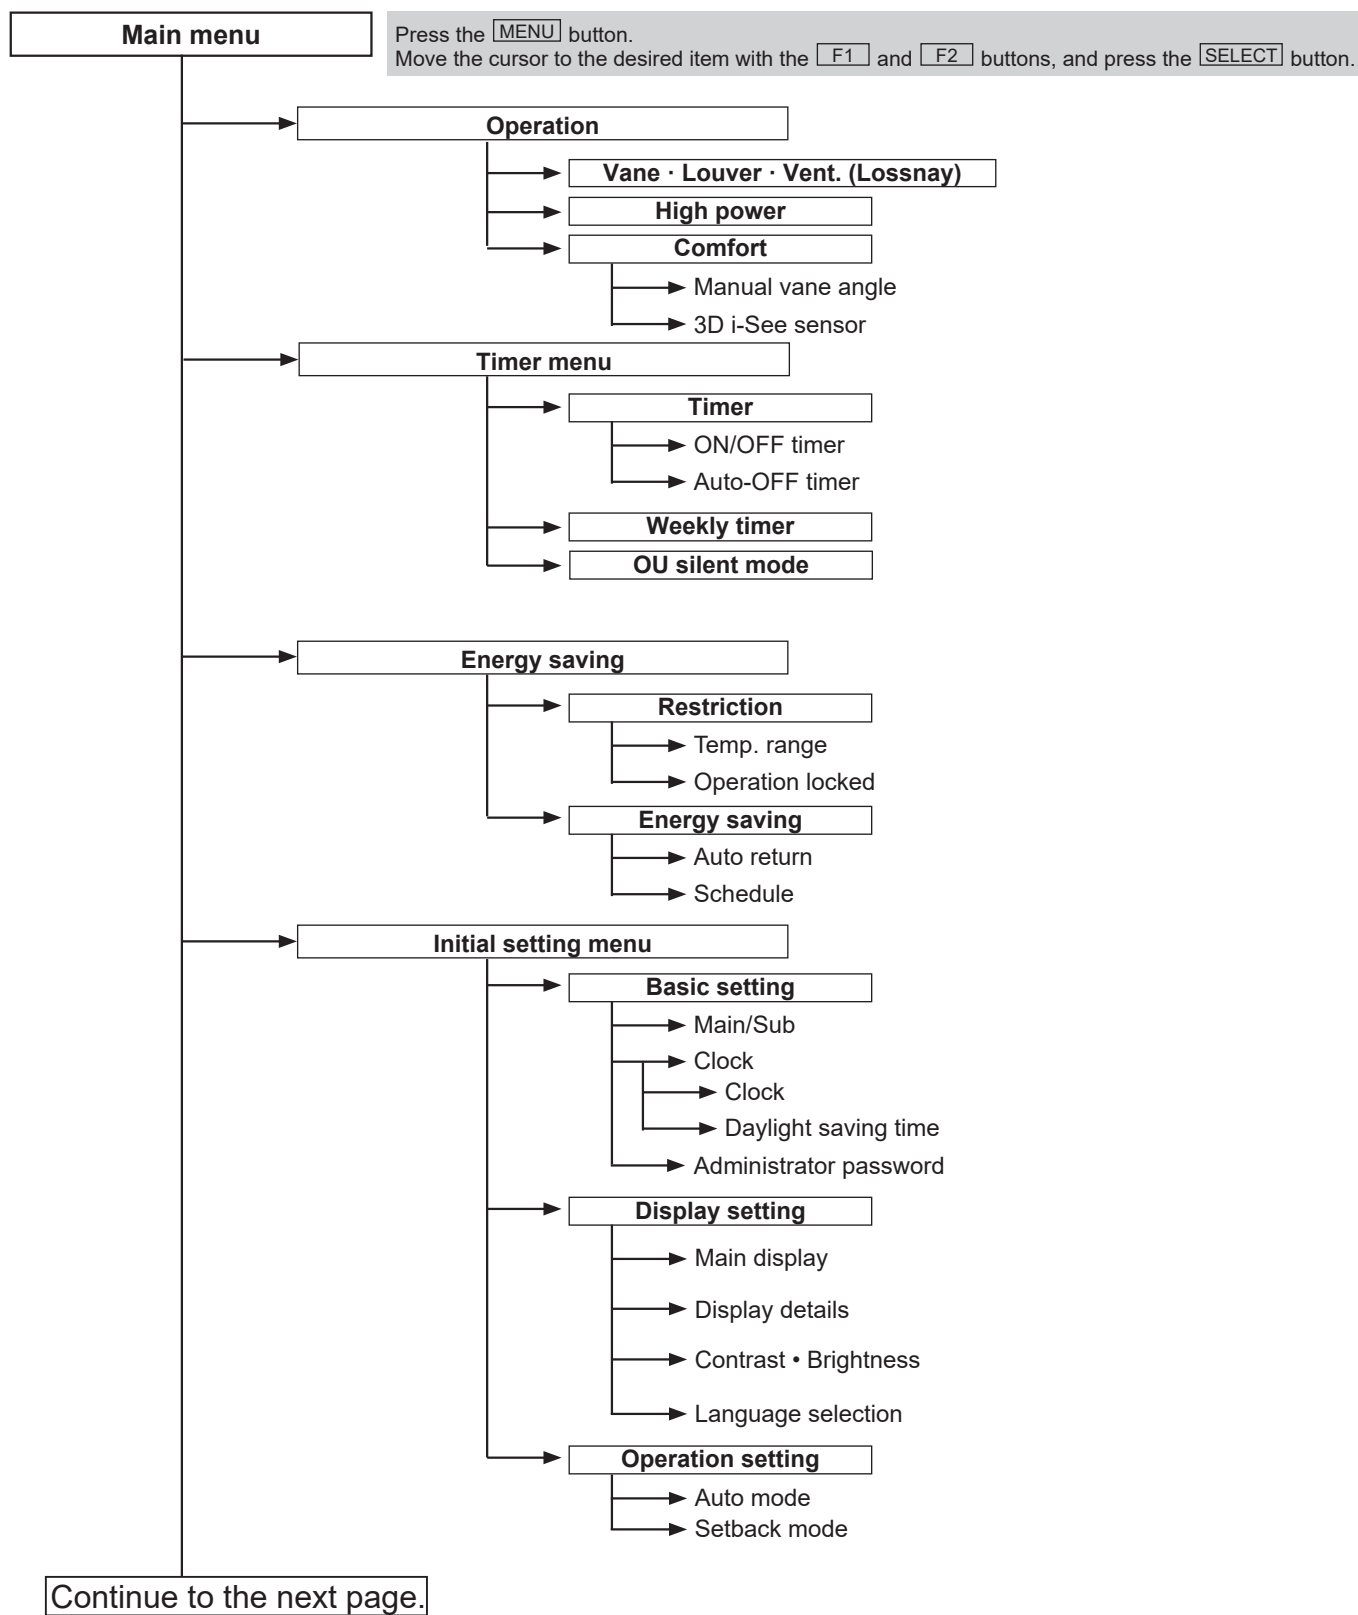

Not all functions are available on all models of indoor units.

Continue from the previous page.

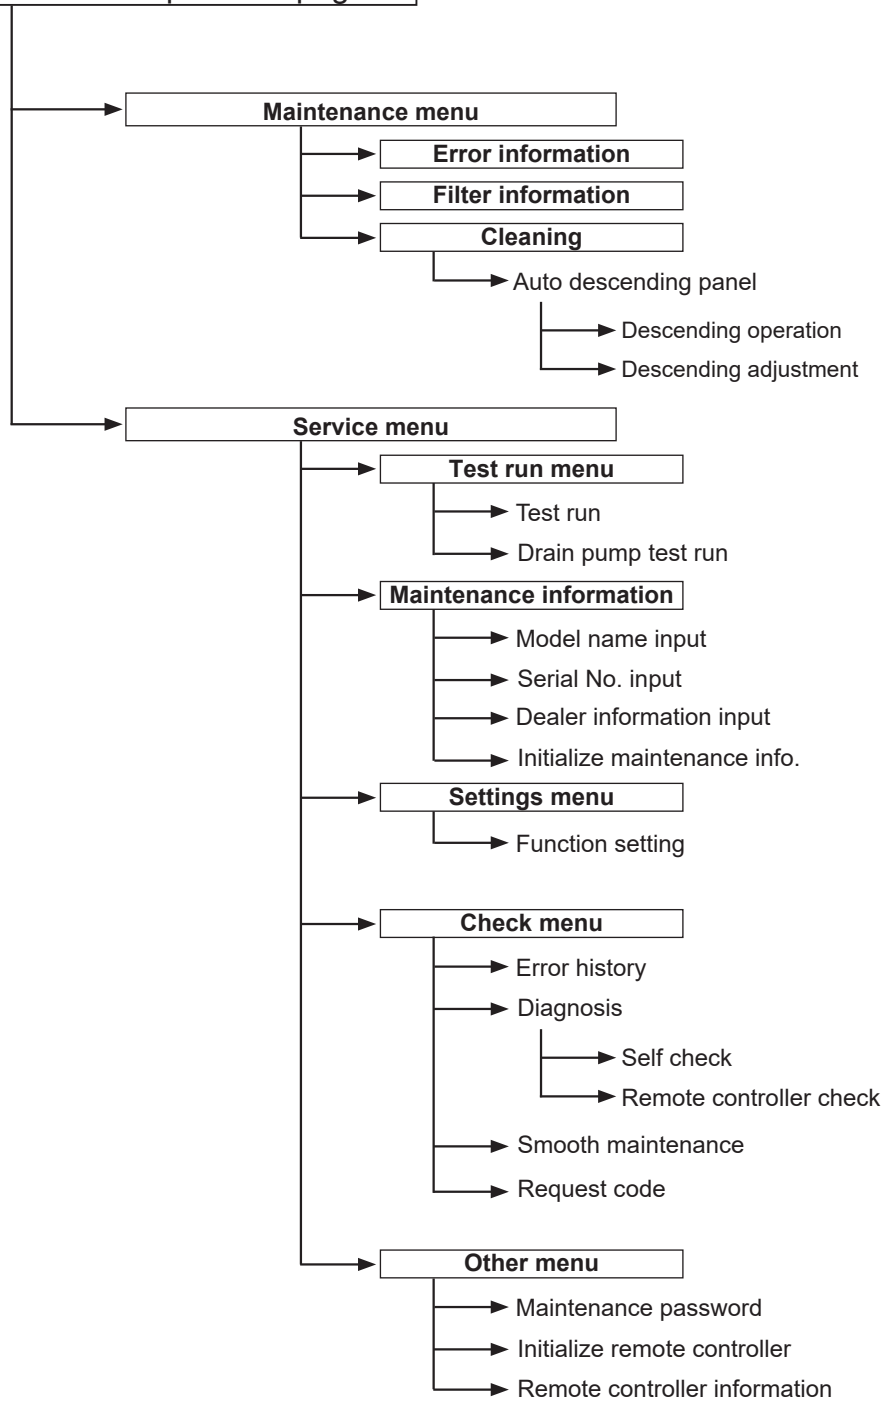

Not all functions are available on all models of indoor units.




## Main menu list

| Main menu       | Setting and display items        |                            | Setting details                                                                                                                                                                                                                                                                                                                                    |
|-----------------|----------------------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operation       | Vane · Louver · Vent. (Lossnay)  |                            | <b>Use to set the vane angle.</b><br>• Select a desired vane setting.<br><b>Use to turn ON/OFF the louver.</b><br>• Select a desired setting from "ON" and "OFF."<br><b>Use to set the amount of ventilation.</b><br>• Select a desired setting from "Off," "Low," and "High."                                                                     |
|                 | High power <sup>*3</sup>         |                            | <b>Use to reach the comfortable room temperature quickly.</b><br>• Units can be operated in the High-power mode for up to 30 minutes.                                                                                                                                                                                                              |
|                 | Comfort                          | Manual vane angle          | <b>Use to fix each vane angle.</b>                                                                                                                                                                                                                                                                                                                 |
|                 |                                  | 3D i-See sensor            | <b>Use to set the following functions for 3D i-See sensor.</b><br>• Air distribution • Energy saving option • Seasonal airflow                                                                                                                                                                                                                     |
| Timer           | Timer                            | ON/OFF timer <sup>*1</sup> | <b>Use to set the operation ON/OFF times.</b><br>• Time can be set in 5-minute increments.                                                                                                                                                                                                                                                         |
|                 |                                  | Auto-Off timer             | <b>Use to set the Auto-Off time.</b><br>• Time can be set to a value from 30 to 240 in 10-minute increments.                                                                                                                                                                                                                                       |
|                 | Weekly timer <sup>*1, *2</sup>   |                            | <b>Use to set the weekly operation ON/OFF times.</b><br>• Up to 8 operation patterns can be set for each day.<br>(Not valid when the ON/OFF timer is enabled.)                                                                                                                                                                                     |
|                 | OU silent mode <sup>*1, *3</sup> |                            | <b>Use to set the time periods in which priority is given to quiet operation of outdoor units over temperature control. Set the Start/Stop times for each day of the week.</b><br>• Select the desired silent level from "Normal," "Middle," and "Quiet."                                                                                          |
| Energy saving   | Restriction                      | Temp. range <sup>*2</sup>  | <b>Use to restrict the preset temperature range.</b><br>• Different temperature ranges can be set for different operation modes.                                                                                                                                                                                                                   |
|                 |                                  | Operation locked           | <b>Use to lock selected functions.</b><br>• The locked functions cannot be operated.                                                                                                                                                                                                                                                               |
|                 | Energy saving                    | Auto return <sup>*2</sup>  | <b>Use to get the units to operate at the preset temperature after performing energy saving operation for a specified time period.</b><br>• Time can be set to a value from 30 and 120 in 10-minute increments.<br>(This function will not be valid when the preset temperature ranges are restricted.)                                            |
|                 |                                  | Schedule <sup>*1, *3</sup> | <b>Set the start/stop times to operate the units in the energy saving mode for each day of the week, and set the energy saving rate.</b><br>• Up to 4 energy saving operation patterns can be set for each day.<br>• Time can be set in 5-minute increments.<br>• Energy saving rate can be set to a value from 0% or 50 to 90% in 10% increments. |
| Initial setting | Basic setting                    | Main/Sub                   | <b>When connecting 2 remote controllers, one of them needs to be designated as a sub controller.</b>                                                                                                                                                                                                                                               |
|                 |                                  | Clock                      | <b>Use to set the current time.</b>                                                                                                                                                                                                                                                                                                                |
|                 |                                  | Daylight saving time       | <b>Set the daylight saving time.</b>                                                                                                                                                                                                                                                                                                               |
|                 |                                  | Administrator password     | <b>The administrator password is required to make the settings for the following items.</b><br>• Timer setting • Energy saving setting • Weekly timer setting<br>• Restriction setting • Outdoor unit silent mode setting                                                                                                                          |

<sup>\*1</sup> Clock setting is required.

<sup>\*2</sup> 2°F (1°C) increments.


<sup>\*3</sup> This function is available only when certain outdoor units are connected.



| Main menu       | Setting and display items |                               | Setting details                                                                                                                                                                                                                                                                                                               |
|-----------------|---------------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Initial setting | Display setting           | Main display                  | Use to switch between "Full" and "Basic" modes for the Main display, and use to change the background colors of the display to black.                                                                                                                                                                                         |
|                 |                           | Display details               | Make the settings for the remote controller related items as necessary.<br><b>Clock:</b> The initial settings are "Yes" and "24h" format.<br><b>Temperature:</b> Set either Celsius (°C) or Fahrenheit (°F).<br><b>Room temp. :</b> Set Show or Hide.<br><b>Auto mode:</b> Set the Auto mode display or Only Auto display.    |
|                 |                           | Contrast • Brightness         | Use to adjust screen contrast and brightness.                                                                                                                                                                                                                                                                                 |
|                 |                           | Language selection            | Use to select the desired language.                                                                                                                                                                                                                                                                                           |
|                 | Operation setting         | Auto mode                     | Whether or not to use the Auto mode can be selected by using the button. This setting is valid only when indoor units with the Auto mode function are connected.                                                                                                                                                              |
|                 |                           | Setback mode                  | Whether or not to use the Setback mode can be selected by using the button. This setting is valid only when indoor units with the Setback mode function are connected.                                                                                                                                                        |
| Maintenance     | Error information         |                               | Use to check error information when an error occurs.<br>• Check code, error source, refrigerant address, unit model, manufacturing number, contact information (dealer's phone number) can be displayed.<br>(The unit model, manufacturing number, and contact information need to be registered in advance to be displayed.) |
|                 | Filter information        |                               | Use to check the filter status.<br>• The filter sign can be reset.                                                                                                                                                                                                                                                            |
|                 | Cleaning                  | Auto descending panel         | Use to lift and lower the auto descending panel (Optional parts).                                                                                                                                                                                                                                                             |
| Service         | Test run                  |                               | Select "Test run" from the Service menu to bring up the Test run menu.<br>• Test run • Drain pump test run                                                                                                                                                                                                                    |
|                 | Input maintenance         |                               | Select "Input maintenance Info." from the Service menu to bring up the Maintenance information screen.<br>The following settings can be made from the Maintenance Information screen.<br>• Model name input • Serial No. input • Dealer information input • Initialize maintenance info.                                      |
|                 | Settings                  | Function setting              | Make the settings for the indoor unit functions via the remote controller as necessary.                                                                                                                                                                                                                                       |
|                 | Check                     | Error history                 | Display the error history and execute "delete error history".                                                                                                                                                                                                                                                                 |
|                 |                           | Diagnosis                     | <b>Self check:</b> Error history of each unit can be checked via the remote controller.<br><b>Remote controller check:</b> When the remote controller does not work properly, use the remote controller checking function to troubleshoot the problem.                                                                        |
|                 |                           | Smooth maintenance<br>*1      | Use to display the maintenance data of indoor/outdoor units.                                                                                                                                                                                                                                                                  |
|                 |                           | Request code<br>*1            | Use to check operation data such as thermistor temperature and error information.                                                                                                                                                                                                                                             |
|                 | Others                    | Maintenance password          | Use to change the maintenance password.                                                                                                                                                                                                                                                                                       |
|                 |                           | Initialize remote controller  | Use to initialize the remote controller to the factory shipment status.                                                                                                                                                                                                                                                       |
|                 |                           | Remote controller information | Use to display the remote controller model name, software version, and serial number.                                                                                                                                                                                                                                         |

\*1 This function is available only when certain outdoor units are connected.


## <PAR-SL97A-E>

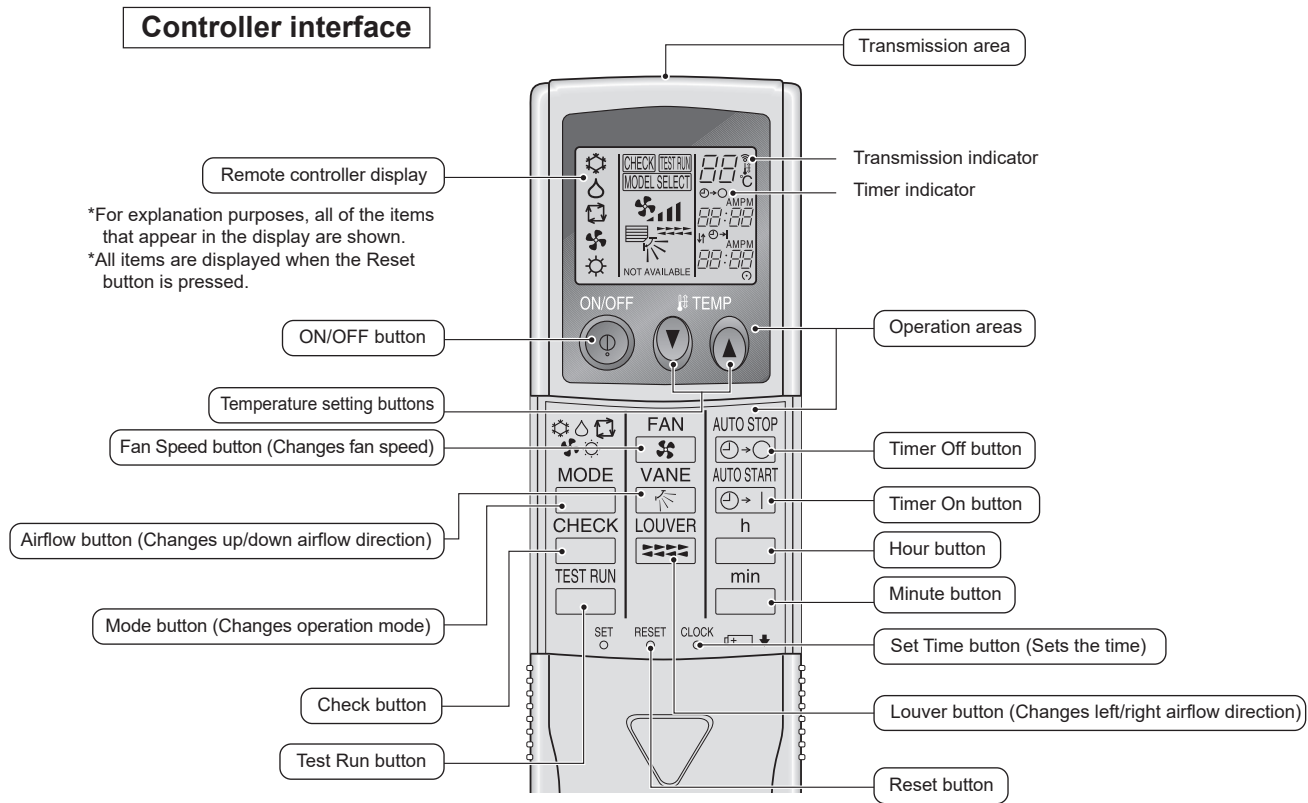

- When using the wireless remote controller, point it towards the receiver on the indoor unit.
- If the remote controller is operated within approximately two minutes after power is supplied to the indoor unit, the indoor unit may beep twice as the unit is performing the initial automatic check.
- The indoor unit beeps to confirm that the signal transmitted from the remote controller has been received. Signals can be received up to approximately 7 meters in a direct line from the indoor unit in an area 45° to the left and right of the unit. However, illumination such as fluorescent lights and strong light can affect the ability of the indoor unit to receive signals.
- If the operation lamp near the receiver on the indoor unit is blinking, the unit needs to be inspected. Consult your dealer for service.
- Handle the remote controller carefully! Do not drop the remote controller or subject it to strong shocks. In addition, do not get the remote controller wet or leave it in a location with high humidity.
- To avoid misplacing the remote controller, install the holder included with the remote controller on a wall and be sure to always place the remote controller in the holder after use.

## <PAR-SL100A-E>


### Controller interface

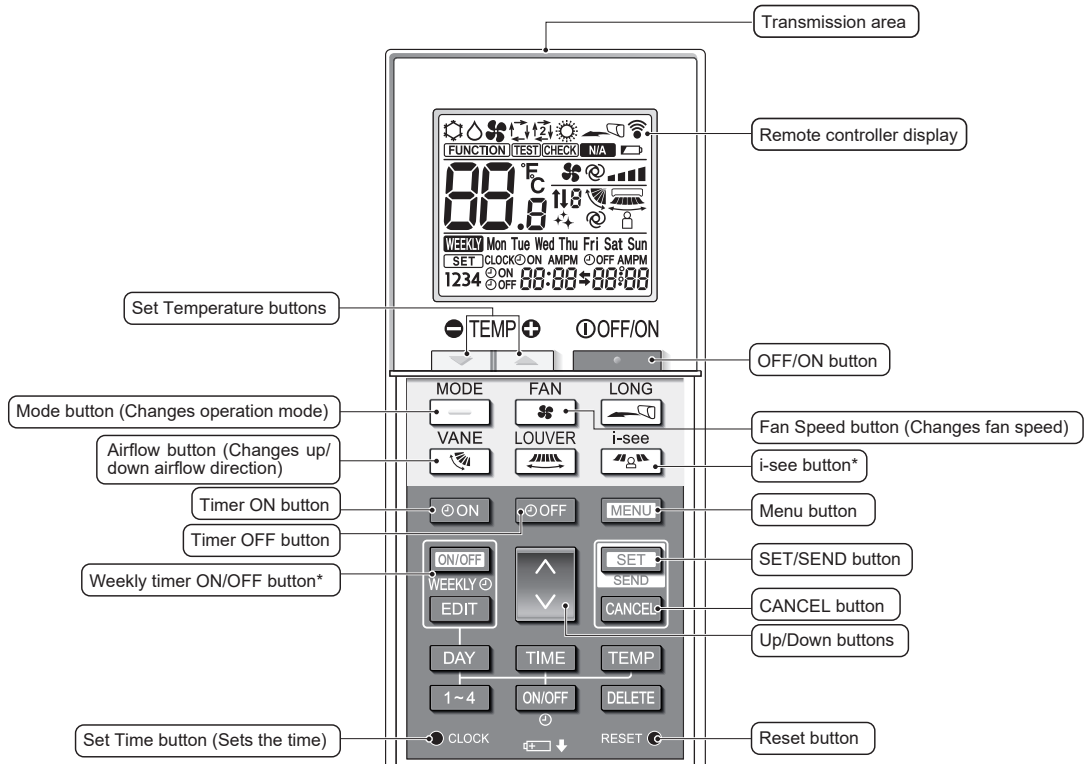

Note:

\* This button is enabled or disabled depending on the model of the indoor unit.

### Display

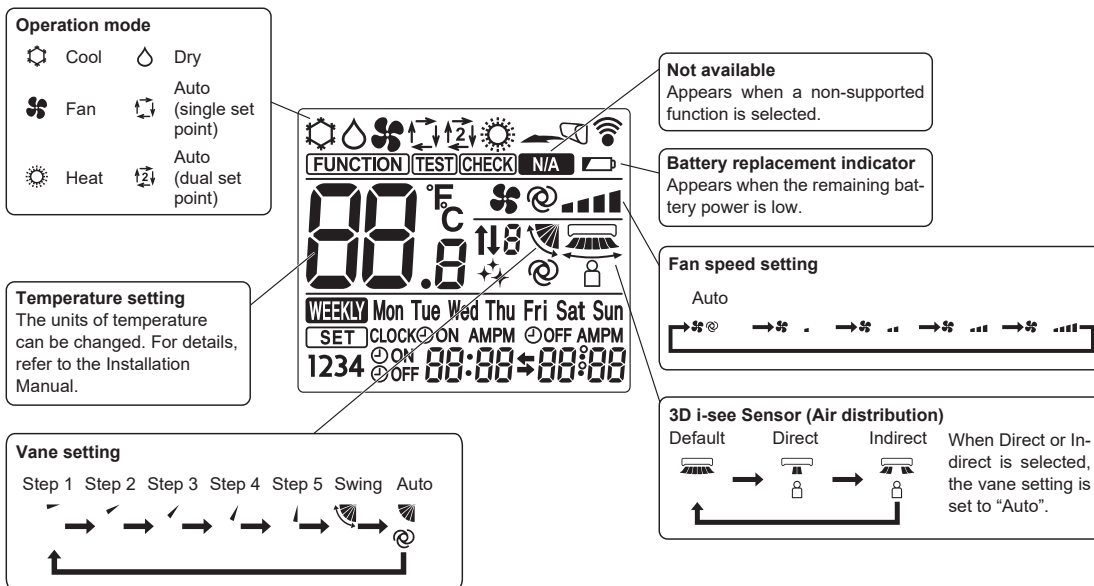

15-2. ERROR INFORMATION

When an error occurs, the following screen will appear.  
Check the error status, stop the operation, and consult your dealer.

1. Check code, error unit, refrigerant address, unit model name, and serial number will appear.  
The model name and serial number will appear only if the information has been registered.

Press the **F1** or **F2** button to go to the next page.

Error information 1/2

|               |             |
|---------------|-------------|
| Error code    | A3          |
| Error unit    | IU 8 Unit#1 |
| Time Occurred | 02/01 4:48  |
| Model name    |             |
| Serial No.    |             |

Reset error: Reset button

▼ Page ▲

Reset

F1

F2

F3

F4

blinks

MENU

RETURN

SELECT  
HOLD

ON

OFF

Contact information (dealer's phone number) will appear if the information has been registered.

Error information 2/2

|                     |  |
|---------------------|--|
| Contact information |  |
| Dealer              |  |
| Tel                 |  |

Reset error: Reset button

▼ Page ▲

Reset

2. Press the **F4** button or the [ON/OFF] button to reset the error that is occurring.

Errors cannot be reset while the ON/OFF operation is prohibited.

Error information 1/2

|               |             |
|---------------|-------------|
| Error code    | A3          |
| Error unit    | IU 8 Unit#1 |
| Time Occurred | 02/01 4:48  |
| Model name    |             |
| Serial No.    |             |

Reset error: Reset button

▼ Page ▲

Reset

F1

F2

F3

F4

blinks

MENU

RETURN

SELECT  
HOLD

ON

OFF

Select "OK" with the **F4** button.

Error reset

Reset current error?

Cancel

OK

F1

F2

F3

F4

Error reset

Error reset


Main menu: MENU


Navigating through the screens

- To go back to the Main menu ..... [MENU] button

## • Checking the error information

While no errors are occurring, page 2/2 of the error information can be viewed by selecting "Error information" from the Maintenance menu. Errors cannot be reset from this screen.

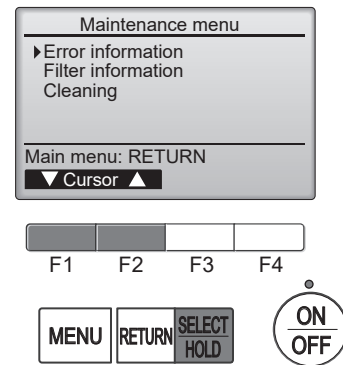




15-3. SERVICE MENU

Maintenance password is required

1. Select "Service" from the Main menu, and press the [SELECT] button.

\*At the main display, the menu button and select "Service" to make the maintenance setting.



2. When the Service menu is selected, a window will appear asking for the password.


To enter the current maintenance password (4 numerical digits), move the cursor to the digit you want to change with the [F1] or [F2] button.



Set each number (0 through 9) with the [F3] or [F4] button.



Then, press the [SELECT] button.

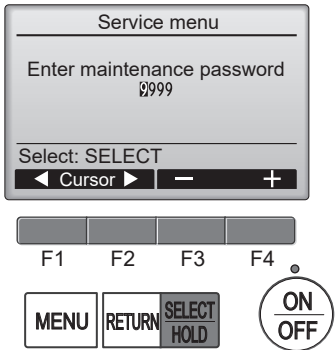

**Note:** The initial maintenance password is "9999". Change the default password as necessary to prevent unauthorized access. Have the password available for those who need it.  
: If you forget your maintenance password, you can initialize the password to the default password "9999" by pressing and holding the [F1] button for 10 seconds on the maintenance password setting screen.


3. If the password matches, the Service menu will appear.

The type of menu that appears depends on the connected indoor units' type.

**Note:** Air conditioning units may need to be stopped to make only at "Settings". There may be some settings that cannot be made when the system is centrally controlled.



A screen will appear that indicates the setting has been saved.



Navigating through the screens

- To go back to the Service menu ..... [MENU] button
- To return to the previous screen..... [RETURN] button


## 15-4. TEST RUN

### 15-4-1. TAR-40MAA


1. Select "Service" from the Main menu, and press the [SELECT] button.



Select "Test run" with the **F1** or **F2** button, and press the [SELECT] button.



2. Select "Test run" with the **F1** or **F2** button, and press the [SELECT] button.



#### Test run operation


Press the **F1** button to go through the operation modes in the order of "Cool and Heat".

Cool mode: Check the cold air blows out.  
Heat mode: Check the heat blows out.

Check the operation of the outdoor unit's fan.



Press the [SELECT] button and open the Vane setting screen.



#### Auto vane check

Check the auto vane with the **F1** **F2** buttons.




Press the [RETURN] button to return to "Test run operation".



Press the [ON/OFF] button.

When the test run is completed, the "Test run menu" screen will appear.  
The test run will automatically stop after 2 hours.

\*The function is available only for the model with vanes.




### 15-4-2. PAR-SL97A-E

Measure an impedance between the power supply terminal block on the outdoor unit and ground with a 500V Megger and check that it is equal to or greater than 1.0MΩ.

- ① Turn on the main power to the unit.
- ② Press the  button twice continuously.  
(Start this operation from the status of remote controller display turned off.)  
A  and current operation mode are displayed.
- ③ Press the  (  ) button to activate  mode, then check whether cool air blows out from the unit.
- ④ Press the  (  ) button to activate  mode, then check whether warm air blows out from the unit.
- ⑤ Press the  button and check whether strong air blows out from the unit.
- ⑥ Press the  button and check whether the auto vane operates properly.
- ⑦ Press the ON/OFF button to stop the test run.


#### Note:

- Point the remote controller towards the indoor unit receiver while following steps ② to ⑦.
- It is not possible to run in FAN, DRY or AUTO mode.

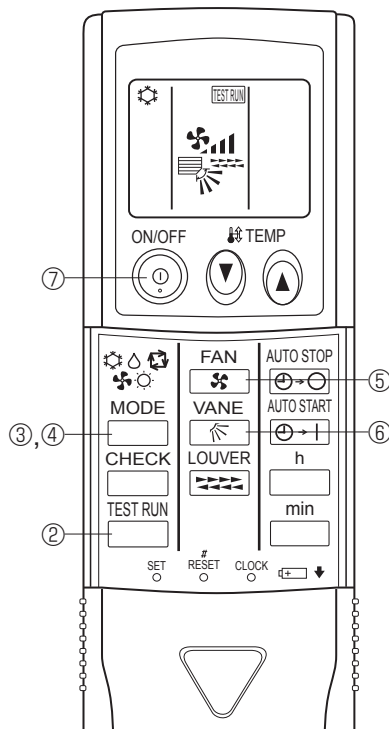

### 15-4-3. PAR-SL100A-E

1. Press the  button ① to stop the air conditioner.
  - If the weekly timer is enabled ( is on), press the  button ③ to disable it ( is off).
2. Press the  button ② for 5 seconds.
  -  comes on and the unit enters the service mode.
3. Press the  button ②.
  -  ④ comes on and the unit enters the test run mode.
4. Press the following buttons to start the test run.
  - : Switch the operation mode between cooling and heating and start the test run.
  - : Switch the fan speed and start the test run.
  - : Switch the airflow direction and start the test run.
  - : Switch the louver and start the test run.
  - : Start the test run.
5. Stop the test run.
  - Press the  button ① to stop the test run.
  - After 2 hours, the stop signal is transmitted.

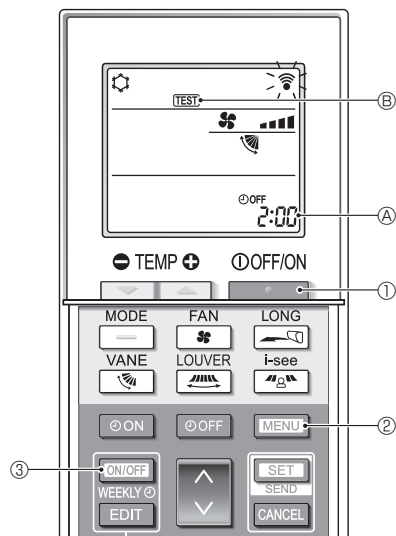


## 15-5. FUNCTION SETTING

### 15-5-1. TAR-40MAA

1. Select "Service" from the Main menu, and press the [SELECT] button.

Select "Setting" from the Service menu, and press the [SELECT] button.


Select "Function setting", and press the [SELECT] button.

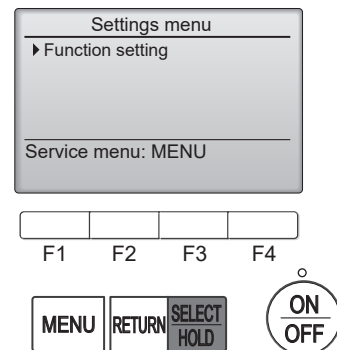


2. Set the indoor unit refrigerant addresses and unit numbers with the [F1] through [F4] buttons, and then press the [SELECT] button to confirm the current setting.

#### Note: Checking the indoor unit No.


When the [SELECT] button is pressed, the target indoor unit will start fan operation. If the unit is common or when running all units, all indoor units for the selected refrigerant address will start fan operation.



3. When data collection from the indoor units is completed, the current settings appears highlighted.  
Non-highlighted items indicate that no function settings are made.  
Screen appearance varies depending on the "Unit No." setting.




4. Use the [F1] or [F2] button to move the cursor to select the mode number, and change the setting number with the [F3] or [F4] button.



5. When the settings are completed, press the [SELECT] button to send the setting data from the remote controller to the indoor units.  
When the transmission is successfully completed, the screen will return to the Function setting screen.

#### Note: • Make the above settings only on Mr. Slim units as necessary.


- The above function settings are not available for the CITY MULTI units.
- Table 1 summarizes the setting options for each mode number. Refer to the indoor unit Installation Manual for the detailed information about initial settings, mode numbers, and setting numbers for the indoor units.
- Be sure to write down the settings for all functions if any of the initial settings has been changed after the completion of installation work.




## 15-5-2. PAR-SL97A-E

Functions can be selected with the wireless remote controller. Function selection using wireless remote controller is available only for refrigerant system with wireless function. Refrigerant address cannot be specified by the wireless remote controller.

### [Flow of function selection procedure]

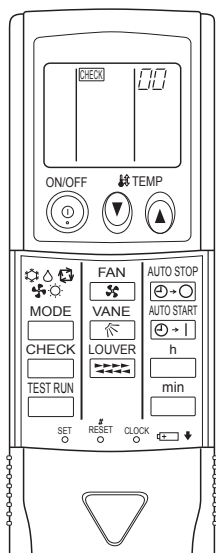

The flow of the function selection procedure is shown below. This example shows how to turn off the function that raises the set temperature by 4 degrees during HEAT operation. The procedure is given after the flow chart.

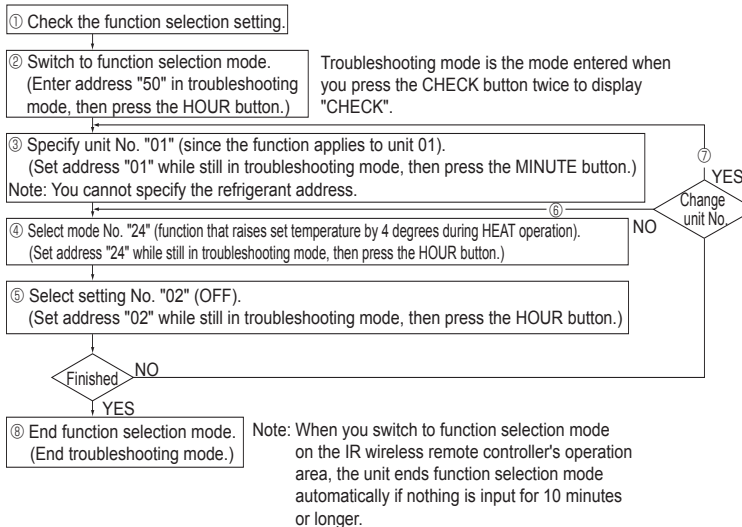

### [Operating instructions]

#### ① Check the function settings.

#### ② Press the button twice continuously. → is lit and "00" blinks.

Press the button once to set "50". Direct the IR wireless remote controller toward the receiver of the indoor unit and press the button.

#### ③ Set the unit number.

Press the button to set the unit number. (Press "01" to specify the indoor unit whose unit number is 01.)

Direct the IR wireless remote controller toward the receiver of the indoor unit and press the button.

(By setting unit number with the button, specified indoor unit starts performing fan operation.

Detect which unit is assigned to which number using this function. If unit number is set to AL, all the indoor units in same refrigerant system start performing fan operation simultaneously.)

#### Notes:

1. If a unit number that cannot be recognized by the unit is entered, 3 beeps of 0.4 seconds will be heard. Reenter the unit number setting.
2. If the signal was not received by the sensor, you will not hear a beep or a "double ping sound" may be heard. Reenter the unit number setting.

#### ④ Select a mode.

Press the button to set a mode. Press "24" to turn on the function that raises the set temperature by 4 degrees during heat operation. Direct the IR wireless remote controller toward the sensor of the indoor unit and press the button.

→ The sensor-operation indicator will blink and beeps will be heard to indicate the current setting number.

Current setting number: 1 = 1 beep (one second)  
2 = 2 beeps (one second each)  
3 = 3 beeps (one second each)

#### Notes:

1. If a mode number that cannot be recognized by the unit is entered, 3 beeps of 0.4 seconds will be heard. Reenter the mode number.
2. If the signal was not received by the sensor, you will not hear a beep or a "double ping sound" may be heard. Reenter the mode number.

#### ⑤ Select the setting number.

Press the button to select the setting number. (02: Not available)

Direct the IR wireless remote controller toward the receiver of the indoor unit and press the button.

→ The sensor-operation indicator will blink and beeps will be heard to indicate the setting number.

Setting number: 1 = 2 beeps (0.4 seconds each)  
2 = 2 beeps (0.4 seconds each, repeated twice)  
3 = 2 beeps (0.4 seconds each, repeated 3 times)

#### Notes:

1. If a setting number that cannot be recognized by the unit is entered, the setting will turn back to the original setting.
2. If the signal was not received by the sensor, you will not hear a beep or a "double ping sound" may be heard. Reenter the setting number.

#### ⑥ Repeat steps ④ and ⑤ to make an additional setting without changing unit number.

#### ⑦ Repeat steps ③ to ⑤ to change unit number and make function settings on it.

#### ⑧ Complete the function settings

Press button.

**Do not use the wireless remote controller for 30 seconds after completing the function setting.**

### 15-5-3. PAR-SL100A-E




Fig. 15-1

#### 1. Going to the function select mode

Press the **[MENU]** button between of 5 seconds.

(Start this operation from the status of remote controller display turned off.)

[CHECK] is lit and "00" blinks. (Fig. 15-1)

Press the **[DOWN]** button to set the "50".

Direct the wireless remote controller toward the receiver of the indoor unit and press the **[SET]** button.




Fig. 15-2

#### 2. Setting the unit number

Press the **[DOWN]** button to set unit number **A**. (Fig. 15-2)

Direct the wireless remote controller toward the receiver of the indoor unit and press the **[SET]** button.




Fig. 15-3

#### 3. Select a mode

Press the **[DOWN]** button to set Mode number **B**. (Fig. 15-3)

Direct the wireless remote controller toward the receiver of the indoor unit and press the **[SET]** button.

Current setting number:

1=1 beep (1 second)

2=2 beep (1 second each)

3=3 beep (1 second each)




Fig. 15-4

#### 4. Selecting the setting number

Use the **[DOWN]** button to change the Setting number **C**. (Fig. 15-4)

Direct the wireless remote controller toward the receiver of the indoor unit and press the **[SET]** button.

#### 5. To select multiple functions continuously

Repeat select **③** and **④** to change multiple function settings continuously.

#### 6. Complete function selection

Direct the wireless remote controller toward the sensor of the indoor unit and press the **OFF/ON** button.


**Note:** Be sure to write down the settings for all functions if any of the initial settings has been changed after the completion of installation work.

15-6. ERROR HISTORY


1. Select "Service" from the Main menu, and press the [SELECT] button.



Select "Check" with the [F1] or [F2] button, and press the [SELECT] button.

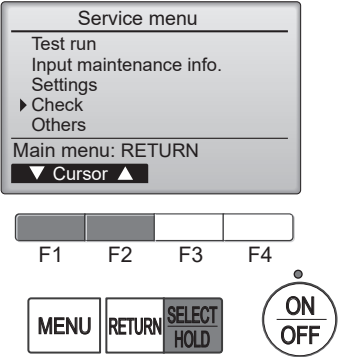


2. Select "Error history" with the [F1] or [F2] button, and press the [SELECT] button.



3. 16 error history records will appear.

4 records are shown per page, and the top record on the first page indicates the latest error record.

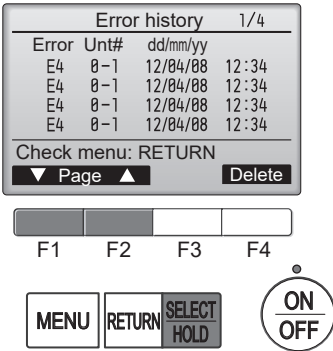

4. Deleting the error history

To delete the error history, press the [F4] button (Delete) on the screen that shows error history. A confirmation screen will appear asking if you want to delete the error history.




Press the [F4] button (OK) to delete the history.



"Error history deleted" will appear on the screen.

Press the [RETURN] button to go back to the Check menu screen.

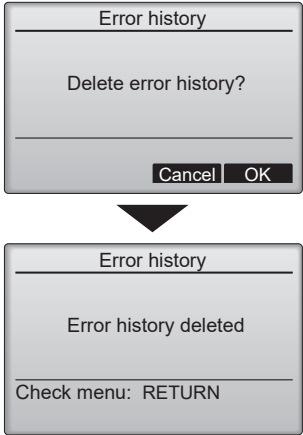

## 15-7. SELF-DIAGNOSIS


### 15-7-1. TAR-40MAA

1. Select "Service" from the Main menu,  
and press the [SELECT] button.


Select "Check" from the Service menu,  
and press the [SELECT] button.

Select "Diagnosis" from the Check menu,  
and press the [SELECT] button.


Select "Self check" with the **[F1]** or **[F2]** button,  
and press the [SELECT] button.

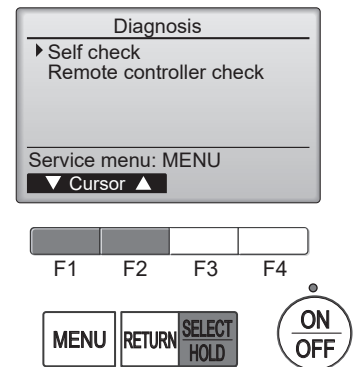


2. With the **[F1]** or **[F2]** button, enter the refrigerant address, and press the [SELECT] button.



3. Check code, unit number, attribute will appear.  
"-" will appear if no error history is available.



**When there is no error history**





4. Resetting the error history

Press the **[F4]** button (Reset) on the screen that shows the error history.

A confirmation screen will appear asking if you want to delete the error history.

Press the **[F4]** button (OK) to delete the error history.

If deletion fails, "Request rejected" will appear.  
"Unit not exist" will appear if no indoor units that are correspond to the entered address are found.




#### Navigating through the screens

- To go back to the Service menu ..... [MENU] button
- To return to the previous screen..... [RETURN] button

### 15-7-2. PAR-SL97A-E

When a malfunction occurs to air conditioner, both indoor unit and outdoor unit will stop and operation lamp blinks to inform unusual stop.

#### <Malfunction-diagnosis method at maintenance service>

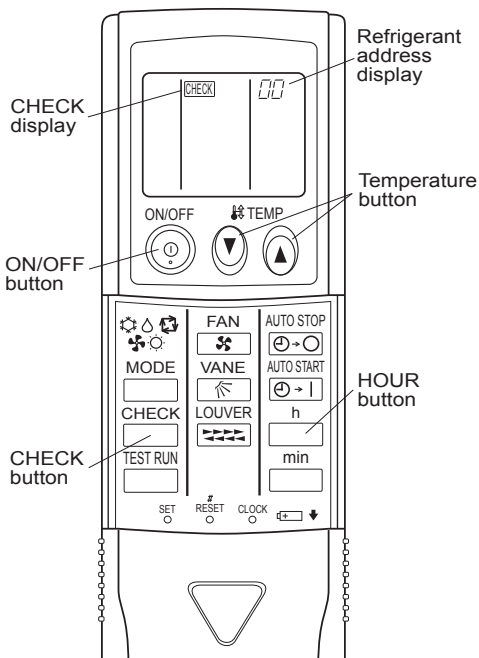


#### [Procedure]

1. Press the CHECK button twice.
  - "CHECK" lights, and refrigerant address "00" blinks.
  - Check that the remote controller's display has stopped before continuing.
2. Press the TEMP buttons.
  - Select the refrigerant address of the indoor unit for the self-diagnosis.

Note: Set refrigerant address using the outdoor unit's DIP switch (SW1). (For more information, see the outdoor unit installation manual.)
3. Point the remote controller at the sensor on the indoor unit and press the HOUR button.
  - If an air conditioner error occurs, the indoor unit's sensor emits an intermittent buzzer sound, the operation light blinks, and the check code is output.
  - (It takes 3 seconds at most for check code to appear.)
4. Point the remote controller at the sensor on the indoor unit and press the ON/OFF button.
  - The check mode is cancelled.

### 15-7-3. PAR-SL100A-E

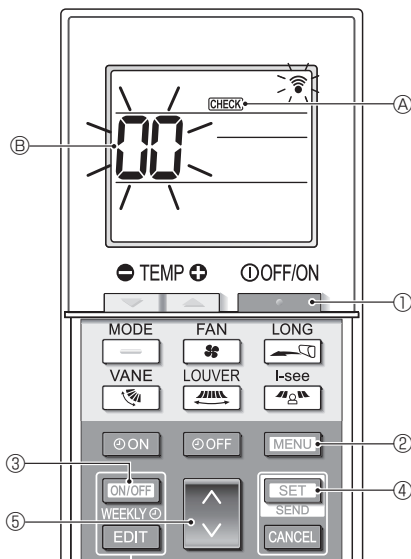

1. Press the button ① to stop the air conditioner.
  - If the weekly timer is enabled (WEEKLY is on), press the button ③ to disable it (WEEKLY is off).
2. Press the button ② for 5 seconds.
  - ④ comes on and the unit enters the self-check mode.
3. Press the button ⑤ to select the refrigerant address (M-NET address) ⑥ of the indoor unit for which you want to perform the self-check.
4. Press the button ④.
  - If an error is detected, the check code is indicated by the number of beeps from the indoor unit and the number of blinks of the OPERATION INDICATOR lamp.
5. Press the button ①.
  - ④ and the refrigerant address (M-NET address) ⑥ go off and the self-check is completed.

## 15-8. REMOTE CONTROLLER CHECK


If operations cannot be completed with the remote controller, diagnose the remote controller with this function.

1. Select "Service" from the Main menu, and press the [SELECT] button.

Select "Check" from the Service menu, and press the [SELECT] button.

Select "Diagnosis" from the Check menu, and press the [SELECT] button.


Select "Remote controller check" with the **F1** or **F2** button, and press the [SELECT] button.

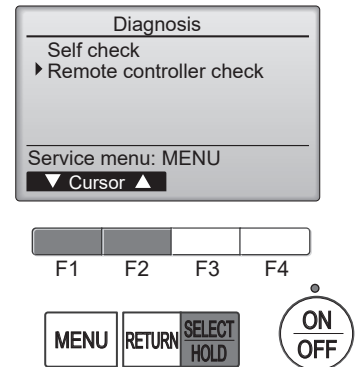

2. Select "Remote controller check" from the Diagnosis menu, and press the [SELECT] button to start the remote controller check and see the check results.


To cancel the remote controller check and exit the "Remote controller check" menu screen, press the [MENU] or the [RETURN] button.

The remote controller will not reboot itself.

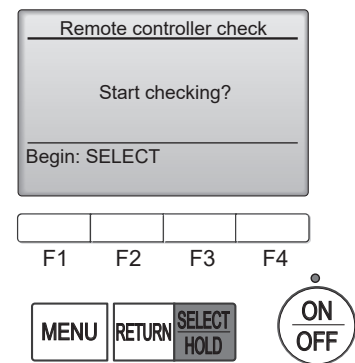

3.
  - OK: No problems are found with the remote controller. Check other parts for problems.
  - E3, 6832: There is noise on the transmission line, or the indoor unit or another remote controller is faulty. Check the transmission line and the other remote controllers.
  - NG (ALL0, ALL1): Send-receive circuit fault. The remote controller needs replacing.
  - ERC: The number of data errors is the discrepancy between the number of bits in the data transmitted from the remote controller and that of the data that was actually transmitted over the transmission line. If data errors are found, check the transmission line for external noise interference.

### Remote controller check results screen





If the [SELECT] button is pressed after the remote controller check results are displayed, remote controller check will end, and the remote controller will automatically reboot itself.

**Check the remote controller display and see if anything is displayed (including lines). Nothing will appear on the remote controller display if the correct voltage (8.5–12 VDC) is not supplied to the remote controller. If this is the case, check the remote controller wiring and indoor units.**

15-9. SMOOTH MAINTENANCE

1. Select "Service" from the Main menu, and press the [SELECT] button.

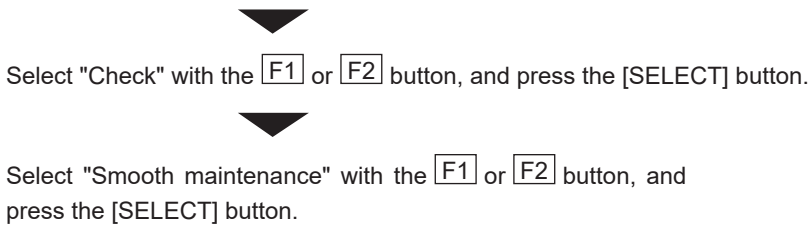


2. Set each item.

Select the item to be changed with the [F1] or [F2] button.

Select the required setting with the [F3] or [F4] button.

- <Ref.address>setting [ 0 ] – [ 15 ]
- <Stable mode>setting [ Cool ] / [ Heat ] / [ Normal ]

Press the [SELECT] button, Fixed operation will start.  
Note: Stable mode will take approx. 20 minutes.

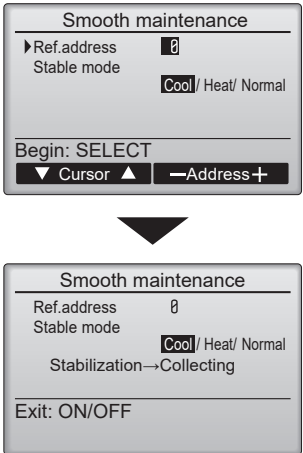


3. The operation data will appear.

The Compressor-Accumulated operating (COMP. run) time is 10-hour unit, and the Compressor-Number of operation times (COMP. ON/OFF) is a 100-time unit (fractions discarded).

**Navigating through the screens**

- To go back to the Service menu ..... [MENU] button
- To return to the previous screen ..... [RETURN] button

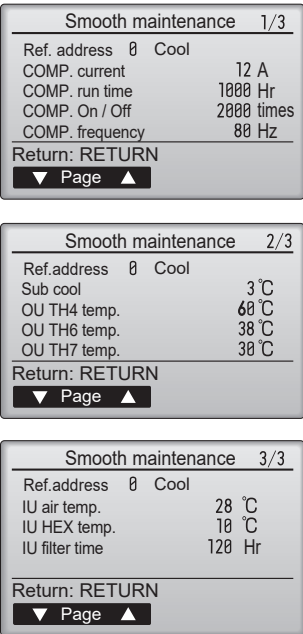


## ■ Refrigerant address

### Single refrigerant system


In the case of single refrigerant system, the refrigerant address is "00" and no operation is required.

Simultaneous twin, triple units belong to this category (single refrigerant system).

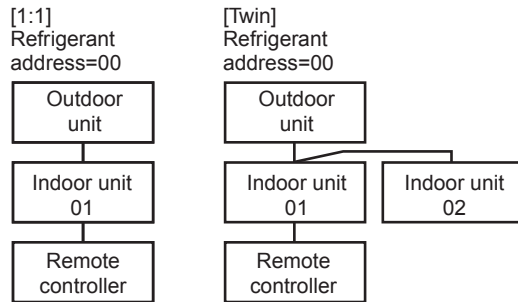

### Multi refrigerant system (group control)

Up to 16 refrigerant systems (16 outdoor units) can be connected as a group by 1 remote controller. To check or set the refrigerant addresses.

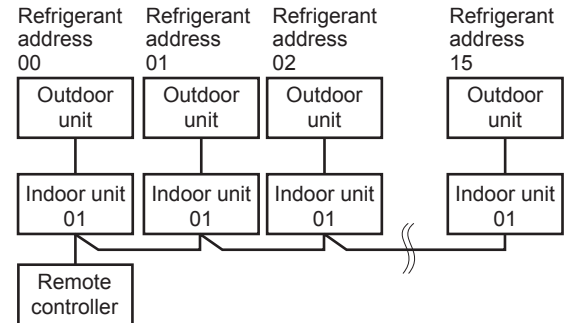


## 15-10. REQUEST CODE

Details on the operation data including each thermistor temperature and error history can be confirmed with the remote controller.

1. Select "Service" from the Main menu, and press the [SELECT] button.

Select "Check" with the **F1** or **F2** button, and press the [SELECT] button.

Select "Request code" with the **F1** or **F2** button, and press the [SELECT] button.





2. Set the Refrigerant address and Request code.

Select the item to be changed with the **F1** or **F2** button.

Select the required setting with the **F3** or **F4** button.

- <Ref.address>setting [ 0 ] – [ 15 ]
- <Request code>setting

Press the [SELECT] button, Data will be collected and displayed.



**Request code: 004**  
**Discharge temperature: 69°C**

# **MITSUBISHI ELECTRIC TRANE HVAC US LLC**

HEAD OFFICE: 1340 SATELLITE BOULEVARD, SUWANEE, GA 30024, USA

©Copyright 2020 MITSUBISHI ELECTRIC CORPORATION  
Issued: May 2022 No. OCHT754 REVISED EDITION-D  
Issued: Mar. 2022 No. OCHT754 REVISED EDITION-C  
Issued: Jun. 2021 No. OCHT754 REVISED EDITION-B  
Issued: Dec. 2020 No. OCHT754 REVISED EDITION-A  
Published: Oct. 2020 No. OCHT754  
Made in Japan

Specifications are subject to change without notice.