


## SPECIFICATION

Furnish and install hard plastic base roof vent flashing with elastomer collar. Unit shall be Water-Tite item number checked below as manufactured by IPS Corporation, as per corresponding dimensional characteristics, or equivalent. **(Do not use Petroleum based mastics, sealing compounds, or paints on collar portion of all flashings, on all hardbase, flexible, or rain collars.)**

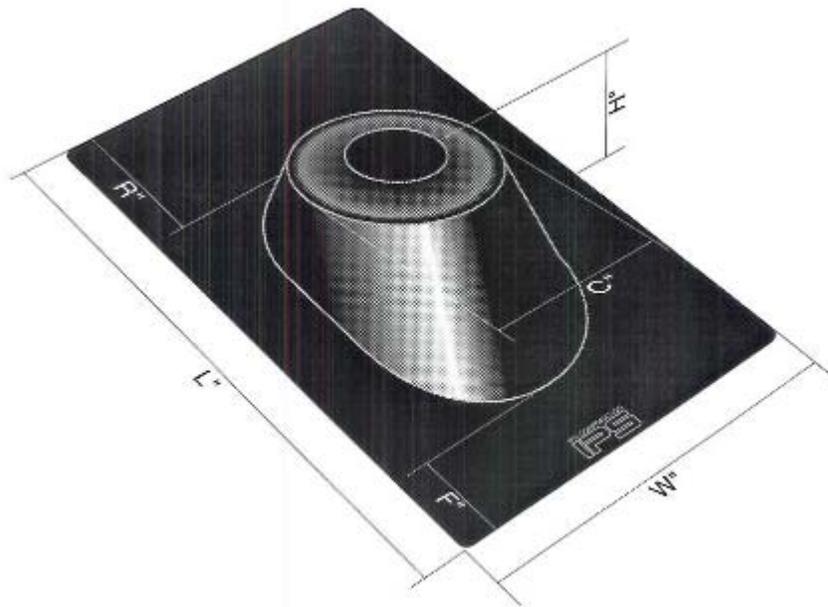

✓ PROD. CODE

|       |
|-------|
| 81750 |
| 81751 |
| 81755 |
| 81756 |
| 81760 |
| 81765 |

**Roof Vent Flashing Dimensional Characteristics**

| Model  | Vent Size       | Dim. W  | Dim. L  | Dim. R | Dim. F | Dim. C  | Dim. H  |
|--------|-----------------|---------|---------|--------|--------|---------|---------|
| HB 1   | 1 1/4" - 1 1/2" | 9 1/4"  | 13"     | 3 3/8" | 2 3/8" | 4"      | 2 1/4"  |
| HB 1LB | 1 1/4" - 1 1/2" | 11 1/8" | 15"     | 3 1/2" | 2 1/2" | 5 3/10" | 2 7/8"  |
| HB 2   | 2"              | 9 1/4"  | 13"     | 3 3/8" | 2 3/8" | 4"      | 2 1/4"  |
| HB 2LB | 2"              | 11 1/8" | 15"     | 3 1/2" | 2 1/2" | 5 3/10" | 2 7/8"  |
| HB 3   | 3"              | 11 1/8" | 15"     | 3 1/2" | 2 1/2" | 5 3/10" | 2 7/8"  |
| HB 4   | 4"              | 12"     | 15 1/2" | 3 3/8" | 2 1/8" | 6 1/4"  | 2 9/10" |