


NEW

CPVC x Male Sweat Adapters



643-C211



643-C311

- **Perfect for connecting sillcocks, laundry boxes, water service connections, etc.**
- **All fittings are production tested to ensure maximum quality and a leak free connection.**

CAUTION

Do not cut this fitting prior to soldering.
Cutting this fitting voids warranty.

CAUTION

Do not allow CPVC portion of fitting to be heated.
Do not exceed 190 °F. Excessive heat can damage the CPVC insert and internal o-ring.


Caution When Soldering

Whenever possible, solder with CPVC cup facing downward.

If CPVC joint is **above** solder joint, plug temporarily with nipple and cap to prevent chimney effect.

Be sure to apply commercial heat blocking agent between solder joint and CPVC joint, as shown.

Apply torch to female fitting, not adapter.

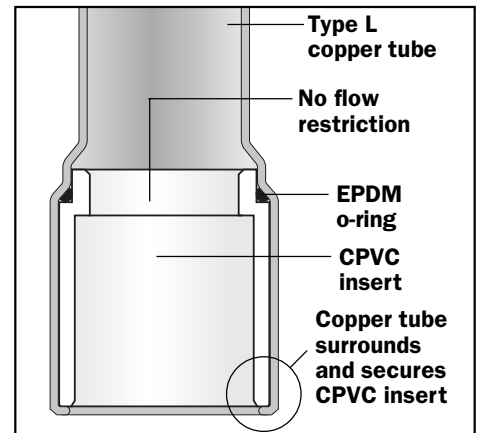

Item No.	Description	Min. Qty.	Case Qty.	List Price Each
643-C211	1/2" CPVC x 1/2" MSWT x 11" long	100	100	4.80
643-C311	3/4" CPVC x 3/4" MSWT x 11" long	50	50	6.00

SBV2-5/03 CPVC SWEAT ADAPTERS © 2003 SIOUX CHIEF MFG.



1-800-821-3944 • www.siouxchief.com

Sioux Chief
MANUFACTURING COMPANY

