

SUBMITTAL DATA SHEET

breeze33

Series Name: J Series
Model Number: BZ33-WMAHU24-454-G3-J / BZ33-INV24OUT2-454-G3-J

Air Handler Heat Pump System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION	
ESP(in.W.G)	0-0.8
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	53.0/51/48/37.5/N/A
Dimension(W×D×H)	inch 20-5/16 x 15-3/4 x 36-9/16
	mm 515×399×928
Package(W×D×H)	inch 22-13/16 x 19-1/2 x 42-5/16
	mm 580×495×1090
Net/Gross Weight	lbs 91.49/111.33
	kg 41.5/50.5

OUTDOOR SPECIFICATION	
Compressor Type	ROTARY
Compressor Model	KTM240D46UKT2
Refrigerant	R454B
Refrigerant Oil Charge(mL)	620
Refrigerant Oil	VG74
Outdoor Air Flow (Max) (CFM)	1765.8
Outdoor Noise Level (dBA)	59
Dimension(W×D×H)	inch 35-1/16 x 13-7/16 x 26-1/2
	mm 890×342×673
Package(W×D×H)	inch 39-3/16 x 15-11/16 x 29-1/8
	mm 995×398×740
Net/Gross Weight	lbs 101.41/109.13
	kg 46/49.5

EFFICIENCY			
Cooling		Heating	
SEER2	17.5	HSPF2-4	10.5
EER2	11.7	COP	3.8


PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	22000
Min/Max Capacity	10100~27500
Moisture Removal(L/h)	2.5
Standard Operating Range(°F/°C)	-22~122(-30~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	25000
1. @ 47°F Min/Max Capacity	7000~32200
2. @ 17°F Rated	20800
3. @ 5°F Rated: Capacity / COP	19600/1.96
3. @ 5°F Max: Capacity	19400
Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL	
Indoor Power Supply	115V/208/230V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	4
Indoor MOP	15
Outdoor Power Supply	208/230V,60Hz,1Ph
Outdoor MCA	19
Outdoor MOP	20
Communication Wiring	AWG 20-2
Compressor RLA	14
Outdoor Fan Motor RLA	1
Outdoor Fan Motor W	/
Indoor Fan Motor RLA	3
Indoor Fan Motor W	250
System Power Input @ Cooling (W)	1880(830 ~ 2850)
System Power Input @ Heating (W)	1980(455 ~ 2590)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	164(50)
Max. Height Difference(ft/m)	82(25)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	74.08(2.1)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.7(65)
Connection Method	Flared

Indoor Unit Dimension

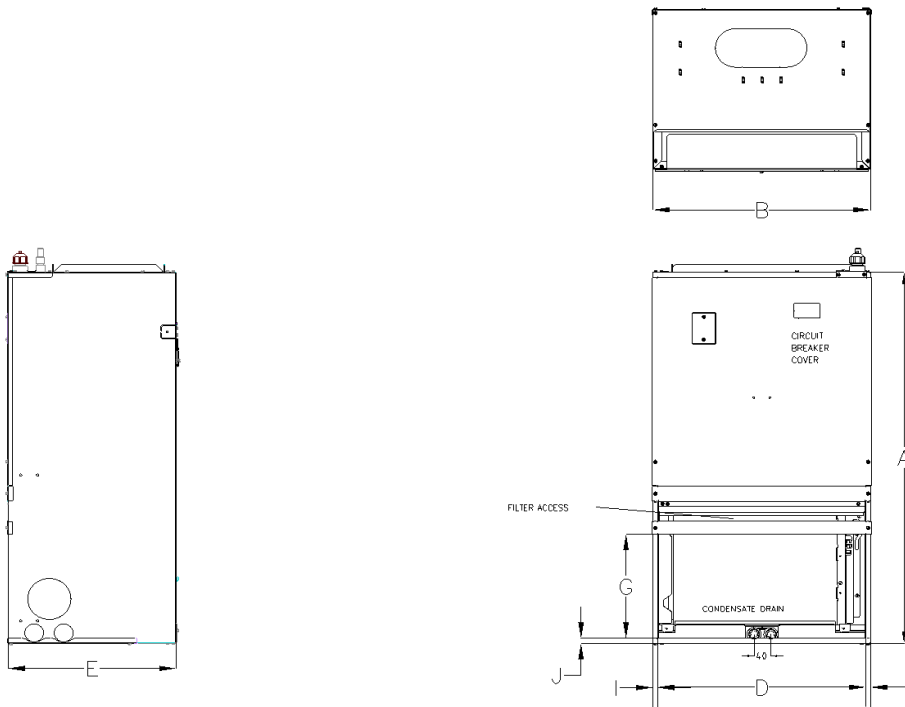


Dimensions		Model(Btu/h)		18K/24K		30K/36K	
				inch	mm	inch	mm
A	Model Height			36.5	928	49	1017
B	Model Width			20.3	515	21	559
C	Supply Air Opening Width			17.4	442	18.8	478.6
D	Return Air Opening Width			19.4	493.8	21.2	537.8
E	Model Depth			15.7	399	21	483
F	Supply Air Opening Depth			10.4	265.2	9.3	235.4
G	Return Air Opening Depth			10.3	261	13.1	332.5
H	Supply Air Opening Clearance			1.1	29.1	1.6	41
I	Return Air Opening Side Clearance			0.42	10.6	0.42	10.6
J	Return Air Opening Front Clearance			0.47	12	0.63	16

Outdoor Unit Dimension

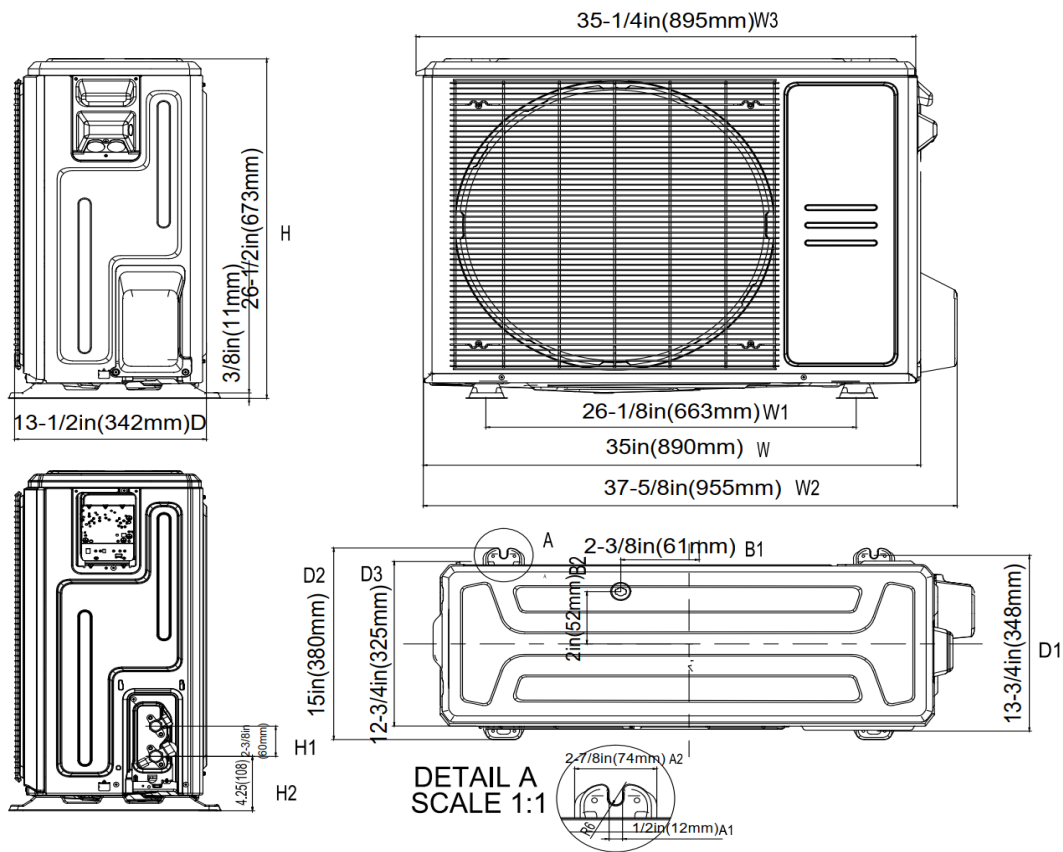


Installation Instruction For Outdoor Unit

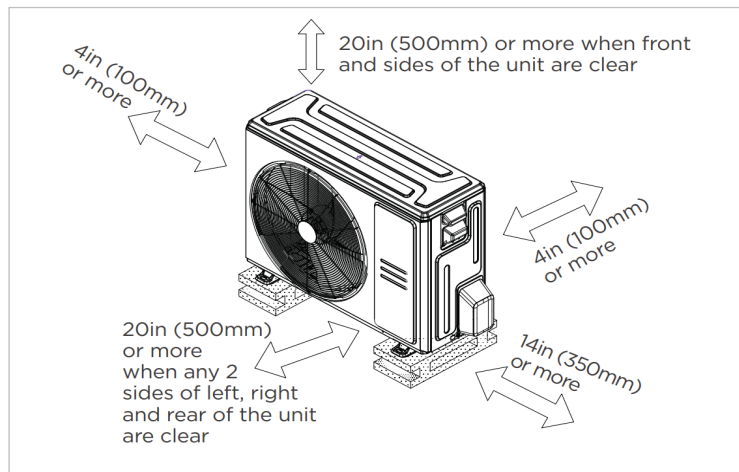

☒ Meets all spatial requirements shown in Installation Clearance Requirements above.

24K

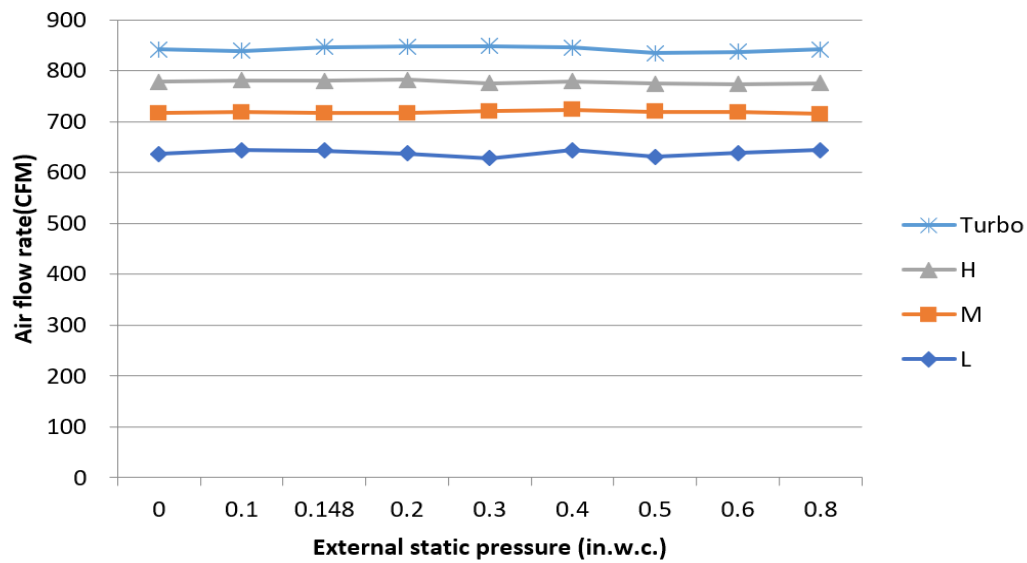

Features

- Multi-position of return air: front(factory standard) or bottom
- Aluminum Coil
- Constantly Air Flow system up to 0.80 In.W.G
- Optional Auxiliary heat kit up to 10kW
- Easy Maintenance
- Multiple control options available:
 - Two way communication wired controller:120N(X6)
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Wireless remote controller
 - Third-Party 24V Thermostat
- High efficiency up to 19.3 SEER2, 12.1 EER2, 10.8 HSPF2
- Chassis heater and crankcase heater equipped as standard