

R454b Refrigerant

SUBMITTAL DATA SHEET



Series Name: Ceiling&Floor Regular Series
Model Number: 20

Ceiling&Floor Regular System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPEINDOOR SPECIFICATIONCIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	1366 / 1236 / 1118 / 883 / 777	
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	55 / 55 / 50 / 42 / 39	
Dimension (W×D×H)	inch	65 x 26-5/8 x 9-1/4
	mm	1650 x 675 x 235
Package (W×D×H)	inch	67-7/8 x 29-3/4 x 12-1/2
	mm	1725 x 755 x 318
Net/Gross Weight	lbs	95 / 111
	kg	43.2 / 50.5

OUTDOOR SPECIFICATION

Compressor Type	ROTARY	
Compressor Model	KTQ420D1UMU	
Refrigerant	R454B	
Refrigerant Oil Charge(mL)	1400	
Refrigerant Oil	VG74	
Outdoor Air Flow (Max) (CFM)	4,238	
Outdoor Noise Level (dBA)	63.5	
Dimension (W×D×H)	inch	37-1/2 x 16-3/8 x 52-1/2
	mm	952 x 416 x 1333
Package (W×D×H)	inch	43-1/8 x 19-1/2 x 57-1/2
	mm	1095 x 495 x 1460
Net/Gross Weight	lbs	209 / 240
	kg	95 / 108.9

EFFICIENCY

Cooling		Heating	
SEER2	19.5	HSPF2-4	9.5
EER2	9.5	COP	3.05

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	54,000
Min/Max Capacity	15,000~54,500
Moisture Removal(L/h)	7.48
Standard Operating Range(*F/*C)	-13~122 (-25~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	60,000
1. @ 47°F Min/Max Capacity	20,200~60,000
2. @ 17°F Rated	37,200
3. @ 5°F Rated: Capacity / COP	35,000 / 2.01
3. @ 5°F Max: Capacity	35,000
Standard Operating Range(*F/*C)	-13~75 (-25~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL




Power Supply	208 / 230 V,60 Hz,1 Ph	
System MCA	42.0	
Communication wiring	AWG 20/2	
System MOCP	45.0	
Compressor RLA	25	
Outdoor Fan Motor RLA	2.2	
Outdoor Fan Motor W	85	
Indoor Fan Motor RLA	2	
Indoor Fan Motor W	160	
System Power Input @ Cooling (W)	5,625 (1,400~6,050)	
System Power Input @ Heating (W)	5,765 (1,150~5,765)	
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)	
RLA: Rated load amps (A)	W: Fan motor rated output (W)	

PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	3/8" (9.52 mm)
Gas Size	3/4" (19 mm)
Max. Piping Length(ft/m)	246 (75)
Max. Height Difference(ft/m)	98 (30)
Max. Pre-charged Length(ft/m)	25 (7.5)
Refrigerant Pre-charged Amount(oz/kg)	145 (4.1)
Additional Charge of Refrigerant((oz/ft)/(g/m)	0.32 (30)
Connection Method	Flared



Indoor Unit Dimension

Unit: inch (mm)

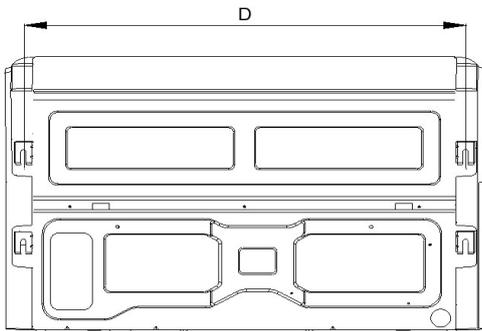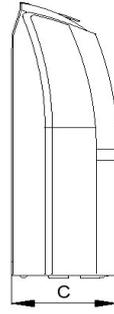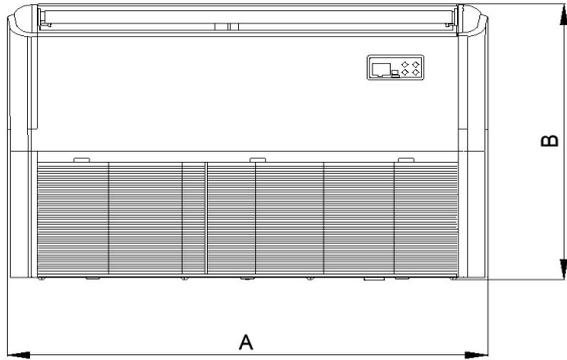


Model	A	B	C	D
18K~24K	42	26-5/8	9-1/4	38-3/4
36K~60K	65	26-5/8	9-1/4	61-5/8

Installation Instruction

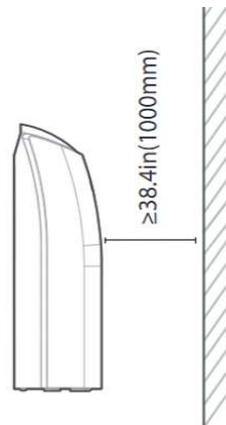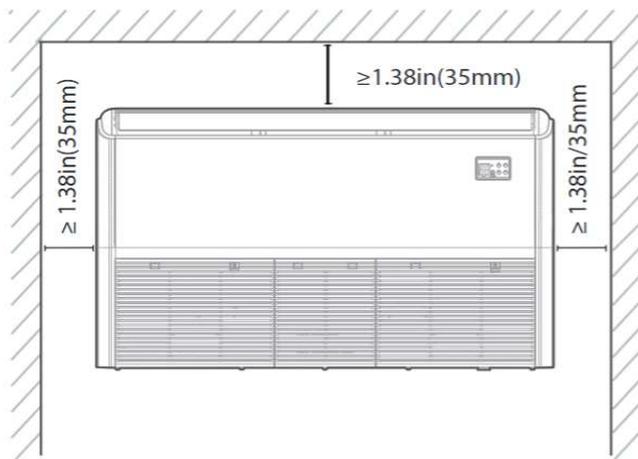


Outdoor Unit Dimension

Unit: inch (mm)

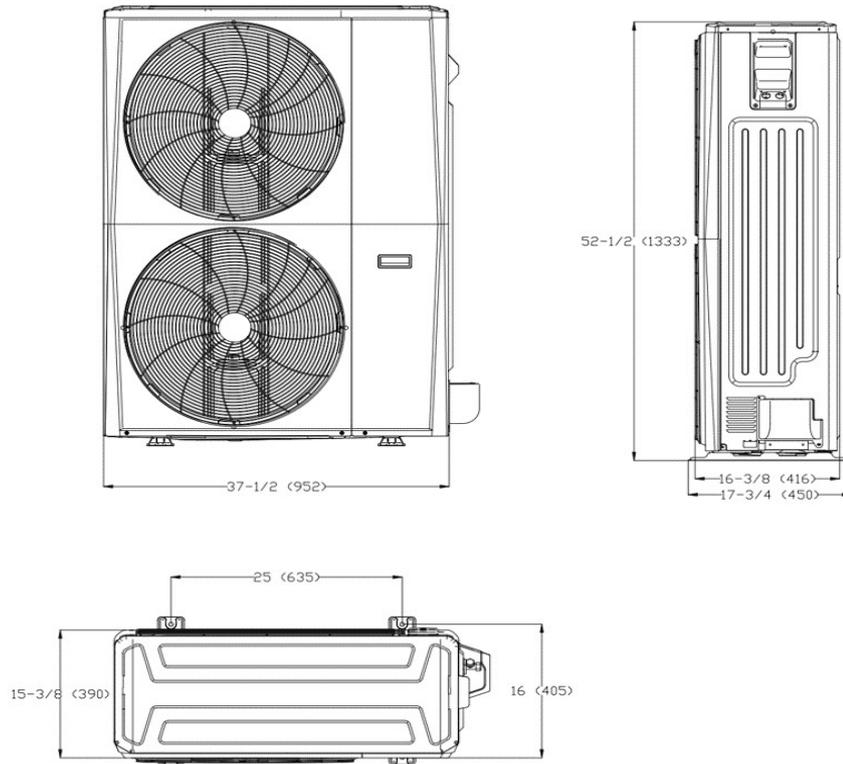

Installation Instruction

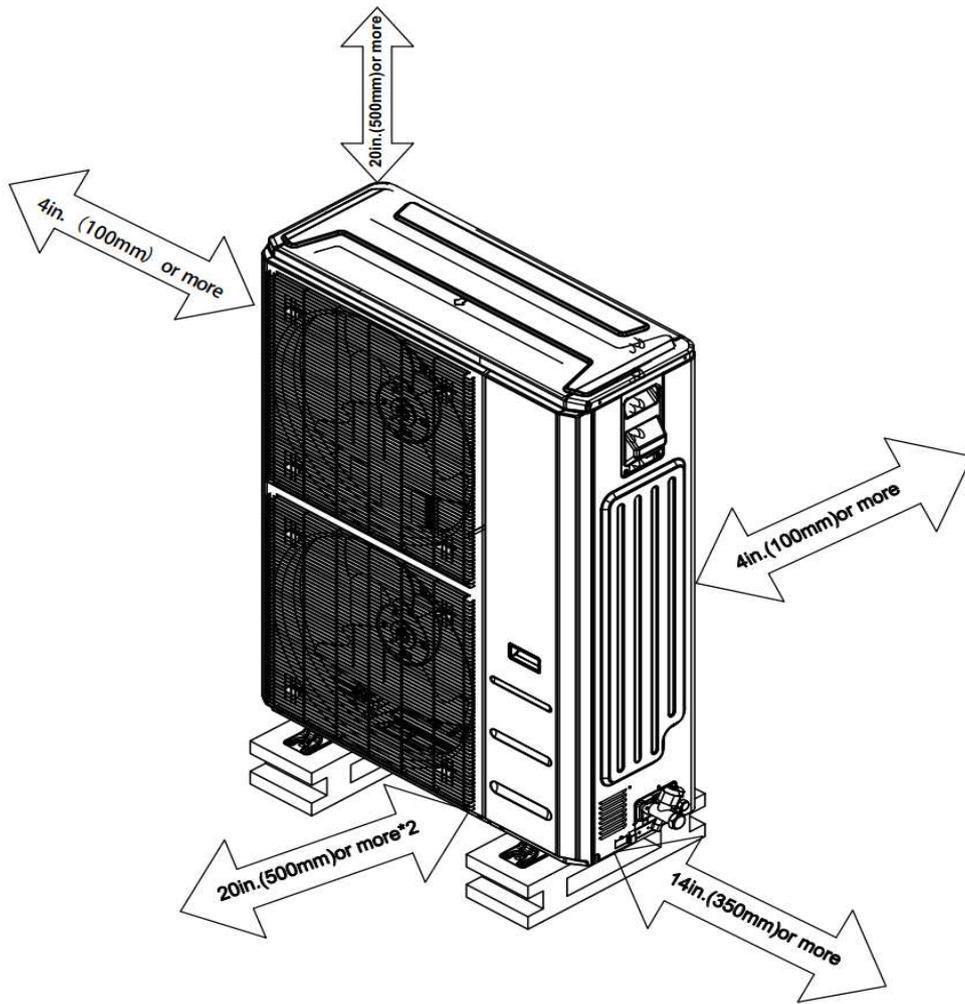

FEATURES

- 2 Style Installation
- 3D Airflow
- Refrigerant leakage detection sensor
- Humidity sensor
- “88” display tube
- 1~100% fan speed setting
- WiFi capability: Wired controller with built-in Wi-Fi
- OTA(by using 120N(X6W))
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple control options available:
 - Two-way communication wired controller with built-in Wi-Fi:120N(X6W)
 - Wireless remote controller
 - Third-Party 24V Thermostat*

*24V interface is required.