

# R454b Refrigerant

# SUBMITTAL DATA SHEET



Series Name: EP 30K 36K Entry Series  
Model Number: MSEEU-H30B-2A/MO1BS-H30B-2A

### High Wall Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



### INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	883 / 636 / 506 / 383 / 383	
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	53 / 46 / 40 / 31 / 20	
Dimension (W×D×H)	inch	44-7/8 x 10-7/8 x 14-1/2
	mm	1140 x 275 x 370
Package (W×D×H)	inch	50-3/8 x 14-1/8 x 17-7/8
	mm	1280 x 360 x 455
Net/Gross Weight	lbs	43 / 55
	kg	19.6 / 24.8

### OUTDOOR SPECIFICATION

Compressor Type	ROTARY	
Compressor Model	KTF250D22UMT	
Refrigerant	R454B	
Refrigerant Oil Charge(mL)	670	
Refrigerant Oil	VG74	
Outdoor Air Flow (Max) (CFM)	2,235	
Outdoor Noise Level (dBA)	61	
Dimension (W×D×H)	inch	37-1/4 x 16-1/8 x 31-7/8
	mm	946 x 410 x 810
Package (W×D×H)	inch	42-7/8 x 19-5/8 x 34-7/8
	mm	1090 x 500 x 885
Net/Gross Weight	lbs	143 / 155
	kg	64.8 / 70.1

### EFFICIENCY

Cooling		Heating	
SEER2	20.5	HSPF2-4	9.5
EER2	12.0	COP	3.08

### PERFORMANCE of Cooling

#### Cooling (Btu/hr)

Rated Capacity	30,000
Min/Max Capacity	6,500~32,800
Moisture Removal(L/h)	4.0
Standard Operating Range(*F/*C)	-13~122 ( -25 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

### PERFORMANCE of Heating

#### Heating (Btu/hr)

1. @ 47°F Rated	30,000
1. @ 47°F Min/Max Capacity	12,600~31,400
2. @ 17°F Rated	20,400
3. @ 5°F Rated: Capacity / COP	20,000/2.03
3. @ 5°F Max: Capacity	20,000
Standard Operating Range(*F/*C)	-13~75 ( -25 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


### ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	28.0
Connection Wiring	AWG 14/4
System MOCP	30.0
Compressor RLA	17.5
Outdoor Fan Motor RLA	1.3
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	0.7
Indoor Fan Motor W	58
System Power Input @ Cooling (W)	2,500 ( 700 ~ 3,200)
System Power Input @ Heating (W)	2,857 ( 760 ~2,990)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

### PIPING


Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Capillary
Liquid Size	3/8" (9.52mm)
Gas Size	5/8" (15.9mm)
Max. Piping Length(ft/m)	164 ( 50)
Max. Height Difference(ft/m)	82 ( 25)
Max. Pre-charged Length(ft/m)	25 (7.5)
Refrigerant Pre-charged Amount(oz/g)	85 ( 2.4)
Additional Charge of Refrigerant((oz/ft)/(g/m)	0.32 ( 30)
Connection Method	Flared

### Indoor Unit Dimension

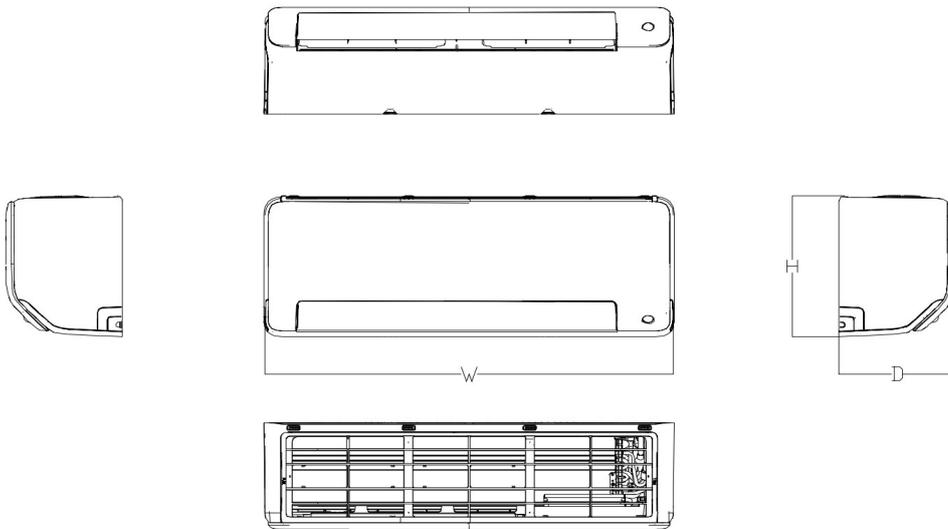

Capacity	Body Code	Unit	W	D	H
6k~12k	B	mm	795	225	295
		inch	31-3/8	8-7/8	11-5/8
12k~18k	C	mm	965	239	319
		inch	38	9-3/8	12-1/2
24k~36k	D	mm	1140	275	370
		inch	44-7/8	10-7/8	14-1/2


### Installation Instruction

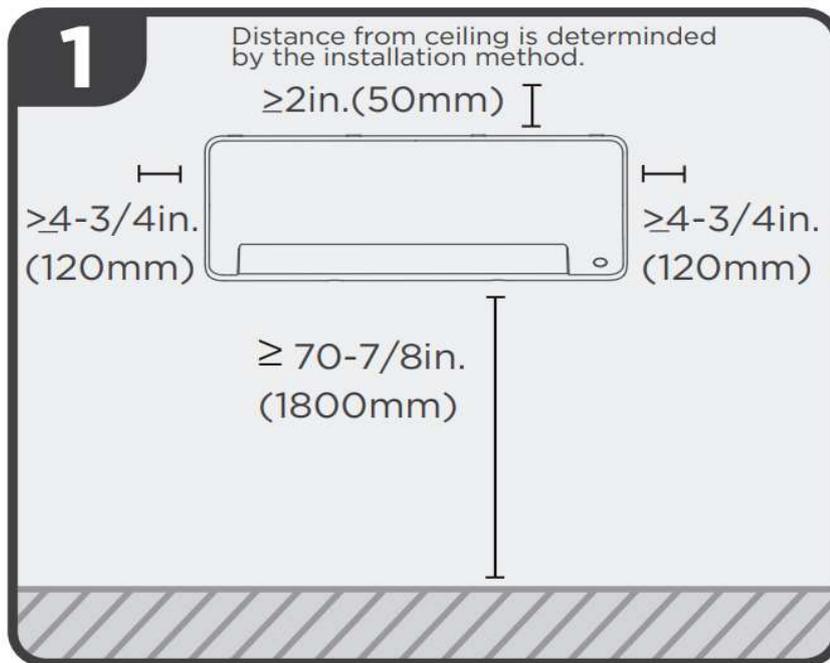


Select Installation Location

### Outdoor Unit Dimension

Unit: inch (mm)

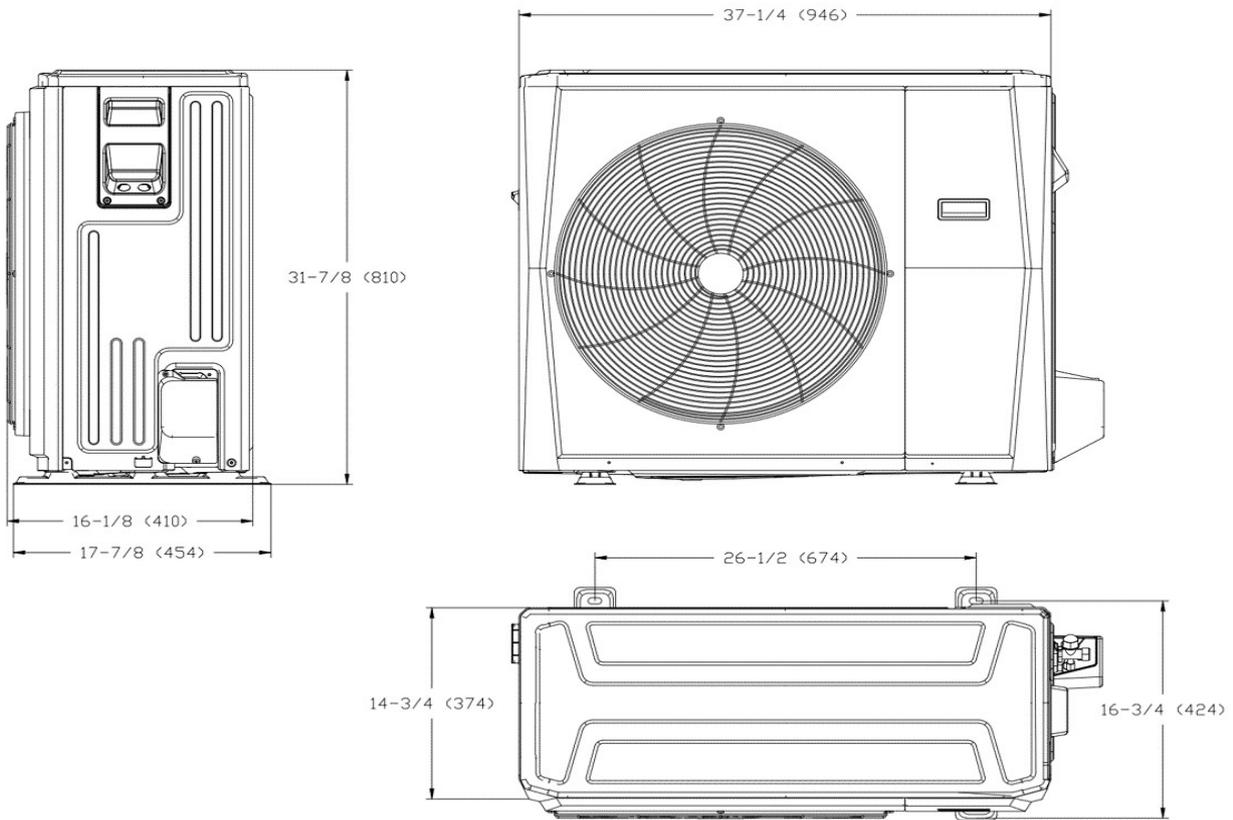

### Installation Instruction

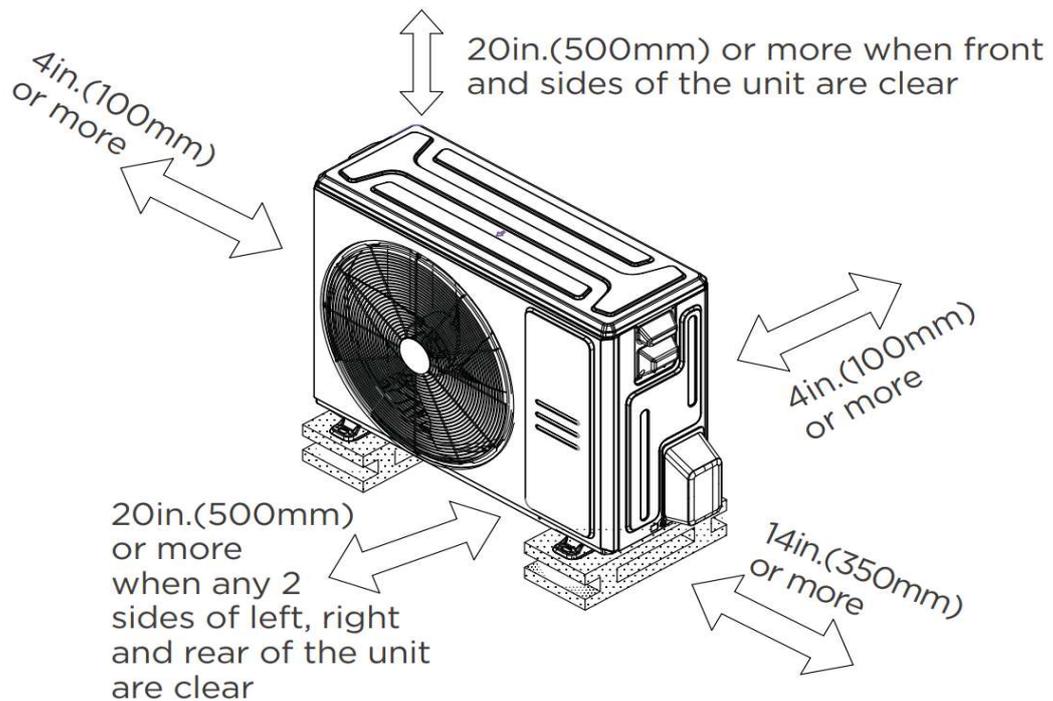

## FEATURES

- Intelligent eye
- Easy maintenance design
- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- Multiple control options available:
  - Two-way communication wired controller:120N(X6)
  - Two-way communication wired controller with built-in Wi-Fi: 120N (X6W)
  - Infrared wired controller: 120L
  - Wireless remote controller
  - Third-Party 24V Thermostat\*

\*24V interface is required.