

Introduction

GV-ASManager offers a network access control solution suitable for both small business and multinationals with facilities around the globe. GV-ASManager can control up to 1,000 units of GV-AS Controller (door controller) and GV-EV Controller (elevator controller). In addition, IP devices can be connected to GV-ASManager over a network to provide live video and event playback.


Key Features

Access Control Functions

- Control up to 1,000 GV-AS / GV-EV Controllers
- Four access modes: Card only, Card and PIN Code, Card or Common mode, Release mode
- Alarm conditions: door held open, door forced entry, tamper, access denied, duress, fire alarm
- SMS or E-Mail notification with user-defined content, video snapshot and user photo
- Up to 100 Web browser connections supported
- Up to 100,000 cards supported for GV-AS Controllers
- Up to 1,000 system users and 10,000 access groups
- Up to 256 time zones, weekly schedules and holiday planning for 14 months
- Multiple cards per user
- Enroll cards in batch mode
- Anti-Duress operation
- Anti-Passback capabilities
- Door Interlock
- Support Microsoft Access or SQL database
- Import/export of card and user data in Access or Excel file format
- User-defined screen layout and dual monitor display support
- Patrol Tour requiring security personnel to check in at the specified locations
- Integration of face recognition into security management with support for GV-Face Recognition Cameras / GV-AI FR (software) / GV-FR Panel (reader)
- Languages supported: Czech, English, French, Hebrew, Italian, Japanese, Persian, Polish, Portuguese, Russian, Serbian, Spanish, Traditional Chinese, Turkish, and Ukrainian


Video Integration

- Video integration with GeoVision software, IP devices and third-party IP cameras for live viewing
- Support for third-party IP devices using ONVIF, PSIA and RTSP protocols
- User-defined matrix of 16-channel multi-views
- Instant event playback

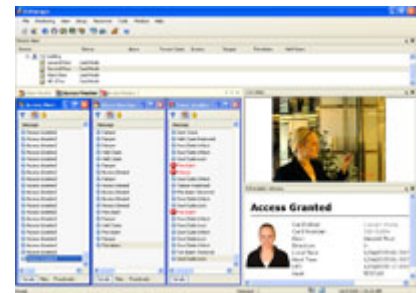

GV-ASManager

Installed in local PC, link to controllers
Main function: Management & Monitoring

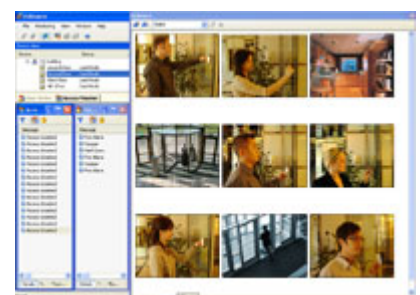

GV-ASRemote

Installed in remote PC,
unlimited links to GV-ASManager
Main function: Monitoring & Basic control

GV-ASRemote


- Monitor unlimited GV-ASManager over Internet
- Remote door monitoring, video playback, door operation

GV-TAWeb

- Flexible workforce schedule arrangement
- Payroll calculation
- Attendance and payroll report search

GV-ASWeb

- Remotely watch live view from connected devices
- Remotely add or delete cards, users, controllers, access groups, cameras
- Remotely set up operator accounts, patrol tours, parking lots, and notification settings
- Web interface for historical log search with corresponding video and snapshot
- Log export in Excel, Text, HTML, Zip and PDF file formats
- View access data on Google Maps in the order of access time
- Track GPS positions of detected vehicles

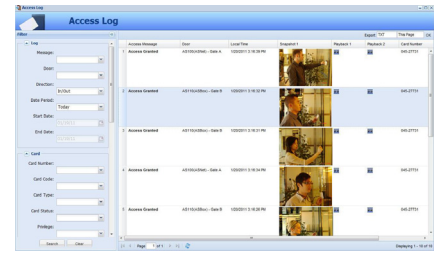

GV-ASWeb

Web interface

Main function: Search historical events with synchronized videos

GV-VMWeb

- Web interface for creating visitor database and granting access
- Visitor record search
- Visitor self registration



GV-Access Mobile Applications

Main function:

Remote control and monitoring

GV-Access Mobile App

- Support up to 5 GV-ASManager systems
- Provide the connection and alert status of each controller, door, LPR device and lane
- Access live views of cameras mapped to a door or lane
- Lock or unlock a door
- Open an LPR gate
- Clear an alert event
- Push notifications upon any access control, LPR, I/O box, system and user activity events from GV-ASManager
- Push notifications and live view call when the touchpad is activated in GV-CR1320 (reader) / GV-CS1320 (controller)

GV-Patrol Mobile App

- Access patrol tours created from GV-ASManager
- Check in at patrol points
- View patrol status and historical tours

Minimum System Requirements

No of connected controllers		0-50	51~100	101~1000
OS	64-bit	Windows 10 / Windows 11 / Server 2016 / Server 2019 / Server 2022		
CPU		Intel Core i3, 3.4 GHz (2 Cores, 2 Threads)	Intel Core i5, 3.4 GHz (2 Cores, 2 Threads)	Intel Core i7, 3.0 GHz (4 Cores, 8 Threads)
Memory		8 GB		16 GB
Database		MDB or Microsoft SQL database		Microsoft SQL database
Hard Disk		500 GB		1 TB
Program		.NET Framework 4.5 Microsoft SQL Server 2005 Express (optional)		
Browser		Internet Explorer 9.0 or later, Edge, Chrome, Firefox		

Licensing

Free License	4 controllers
Maximum License	1000 controllers
Increment for Each License	1 controller
Optional Combination	GV-AS Controllers + GV-Patrol
License Type	GV-USB Dongle Software License
	External or Internal GV-ASManager V5.3.0 or later only

- Note:**
- The Maximum License is a paid service.
 - The licensing comes in two forms: *GV-USB dongle* and *software license*. The two are incompatible. If a GV-USB dongle has been inserted on the computer with the system, please remove it before using software licensing.
 - Software licensing ONLY supports the following controllers:
 - GV-AS210 series / 410 series / 810 series firmware V2.30 or later
 - GV-AS1520 firmware version V2.03 or later
 - GV-AS1620 firmware version V1.01 or later
 - GV-CS1320 firmware V3.01 or later
 - GV-EV48 firmware V2.30 or later

Supported Software Versions

- GV-DVR / NVR: V8.5.9.0 or later
- GV-VMS: V15.10 or later
- GV-Recording Server: V1.4.2 or later
- GV-Control Center: V4.0.0 or later

Note: GV-ASManager does not support 3rd party controllers.

Options

GV-FWC	GV-FWC integrates GeoVision face-recognition-based cameras, software and readers into access control systems by sending access card data, paired to Face IDs, to controllers either through TCP/IP or Wiegand.
GV-IO Box Series	GV-IO Box series provides 4 / 8 / 16 inputs and relay outputs, and supports both DC and AC output voltages, with optional support for Ethernet module and 4E additionally supporting PoE connection.
GV-PCR1251 Enrollment Reader	GV-PCR1251 is a USB card reader, supporting 125 kHz, designed to assist with GV-AS ID Card / Key Fob enrollment to GV-ASManager.
GV-PCR1352 Enrollment Reader	GV-PCR1352 is a USB card reader, supporting 13.56 MHz, designed to assist with GV-AS ID Card / Key Fob enrollment to GV-ASManager.

Case Study



Along with powerful access controllers and other hardware accessories, GeoVision offers a series of complementary access control software including GV-ASManager, GV-ASWeb, GV-ASRemote, and GV-Access mobile applications to provide flexibility and scalability for both local and remote access control.

The diagram above shows how the access control software can be set up for a retail chain. GV-ASManager can be installed in local PCs of the chain stores and the headquarters can remotely monitor the chain stores using GV-ASWeb or GV-ASRemote. Using GV-Access mobile app, up to 5 GV-ASManager systems can be accessed from a mobile device.