


# PRODUCT DATA SHEET

**Product Description:** Lock lever, entry, reversible, Schlage "SC 4 Keyway", ANSI Grade 2. Removable, non interchangeable core. Handles are fabricated from zinc and escutcheon is fabricated from stainless steel in a US19 matte black finish. The outside lever is unlocked by key. Pushing button in inside lever locks outside lever. Inside lever is always unlocked providing emergency exit. Full length lever handle with 3/8" return. Free wheeling clutch design. ADA complaint. UL10C 3 hour fire rated. Ships with mounting hardware. 2 3/8" latch (product #CLMB60MM) sold separately.

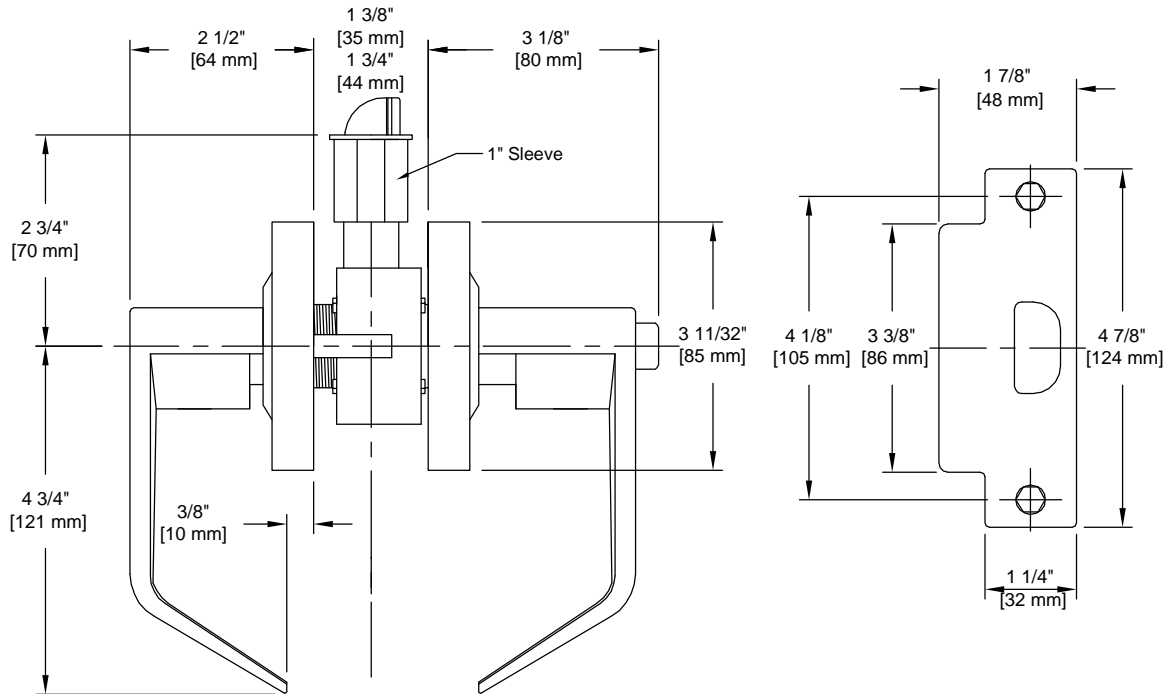

**Door Prep:** Cross Bore 2 1/8", Edge Bore 1", Latch Face 1 1/8" x 2 1/4"

**Backset:** 2 3/4" (2 3/8" latch sold separately)

**Door Thickness:** Standard Doors 1 3/8" to 1 3/4"

**Cylinder:** 6-Pin Removable Core

**Strike Plate:** 4 7/8", 3 3/8" Lip Strike

**Bolt:** 1/2" Throw, Stainless Steel

**ANSI/BHMA:** A156.2 Grade 2

**REKEY OPTIONAL**



**Overall Size:** 6 13/32" W X 3 11/32" H X 3 1/8" D

**Material:** Zinc Handles, Stainless Steel Escutcheon

**Finish:** US19 Matte Black

## Cross Reference

| Manufacturer | Part Number |
|--------------|-------------|
|              |             |
|              |             |



Description:

**Lock Lever, Entry, Reversible, SAT Style Handle, Schlage "SC 4", UL 10C, ANSI Grade 2**

Part Number:

**86540**

Date

09/23

Rev.

00

Sheet 1 of 1