


# PRODUCT DATA SHEET

**Product Description:** Panic exit device, for 33" to 52" wide doors. UL panic rated, ANSI A156.3 Grade 1. Non handed. Rail and push pad are fabricated from heavy gauge steel with a powder coated aluminum finish. Trim available in the following functions: classroom, storeroom, passage and dummy. Device and trim for 161 standard cut out. Mounting hardware and 239 strike included. ADA compliant. Ships with mounting hardware.

## Designed For 161 Cut Out Door Prep

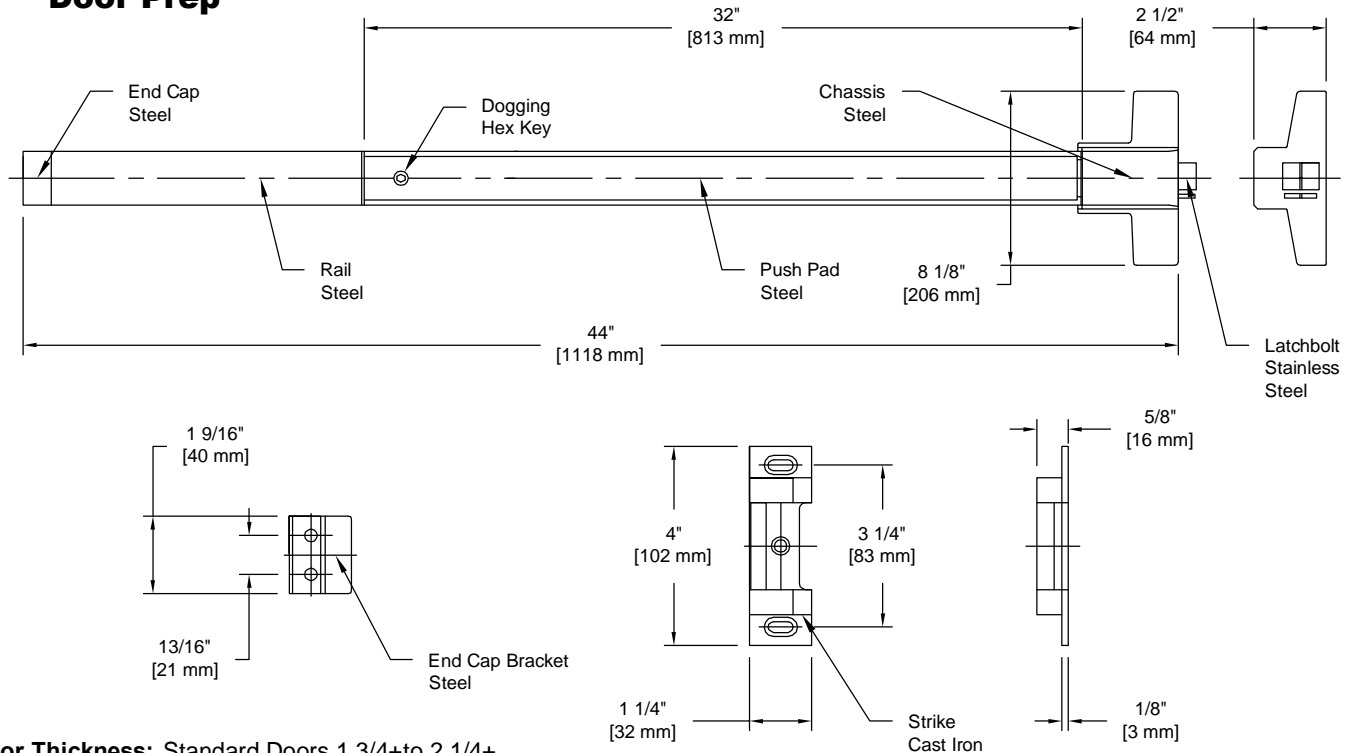

**Door Thickness:** Standard Doors 1 3/4" to 2 1/4"

**Latch Bolt:** Stainless Steel 3/4" Throw

**Strike:** 239 Standard

**ANSI/BHMA:** Exit Device: A156.3 Grade 1



**Overall Size:** 44" W X 8 1/8" H X 2 1/2" D

**Material:** Steel, Cast Iron, Stainless Steel

**Finish:** Powder Coated Aluminum

### Cross Reference

Manufacturer	Part Number
CAL-ROYAL	6620EO48
CORBIN/RUSSWIN	ED8200
DORMA	8300
VON DUPRIN	22
YALE	2100



Description:

**Panic Exit Device, Panic  
Rated, 44", Rim Type,  
ANSI Grade 1**

Part Number:

**PE550048PP**

Date

10/23

Rev.

04

Sheet 1 of 1