



shown in Brushed Bronze
with Brushed Bronze blades
and optional metal cover

COASTAL WET LOCATION 
100% 316 MARINE GRADE STAINLESS STEEL







Donaire

Designed in 2015

With teardrop motor housing, the 52" Donaire 316 marine grade stainless steel coastal wet location ceiling fan is transitional in design. Donaire is finished in brushed bronze, brushed stainless, or gloss white, equipped with all weather blades and 16W LED dimmable light kit with optional metal cover. Constructed of entirely 316 marine grade stainless steel, the Donaire carries a limited lifetime warranty.

Blade Options

 Brushed Bronze	 Brushed Stainless
 Barn Wood	 Gloss White



shown in Gloss White
with Barn Wood blade



shown in Gloss White
with Gloss White blade




shown in Brushed Stainless
with Barn Wood blades
and optional metal cover




shown in Brushed Stainless
with Brushed Stainless blades

SKU NAMING CONVENTION	
SKU#	DA-XX-XX (Model+Finish+Blade)
Standard Finishes	Brushed Bronze - BB
	Brushed Stainless - BS
	Gloss White - WH
Blade Finish	Barn Wood Tone - BW
	Brushed Bronze - BB
	Brushed Stainless - BS
	Gloss White - WH

STANDARD EQUIPMENT	
One downrod of 10 inches / 13 cm	
Vaulted ceiling canopy for up to 29°	
Light cover	
3-speed RF remote control in black	ACCESSORY Decora-style, 3-speed, Lutron SFSQ-LF non-dimmable wall control
	

CEILING HEIGHT / DOWNROD TABLE	
Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

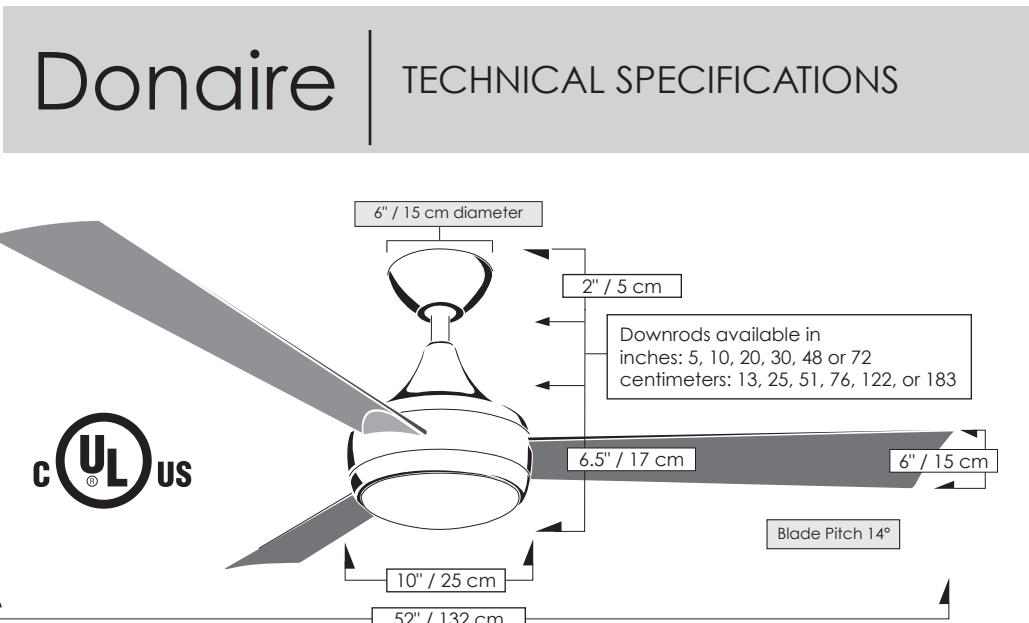

FAN SPECIFICATIONS	
Fan Diameter	52 inches / 132 cm
Overall Drop	8.5 inches / 22 cm + downrod length
Fan Weight	29 lbs
Voltage	110 (Please contact us for 220 conversion)
Motor Type	AC
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Remote Control	Hand-held & wall-mountable 3-speed
Wall Control	Lutron decora-style wall control: SFSQ-LF
Environment	Coastal and wet locations All weather blade system
Ambience	Silent
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA	
RPM (Low / High)	55 / 172
CFM (Low / High)	1775 / 6013
Watts (High)	58.62
CFM/Watt (High)	102.57
Blade Pitch	14°

LIGHT KIT PHOTOMETRICS						
Lamping (Replaceable)	Remote Dimmable	Delivered Temperature in K	Delivered Lumens	CRI	Watts	Hours
Integrated LED	Yes	3017	725	90	16	60,000
Light kit longevity if used 6 Hours/Day: 27.4						

Matthews Fan Company
 1881 Industrial Drive
 Libertyville, IL 60048
 Tele: 847.680.9043
 Fax: 847.680.8140
 www.matthewsfanco.com
 © 2019 Matthews Fan Company. All rights reserved.

