GR366



FEATURES

Control temperature precisely with six dual-stacked, sealed gas burners for higher highs, lower lows

Enjoy quicker heat and more even cooking with this large capacity gas convection oven

Clean up sloshes and spills easily with the seamless, sealed, black porcelain-coated burner pans

Produce crisper crusts and faster sears with the powerful infrared interior

Re-ignites flame automatically with our spark ignition system for improved temperature control and added safety

Slide pots and pans across the continuous, cast-iron grates easily

Find your kitchen style with a choice of iconic red, black, or brushed stainless control knobs

ACCESSORIES

2-Burner Wok Grate

Bake Stone Kit

Filler Trim

Front Leg Covers

Full-Extension Ball Bearing Rack

S-Grates

Stainless Steel Kickplate

Stainless steel, brass or chrome bezels

High altitude conversion kit

Signature red, black or stainless steel control knobs

5" and 10" stainless steel risers, and 20" riser with shelf

Accessories available through an authorized dealer. For local dealer information, visit <u>subzero-wolf.com/locator</u>.




KNOB OPTIONS







TOP CONFIGURATION



RANGETOP SPECIFICATIONS

- 1 9,200 Btu burner
- 5 15,000 Btu burners
- · 2 cast-iron grates




PRODUCT SPECIFICATIONS

Model	GR366
Dimensions	35 7/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	30"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	3.7 cu. ft.
Oven 1 Overall Capacity	5.5 cu. ft.
Door Clearance	19 1/2"
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type


ELECTRICAL

GAS

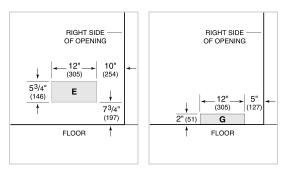


 $\ensuremath{\text{NOTE:}}$ Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

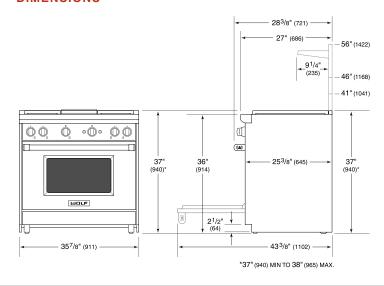

STANDARD INSTALLATION

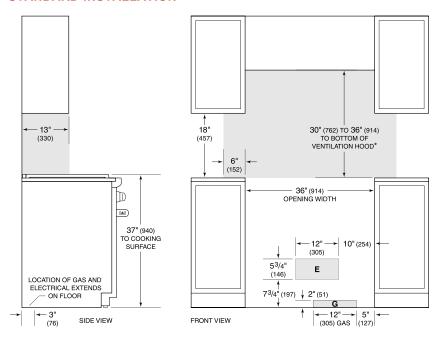

*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler requires non-combustible materials.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces,
combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.