


**Specifications:**

CORD ..... 18/2 SJOW  
 PLUG ..... None  
 FLOAT ..... Polypropylene for use in water & sewage up to  
 140° (60° C).  
 WATER DEPTH ..... Maximum 30' (9m), 13 PSI  
 SWITCH:  
     P/N 125148: ..... Snap Action, Normally Open  
     P/N 125149: ..... Snap Action, Normally Closed  
 CLAMP ..... Stainless Steel Construction. Range: 1" to 3" Dia.  
 MOUNTING SADDLE ..... ABS/Nylon  
 SWITCH COMPONENT ELECTRICAL RATINGS:  
     125/250 VAC: ... Maximum Electrical Load: 5.0 Amps  
                             Minimum Electrical Load: 100.0 Milliamps @ 12 VAC  
 ELECTRICAL CONFIGURATION:  
     P/N 125148: ..... Normally Open  
     P/N 125149: ..... Normally Closed  
 COLOR ..... Black  
 PACKING ..... Pack Float Assembly, Clamp, Saddle &  
 Instruction Sheet in Individual Carton.



**P/N: 125148**  
**125149**

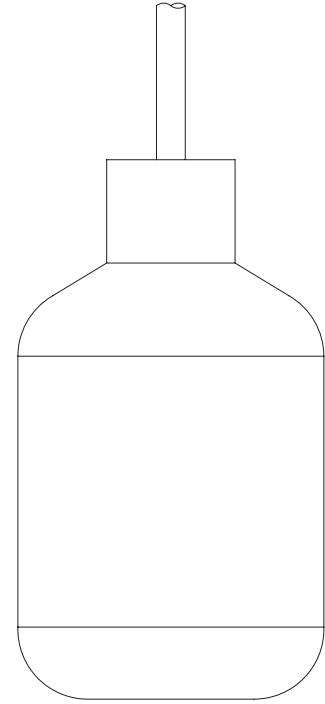

PART NUMBER	CORD LENGTH	TYPE INSTALLATION	CONTACTS
125148	15', 30', 50', 100'	Pipe Mounted 125/250 Volt	OPEN
125149	15', 30', 50', 100'	Pipe Mounted 125/250 Volt	CLOSED

inches  
(mm)

CORD LENGTH (DIM "A")

