



CASTER SELECTION GUIDE


Technical Information/Wheel Types



1. Plate
2. Swivel Radius*
3. Overall Height
**(Distance measured horizontally from the center of the kingpin to the trailing edge of the wheel)*



4. Wheel Diameter
5. Wheel Tread Width*
**(Wheel width at tread)*
6. Hub Width*
**(Distance measured horizontally of the hub)*
7. Axle Hole



1. Overall*
**(Total Width x Total Length of the plate)*



A soft rubber wheel is used for general applications under light to moderate load ratings where non-marking characteristics are not required. This wheel can be used on various surfaces.

Applications: Store fixtures, office furniture, etc.



A hard rubber wheel is used for general applications with a slightly higher weight capacity rating than soft rubber where non-marking characteristics are not required. This wheel can be used on various surfaces.

Applications: Institutional equipment and store fixtures.



A gray soft rubber tread wheel is for applications under moderate load ratings where non-marking characteristics are required. This wheel is best when used on smooth surfaces.

Applications: Display fixtures and indoor.



A phenolic wheel is highly chemical and heat resistant. It has a wide variety of applications with higher weight capacities. And it is best when used on smooth surfaces.

Applications: Bakery equipment, heavy equipment and prisons.



Plastic Wheels are light in weight, very economical and high in impact strength. Non-marking, non-chipping, oil and chemical resistant, non-absorbent and is a steam cleanable wheel. This wheel can be used on almost all surfaces.

Applications: Office furniture, display fixtures and institutions.



A polyurethane wheel can handle higher weight capacities and is resistant to most chemicals. Also, polyurethane is a non-marking material and can be used where non-marking is needed. Durability is unmatched by any rubber tread wheels. This wheel can be used on almost all surfaces.

Applications: Display fixtures with colored wheels.

SECTION W CASTERS

PLATE MOUNTED CASTERS

PLATE MOUNT SWIVEL CASTERS WITHOUT BRAKE

Roller Furniture Casters
Light Duty, 65 lbs.
Weight Capacity



- Plate finish is Zinc with a white plastic wheel
- Smooth and easy rolling
- Plate size: 1-5/8" x 1-1/4"
- Applications: Office furniture, light duty carts, juvenile furniture

Packing: As shown below.

Sold In: Both broken and full box quantities.

Item#	Wheel Diameter	Wheel Tread Width	Overall Height	Box Qty
CCR158P0Z	1-5/8"	5/8"	1-7/8"	100

PLATE MOUNT SWIVEL CASTERS WITHOUT BRAKE

Light Duty, 70 to 80 lbs.
Weight Capacity



- Used for wood base office furniture
- Double ball-bearing construction allows for instant swiveling
- Plate Size: 1-1/8" x 2"
- Plate Fastening: 2" x 1-3/16" with four #8 holes
- Finish: Copper Oxide with a soft black rubber wheel

Packing: As shown below.

Sold In: Pairs, both broken and full box quantities.

Discount available for full box orders.

Item#	Wheel Diameter	Weight Capacity	Overall Height	Box Qty
SD9348	1-5/8"	70 lbs.	2-5/16"	6
SD9346	2"	80 lbs.	2-5/8"	6

PLATE MOUNT RIGID CASTERS WITHOUT BRAKE

Medium Duty, 125 to 255 lbs. Weight Capacity



- Two wheel types available: soft rubber and polypropylene
- Caster has fixed/rigid plate design
- Medium soft rubber wheels provide quiet movement and maximum floor protection
- Polypropylene: Primarily used for water and chemical resistance and maximum mobility applications
- Finish: Both types feature heavy Zinc plate for a lustrous appearance as well as corrosion resistance

Packing: As shown below.

Sold In: Both broken and full box quantities. Discount available for full box orders.

Item#	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Plate Size (Width x Length)	Overall Height	Box Qty
SD9481	2"	29/32"	Soft Rubber	125 lbs.	1-1/2"W x 2-21/32"L	2-1/2"	64
SD9482	2-1/2"	1-7/64"	Soft Rubber	175 lbs.	2-1/4"W x 4-7/16"L	3-9/32"	32
SD9483	3"	1-9/32"	Soft Rubber	210 lbs.	2-1/4"W x 4-7/16"L	3-27/32"	24
SD9396	2"	1-3/16"	Polypropylene	125 lbs.	2-5/8"W x 1-7/8"L	2-5/8"	36
SD9397	2-1/2"	1-1/8"	Polypropylene	175 lbs.	2-1/8"W x 4-3/4"L	3-1/4"	12
SD9399	4"	1-1/4"	Polypropylene	255 lbs.	2-9/16"W x 5-1/2"L	4-3/4"	4

PLATE MOUNT SWIVEL & RIGID CASTERS

Medium Duty, 125 to 300 lbs. Weight Capacity



- With side locking brake or without brake, rigid and swivel design
- Wheel diameter sizes from 2" to 4"
- General duty casters are available in hard rubber, plastic and non-marking rubber wheel material types
- Finish is corrosion-resistant Zinc Plated
- Applications: Widely used in factories and warehouses on furniture and equipment

Packing: As shown below.

Sold In: Both broken and full box quantities.



Rigid without
brake



Swivel with
brake

Item#	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Swivel Radius	Plate Size (Width x Length)	Overall Height	Box Qty
WITHOUT BRAKE								
CCGD20PR	2"	15/16"	Plastic	125 lbs.	Rigid	1-1/2"W x 2-21/32"L	2-7/16"	170
CCGD20MRR	2"	15/16"	Non-Marking Gray	125 lbs.	Rigid	1-1/2"W x 2-21/32"L	2-7/16"	170
CCGD20HRR	2"	15/16"	Hard Rubber	125 lbs.	Rigid	1-1/2"W x 2-21/32"L	2-7/16"	170
CCGD20PS	2"	15/16"	Plastic	125 lbs.	1-3/4"	1-7/8"W x 2-9/16"L	2-7/16"	150
CCGD20MRS	2"	15/16"	Non-Marking Gray	125 lbs.	1-3/4"	1-7/8"W x 2-9/16"L	2-7/16"	150
CCGD20HRS	2"	15/16"	Hard Rubber	125 lbs.	1-3/4"	1-7/8"W x 2-9/16"L	2-7/16"	150
CCGD25HRR	2-1/2"	1-1/8"	Hard Rubber	200 lbs.	Rigid	2-1/4"W x 4-7/16"L	3-1/4"	60
CCGD25MRR	2-1/2"	1-1/8"	Non-Marking Gray	175 lbs.	Rigid	2-1/4"W x 4-7/16"L	3-1/4"	60
CCGD25PS	2-1/2"	1-1/8"	Plastic	175 lbs.	2-3/8"	2-3/4"W x 3-27/32"L	3-1/4"	60
CCGD25MRS	2-1/2"	1-1/8"	Non-Marking Gray	175 lbs.	2-3/8"	2-3/4"W x 3-27/32"L	3-1/4"	60
CCGD25HRS	2-1/2"	1-1/8"	Hard Rubber	200 lbs.	2-3/8"	2-3/4"W x 3-27/32"L	3-1/4"	60
CCGD30PR	3"	1-1/4"	Plastic	220 lbs.	Rigid	2-1/2"W x 4-7/8"L	3-13/16"	40
CCGD30HRR	3"	1-1/4"	Hard Rubber	220 lbs.	Rigid	2-1/2"W x 4-7/8"L	3-13/16"	40
CCGD30MRR	3"	1-1/4"	Non-Marking Gray	225 lbs.	Rigid	2-1/2"W x 4-7/8"L	3-13/16"	40
CCGD30PS	3"	1-1/4"	Plastic	220 lbs.	2-7/16"	3-1/8"W x 4-1/16"L	3-13/16"	40
CCGD30HRS	3"	1-1/4"	Hard Rubber	220 lbs.	2-7/16"	3-1/8"W x 4-1/16"L	3-13/16"	40
CCGD30MRS	3"	1-1/4"	Non-Marking Gray	225 lbs.	2-7/16"	3-1/8"W x 4-1/16"L	3-13/16"	40
CCGD40HRR	4"	1-1/4"	Hard Rubber	300 lbs.	Rigid	2-3/4"W x 6"L	5"	24
CCGD40PS	4"	1-1/4"	Plastic	225 lbs.	3-1/4"	4"W x 5-1/18"L	5"	40
CCGD40HRS	4"	1-1/4"	Hard Rubber	300 lbs.	3-1/4"	4"W x 5-1/18"L	5"	24
WITH BRAKE								
CCGD20PSB	2"	15/16"	Plastic	125 lbs.	1-3/4"	1-7/8"W x 2-9/16"L	2-7/16"	140
CCGD20HR SB	2"	15/16"	Hard Rubber	125 lbs.	1-3/4"	1-7/8"W x 2-9/16"L	2-7/16"	140
CCGD20MR SB	2"	15/16"	Non-Marking Gray	125 lbs.	1-3/4"	1-7/8"W x 2-9/16"L	2-7/16"	140
CCGD25PSB	2-1/2"	1-1/8"	Plastic	175 lbs.	2-3/8"	2-3/4"W x 3-27/32"L	3-1/4"	50
CCGD25HR SB	2-1/2"	1-1/8"	Hard Rubber	200 lbs.	2-3/8"	2-3/4"W x 3-27/32"L	3-1/4"	50
CCGD25MR SB	2-1/2"	1-1/8"	Non-Marking Gray	175 lbs.	2-3/8"	2-3/4"W x 3-27/32"L	3-1/4"	50
CCGD30PSB	3"	1-1/4"	Plastic	220 lbs.	2-7/16"	3-1/8"W x 4-1/16"L	3-13/16"	35
CCGD30HR SB	3"	1-1/4"	Hard Rubber	220 lbs.	2-7/16"	3-1/8"W x 4-1/16"L	3-13/16"	35
CCGD30MR SB	3"	1-1/4"	Non-Marking Gray	225 lbs.	2-7/16"	3-1/8"W x 4-1/16"L	3-13/16"	35
CCGD40HR SB	4"	1-1/4"	Hard Rubber	300 lbs.	3-1/4"	4"W x 5-1/18"L	5"	40

SECTION W CASTERS

PLATE MOUNTED CASTERS


PLATE MOUNT SWIVEL & RIGID CASTERS

Medium Duty, 220 to 300 lbs. Weight Capacity

- With or without brake, rigid and swivel types
- Wheel diameter sizes from 3-1/2" to 5"
- Available wheel material: Rubber, Non-Marking and Polyurethane
- Hardened raceway and yoke for extra strength

Packing: As shown below.

Sold In: Both broken and full box quantities.

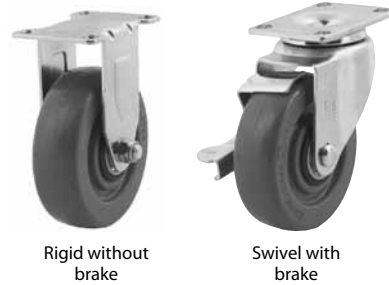

Rigid without
brake

Swivel with
brake



Item#	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Swivel Radius	Plate Size (Width x Length)	Overall Height	Box Qty
WITHOUT BRAKE								
CCLM35P1MS	3-1/2"	1-1/4"	Non-Marking (Gray)	220 lbs.	3-1/16"	2-3/8"W x 3-5/8"L	4-11/16"	40
CCLM4P1PUR	4"	1-1/4"	Polyurethane	275 lbs.	Rigid	2-3/8"W x 3-5/8"L	5-1/8"	36
CCLM4P1MR	4"	1-1/4"	Non-Marking (Gray)	240 lbs.	Rigid	2-3/8"W x 3-5/8"L	5-1/8"	36
CCLM4P1RR	4"	1-1/4"	Rubber	265 lbs.	Rigid	2-3/8"W x 3-5/8"L	5-1/8"	36
CCLM4P1PUS	4"	1-1/4"	Polyurethane	275 lbs.	3-1/2"	2-3/8"W x 3-5/8"L	5-1/8"	36
CCLM4P1MS	4"	1-1/4"	Non-Marking (Gray)	240 lbs.	3-1/2"	2-3/8"W x 3-5/8"L	5-1/8"	36
CCLM4P1RS	4"	1-1/4"	Rubber	265 lbs.	3-1/2"	2-3/8"W x 3-5/8"L	5-1/8"	36
CCLM5P1PUS	5"	1-1/4"	Polyurethane	300 lbs.	4"	2-3/8"W x 3-5/8"L	6-5/32"	30
WITH BRAKE								
CCLM35P1MSB	3-1/2"	1-1/4"	Non-Marking (Gray)	220 lbs.	3-1/16"	2-3/8"W x 3-5/8"L	4-11/16"	30
CCLM4P1MSB	4"	1-1/4"	Non-Marking (Gray)	240 lbs.	3-1/2"	2-3/8"W x 3-5/8"L	5-1/8"	36
CCLM4P1RSB	4"	1-1/4"	Rubber	265 lbs.	3-1/2"	2-3/8"W x 3-5/8"L	5-1/8"	36
CCLM4P1PUSB	4"	1-1/4"	Polyurethane	275 lbs.	3-1/2"	2-3/8"W x 3-5/8"L	5-1/8"	36
CCLM5P1PUSB	5"	1-1/4"	Polyurethane	300 lbs.	4"	2-3/8"W x 3-5/8"L	6-5/32"	30

PLATE MOUNT SWIVEL CASTERS WITH SUPREME LOCKING BRAKE

Medium Duty, 265 to 275 lbs. Weight Capacity

- Total locking when engaged "Supreme" brake locks both wheel and yoke
- 4" wheel diameter
- Wheel material available: Soft Rubber Black and Polyurethane Blue
- Hardened raceway and yoke for extra strength
- Applications: Shop carts and equipment, industrial carts and store fixtures

Packing: As shown below.

Sold In: Both broken and full box quantities.



Item#	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Swivel Radius	Plate Size (Width x Length)	Overall Height	Box Qty
CCML4P1PUS	4"	1-1/4"	Polyurethane Blue	275 lbs.	3-1/2"	2-3/8"W x 3-5/8"L	5-1/8"	40
CCML4P1RS	4"	1-1/4"	Soft Rubber Black	265 lbs.	3-1/2"	2-3/8"W x 3-5/8"L	5-1/8"	40

PLATE MOUNTED CASTERS

SECTION W CASTERS

PLATE MOUNT SWIVEL & RIGID CASTERS WITHOUT BRAKE

Low Profile, Heavy Duty, 440 lbs. Weight Capacity



- Low profile twin wheel design for heavy weight capacity
- Excellent mobility
- Applications: Heavy equipment, stock carts

Packing: As shown below.

Sold In: Both broken and full box quantities.



Item #	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Swivel Radius	Plate Size (Width x Length)	Overall Height	Box Qty
CCBU3P1NR	3"	1-13/16"	Nylon	440 lbs.	Rigid	3-1/4"W x 4-1/4"L	4-3/16"	20
CCBU3P1NS	3"	1-13/16"	Nylon	440 lbs.	2-5/16"	3-1/4"W x 4-1/4"L	4-3/16"	20

PLATE MOUNT SWIVEL CASTERS, QUIET SUPREME CASTERS WITHOUT BRAKE

Heavy Duty, 660 lbs. Weight Capacity



- Precision bearing on raceway for quiet and smooth rolling
- Embossed Zinc Plated yoke for corrosion resistance

Packing: As shown below.

Sold In: Both broken and full box quantities.



Item #	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Swivel Radius	Plate Size (Width x Length)	Overall Height	Box Qty
CCQS4OPTS	4"	2"	Orange Polyurethane	660 lbs.	3-3/16"	3-15/16"W x 4-1/2"L	5-5/8"	10

PLATE MOUNT SWIVEL & RIGID CASTERS WITHOUT BRAKE

Heavy Duty, 400 to 1,000 lbs. Weight Capacity



- Wheel material available in Molden Rubber (Rubber & Steel) and Phenolic
- Wheel diameter from 4" to 6"
- Leg double welded for extra strength

Packing: As shown below.

Sold In: Both broken and full box quantities.



Item#	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Swivel Radius	Plate Size (Width x Length)	Overall Height	Box Qty
CCMHD4PNR	4"	2"	Phenolic	800 lbs.	Rigid	3-15/16"W x 4-1/2"L	5-5/8"	10
CCMHD4PNS	4"	2"	Phenolic	800 lbs.	3-3/16"	3-15/16"W x 4-1/2"L	5-5/8"	10
CCMHD5MRS	5"	2"	Moldon Rubber	400 lbs.	3-7/8"	3-15/16"W x 4-1/2"L	6-1/2"	10
CCMHD5PNS	5"	2"	Phenolic	900 lbs.	3-7/8"	3-15/16"W x 4-1/2"L	6-1/2"	10
CCMHD6PNR	6"	2"	Phenolic	1000 lbs.	Rigid	3-15/16"W x 4-1/2"L	7-1/2"	8
CCMHD6PNS	6"	2"	Phenolic	1000 lbs.	4-37/64"	3-15/16"W x 4-1/2"L	7-1/2"	8
CCMHD8PNS	8"	2"	Phenolic	1000 lbs.	6"	3-15/16"W x 4-1/2"L	9-1/2"	6

SECTION W CASTERS

STEM MOUNTED CASTERS

TWIN WHEEL SWIVEL CASTERS

Light Duty, 70 to 85 lbs. Weight Capacity
Plate, Stem/Socket & Threaded Mounting

- Light duty 70 to 85 lbs. weight capacity with or without brake
- Easy and smooth rolling on carpet or floor
- Applications: Office furniture, store fixture and all purpose carts
- Finish: Black

Packing: As shown below.

Sold In: Both broken and full box quantity.



Item#	Wheel Diameter	Wheel Material	Weight Capacity	Mount Type	Stem Size (Diameter x Gauge x Length) Plate Size (Width x Length)	Overall Height	Box Qty
WITHOUT BRAKE							
CCT20T1BK	2"	Plastic	85 lbs.	Threaded	5/16"D - 18 Gauge x 1"L	2-1/8"	200
CCT20S1BK	2"	Plastic	85 lbs.	Stem & Socket	5/16"D - 18 Gauge x 1-1/2"L	2-1/8"	200
CCT15P1BK	1-1/2"	Plastic	70 lbs.	Plate	1-1/2"W x 1-1/2"L	1-3/4"	240
CCT20P1BK	2"	Plastic	85 lbs.	Plate	1-1/2"W x 1-1/2"L	2-1/8"	200
WITH BRAKE							
CCT20T1BKB	2"	Plastic	85 lbs.	Threaded	5/16"D - 18 Gauge x 1"L	2-1/8"	200
CCT20S1BKB	2"	Plastic	85 lbs.	Stem & Socket	5/16"D - 18 Gauge x 1-1/2"L	2-1/8"	200
CCT15P1BKB	1-1/2"	Plastic	70 lbs.	Plate	1-1/2"W x 1-1/2"L	1-3/4"	240
CCT20P1BKB	2"	Plastic	85 lbs.	Plate	1-1/2"W x 1-1/2"L	2-1/8"	200

METAL HOODED SWIVEL CASTERS

Light Duty, 90 lbs. Weight Capacity, Stem & Socket Mount

- Available in Brass and Chrome
- Rubber ball wheels easily roll on carpet
- Stem and socket size: 5/16" x 1-1/2"
- Application: Widely used on furniture for low-pile carpeting and all hard flooring

Packing: As shown below.

Sold In: Both broken and full box quantities.



Item#	Wheel Diameter	Wheel Material	Weight Capacity	Finish	Mount Type	Stem Thread Size (Diameter x Length)	Overall Height	Box Qty
CCH20S1BR	2"	Rubber Ball	90 lbs.	Brass	Stem & Socket	5/16"D x 1-1/2"L	2-1/2"	120
CCH20S1CR	2"	Rubber Ball	90 lbs.	Chrome	Stem & Socket	5/16"D x 1-1/2"L	2-1/2"	120

METAL HOODED SWIVEL CASTERS

Light Duty, 80 lbs. Weight Capacity, Stem & Socket Mount

- Double race ball bearing construction permits easy swiveling action
- Applications: Recommended for medium weight furniture, small sofas and chairs, etc.
- Stem Fastening: 3/8" diameter socket x 1-1/2" long

Packing: As shown below.

Sold In: Both broken and full box quantities. Discount available for full box orders.



Item#	Wheel Diameter	Wheel Material	Weight Capacity	Finish	Mount Type	Stem Thread Size (Diameter x Length)	Overall Height	Box Qty
SD9516	2"	Rubber	80 lbs.	Bright Brass	Stem & Socket	5/16"D x 1-1/2"L	2-1/2"	24

THREADED STEM SWIVEL CASTERS WITH BRAKE

Light Duty, 100 lbs. Store Fixture Caster

- Store fixture caster with octagonal upper cup for easy assembling
- Excellent floor protection has easy rolling, non-marking gray wheel

Packing: As shown below.**Sold In:** Both broken and full box quantities.

Item #	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Swivel Radius	Stem Thread Size (Diameter x Length)	Overall Height	Box Qty
CCL30T6MSB	3"	1"	Non-Marking Gray	100 lbs.	2-5/8"	1/2"D - 13 Gauge x 5/8"L	3-3/4"	60

THREADED STEM MOUNT SWIVEL CASTERS

Light Duty, 66 to 110 lbs. Weight Capacity

- With or without brakes
- Available in rubber (black) and non-marking rubber (gray)
- Two stem sizes available: 3/8" diameter x 16 gauge x 1-1/4" length and 5/16" diameter x 18 gauge x 1" length
- Embossed Zinc Plated yoke

Packing: As shown below.**Sold In:** Both broken and full box quantities.

Without brake



With brake



Item#	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Swivel Radius	Stem Thread Size (Diameter x Gauge x Length)	Overall Height	Box Qty
WITHOUT BRAKE								
CCL20T2RS	2"	13/16"	Rubber	77 lbs.	1-13/16"	3/8" D - 16 Gauge x 1-1/4"L	2-5/8"	150
CCL20T1RS	2"	13/16"	Rubber	77 lbs.	1-13/16"	5/16" D - 18 Gauge x 1" L	2-5/8"	150
CCL20T2MS	2"	13/16"	Non-Marking (Gray)	66 lbs.	1-13/16"	3/8" D - 16 Gauge x 1-1/4"L	2-5/8"	180
CCL20T1MS	2"	13/16"	Non-Marking (Gray)	66 lbs.	1-13/16"	5/16" D - 18 Gauge x 1" L	2-5/8"	180
CCL30T2MS	3"	13/16"	Non-Marking (Gray)	100 lbs.	2-3/8"	3/8" D - 16 Gauge x 1-1/4" L	3-5/8"	100
CCL30T2RS	3"	13/16"	Rubber	110 lbs.	2-3/8"	3/8" D - 16 Gauge x 1-1/4" L	3-5/8"	84
WITH BRAKE								
CCL20T2RSB	2"	13/16"	Rubber	77 lbs.	1-13/16"	3/8" D - 16 Gauge x 1-1/4"L	2-5/8"	120
CCL20T1RSB	2"	13/16"	Rubber	77 lbs.	1-13/16"	5/16" D - 18 Gauge x 1" L	2-5/8"	120
CCL20T2MSB	2"	13/16"	Non-Marking (Gray)	66 lbs.	1-13/16"	3/8" D - 16 Gauge x 1-1/4"L	2-5/8"	120
CCL20T1MSB	2"	13/16"	Non-Marking (Gray)	66 lbs.	1-13/16"	5/16" D - 18 Gauge x 1" L	2-5/8"	120
CCL30T2RSB	3"	13/16"	Rubber	110 lbs.	2-3/8"	3/8" D - 16 Gauge x 1-1/4" L	3-5/8"	50
CCL30T2MSB	3"	13/16"	Non-Marking (Gray)	110 lbs.	2-3/8"	3/8" D - 16 Gauge x 1-1/4" L	3-5/8"	80

SECTION W CASTERS

STEM MOUNTED CASTERS

THREADED STEM MOUNT CASTERS

Medium Duty, 220 lbs. Weight Capacity

- With or without brake
- Wheel material available in rubber
- Hardened raceway and yoke for extra strength

Packing: As shown below.

Sold In: Both broken and full box quantities.



Image not available for
CCLM3T3RSB

Item#	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Swivel Radius	Stem Thread Size (Diameter x Gauge x Length)	Overall Height	Box Qty
WITHOUT BRAKE								
CCLM3T3RS	3"	1-1/4"	Rubber	220 lbs.	2-3/4"	1/2" D -13 Gauge x 1-1/2" L	4-1/4"	48
WITH BRAKE								
CCLM3T3RSB	3"	1-1/4"	Rubber	220 lbs.	2-3/4"	1/2" D - 13 Gauge x 1-1/2" L	4-1/4"	36

SHOPPING CART CASTERS

Medium Duty, 200 lbs. Weight Capacity

- Deeply embossed formed yoke
- Corrosion resistant Zinc Plated finish
- Excellent mobility
- Application: Shopping carts

Packing: As shown below.

Sold In: Both broken and full box quantities.



Item #	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Swivel Radius	Stem Thread Size Diameter x Gauge x Length	Overall Height	Box Qty
CCSC5T1PS	5"	1-1/4"	Polyurethane	200 lbs.	4"	1/2"D - 13 Gauge x 7/8"L	5-29/32"	40

APPLIANCE CASTERS

Medium Duty, 250 lbs. Weight Capacity

- Appliance casters easily move refrigerators and other heavy appliances or other items that do not required frequent movement
- Split 4 wheel design permits easier steering
- White hard plastic wheels have 7/8" diameter
- Caster body is made of hardened Zinc
- Not recommended for use on cushioned vinyl and hardwood floors

Packing: Sets of 4 casters. Full box quantity of six sets of four.

Sold In: Sets of 4 only. Discount available for full box orders.



Item#	Wheel Diameter	Wheel Tread Width	Wheel Material	Weight Capacity	Stem Thread Size (Diameter x Gauge x Length)	Body Height	Sets of 4 per Box
SD9441	7/8"	1-1/2"	Plastic	250 lbs.	5/16" D - 18 Gauge x 3/4" L	1-1/4"	6