



NEW!



3W EquiLine Puck

12VDC PUCK LIGHTING




218 Lumens



3W EquiLine Puck

With recessed or surface mount ability, EquiLine LED Pucks are perfect for use in a wide range of applications. Designed for the economically conscious, they feature a slim profile and a 79" (2 m) starter cord attached with an unattached AMP® connector for easy wire routing.

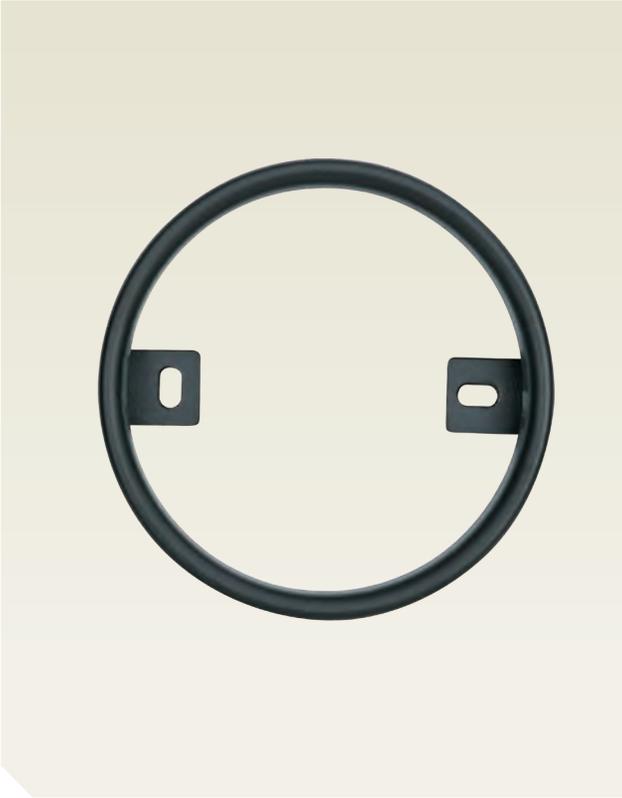

▶ Surface mount ring sold separately



▶ Available in black or nickel

Features:



- ▶ 100° beam spread
- ▶ Low profile
- ▶ Dimmable
- ▶ No dotted LED "hot spot" reflection on countertop

Typical Applications:

- ▶ Furniture
- ▶ Desk
- ▶ Headboards
- ▶ Closet
- ▶ Cabinets & light boxes

Available Finishes:



Black (BL)



Nickel (NI)


Dimensions:



Specifications:

Wattage	3W
Lumens	218
Efficacy (lm/W)	73
Input Voltage	12VDC
Diode Life	25,000 Hours
Max Per 60W Power Supply	20 Fixtures
Max Continuous Run	N/A
Mounting	Recess/Surface
Warranty	1 Year
Certifications	

Beam Angle




Photometric Data

	Height	Light Output	Beam Area
	1ft (.3 m)	89.00Fc (958lx)	2ft diameter (.6 m diameter)
	3ft (.9 m)	9.89Fc (106.5lx)	7ft diameter (2.1 m diameter)
	6ft (1.8 m)	2.47Fc (26.6lx)	14ft diameter (4.3 m diameter)

L-POC-3EQFR-CNI Tested


Color Temperature

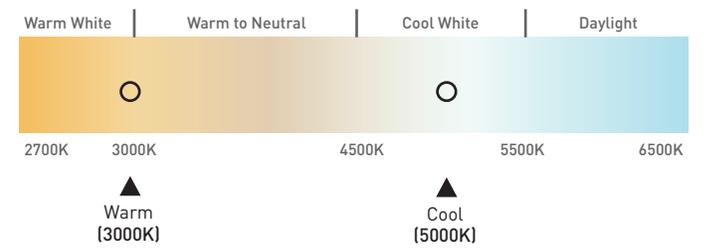

IES data verified by Underwriters Laboratory.

Required Items

EquiLine Puck Light

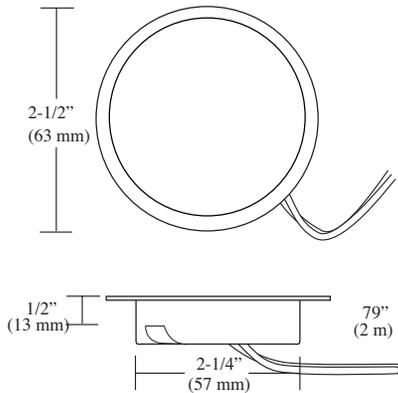

Part #	Description
L-POC-3EQFR-CBL-1	3W EquiLine Puck 5000K - Black
L-POC-3EQFR-WBL-1	3W EquiLine Puck 3000K - Black
L-POC-3EQFR-CNI-1	3W EquiLine Puck 5000K - Nickel
L-POC-3EQFR-WNI-1	3W EquiLine Puck 3000K - Nickel

25,000 useful life hours.
 2-1/4" (57 mm) hole required for recessed mounting.
 EquiLine includes starter cord 79" (2 m) and AMP® Connector with each light.

Power Supplies




Part #	Description
L-DC-ELT12-CON-1	12W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT18-CON-1	18W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT60-CON-1	60W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT6WP-CON-1	6W 12VDC Wall Mount Power Supply w/3 Snap Block*
L-DC-ELT15WP-CON-1	15W 12VDC Wall Mount Power Supply w/6 Snap Block*
L-DCE12D-CON-1	12VDC 12W Dimmable LED Power Supply
L-DCE50D-CON-1	12VDC 50W Dimmable LED Power Supply

* Dimmable on trailing edge (12V side). Mounting block and power cord are included.

Optional Items

EquiLine Puck Surface Ring



Part #	Description
L-SMR-2LED-BL-1	EquiLine Puck Surface Ring Black
L-SMR-2LED-NI-1	EquiLine Puck Surface Ring Nickel

