

- ☒ Standard Series — Satin Finish
- ☒ Recessed
- ☒ ADA Compliant

### Product Materials

**FLANGE:** 22 gauge stainless steel with exposed surfaces in architectural satin finish. One-piece seamless construction, 1" wide with beveled edges.

**CABINET:** heavy gauge stainless steel.

**SOAP VESSEL:** 22 gauge stainless steel with exposed surfaces in architectural satin finish. Tumbler lock keyed like other Bradley units.

**SOAP VESSEL LINER:** plastic.

**SOAP VALVE:** chrome-plated brass with ABS mechanism. Internal Buna-N check valves prevent leakage. Requires less than 5 lbs. of force to dispense soap.

### Capacity

32 oz. liquid soap.

### Operation

Soap dispenser slides open for filling and cleaning. Sight gauge indicates refill time. Valve dispenses measured amount of liquid soap. Requires less than 5 lbs. of force to dispense soap.

- ☒ Bradley liquid soap valves operate best with any vegetable oil or coconut oil hand soap having a 10–15% soap concentration.


### Installation

Verify all rough-in dimensions prior to installation. Requires rough wall opening 8-1/2"W x 4-1/2"H x 4"D. Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

### Guide Specification

Recessed liquid soap dispenser shall be fabricated of 22 gauge stainless steel with exposed surfaces in satin finish. Requires less than 5 lbs. force to dispense soap. Capacity: 32 oz. liquid soap.

**Overall dimensions: 10"W x 6"H x 4"D.**

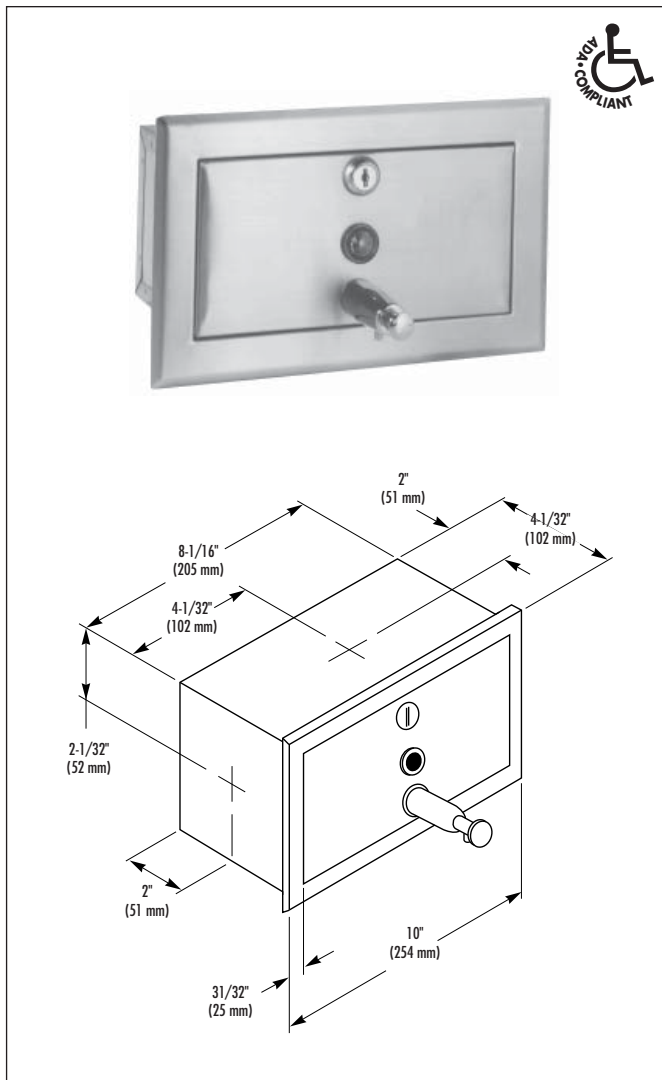

### ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.

Washroom Accessories  
Document No. 8645