



IS-IP500

IS-IP500

The IS-IP500 is a professional-grade multi-megapixel network security and surveillance camera. With an active resolution more than 16x that of traditional CCTV cameras, the IS-IP500 is a state-of-the-art surveillance system. The IS-IP500 is a great choice in applications requiring the highest forensic detail.

Dimensions

- 1.38 x 2.52 x 3.27 in (35.1 x 64 x 83.1 mm)*
- 0.33 lb (150 g)*

Performance Specification

- Sensor: 5.0MP CMOS
- Maximum Resolution: 2560 x 1920
- Active Pixel Count: 4,915,200
- Maximum Frame Rate: 14 fps (at max res)
- Compression: MJPEG / H.264
- Streaming: Quad H.264 + MJPEG
- 0.02 Lux (color) at F/1.4
- Backlight Compensation
- Dynamic Range: 70 dB
- Owl Eye™ Noise Reduction
- Full Onvif Compatibility

*Without lens

Technical Specification

- Lens: CS Mount
- Motion Detection
- 100/10 LAN Connection
- UDP, TCP, HTTP, TFTP, RTSP

Electrical Specification

- PoE / 10 - 16V
- 4 - 4.5 watts

Environmental Specification

- Operating Temperature: -4° - 122° F
-20° - 50° C
- Humidity: 0% to 90%, No condensation

Warranty

- 3 Year, Parts and Labor

Images




1




2

Dimensional Outline

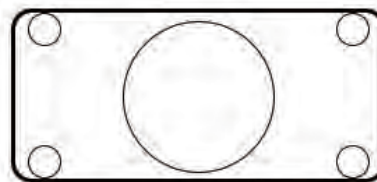

2.52

1.38

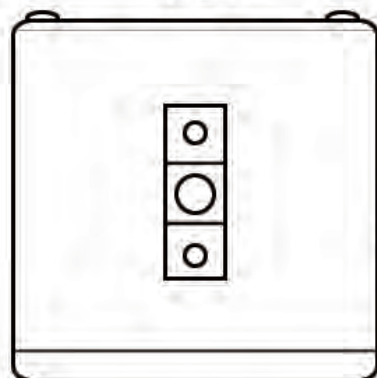

2.31



Compatible Accessories

- IS-IR-850-50
- IS-IR-850-70
- IS-IR-850-100
- IS-IH
- IS-OH-HB
- IS-IH-WALL
- All C / CS Mount Lenses