

4430, 4431 Flush Locksets (Including Deadlock)




ALUMINUM

HOLLOW
METALGRADE 2
EB292

The 4430 and 4431 Flush Locksets for sliding doors combine the time-tested and field-proven Adams Rite MS1847 with a slide button.

Function

Similar in function and nearly identical in size to the all-metal 4189 and 4190 Flush Locksets, these economical units feature escutcheons molded of sturdy ABS resin. The black satin finish of the 4430 and 4431 lends elegance to aluminum door stiles. Not recommended for wood doors.

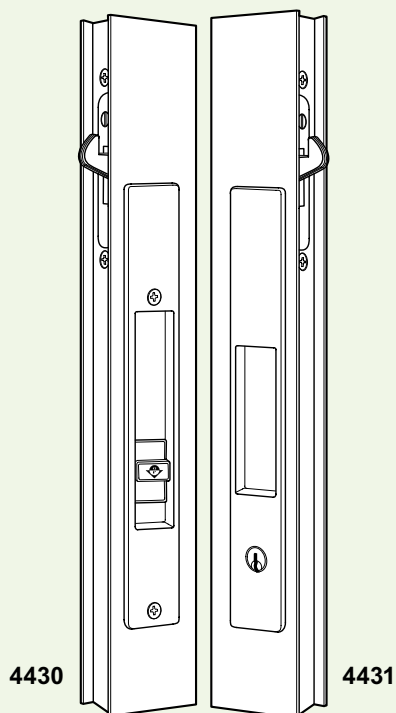

Operation

Both locksets operated from inside by a simple up or down movement of a slide button, set flush in the deeply recessed finger pull. The lock mechanism (latching action unavailable) is the time-tested and field-proven Adams Rite MS1848 and features the adjustable, self-protecting bolt. Matching "dummy set" is also available (4432).

Specifications

INSIDE OPERATION

- Vertical slide button projects or retracts deadlock bolt.

OUTSIDE OPERATION (4431 ONLY)

- Key in, five-pin cylinder with Schlage "C" keyway, projects or retracts bolt. Other cylinder makes not available.

BACKSET

- Variable, minimum 5/8", maximum 1-9/32" (from face to lock to escutcheon and cylinder centerline).

STILE THICKNESS

- May be 1" to 1-3/8". Available by special order for stiles 1-3/8" thick or greater at extra cost.

STILE DEPTH

- Minimum clear depth: Backset plus 9/16".

ANTI-LIFT LOCK MECHANISM

- Basic MS 1848-09 (radius ends) or MS1848-10 (square ends) is supplied. Stainless steel bolt is self-protecting, adjustable for reach.

ESCUTCHEONS

- Molded ABS resin plastic. Black Satin finish. Deeply recessed finger pull on both sides. Fits same cutout as metal 4189, 4190 Flush Locksets.

OPTIONS


- Specify 4431 if outside key-cylinder operation required; 4430 if not. Add Dash number -10 for square-ended lock face or -09 for round end. Dummy set 4432 available. 4453 Interior Pull available separately.

STANDARD PACKAGE


- 4431, with cylinder, and 4430, without cylinder, are each complete packages. Shipped individually boxed with mounting screws. 4431 includes two keys. Standard 4431 units are keyed different (KD). Contact factory for special keying. Weight: 1-1/4 lbs.

All measurements are approximate and are provided for informational purposes only. Refer to the product Installation Instructions.


Dimensions

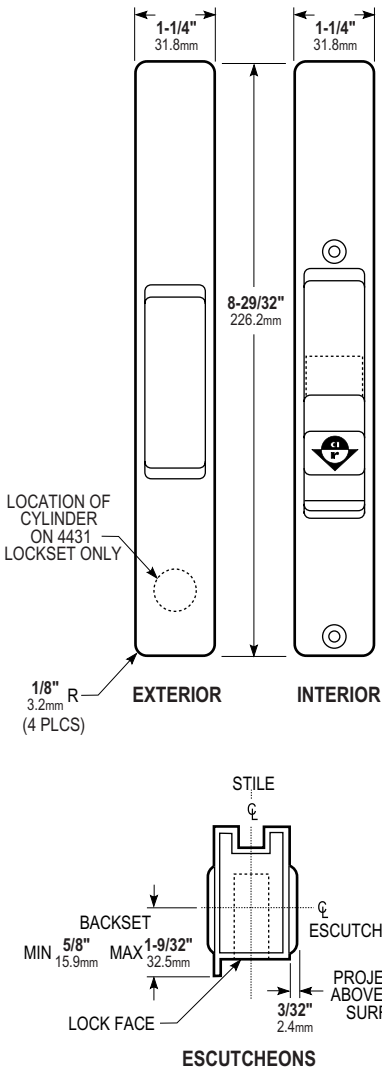

Stile Preparation

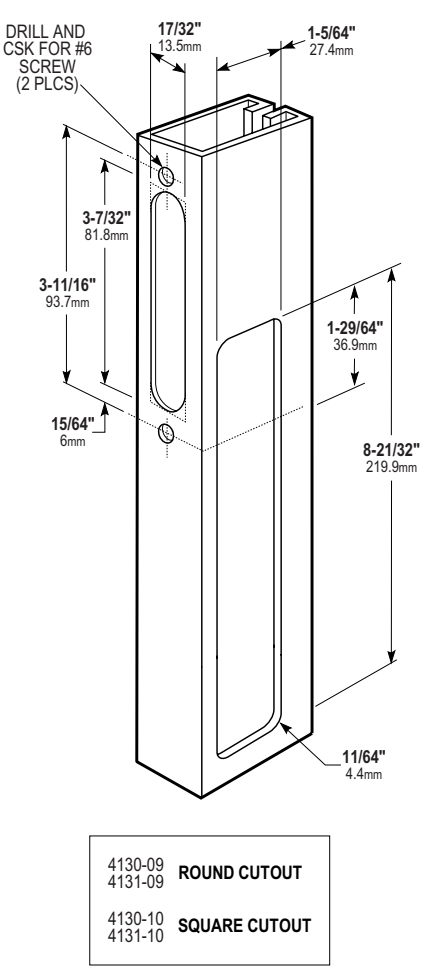

Installation

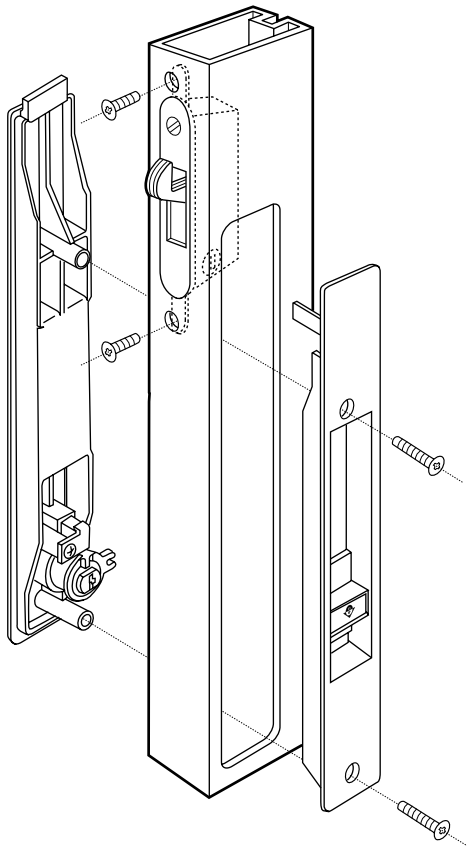

HOW TO ORDER 4430, 4431 FLUSH LOCKSETS (INCLUDING DEADLOCK)

Specify quantity and the following information. Order related products separately.

PRODUCT NO.	LOCKSET EXTERIOR	LOCK FACE	STILE THICKNESS	KEYING OPTIONS	PACKAGING
44	31	-09	-05	-01	-IB
	30 Without Cylinder	00 Without Lock	00 1" to 1-5/16"	00 Without Cylinder	IB Individually Boxed
	31 With Cylinder	09 Radius	05 1-3/8" to 1-5/8"	01 Keyed Different	
	32 Dummy	09S Radius Stainless Steel	08 1-3/4" to 2"	02 Keyed Alike in Pairs	
		10 Square		50 Keyed Alike (50)	
		10S Square Stainless Steel			

RELATED PRODUCTS When purchasing this product, please consider the following related products, available separately:

Accessories

4413 Interior Pull.

Special Order Options

Special keying available by special order only:

- 1) Keyed alike 2
- 2) Keyed alike 50
- 3) Keyed alike 100