

### Häfele Free Swing



- > For one-piece wood, glass or aluminum frame doors
- > Full access to the cabinet contents; Ideal for large front panels; Modern design with clear-cut contours
- > Minimum opening resistance, multi-position stop function and soft opening and soft closing mechanism for ease of operation
- > Time-saving assembly provided by tabs, pre-mounted Euro screws and clip mounting of front panel and cross bar, eccentric adjustment of front panel
- > Adjustment facility: Height adjustment  $\pm 1.5$  mm, side adjustment  $\pm 1.5$  mm, tilting angle  $\pm 1.5^\circ$ , holding power
- > Material: Fitting: Plastic, Steel; Finish: nickel-plated  
Cover Cap: Plastic; Finish: gray

Model	S4sw	S5sw	S6sw	S7sw	S8sw	S9sw
<b>Door height</b>						
370–500 (14 9/16"–19 11/16")	7–12 lbs.	–	–	11–19 lbs.	–	–
500–670 (19 11/16"–26 3/8")	–	10–19 lbs.	–	–	18–30 lbs.	–
670–800 (26 3/8"–31 1/2")	–	–	12–22 lbs.	–	–	18–33 lbs.



Model	Item No.
S4sw	372.34.501
S5sw	372.34.511
S6sw	372.34.521
S7sw	372.34.502
S8sw	372.34.512
S9sw	372.34.522



#### Supplied With

- 2 Fittings (right/left)
- Front mounting material for wood or wide aluminum doors
- Installation instructions
- Paper drilling template
- 2 Cover caps for fitting (right/left)

#### Note

Cross bar and adapters for glass front panels or narrow aluminum frames (if applicable) must be ordered separately.  
Use two Free swing sets for flap widths >1800 mm (70 7/8").

### → Full Overlay Door Bracket, optional

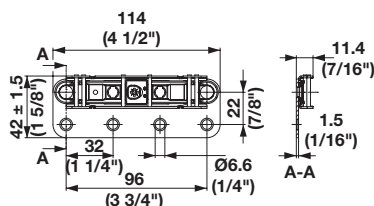

- > Allows for the use of 5 panel doors in a face frame full overlay application
- > Unhanded
- > L x W x H: 114 x 42 x 11.4 mm (4 1/2" x 1 5/8" x 7/16")
- > Material: Steel

Finish	Item No.
nickel-plated	372.29.402

#### Supplied With

- 2 Brackets
- Mounting instructions