


Salice Full Extension

→ Progressa⁺ Smove - 16




- > Weight capacity: Dynamic: 70 kg (154 lbs.)
Static: 77 kg (170 lbs.)
- > Full extension with a synchronized mechanism
- > Fully integrated soft close mechanism
- > Elongated holes for depth and height adjustment
- > Adjustable clips allow for easy drawer insertion and removal
- > Tool-less height adjustments: +2.5 mm (3/32")
- > Tool-less side adjustments: ±1.5 mm (1/16")
- > Tool-less depth adjustments: +/-3 mm (1/8")
- > For 12–16 mm (1/2"–5/8") drawer box
- > 100% made in Italy
- > Material: Steel; Finish: bright zinc-plated

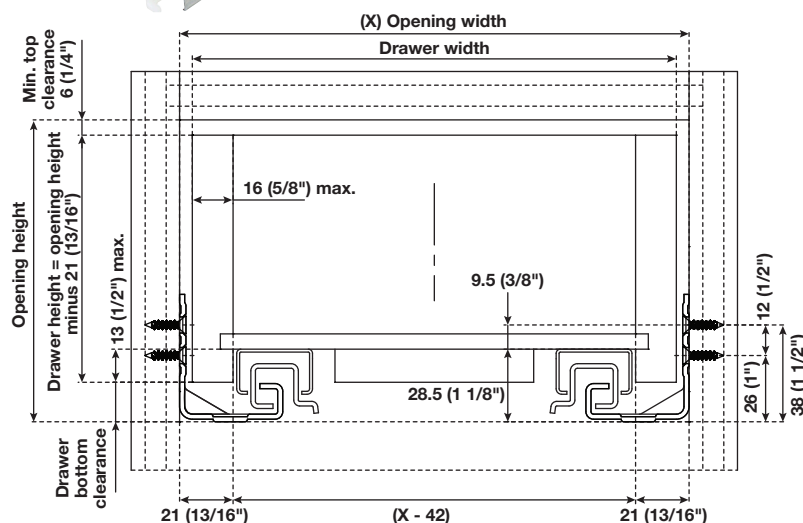


Drawer dimensions and drilling

Full-extension runner for 12 mm (1/2") to 16 mm (5/8") drawer material

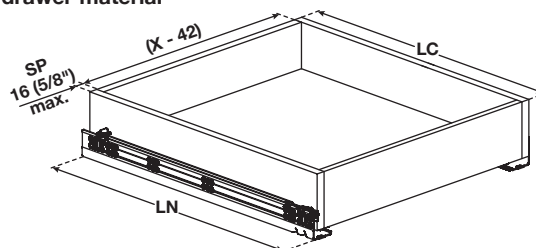

SP = Drawer side thickness
LN = Nominal runner length
LC = Drawer length

Drawer back preparation



→ For Face Frame Construction - 16

Drawer length LC	Runner length LN	Min. inside cabinet depth w/ metal socket	Max. inside cabinet depth w/ metal socket	Min. inside cabinet depth	Item No.
381 (15")	390 (15 7/16")	402 (15 27/32")	447 (17 9/16")	399 (15 25/32")	421.23.401
457 (18")	466 (18 13/32")	478 (18 27/32")	523 (20 9/16")	475 (18 25/32")	421.23.402
533 (21")	542 (21 13/32")	554 (21 29/32")	599 (23 17/32")	551 (21 13/16")	421.23.403

→ For Frameless Construction - 16

Drawer length LC	Runner length LN	Min. inside cabinet depth	Item No.
457 (18")	465 (18 13/32")	474 (18 27/32")	421.23.412
533 (21")	541 (21 13/32")	550 (21 13/16")	421.23.413
610 (24")	618 (24 15/32")	627 (24 25/32")	421.23.414
686 (27")	694 (27 7/16")	703 (27 29/32")	421.23.415
762 (30")	770 (30 7/16")	779 (30 15/16")	421.23.416

Note

Required clips and accessories, see page 8.62D.