



Step 2

→ Ordering product components

Required number of furniture locks	Multi-lock adapter *	Power supply unit	6-way distributor	Furniture terminal	Antenna, cable length 3 m (118")
EFL 6	MLA 8		CC 140	FT 200	FAN 200
					
237.56.062 page 10.98	237.59.030 page 10.108	237.58.149 page 10.110	823.28.780 page 10.110	237.59.010 page 10.102	237.59.061 page 10.104



Continue to step 3

Page 10.111
Programming and user keys

Keyed alike hinged doors, lift-ups and sliding doors


1-5	1	1	–	1	1
6-10	2	2	–	1	1
11-15	3	3	–	1	1
16-20	4	4	–	1	1

Keyed different hinged doors, lift-ups and sliding doors

2-5	1	1	–	1	1
-----	---	---	---	---	---

* max. 5 EFL 6 furniture locks can be connected to one MLA 8 multi-lock adapter

Installation example

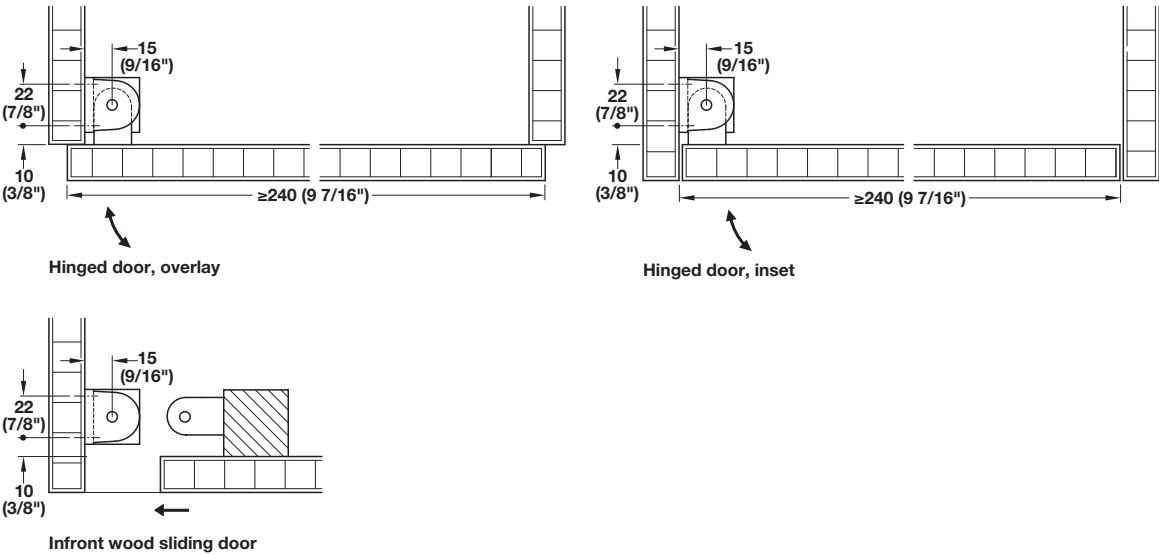

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

CC 140 Distributor

→ For EFL furniture lock with AMP plug



Distributor with keyed alike operation

> For 6 EFL 6, EFL 41, MLC 1 furniture locks with AMP plug

Notes concerning operation

- > Please ensure that a sufficient voltage supply is provided.
- > Electric distributor for indoor use
- > For keyed alike EFL furniture locks with AMP plug
- > With 1 AMP plug, with 6 AMP sockets
- > Material: Plastic

Technical Data

Total length	155 (6 7/64")
Cable length	90 (3 35/64")

Color

white

Item No.

823.28.780

→ Power Supply with Plug 12 VDC 2.5A



- > With amp socket, and 1828 mm (72") primary cord
- > Capacity: max. of 50 EFL1 locks
- > W x D x H: 108 x 58 x 30 mm (4 1/4" x 2 5/16" x 1 3/16")
- > Material: Plastic

Technical Data

AC input voltage	120V ± 15%, 47 – 63 HZ
AC input current	0.6A
DC voltage output	12 VDC ± 5%
Output current range	0 – 2.5A
Operating temp. range	0° – 40°C (32°F – 140°F)

Color

black

Item No.

237.58.149

Note

Powered switches reduce lock capacity. The in-line power supplies are not provided with mounting tabs. They are best placed on a protected shelf or trough.

**For details contact Dialock® Department at
1-888-437-7477 or 1-336-889-2322**