


Surface mounted light bars

With inline dimmer switch, 12 V, linkable



Profile 2103 with Loox LED 2068



Inline dimmer switch is concealed below the diffuser.

- > CRI 90 lights are Title 24 compliant
- > Life time: 50,000 hours
- > Supplied ready to install
- > Optimal lengths for installing under your wall cabinets to brighten up your countertop workspace
- > Linkable to other light bars see page 73



Loox 12 V drivers see pages 130–131




Note

Loox lights and drivers are "Suitable for use within closet storage spaces"

Components


- > Profile: 2103 - see page 34.
- > LED strip: 2068 - see page 10.
- > Mounting brackets: see page 36.
- > Inline touch dimmer: 833.89.281 - see page 87.

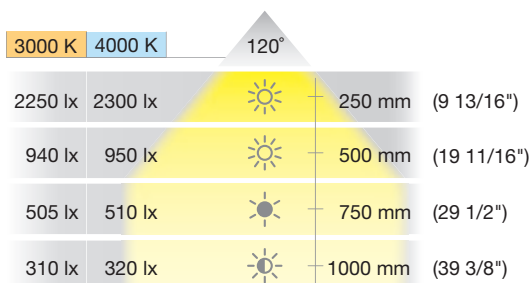


Light Color (K)	3000 (warm white)				4000 (cool white)			
	101				104			
Lumen per watt								
Item No.	833.70.647	833.70.648	833.70.649	833.70.650	833.70.661	833.70.662	833.70.663	833.70.664
Length	152 (6")	229 (9")	305 (12")	381 (15")	152 (6")	229 (9")	305 (12")	381 (15")
Wattage	0.7	1.4	2.2	2.9	0.7	1.4	2.2	2.9
LEDs	9	18	27	36	9	18	27	36
Lumen	73	146	218	291	75	150	225	300
Item No.	833.70.651	833.70.652	833.70.653	833.70.654	833.70.665	833.70.666	833.70.667	833.70.668
Length	457 (18")	533 (21")	610 (24")	686 (27")	457 (18")	533 (21")	610 (24")	686 (27")
Wattage	3.6	4.3	5	5.8	3.6	4.3	5	5.8
LEDs	45	54	63	72	45	54	63	72
Lumen	364	437	509	582	375	450	525	600
Item No.	833.70.655	833.70.656	833.70.657	833.70.658	833.70.669	833.70.670	833.70.671	833.70.672
Length	762 (30")	832 (33")	915 (36")	991 (39")	762 (30")	832 (33")	915 (36")	991 (39")
Wattage	6.5	7.2	7.9	8.6	6.5	7.2	7.9	8.6
LEDs	81	90	99	108	81	90	99	108
Lumen	655	728	800	873	675	750	825	900
Item No.	833.70.659		833.70.660		833.70.673		833.70.674	
Length	1067 (42")		1143 (45")		1067 (42")		1143 (45")	
Wattage	9.4		10.1		9.4		10.1	
LEDs	117		126		117		126	
Lumen	946		1019		975		1050	
CRI	90*							
Material	Aluminum; Lens: Plastic, opal							
Supplied with	2000 mm (78 3/4") driver connection cable with integrated switch, 100 mm (4") female mini driver cable, mounting brackets							

Inline profile switches

Loox5 aluminum profile touch dimmer switch

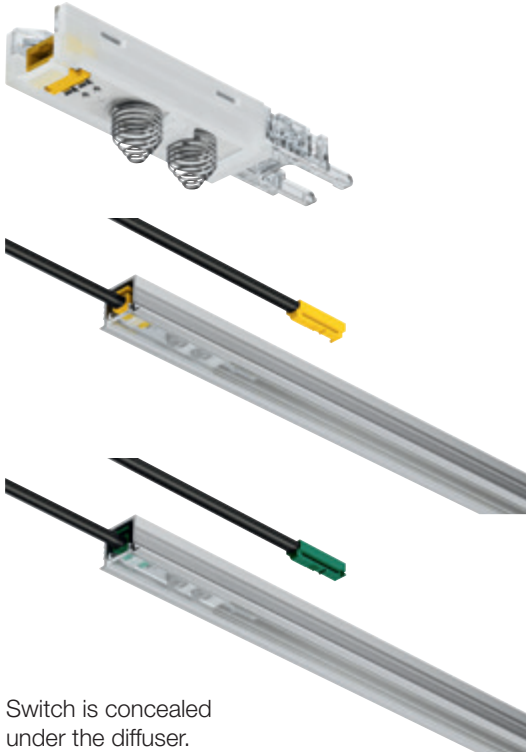

Switch is concealed under the diffuser.

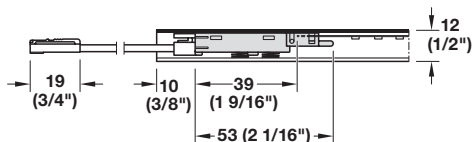

- > Version: For monochrome Loox LED strips 8 mm (5/16") in Loox5 aluminum profiles with 11 mm (7/16") internal width
- > Suitable for: Profiles 1103, 1105, 2102, 2103, 2104
- > Material: Plastic
- > Switching function: Soft on/off
- > Dimming range: 5%–100%
- > Memory function: Dimming level is after switching off
- > Assembly: 70°; slides into aluminum profile

Voltage	Max wattage	Item No.
5 12 V	60	833.89.281
5 24 V	120	833.89.291



Order reference

Please order modular lead separately.

12 V/5 A, 2000 mm (78 3/4"): **833.95.830**

12 V/5 A, 1000 mm (39 3/8"): **833.95.831**

24 V/5 A, 2000 mm (78 3/4"): **833.95.835**

24 V/5 A, 1000 mm (39 3/4"): **833.95.836**