

For use on doors 1-3/8" to 1-3/4" (35 mm - 45 mm) thick

TOOLS REQUIRED FOR NEW INSTALLATION:

- (1) Phillips Head Screwdriver
- (1) 2-1/8" (54 mm) Hole Saw
- (1) 1" (25.4 mm) Drill Bit
- (1) Chisel

TOOLS REQUIRED FOR REPLACEMENT INSTALLATION:

- (1) Phillips Head Screwdriver


FOR REMODELING OR NEW CONSTRUCTION:

- Follow all steps


FOR REPLACEMENT OF EXISTING LOCK:

- Follow steps 3C, 4C, and 5 (single cylinder) or 6 (double cylinder) after removal of old lock

NOTE: When installing an IC Core single cylinder deadbolt to a 1-3/8" thick door, you must install provided spacer ring behind the cylinder assembly for proper spacing.

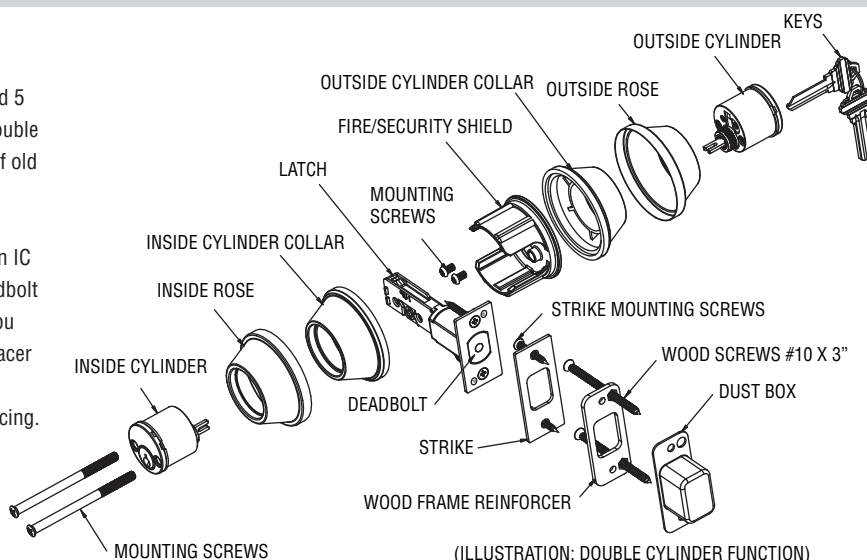


1. MARK DOOR



Measure center line of lock; height as desired from finished floor. Select 2-3/4" or optional 2-3/8" backset, fold and apply template to high side of bevel door and mark center of door edge as indicated on template. Mark center hole on door face through guide on template.

2. DRILL HOLES

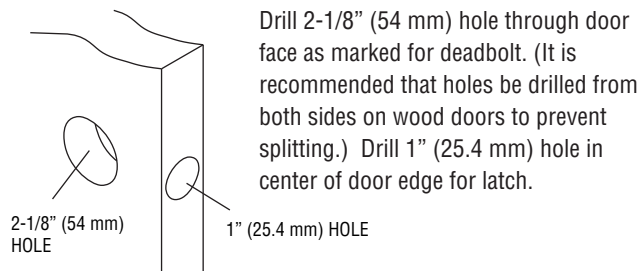


3. INSTALL LATCH


A. Insert latch in hole keeping it parallel to face of door. Mark outline of latch face plate and remove latch.

B. Chisel 5/32" (4 mm) deep or until latch face plate is flush with door edge.

C. Insert latch and tighten to the door using #8 screws.

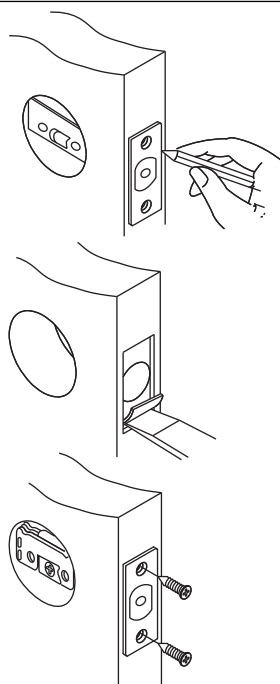

4. INSTALL STRIKE

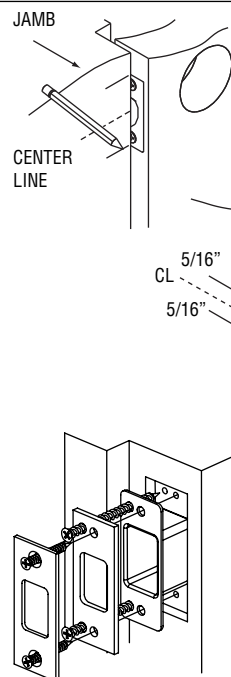


A. Close door. Locate strike in jamb and center line of strike. Open door and extend line to door stop. Measure one half of door thickness plus 1/8" from door stop. Vertically mark center line for strike.

B. Drill two 1" (25.4 mm) holes 1-1/4" (32 mm) deep in door jamb and 5/16" (8 mm) above and 5/16" (8 mm) below horizontal center line. CAUTION: To ensure proper lockset function, hole in jamb must be drilled a full 1-1/4" (32 mm) deep.


C. Match screw holes on strike with vertical centerlines on jamb. Mark outline of strike and chisel 1/4" (6.4 mm) deep for flush fit of dust box, wood frame reinforcer, and strike. Place dust box and wood frame reinforcer into mortised area and tighten to the frame using 3" wood screws. Insert the strike and tighten to the frame with #8 screws. NOTE: Mortise 5/64" (2 mm) deep if mounting strike plate only.

5. INSTALL SINGLE CYLINDER (SKIP TO STEP 6 IF USING DOUBLE CYLINDER)

A. Retract deadbolt to unlock position. Insert exterior tail piece horizontally through latch crank.

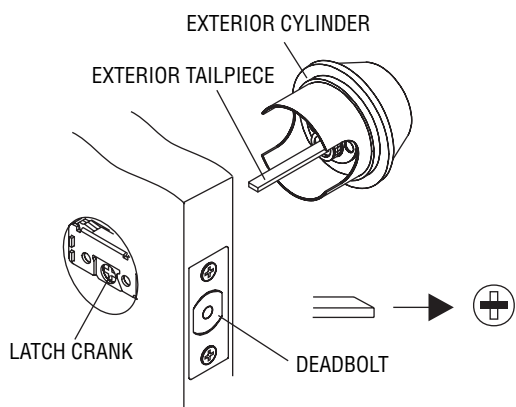


B. Press exterior cylinder flush against door. Install inside thumb turn unit and tighten mounting screws.

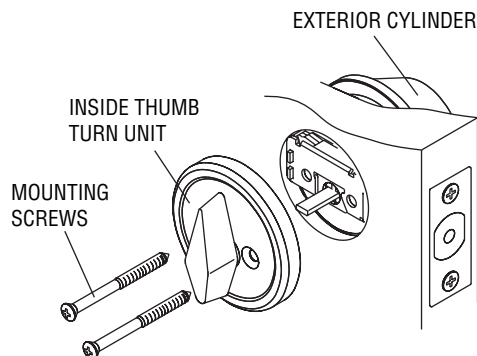


6. INSTALL DOUBLE CYLINDER

A. Retract deadbolt to unlock position. Insert exterior tail piece horizontally through latch crank.

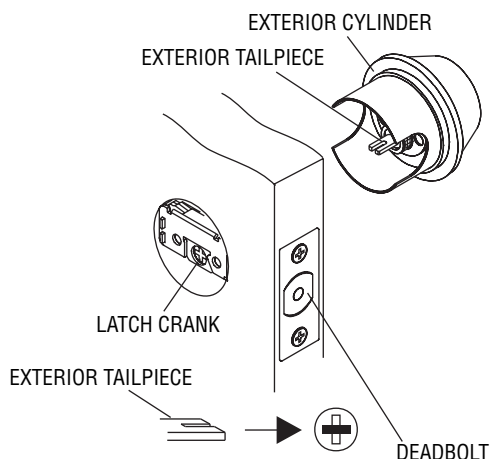

B. Press exterior cylinder flush against door. Install interior tail piece vertically through latch crank. Press interior cylinder flush against door and tighten mounting screws.

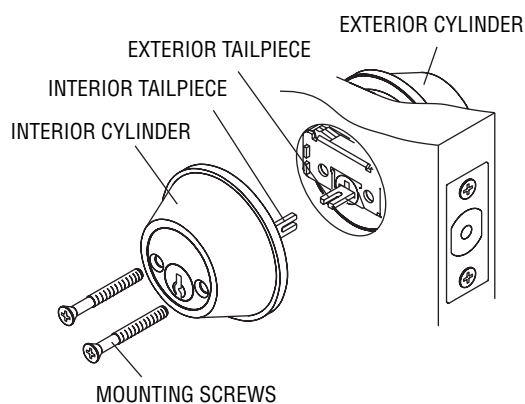

For use on doors 1-3/8" to 1-3/4"
(35-45 mm) thick

Tools required for new installation:


- (1) Phillips head screwdriver
- (1) 2-1/8" (54 mm) hole saw
- (1) 1" (25.4 mm) drill bit
- (1) chisel

Tools required for replacement installation:


- (1) Phillips head screwdriver

For remodeling or new construction:

Follow all steps.

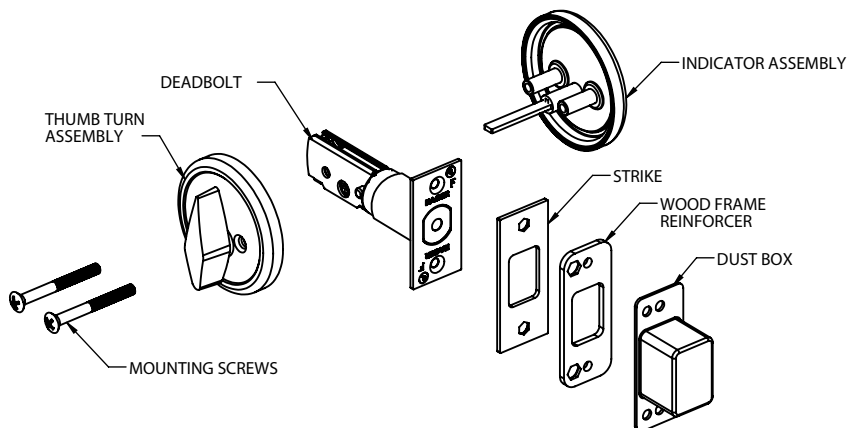


1. MARK DOOR




Measure center line of lock; height as desired from finished floor. Select 2-3/4" or optional 2-3/8" backset, fold and apply template to interior side of door and mark center of door as indicated on template. Mark center hole on door face through guide on template.

2. DRILL HOLES

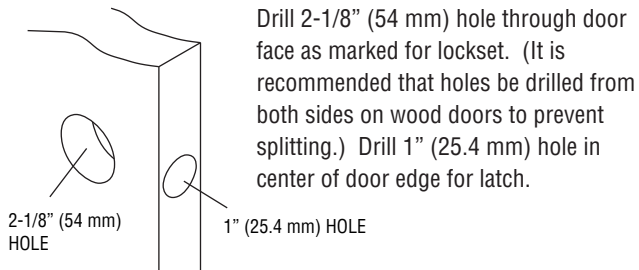


3. INSTALL LATCH


- A. Insert latch in hole, keeping it parallel to face of door. Mark outline of latch face plate and remove latch.
- B. Chisel 5/32" (4 mm) deep or until latch face plate is flush with door edge.
- C. Insert latch and tighten to the door using #8 screws.

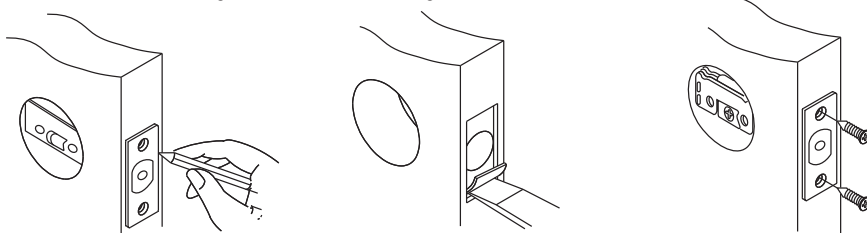


TEMPLATE

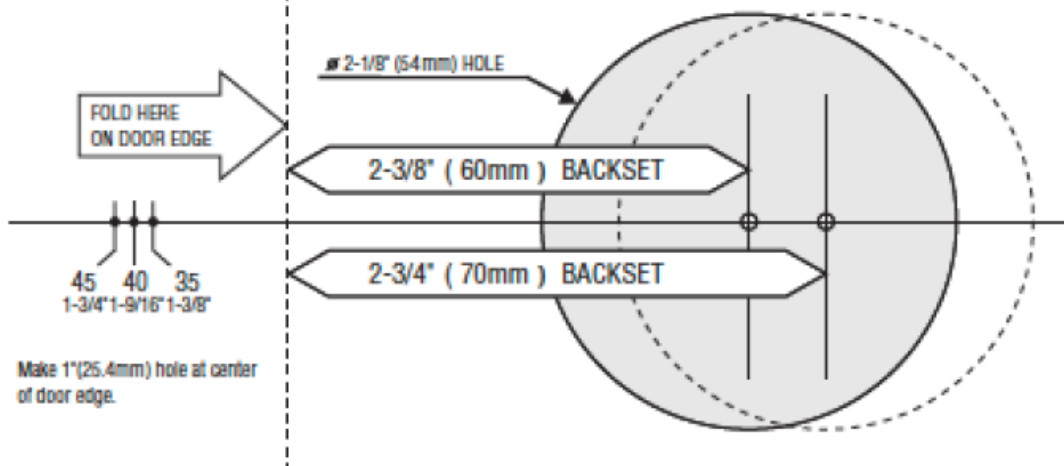

4. INSTALL STRIKE




Close door. Locate strike in jamb and center line of strike. Open door and extend line to door stop. Measure half of door thickness plus 1/8" from door stop. Vertically mark centerline for strike.



Drill (2) 1" (25.4 mm) holes 1-1/4" (31.7 mm) deep in door jamb, 5/16" (8 mm) above and 5/16" (8 mm) below horizontal center line.


CAUTION:
Hole must be drilled a full 1-1/4" (31.7 mm) deep to ensure proper functioning.

c.




Match screw holes on strike with vertical centerlines on jamb. Mark outline of strike and chisel 1/4" (6.4mm) deep for flush fit of dust box, wood frame reinforcer, and strike. Place dust box and wood frame reinforcer into mortised area and tighten to the frame using 3" wood screws. Insert the strike and tighten to the frame with #8 screws.

5. INSTALL THUMBTURN ASSEMBLY AND BLANK PLATE

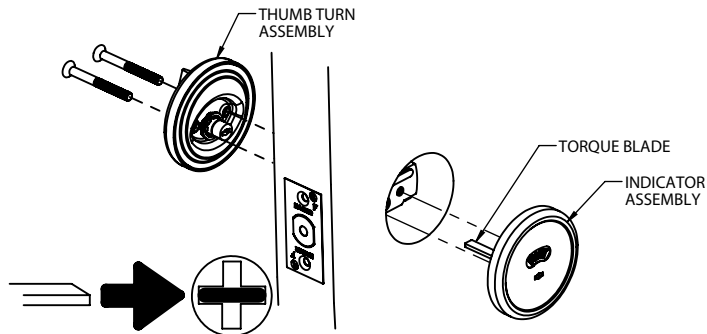

Insert torque blade horizontally into deadbolt latch. Crank until indicator assembly is flush with the door face. Mate the thumbturn assembly with the torque blade on the indicator assembly. Insert the screws thru the holes of the thumbturn assembly and latch body. Tighten the screws to the threaded posts of the blank mounting plate. Tighten the assembly so the complete assembly is tight to the door.

6. BACKSET ADJUSTMENT

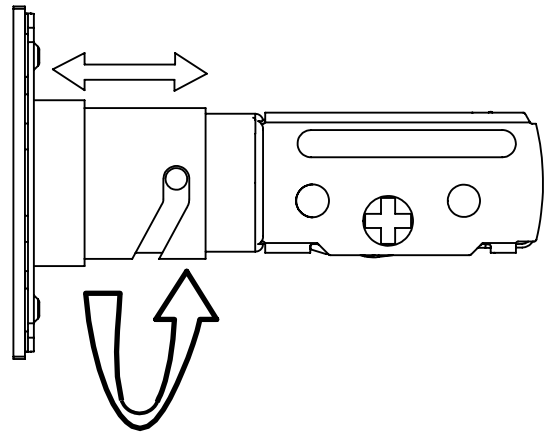

To change deadbolt to a 2-3/8" backset, rotate faceplate 1/2 turn.