

THIS SIDE UP FOR LHR DOOR

FOLD HERE

FOLD AND PLACE ON DOOR EDGE OR STOP FACE

DOOR EDGE OR STOP FACE

PLACE THIS SIDE ON DOOR

THIS SIDE UP FOR RHR DOOR

4700 SURFACE VERTICAL ROD EXIT DEVICE TEMPLATE FOR EXIT DEVICE CHASSIS (FOR PANIC AND FIRE RATED DEVICES)

(REV: 01)
DWG NO: T-ED00318

(2x) METAL: DRILL/TAP FOR 1/4"-20 MACHINE SCREWS
TRIM OR SEXBOLTS: DRILL 5/16" CLEARANCE HOLE
ON PUSH SIDE, 3/8" HOLE ON PULL SIDE
WOOD: PRE DRILL 1/8" HOLES

FOR TRIM DRILL 1/2" CLEARANCE HOLE.

(2x) METAL: DRILL/TAP FOR 1/4"-20 MACHINE SCREWS
SEXBOLTS: DRILL 5/16" CLEARANCE HOLE ON PUSH SIDE,
3/8" HOLE ON PULL SIDE.
WOOD: PRE-DRILL 1/8" HOLES

Q OF DEVICE

2 7/8" [73]
1 7/16" [37]

3/8" [10]
1 3/16" [30]
19 3/32" [15]

AFTER EXIT DEVICE IS CUT AND
MOUNTED, INSTALL END CAP
BRACKET CENTERED ON DEVICE Q

40" [1016]
RECOMMENDED HEIGHT MAY BE
DETERMINED BY DESIGN SPEC'S

FINISHED FLOOR

2 1/4" [57]



HOLE LOCATIONS

PRIMARY DIMENSIONS SHOWN IN INCHES,
DIMENSIONS IN [] ARE MILLIMETERS.





THIS SIDE UP FOR RHR DOOR

TOP LATCH TEMPLATE

4700 SURFACE VERTICAL ROD EXIT DEVICE

TEMPLATE FOR EXIT DEVICE LATCHES (FOR PANIC AND FIRE RATED DEVICES ONLY)

(REV: 01)
DWG NO: T-ED00319

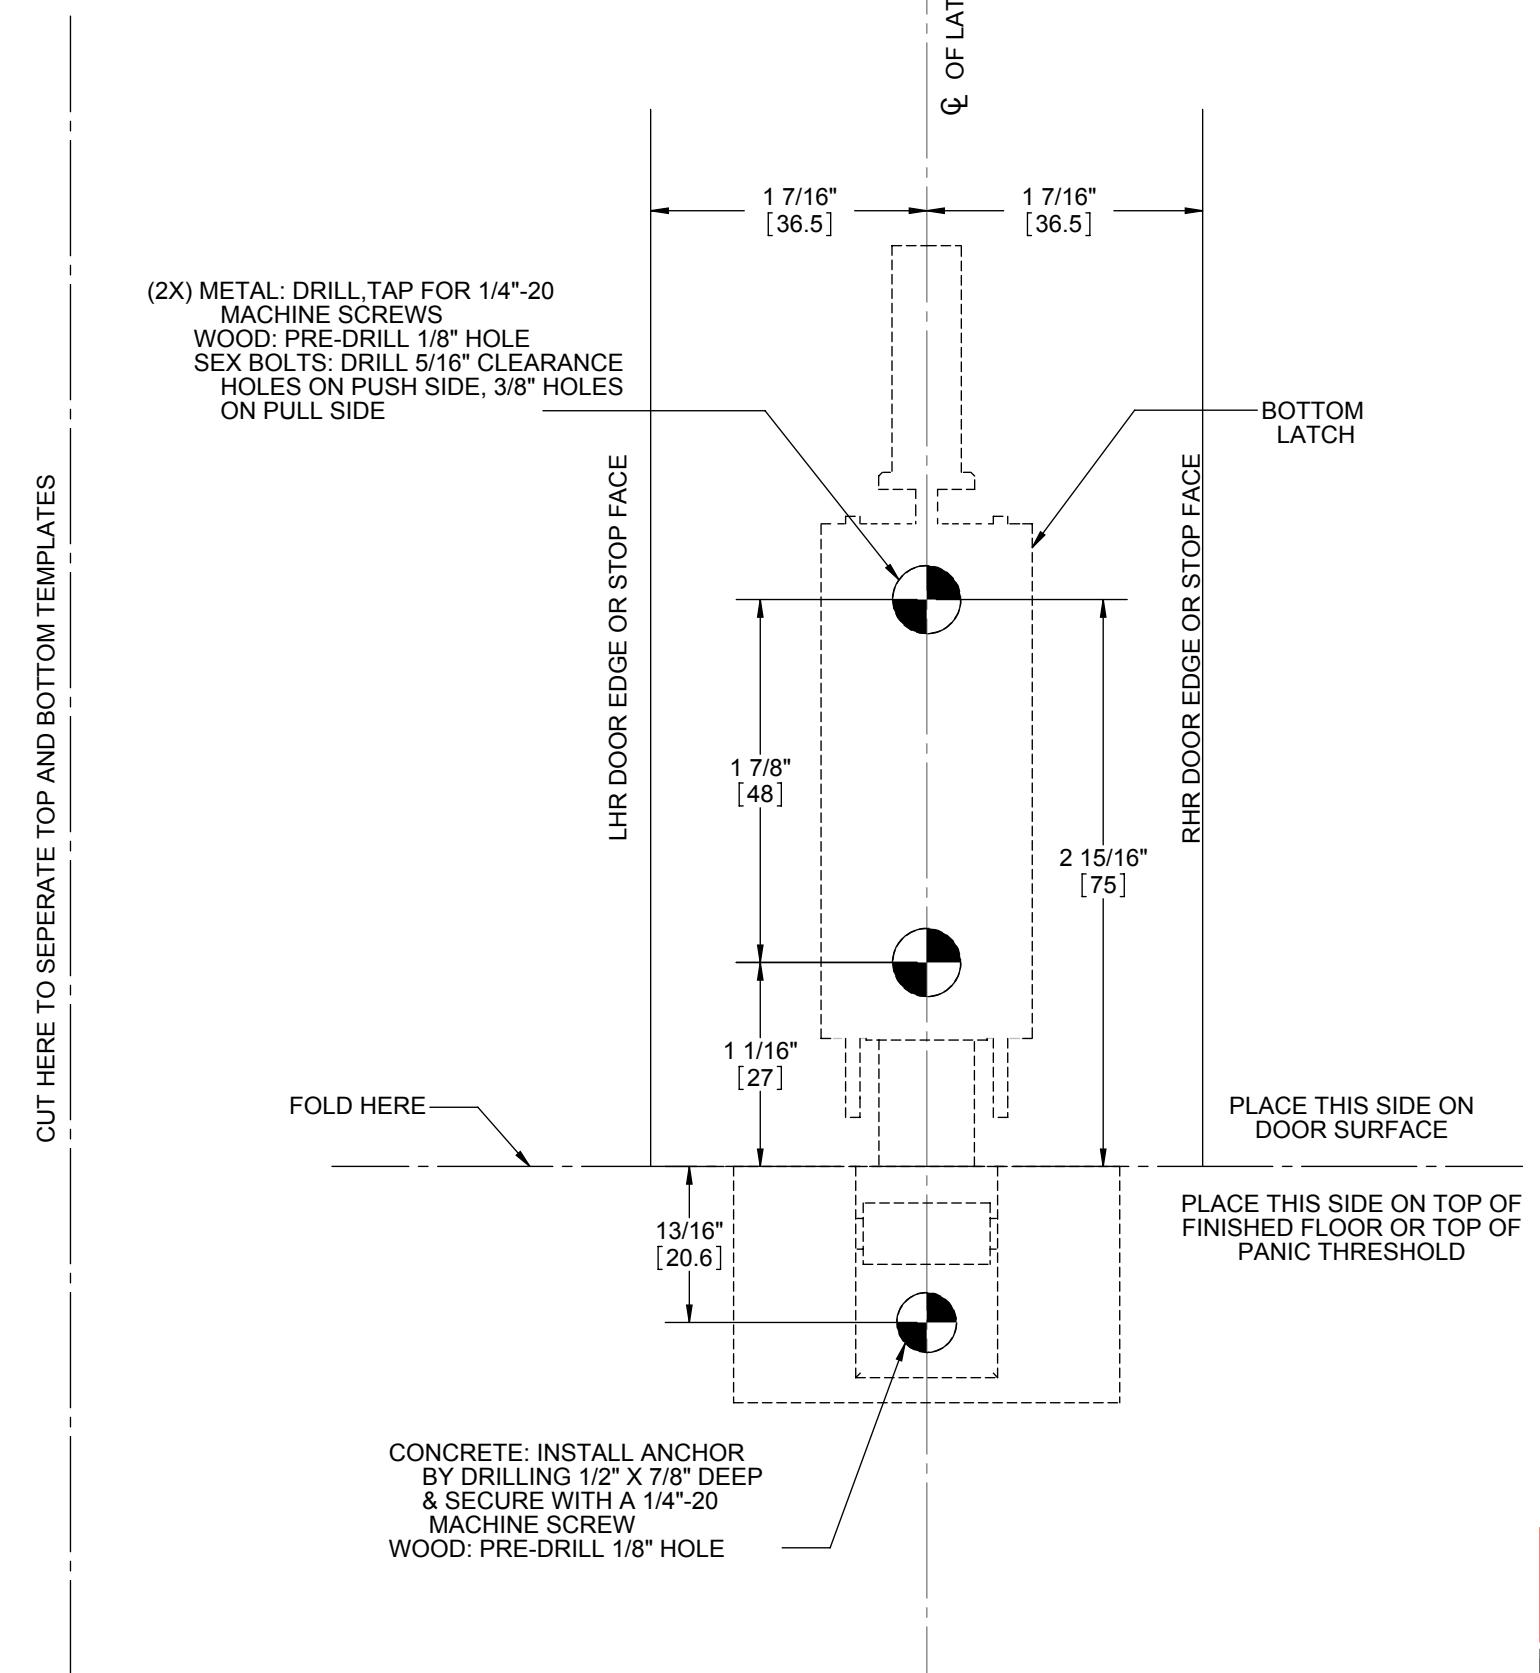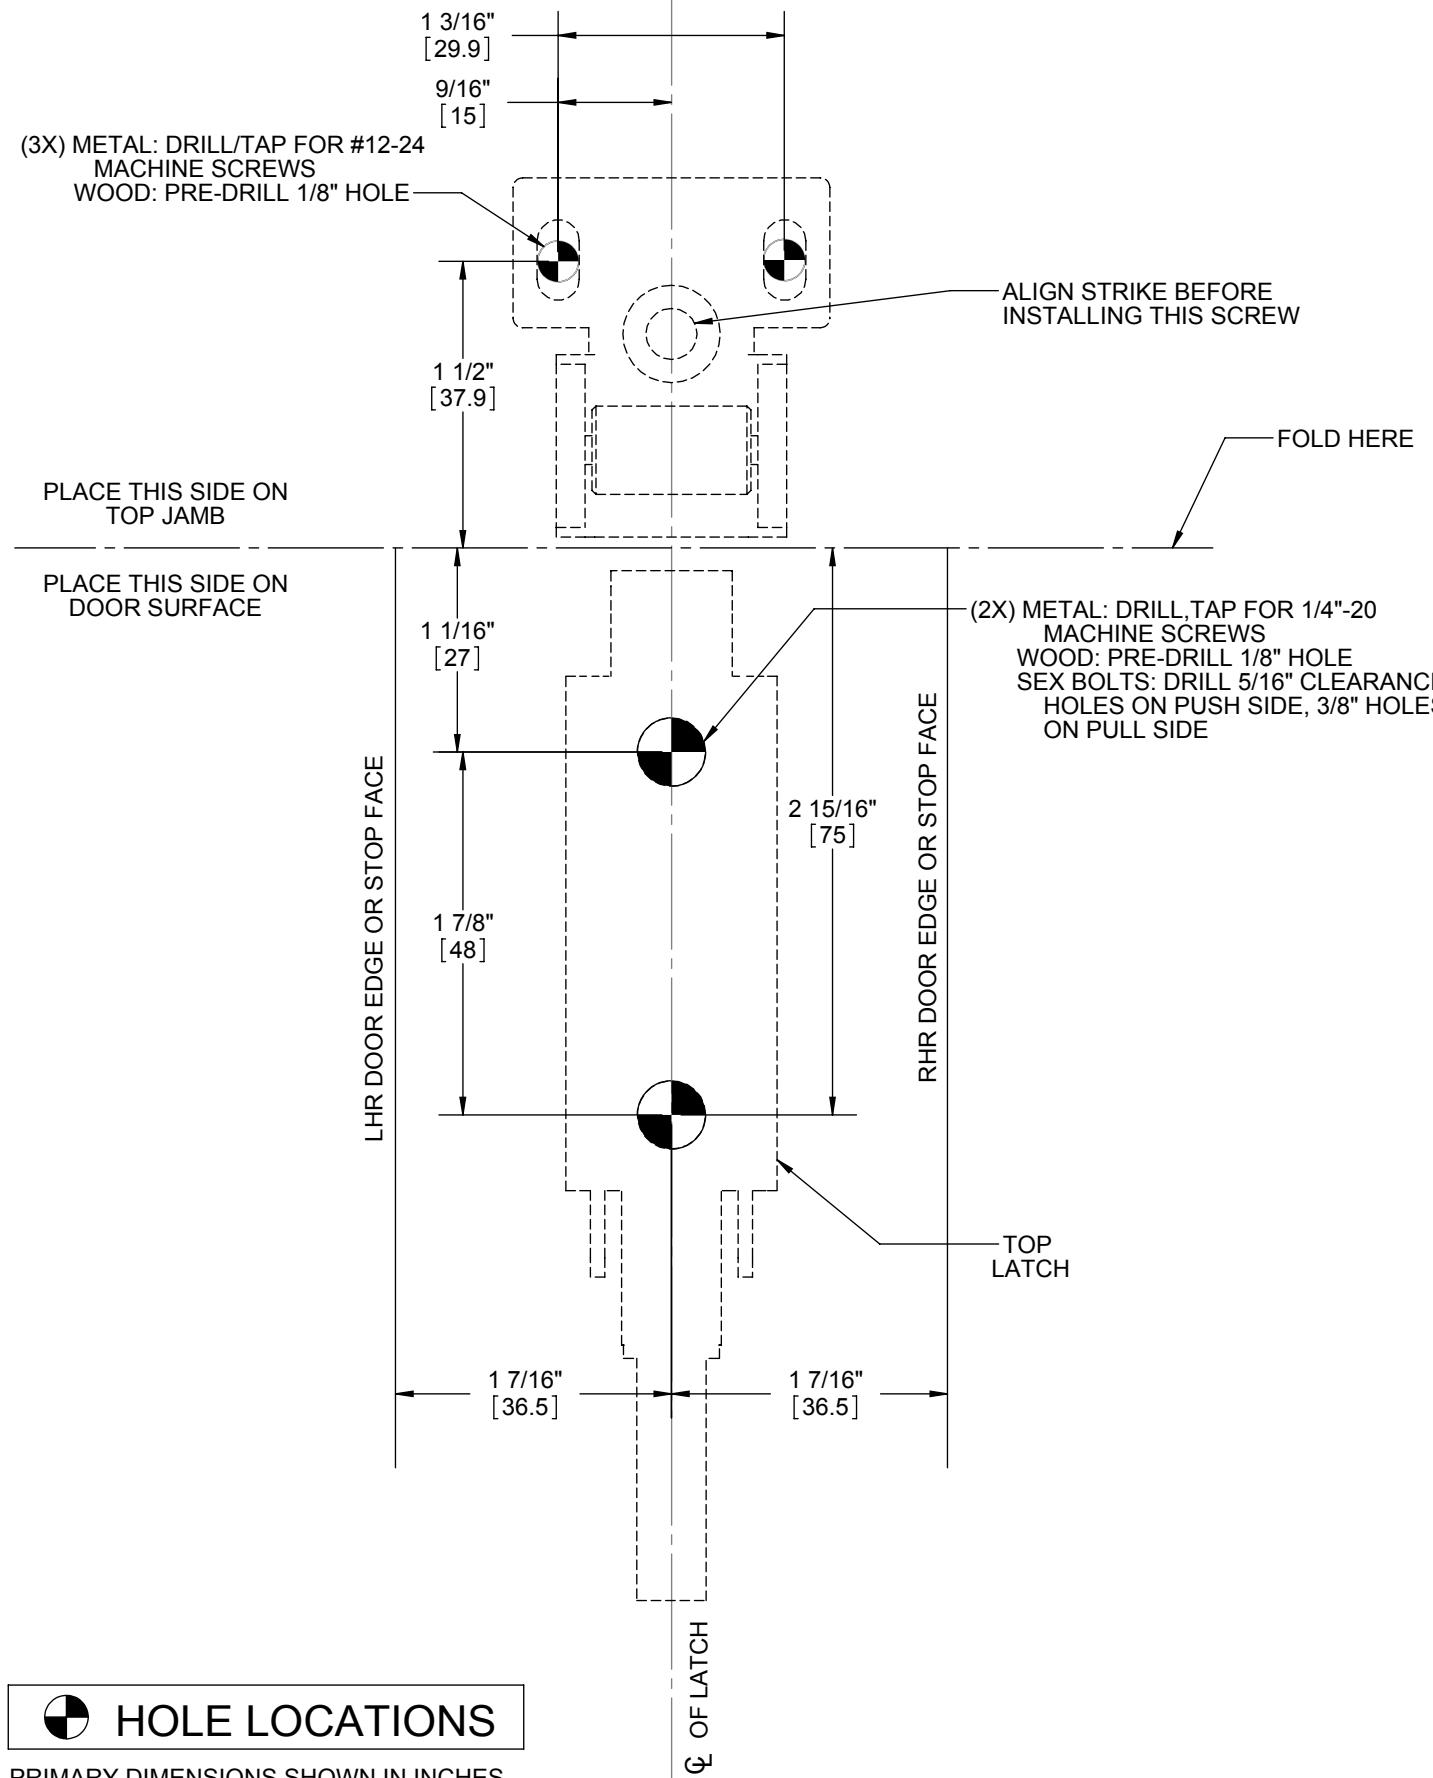

PRIMARY DIMENSIONS SHOWN IN INCHES,
DIMENSIONS IN [] ARE MILLIMETERS.



HAGER COMPANIES 139 Victor Street, St. Louis, MO 63104 (800) 325-9995 Fax (800) 782-0149