


#### FULL MORTISE TEMPLATE BALL BEARING

## HEAVY WEIGHT WIDE THROW 4 112" x 5", 4 112" x 6", 4 112" x 7", 4 112" x 8"

# Templates:

### **WT4B45**

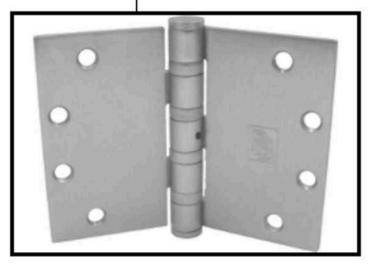

WT4B81 (ANSI A8111)

Steel-Polished and Plated or Bonderized and Prime Coated for Painting.

WT4B21 (ANSI A2111) Brass-Polished and Plated

WT4B51 (ANSI A5111) Stainless Steel-Polished and Satin Finish

- For use on heavy weight doors requiring high frequency service.
- For use where doors must clear molding or protrusion, positioning the door out further, when open.
- For hospital type, add HT to suffix of part number.
- All hinges are ANSI template.

GENERAL PRODUCT INFORMATION: PBB, Inc. template hinges are manufactured to close tolerances and meet all specifications and requirements set by the American National Standards Institute (ANSI).

OTHER SPECIFICATIONS: Height of hinge: 4.50 (+.000/-.015) for 4-1/2"

Width:

5.00 ± .015 for 4-1/2" x 5" 6.00 ± .015 for 4-1/2" x 6" 7.00 ± .015 for 4-1/2" x 7" 8.00 ± .015 for 4-1/2" x 8"

HINGE SWAGING: A standard swaging of our standard weight full mortise hinge when closed to parallel position provides a 1/16" clearance between leaves.

MATERIAL GAUGE:

.180 ± .005 for 4-1/2" x 5", 6", 7", 8"

#### 4-1/2" WIDE THROW STANDARD SCREW SIZE

FHMS - 12-24 x 1/2" FHWS - 12 x 1-1/4"

ALL ITEMS ABOVE CAN BE MADE IN THREE OR FIVE KNUCKLE CONFIGURATION.

#### PACKAGING INFORMATION:

One hinge per plastic bag, 3 hinges and 1 screw pack per unit carton.

8 unit carton or 24 hinges per master shipping carton.

1 screw pack includes all machine screws (24), and 1/2 wood screws (12). ATMS & AWS also available.