


Rakks Bracket Information & Installation

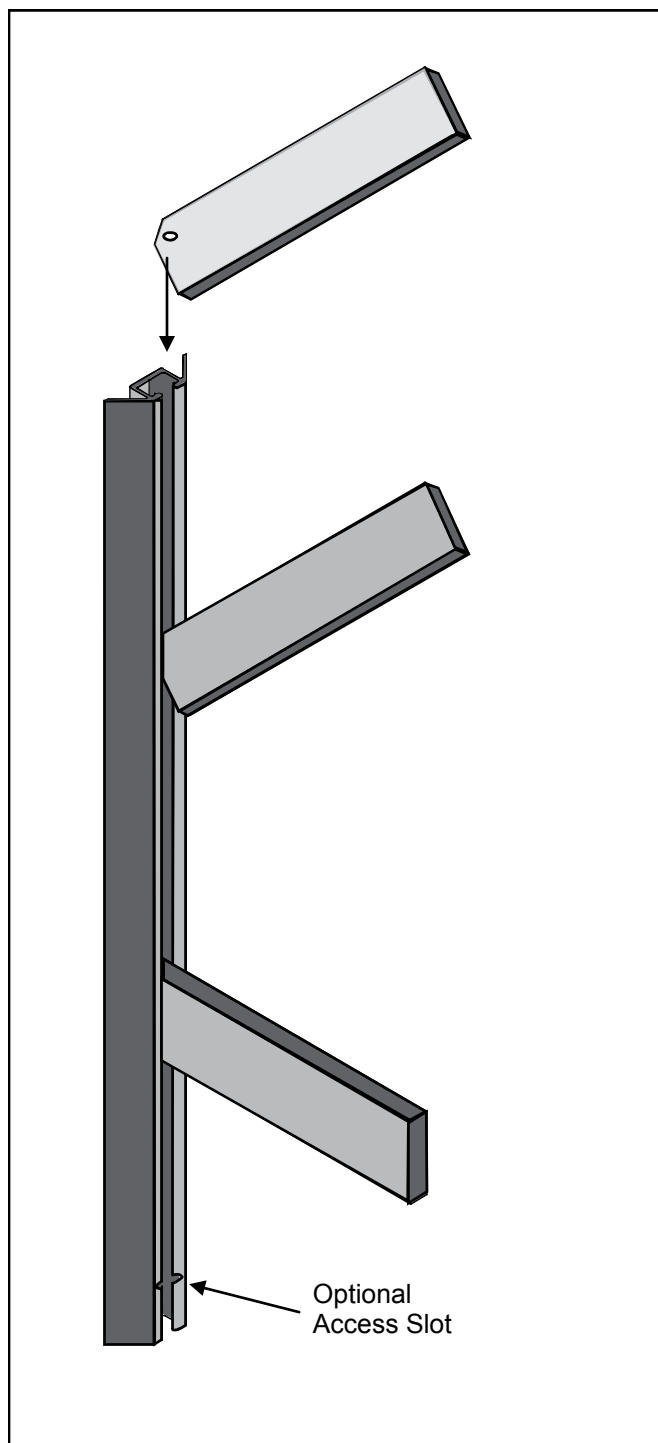

Rakks Shelf Brackets fit all Rakks wall mounted standards and poles. They are infinitely adjustable and can be installed into standards from the ends or into an access slot cut into the face of the channel.

Rakks Brackets are made in a variety of sizes to support shelves up to 24" deep. Shelf brackets are typically shorter than the shelves.

Rakks brackets are available in the following sizes:

Model	Useable Length	Bracket Depth	Shelf Depth	Load Capacity
BR-004	3 1/4"	1 1/4"	4"	100#
BR-006	5 1/4"	1 1/4"	6"	100#
BR-008	7 1/4"	1 1/4"	8"	100#
BR-010	9 1/4"	1 1/4"	10"	75#
BR2-10	9 1/4"	2"	10"	100#
BR-012	11 1/4"	1 1/4"	12"	60#
BR2-12	11 1/4"	2"	12"	100#
BR-014	13 1/4"	1 1/4"	14"	55#
BR2-14	13 1/4"	2"	14"	85#
BR-016	15 1/4"	1 1/4"	16"	50#
BR2-16	15 1/4"	2"	16"	80#
BR2-18	17 1/4"	2"	18"	70#
BR2-24	22-1/2"	2"	24"	45#

Capacities are based on evenly distributed static loads
Front to back with the shelf depths as shown above.

Installation

1. Hold shelf bracket at a 45 degree angle and slide it into either end of the standard or into an access slot.

Note: If brackets do not slide easily in the standard, make sure that mounting screws are fully tightened and flush to the back of the standards.

2. At the desired height, lock the bracket into position by pulling it down firmly. Bracket will lock in at, or slightly less than 90 degrees.